
FILE NOV. 26, 2014

LU/LA ELEVATOR SHALL BE


SYMMETRY "ELEVATION" LIMITED USE/LIMITED APPLICATION ELEVATOR WITH 42"W x 54"D STANDARD PLATFORM, RIGHT HAND ENTRY AND SHALL CONFORM TO ASME A17.1 AND FLORIDA ELEVATOR SAFETY CODE. ALL CONTROLS, INDICATORS, SIGNAGE AND COMMUNICATIONS SYSTEMS SHALL BE PROVIDED AS REQUIRED BY CODE AND SHALL BE INSTALLED IN COMPLIANCE WITH CODE REQUIREMENTS.

CONTACT: JIM JESCHONEK ACCESS LIFTS AND ELEVATORS INC. 8362 PINES BLVD., #380 PEMBROKE PINES, FL. 33024 PHONE: (954) 826-5438 jim.jeschonek@gmail.com

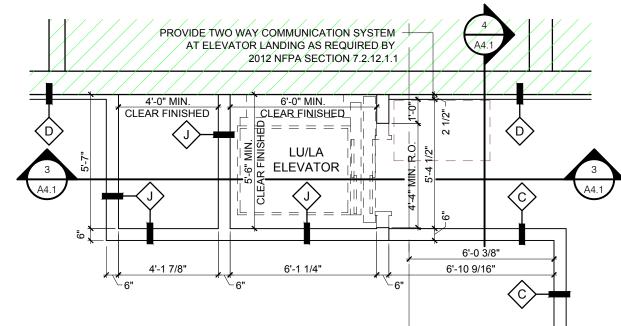

ENLARGED MEZZ. PLAN @ LU/LA ELEVATOR & EQUIP. ROOM

SCALE: 1/4" = 1'-0"

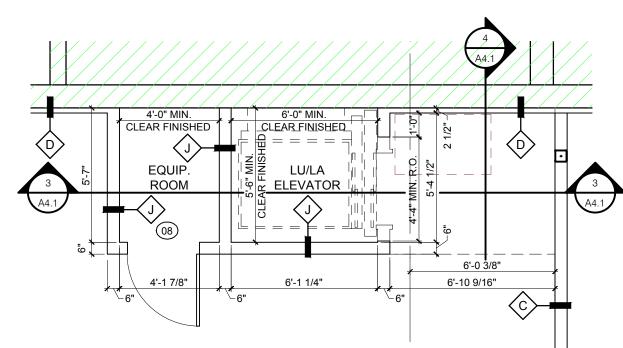



PARTITION TYPE SCHEDULE

APPLIED FINISHES.

20 GAUGE NOMINAL 2" METAL STUDS @ 16" O.C. W/ 5/8" DUROCK CEMENT FILL VOIDS BETWEEN STUDS W/ SOUND ATTENUATING BATTS. TERMINATE BATTS @ 12" ABOVE ADJACENT CEILING. USE 18 GAUGE STUDS FOR WALLS GREATER THAN 13'-0" IN HEIGHT.

INFILL EXIST. CMU WALL OPENING W/ CONSTRUCTION TO MATCH ADJACENT WALLS PER UL NO. U905 W/ CORE FILL 500 FOAM INSULATION IN ALL VOID CELLS. FINISH EXTERIOR FACE OF CMU TO MATCH ADJACENT EXTERIOR BUILDING WALLS.


SAME AS PARTITION TYPE A, EXCEPT USE 5/8" TYPE X BYP. BD. FOR 1 HOUR FIRE RATED ASSEMBLY AS PER UL DESIGN NO. U425 FOR LOAD BEARING INTERIOR METAL STUD WALL. ALL WALL PENETRATIONS SHALL BE PROTECTED AS PER UL SYSTEM NO. W-L-1054.

25 GAUGE 2 1/2" METAL STUD FURRING @ 16" O.C. ON EXIST. CMU WALL W/ 5/8" GYP. BD. ON INTERIOR SIDE OF STUDS TO BOTTOM OF FLOOR/ROOF DECK ABOVE. FILL VOIDS BETWEEN STUDS W/ 2 1/2" R-8 BATTS. SUBSTITUTE 5/8" DUROCK CEMENT BOARD AT WET LOCATIONS.

25 GAUGE 6" METAL STUD FURRING @ 16" O.C. ON EXIST. CMU WALL W/ 5/8" GYP. BD. ON INTERIOR SIDE OF STUDS TO BOTTOM OF FLOOR/ROOF DECK ABOVE. FILL VOIDS BETWEEN STUDS W/ 2 1/2" R-8 BATTS. SUBSTITUTE 5/8" DUROCK CEMENT BOARD AT WET LOCATIONS.

EXIST CMU WALL TO REMAIN. CLEAN AND PREPARE FOR TENANT

BOARD EA. SIDE OF STUDS TO BOTTOM OF FLOOR/ROOF DECK ABOVE.

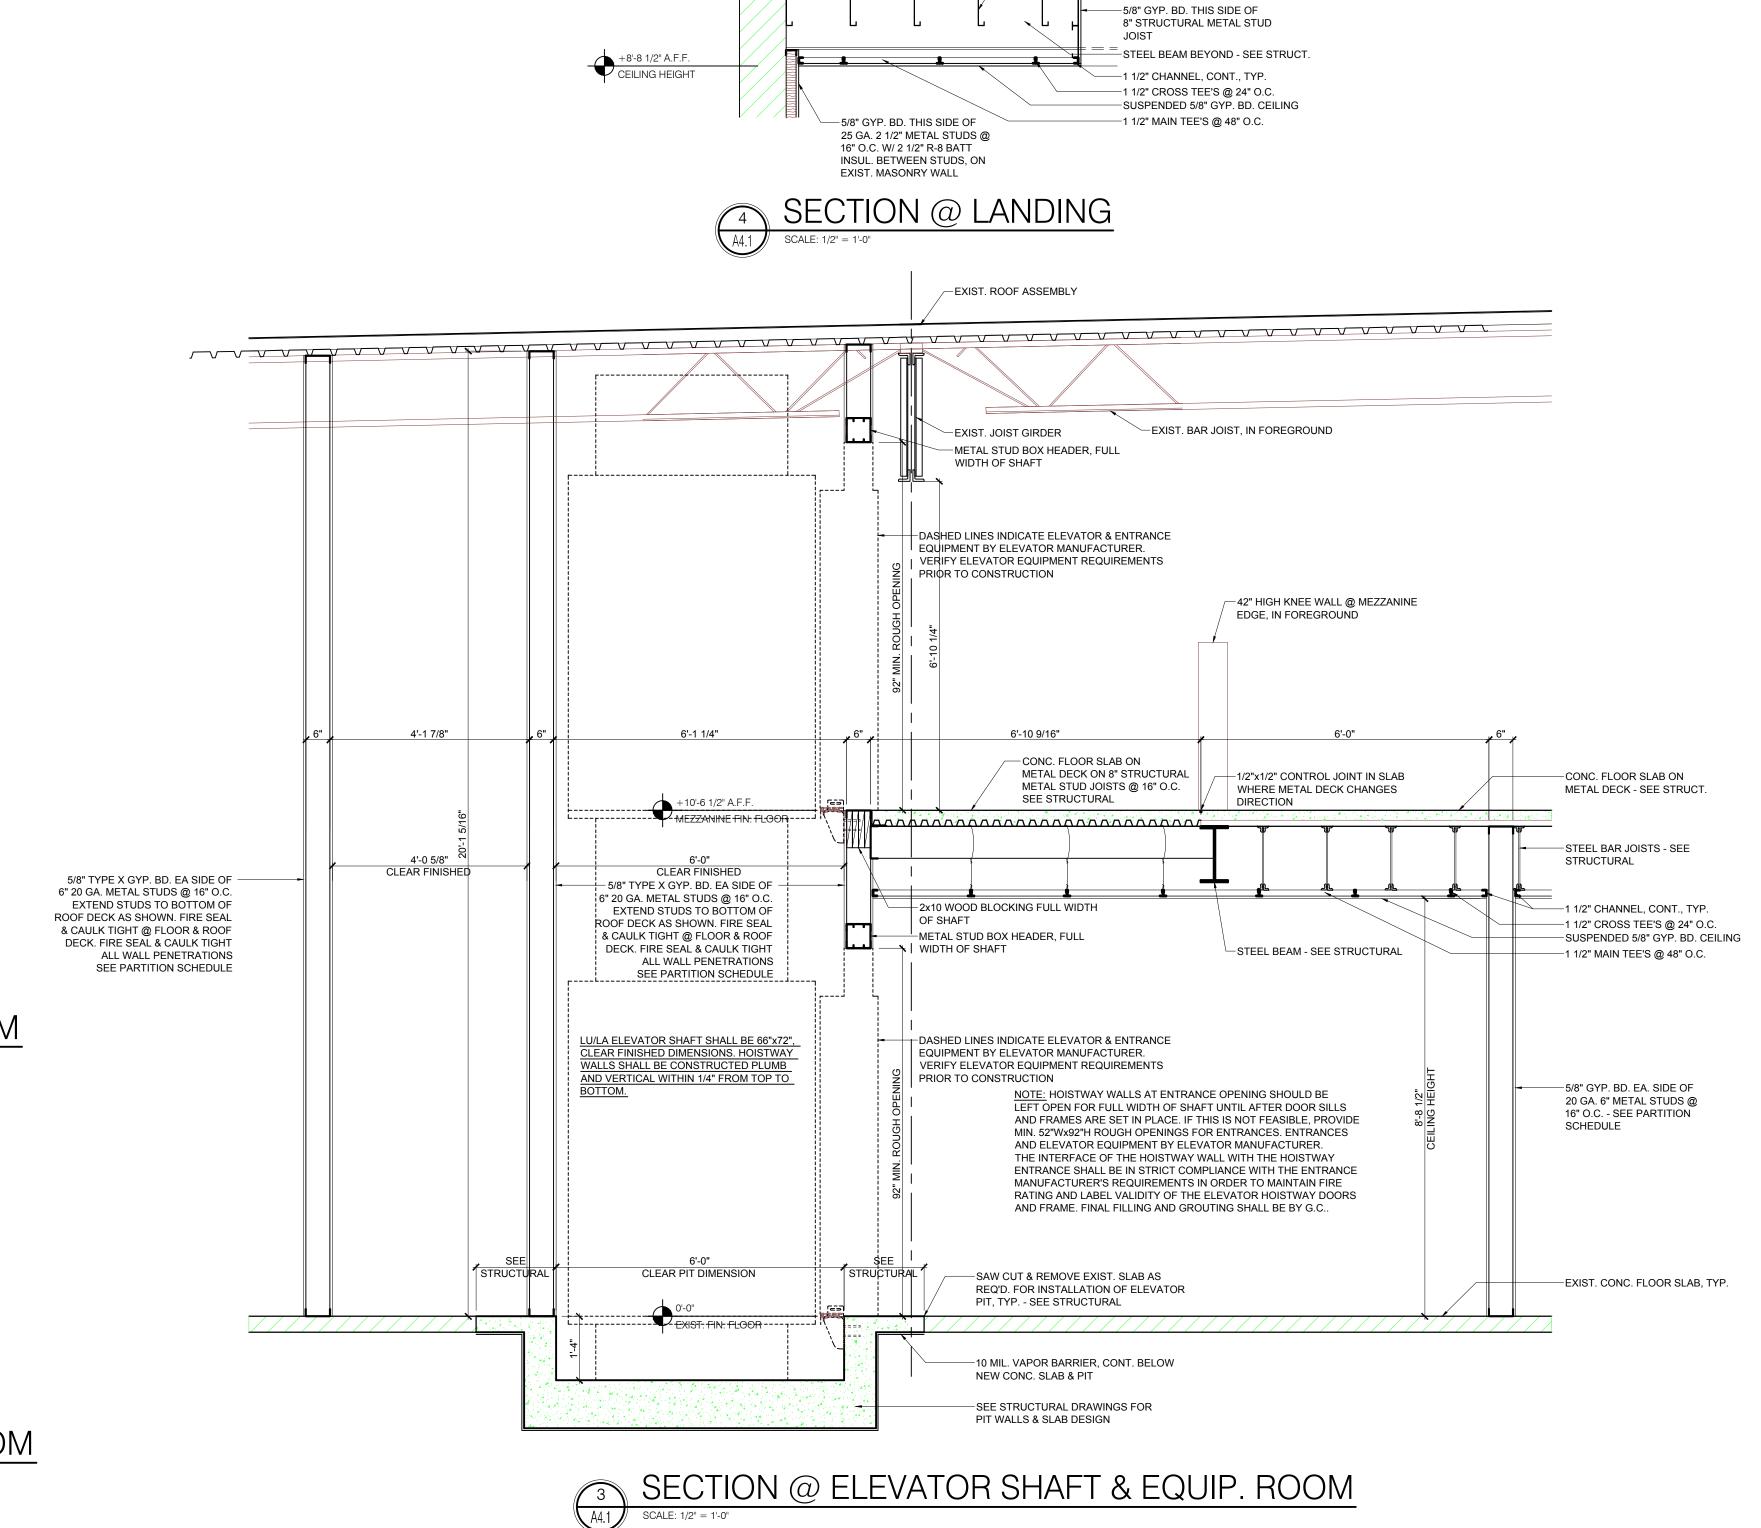

-5/8" GYP. BD. THIS SIDE OF

16" O.C. W/ 2 1/2" R-8 BATT INSUL. BETWEEN STUDS, ON EXIST. MASONRY WALL

BOLT STEEL DECK ANGLE TO -EXIST. MASONRY WALL

SEE STRUCTURAL DWGS.

+10'-6 1/2" A.F.F.

MEZZANINE FIN. FLOOR

25 GA. 2 1/2" METAL STUDS @

-WRAP TOP OF WALL W/

-5/8" GYP. BD. EA. SIDE OF

@ 16" O.C. - SEE STRUCT.

-CONC. FLOOR SLAB ON

METAL DECK - SEE STRUCT

-STEEL DECK ANGLE - SEE _ STRUCTURAL DWGS.

25 GA. 6" METAL STUDS @

-8" STRUCTURAL METAL STUD JOISTS

5/8" GYP. BD.

20 GAUGE 6" METAL STUDS @ 16" O.C. W/ 5/8" GYP. BD. EA. SIDE OF STUDS TO BOTTOM OF FLOOR/ROOF DECK ABOVE. FILL VOIDS BETWEEN STUDS W/ SOUND ATTENUATING BATTS. TERMINATE BATTS @ 12" ABOVE ADJACENT CEILING. SUBSTITUTE 5/8" DUROCK CEMENT BOARD AT WET LOCATIONS. USE 18 GAUGE STUDS FOR WALLS GREATER THAN 13'-0" IN

20 GAUGE 4" METAL STUDS @ 16" O.C. W/ 5/8" GYP. BD. EA. SIDE OF STUDS TO BOTTOM OF FLOOR/ROOF DECK ABOVE. FILL VOIDS BETWEEN STUDS W/ SOUND ATTENUATING BATTS. TERMINATE BATTS @ 12" ABOVE ADJACENT CEILING. SUBSTITUTE 5/8" DUROCK CEMENT BOARD AT WET LOCATIONS. USE 18 GAUGE STUDS FOR WALLS GREATER THAN 13'-0" IN

25 GAUGE 6" METAL STUDS @ 16" O.C. W/ 5/8" GYP. BD. EA. SIDE OF STUDS TO 42" A.F.F. - WRAP TOP OF WALL W/ 5/8" GYP. BD. INSTALL 3" SQUARE STEEL POSTS @ 12'-0" O.C., ANCHOR STEEL POSTS TO SLAB.