EX	ID7		ID5	ID4	ID3	ID2	D1	ND CC	
		ID6 SC						DOOR ROOM NO. NAME	
EXISTING DOOR	PANTRY CLOSET	SOUTH STAIR	UNIT#2	NORTH STAIR	UNIT#3	STORAGE	AHU CLOSET	)OM ME	
DOOR	LOSET	'AIR		「AIR			)ÉT		
Α	>	>	>	>	>	A	Þ	DOOR TYPE	
	WD	WD	WD	WD	WD	WD	WD	DOOR DOOR TYPE MAT.	
	MTL	MTL	MTL	MTL	MTL	MTL	MTL	FRAME MAT	
	2'-0"	3'-0"	3'-0"	3'-0"	3'-0"	3'-0"	3'-0"	E WIDTH	
	6'-8"	6'-8"	6'-8"	6'-8"	6'-8"	6'-8"	6'-8"	SIZE 3ZIS	
	1-3/4"	1-3/4"	1-3/4"	1-3/4"	1-3/4"	1-3/4"	1-3/4"	THKN'S	
	1HR	1HR	1HR	1HR	1HR	1HR	1	RATING	
								GLASS TYPE	
								GLASS TINT	00
	WD	ΝD	ŊD	ŊD	ŊD	₩D	₩D	DOOR FINISH	R S
	1	1	ı	ı	ı	ı	ı	RATINGGLASS GLASS DOOR UNDERCUT	DOOR SCHEDULE
	<u> </u>	<u></u>	<u> </u>	<u></u>	<u> </u>	<u> </u>		HEAD	ULE
	Α	А	A	A	A	A	A	JAMB	
	1	_	_	_	_	_	_	SILL	
							LOUVE	COMMENTS	
							ERED D	S.	
							OOR W		
							/ITH FU		
							LOUVERED DOOR WITH FUSIBLE LINK		
							N N		
EQUALLY SPACED								SPACING	
m Z								G	

241 77 STREET


Issued for Permitting

241 77 street Miami Beach, FL 33141

NOTE:1. ALL DOOR DIMENSIONS HAVE BEEN SPECIFIED BASE SIZES PRODUCED BY DOOR MANUFACTURERS LISTED BELOW.
IF SPECIFIED DOORS ARE SUBSTITUTED WITH ANOTHER MANUFACTURE, FINAL AND ROUGH DIMENSIONS MAY VARY AND
G.C. SHALL COORDINATE ALL DIMENSIONS BEFORE ORDERING. ANY SUBSTITUTIONS SHALL BE APPROVED AND OF EQUAL QUALITY
G.C. TO FIELD VERIFY ALL DIMENSIONS AND EXISTING CONDITIONS OF ALL ROUGH OPENINGS
ALL EXISTING DOOR HEADERS SHALL REMAIN THE SAME.
ALL GLASS TO BE CLASS II TEMP. SAFETY GLASS
ALLOW 6" BETWEEN WALL AND DOOR HINGE MIN. CONFIRM ALL ADA CLEARANCES.

ALL FIRE RATED DOORS TO BE SELF-CLOSING AND SELF LATCHING.

0040



A. FLAT SLAB DOOR AND FRAME NOA: 14-1117.05 EXPIRES: FEB 24, 2020

2. CONTRACTOR TO SUBMIT CUT-SHEETS FOR ALL HARDWARE FOR ARCHITECT REVIEW AND APPROVAL PRIOR TO INSTALLATION.

3. HANDLES, PULLS, LATCHES, LOCKS AND OTHER OPERATING DEVICES ON ACCESSIBLE DOORS SHALL BE LEVER-OPERATED MECHANISMS, PUSH-TYPE MECHANISMS OR U-SHAPED HANDLES. HARDWARE SHALL BE MOUNTED NO HIGHER THAN 48 INCHES ABOVE THE FINISHED FLOOR.

4. THE MAXIMUM FORCE FOR PUSHING OR PULLING OPEN A DOOR SHALL BE AS FOLLOWS:

A) EXTERIOR HINGED DOORS - 8.5 LBF
B) INTERIOR HINGED DOORS - 5 LBF
C) SLIDING OR FOLDING DOORS - 5 LBF

5. EGRESS DOORS SHALL BE READILY OPERABLE FROM THE EGRESS SIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.

## HARDWARE KEYNOTES


CASTELLANOS DESIGN STUDIO


I. CONTRACTOR TO SUBMIT INDICATION OF MIAMI-DADE PRODUCT APPROVAL, PRODUCT DATA AND SHOP DRAWINGS FOR ALL DOORS FOR ARCHITECT REVIEW AND APPROVAL PRIOR TO INSTALLATION.

407 LINCOLN ROAD, SUITE 2C MIAMI BEACH, FL 33139 Tel: 786.218.5335 License #AA 26002467

WWW.CASTELLANOSDESIGN.COM

12MAR/16 PERMIT REV. /3

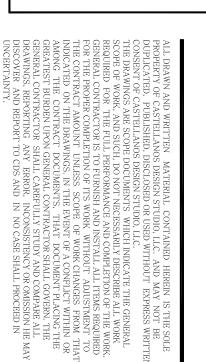



DOOR SCHEDULE

CHECKED BY : WC