



## Construction No. 238B TGKX.238B Roof Deck Constructions

[Page Bottom](#)

### Design/System/Construction/Assembly Usage Disclaimer

- Authorities Having Jurisdiction should be consulted in all cases as to the particular requirements covering the installation and use of UL Listed or Classified products, equipment, system, devices, and materials.
- Authorities Having Jurisdiction should be consulted before construction.
- Fire resistance assemblies and products are developed by the design submitter and have been investigated by UL for compliance with applicable requirements. The published information cannot always address every construction nuance encountered in the field.
- When field issues arise, it is recommended the first contact for assistance be the technical service staff provided by the product manufacturer noted for the design. Users of fire resistance assemblies are advised to consult the general Guide Information for each product category and each group of assemblies. The Guide Information includes specifics concerning alternate materials and alternate methods of construction.
- Only products which bear UL's Mark are considered as Classified, Listed, or Recognized.

### Roof Deck Constructions


[See General Information for Roof Deck Constructions](#)


## Construction No. 238B

February 22, 2012

**Uplift – Class 90**

**Fire Not Investigated**

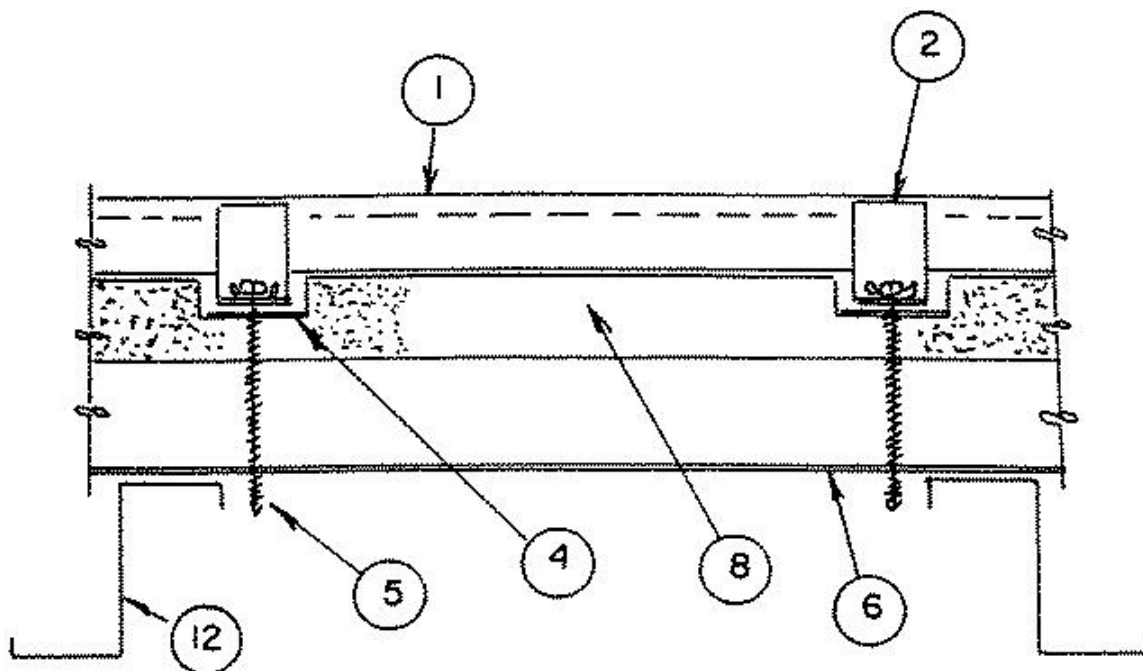

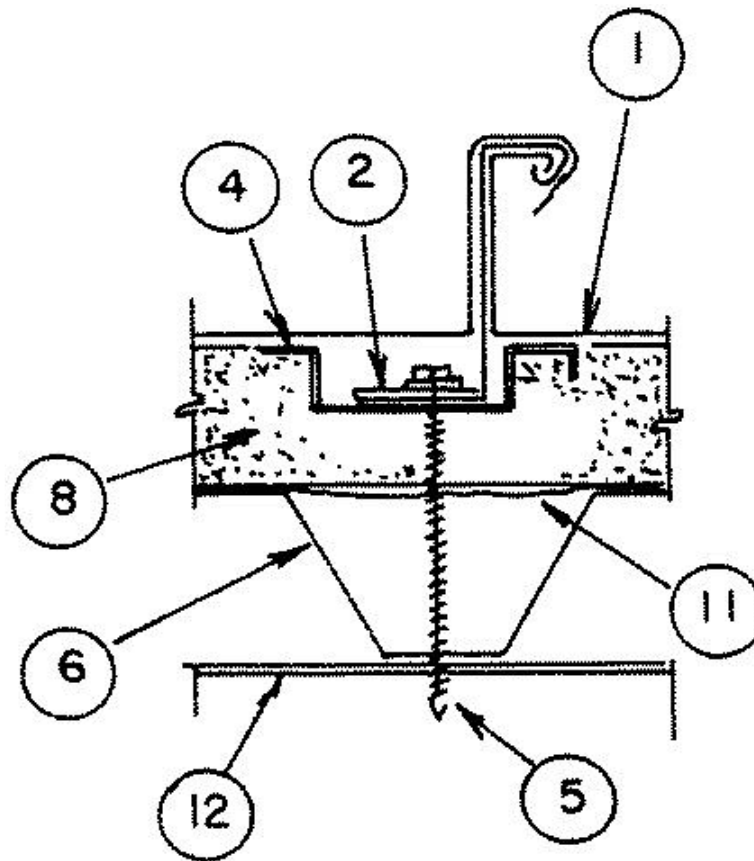

**1. Metal Roof Deck Panels\*** — No. 24 MSG min coated steel. Max panel width 16 in. and rib height 2 in. Panels continuous over two or more spans. Endlap for "BattenLok" or "Super-Lok" panels to be 6 in. and to include back up plate (Item 3). Endlap for "Master-Span" and "KA2000" panels to be 2 in. and to include back up plate (Item 3A). A bead of sealant may be used at panel ends and side joints. Side laps to be tightened and crimped with an electric crimping machine to an angle of 45 degree maximum unless indicated in the individual panels in this item. Crimping process to include the upper portion of panel clips (Items 2 or 2A).

**A & S BUILDING SYSTEMS L P** ([View Classification](#)) — "BattenLok", "BattenLok HS" or "SuperLok"

**AEP SPAN, DIV OF ASC PROFILES** ([View Classification](#)) — "Span-Lok" or "Span-Lok HP" (90° Seam) or "SpanSeam" (180° Seam)

**AMERICAN BUILDINGS CO** ([View Classification](#)) — "Loc-Seam," (90° Seam) "Loc-Seam 360" (180° Seam)

**ARCHITECTURAL BUILDING COMPONENTS INC** ([View Classification](#)) — "JSM 200"

**ARCHITECTURAL METAL WORKS** ([View Classification](#)) — "S 2500"

**BUTLER MANUFACTURING, DIV OF**

**BLUESCOPE BUILDINGS NORTH AMERICA INC** ([View Classification](#)) — "VSRII"

**CENTRAL TEXAS METAL ROLLFORMING INC** ([View Classification](#)) — "SPANLOC 200"

**CHIEF INDUSTRIES INC** ([View Classification](#)) — "MVF" or "MVP"

**CUSTOM-BILT METALS** ([View Classification](#)) — CB-2000

**KIRBY BUILDING SYSTEMS INC** ([View Classification](#)) — "KA2000", "RoofLok" and "RoofLok Plus"

**KNUDSON MFG INC** ([View Classification](#)) — "ULTRALOK"

**MBCI** ([View Classification](#)) — "BattenLok", "BattenLok HS" or "SuperLok"

**MESCO METAL BUILDINGS** ([View Classification](#)) — "BattenLok", "BattenLok HS" or "SuperLok"

**METAL SALES MFG CORP** ([View Classification](#)) — "T-Span" or "T-Span 180" (180° Seam)

**NCI BUILDING SYSTEMS L P** ([View Classification](#)) — "BattenLok", "BattenLok HS" or "SuperLok"

**NUCOR BUILDING SYSTEMS, DIV OF NUCOR**

**CORP** ([View Classification](#)) — VR16 II "Vise Lock" or VR16II "Vise Lock 360".

**PETERSEN ALUMINUM CORP** ([View Classification](#)) — "Tite-Loc" and "Tite-Loc Plus"

**SAN ANTONIO QUALITY METALS** ([View Classification](#)) — "ML-200"

**TREMCO INC** ([View Classification](#)) — "TremLock VP Series II"

**UNITED STRUCTURES OF AMERICA INC** ([View Classification](#)) — "Sure-Lok" or "Supreme-Lok"

**VARCO PRUDEN BUILDINGS, DIV OF**

**BLUESCOPE BUILDINGS NORTH AMERICA INC** ([View Classification](#)) — "SLR II"

1A. **Metal Roof Deck Panels\*** — Panels may be physically curved at a radius of 110 ft. or greater.

**A & S BUILDING SYSTEMS L P** ([View Classification](#)) — "BattenLok" or "SuperLok"

**AEP SPAN, DIV OF ASC PROFILES** ([View Classification](#)) — "SL-216" or "SPS-216"

**MBCI** ([View Classification](#)) — "BattenLok" or "SuperLok"

**MESCO METAL BUILDINGS** ([View Classification](#)) — "BattenLok" or "SuperLok"

**METAL SALES MFG CORP** ([View Classification](#)) — "T-Span" or "T-Span 180" (180° Seam)

**NCI BUILDING SYSTEMS L P** ([View Classification](#)) — "BattenLok" or "SuperLok"

**PETERSEN ALUMINUM CORP** ([View Classification](#)) — "Tite-Loc" and "Tite-Loc Plus"

**UNITED STRUCTURES OF AMERICA INC** ([View Classification](#)) — "Sure-Lok" or "Supreme-Lok"

2. **Roof Deck Fasteners\* (Panel Clips)** — Either of the following:

Fixed Clip or Utility — One piece assembly fabricated from No. 22 MSG min steel, 3 in. wide. Floating Clip — two piece

assembly with a base fabricated from No. 22 MSG min steel, 4-1/4 in. wide, and a top fabricated from No. 22 MSG steel, 4-1/4 in. wide. Clip spacing to be 48 in. O.C. max. Sealant may be used in the top of the clips.

**BUILDING PRODUCTS DEVELOPMENT INC** ([View Classification](#)) — "NC3300", "NCF-3300", "NCF-3300-SS" Series Clip

**NCI BUILDING SYSTEMS L P** ([View Classification](#)) — "BattenLok High or Low, Fixed or Floating Clip" ; "BattenLok Utility Clip" — "SuperLok High or Low, Fixed or Floating Clip" ; "SuperLok Utility Clip" .

**ARCHITECTURAL BUILDING COMPONENTS INC** ([View Classification](#)) — "JSM 200 Utility"

2A. **Roof Deck Fasteners\*** — (Panel Clip) — (Not Shown) — Two part assembly; A base fabricated from No. 16 MSG min coated steel and upper tab fabricated from No. 22 MSG min coated steel. Clips fastened to purlins using two fasteners per clip. See Item No. 3 for description of fasteners.

**METAL SALES MFG CORP** ([View Classification](#)) — "T-Span Clip"

2B. **Roof Deck Fasteners\* (Panel Clips)** — (Not Shown) Used with "Tite-Loc" or "Tite-Loc Plus" Panels.

One piece assembly; 3 in. wide, approximately 2 in. high with two or three guide holes in base. Fabricated from No. 22 MSG coated steel.

**PETERSEN ALUMINUM CORP** ([View Classification](#)) — "Tite-Loc Utility Clip", "Tite-Loc Plus Utility Clip"

One piece assembly; 3 in. wide, approximately 2-3/8 in. or 3 in. high, with three guide holes in base. Fabricated from No. 22 MSG coated steel.

**PETERSEN ALUMINUM CORP** ([View Classification](#)) — "Tite-Loc Low/High Fixed Clip", "Tite-Loc Plus Low/High Fixed Clip"

Two piece assembly; base approximately 2 in. wide, 1-11/16 in. long formed to engage upper tab. Fabricated from No. 16 MSG coated steel. Tab approximately 4-5/16 in. wide; 2-3/8 in. or 2-7/8 in. high, formed to engage base. Fabricated from No. 22 MSG coated steel. Base to have two guide holes.

**PETERSEN ALUMINUM CORP** ([View Classification](#)) — "Tite-Loc Sliding Clip", "Tite-Loc Plus Sliding Clip", "Tite-Loc AR Fixed Clip" and "Tite-Loc AR Sliding Clip", "Tite-Loc Plus AR Fixed Clip" and "Tite-Loc Plus AR Sliding Clip"

2C. **Roof Deck Fasteners (Panel Clips)** — (Not Shown) — No. 24 MSG min gauge coated steel with a separately formed base fabricated of No. 18 MSG min gauge coated steel. One clip to be used per panel at each purlin.

**AMERICAN BUILDINGS CO** ([View Classification](#)) — "LSBC-1", "Loc-Seam MD Clip" or "Loc-Seam Expansion Clip"

**NUCOR BUILDING SYSTEMS, DIV OF NUCOR**

**CORP** ([View Classification](#)) — "NBS VR16 II BC", "NBS VR16 II Sliding " or "NBS VR16 II MD".

**SUPERIOR METAL SYSTEMS INC** ([View Classification](#)) — SMS-24SSC

3. **Endlap Back-Up Plate\*** — (Not Shown) No. 16 MSG min coated steel, 15-1/2 in. wide with two 1 in. wide by 3/4 in. long tabs for sliding over end of panels.

4. **Bearing Plate** — (Optional) No. 20 MSG min coated steel, 4 in. wide by 5 in. long. Used under panel clip (Item 2, 2A, 2B and 2C) over rigid insulation (Item 8).

5. **Panel Fasteners** — (Screws) Screws used to attach the panel clips (Items 2 or 2A) to liner panel (Item 6) to be No. 14 Truss Head with No. 3 Phillips drive. Length to be a min of 1/2 in. longer than the combined thickness of the liner panel (Item 6), rigid insulation (Item 8), gypsum wallboard (Item 10) and plywood or oriented strand board (Item 10). Two screws per clip. Screws used to attach liner panel (Item 6) to purlins (Item 12) to be No. 12 x 1-1/4 in. self-drilling, Hex Head with 5/8 in. O.D. washer. Two screws to be used at each valley. Screws at liner panel side laps to be the same type as liner panel to purlin screws. Spacing to be 20 in. OC.

Screws used at endlap to be one of the following: 14 x 1 in. Type AB, Hex Washer Head self-tapping, 14 x 1-1/4 in. Hex Washer Head, self-tapping; 14 x 1 in. Type AB Phillips Stainless Steel, Self-tapping. Five screws per panel in a 1, 3, 4, 4, 3 in. pattern.

6. **Metal Deck** — No. 22 MSG min steel. Min yield strength 30 KSI. Min depth 1-1/2 in. Panel type to be A, B, F or N Deck. As an alternate metal deck, 22 MSG min steel, min yield strength 80 KSI, min depth 15/16 in. designated Type HD may be used; Liner panel to be fastened to supports with screws as indicated in Item 4 or with welds and weld washers of type indicated by manufacturer of liner panel. Welds to be located in each valley.

7. **Fastener Reinforcement** — (Not Shown) Reinforcements used with the screws attaching the liner panels to the purlins. Thickness to be 0.125 in. with an area of approx 2 sq/in.

8. **Foamed Plastic (Rigid Insulation)** — (Optional) Min thickness 1 in. Any rigid type having a minimum compressive strength of 25 psi or minimum density of 2 pcf or see products Classified under TJBX. Supplied in 4 ft wide sheets.

9. **Plywood or OSB** — (Optional) (Not Shown) Min APA Rated plywood, nom 3/8 in or 1/2 in. thick or oriented strand board (OSB), nom 3/8 in or 7/16 in. thick, 4 x 8 ft. Sheets to be installed on top of Foamed Plastic (Item 8) in lieu of bearing plates (Items 4 or 4A).

10. **Gypsum Board** — (Optional) (Not Shown) Any 5/8 in. thick gypsum wallboard supplied in sheets 2 x 4 to 4 x 12 ft. Applied perpendicular to steel roof deck direction with adhesive. End joints to occur over crests of steel roof deck and be staggered 2 ft in adjacent rows. As an alternate, any 1/2 in. thick gypsum board can be placed on top of the foamed plastic rigid insulation (Item 8). The total cumulative thickness of the rigid board (Item 8) and gypsum board may not exceed 4-1/2 in.

11. **Vapor Barrier** — (Optional) Used between liner panel and foamed plastic. Min 6 mil plastic sheeting.

12. **Supports (Purlins)** — Purlins used for liner panels to be cold formed steel sections. As alternates: structural steel components (hot rolled beams, channels, etc.) may be used. Min gauge and yield to depend on design considerations. Max spacing to depend on design considerations.

Refer to General Information, Roof Deck Constructions, for Items Not Evaluated.

\*Bearing the UL Classification Mark

Last Updated on 2012-02-22

[Questions?](#)

[Print this page](#)

[Notice of Disclaimer](#)

[Page Top](#)

© 2012 UL LLC

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL's Follow-Up Service. Only those products bearing the UL Mark should be considered to be Listed and covered under UL's Follow-Up Service. Always look for the Mark on the product.

UL permits the reproduction of the material contained in the Online Certification Directory subject to the following conditions: 1. The Guide Information, Designs and/or Listings (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from the Online Certifications Directory with permission from UL" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "© 2012 UL LLC".