


CROFT, LLC

SERIES 9100 WOODBUCK MULLION AND SERIES 9100 HEAVY-DUTY MULLION (VERTICAL)


NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE 5TH EDITION FBC, SECTION 1710.5.3.
- MULLION INSTALLATION DETAILS APPLY TO EXTRUDED MULLIONS WITH EXTRUDED ALUMINUM ANCHOR CLIP WHEN USED TO MULL WINDOWS SIDE BY SIDE
- APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED ON THESE PRODUCTS IN WIND BORNE DEBRIS REGIONS ZONE 3 OR LESS SUCH THAT ADJOINING WINDOWS ARE IMPACT RATED.
- USE TWO (2) #10 WOOD SCREWS, PER CLIP, OF SUFFICIENT LENGTH TO ACHIEVE MINIMUM EMBEDMENT OF 1 1/2" INTO WOOD FRAMING. (SEE INSTALLATION DETAILS ON SHEET 2).
- USE TWO (2) 3/16" ITW TAPCONS, PER CLIP, OF SUFFICIENT LENGTH TO ACHIEVE MINIMUM EMBEDMENT OF 1 3/4" INTO CONCRETE OR 1" WHEN INTO HOLLOW BLOCK CMU. (SEE INSTALLATION DETAILS ON SHEET 2).
- USE ONE (1) 1/4" ITW TAPCON, PER CLIP, OF SUFFICIENT LENGTH TO ACHIEVE MINIMUM EMBEDMENT OF 1 3/4" WHEN ANCHORED INTO CONCRETE.
- USE TWO (2) #10-16 SELF-DRILLING SCREWS, PER CLIP, OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM 3 THREADS PENETRATION BEYOND STEEL SUBSTRATE. (SEE INSTALLATION DETAILS ON SHEET 2).
- 2X WOOD BUCKS AND STEEL STUDS TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE AND IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
- SEE CHARTS & NOTES ON SHEET 3, 4, & 5 FOR DESIGN PRESSURE RATINGS.
- THIS MULLION IS ONLY VALID WHEN USED IN CONJUNCTION WITH ALL APPLICABLE CROFT, LLC PRODUCTS.
- ALL WINDOWS USED WITH THIS MULLION SHALL BE QUALIFIED UNDER SEPARATE APPROVAL. THE LESSER DESIGN PRESSURE RATING OF THE WINDOW OR THE MULLION OF INSTALLATION SHALL GOVERN THE OVERALL DESIGN PRESSURE OF THE ASSEMBLY.
- MULLION MATERIAL: 6063-T5 ALUMINUM.
- CLIP MATERIAL: 6063-T5 ALUMINUM.
- INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:
 - WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.
 - CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.
 - CMU - SHALL CONFORM TO MINIMUM REQUIREMENTS OF ASTM C90
 - STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM 18 GA. WALL THICKNESS.

TABLE OF CONTENTS		
SHEET	REVISION	SHEET DESCRIPTION
1	B	GENERAL NOTES & ELEVATIONS
2	A	MULLION INSTALLATION DETAILS & ANCHORING
3	B	SERIES 9100 WOODBUCK MULL DP CHART & DETAILS
4	A	SERIES 9100 HEAVY-DUTY MULL DP CHART & DETAIL
5	A	SERIES 9100 HEAVY-DUTY (LIGHT) MULL DP CHART & DETAIL

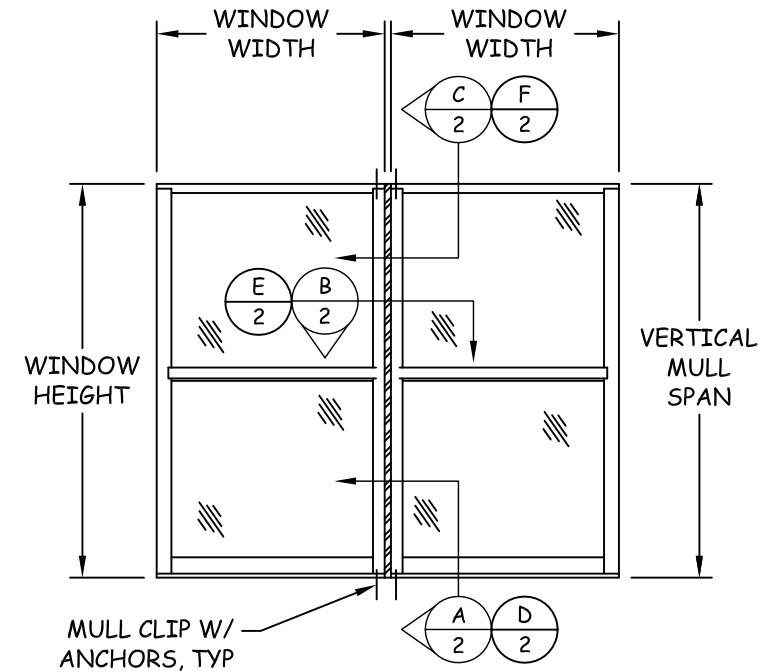

**VERTICAL MULLION FOR
TWIN HUNG WINDOWS**

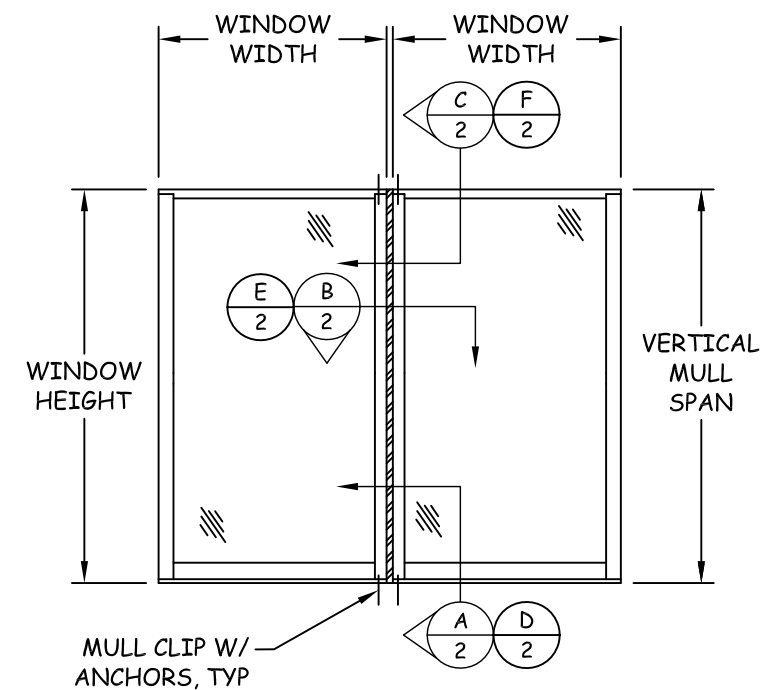

**VERTICAL MULLION FOR
TWIN WINDOWS**




P.O. BOX 826
MCCOMB, MS 39649
PH: 601-684-6121 FX: 601-783-3188

TITLE: SERIES 9000 VERTICAL MULLIONS
GENERAL NOTES AND ELEVATIONS
PREPARED BY:
BUILDING DROPS, INC.
398 EAST DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478 FX: (954) 744-4738


REVISIONS

NO.	DESCRIPTION	BY	DATE
A	REVISION TO MULLIONS & CLIPS	MTJ	6.3.13
B	5TH EDITION FBC UPDATE	SM	9.9.14

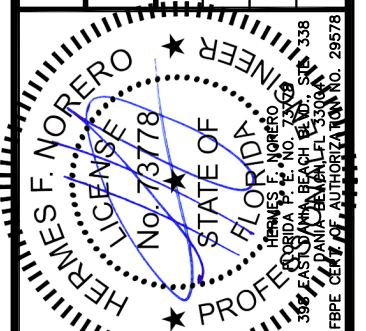


DATE: 04.18.12
DWN BY: MSS
CHK BY: HFN
SCALE: NTS


DWG #: **CRF011**
SHEET: **1 OF 5**

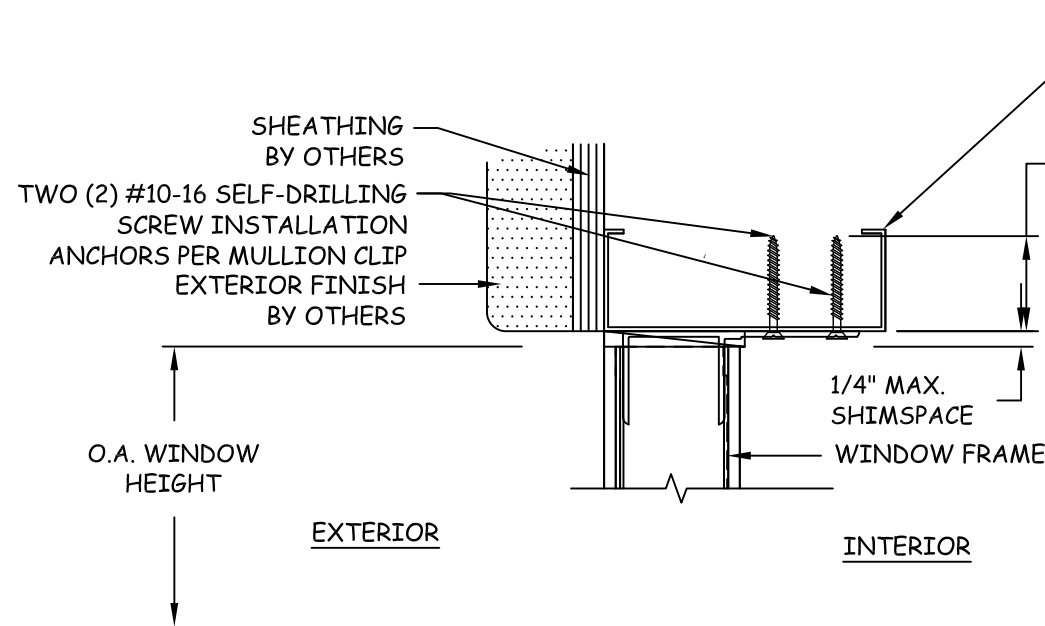


C
2 VERTICAL SECTION
HEAD - STEEL STUD TYP.
SERIES 9100 WOODBUCK MULL

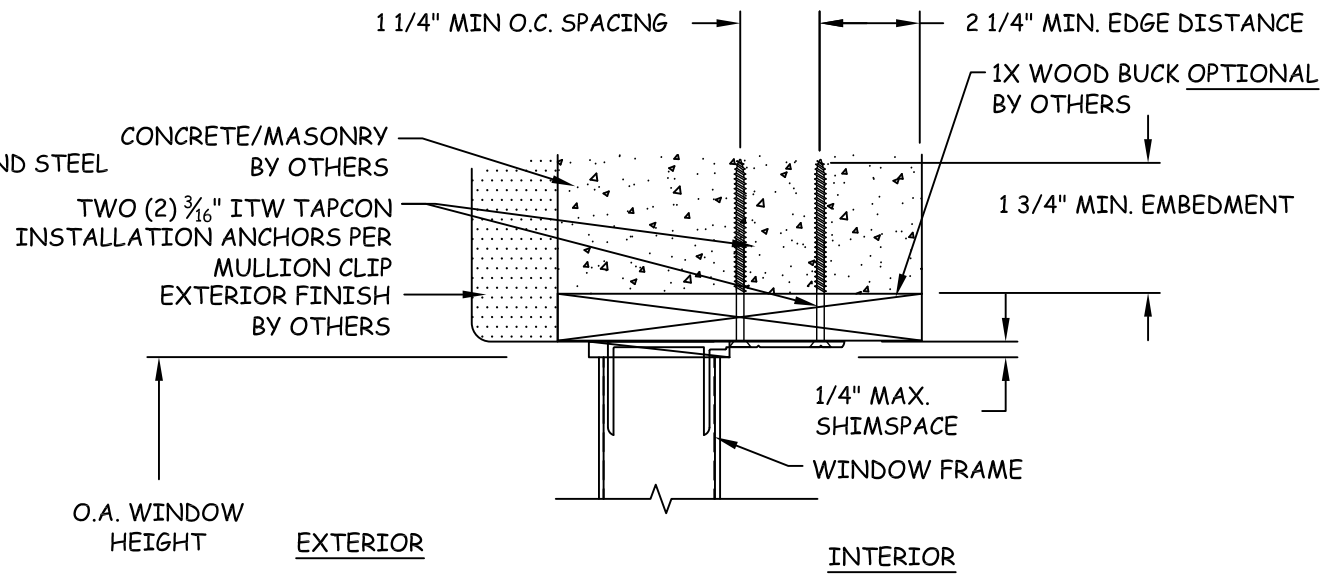

F
2 VERTICAL SECTION
HEAD - 1X BUCK/CONCRETE/MASONRY
SERIES 9000 MULLION (HEAVY/LIGHT)

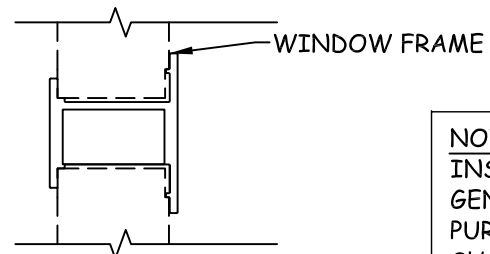


B
2 HORIZONTAL SECTION
SERIES 9100 WOODBUCK MULLION

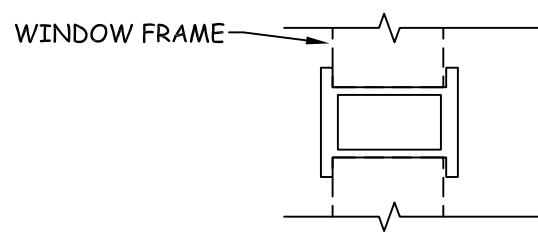


E
2 HORIZONTAL SECTION
SERIES 9000 MULLION (HEAVY/LIGHT)

NOTE:
INSTALLATION DETAILS SHOWN ARE
GENERIC & ARE FOR ILLUSTRATION
PURPOSES. INSTALLATION CONDITIONS
SHOWN MAY BE USED WITH ANY MULLION
DESCRIBED HEREIN.

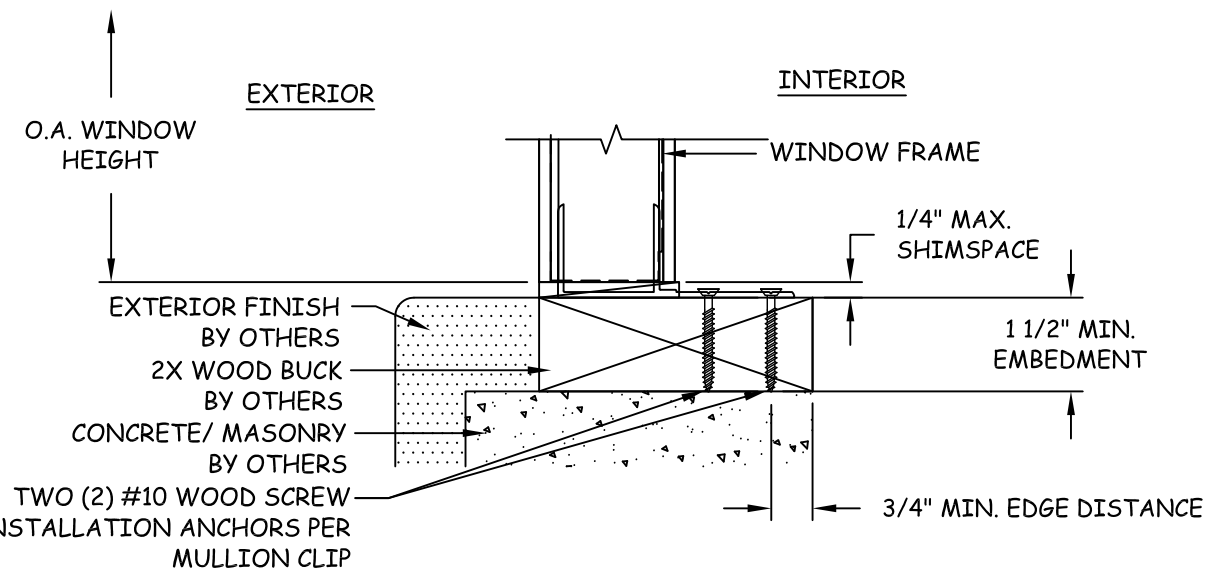

A
2 VERTICAL SECTION
SILL - 2X WOOD BUCK TYP.
SERIES 9100 WOODBUCK MULL

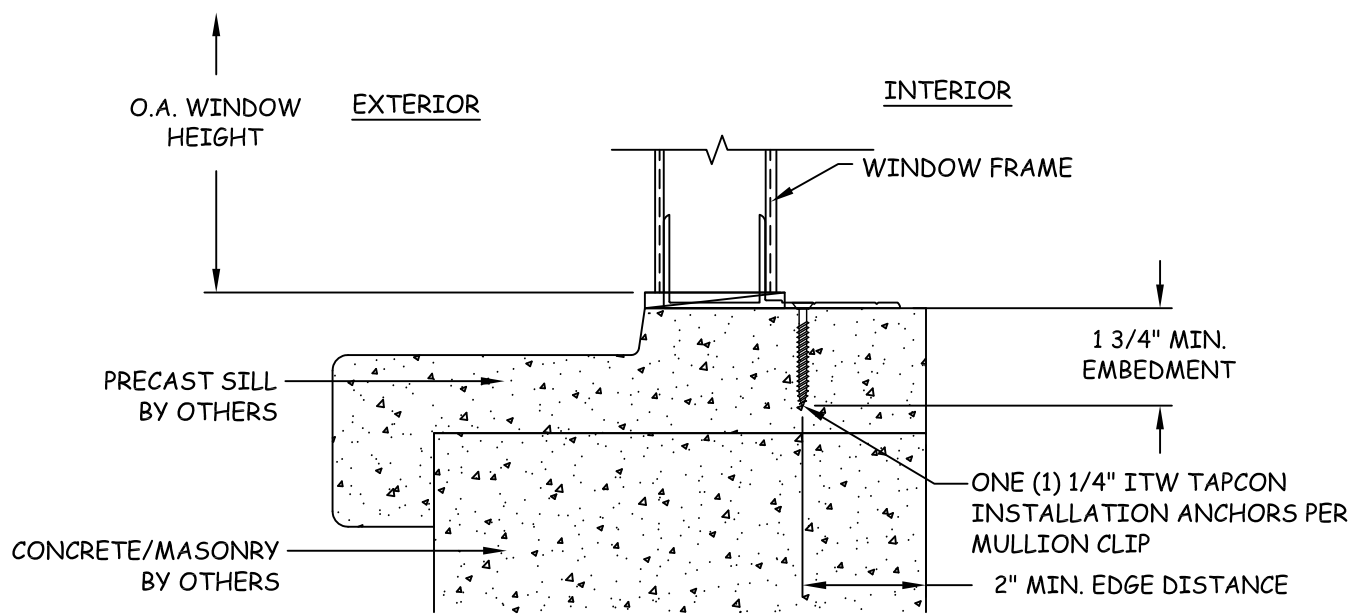


D
2 VERTICAL SECTION
SILL - PRECAST SILL TYP.
SERIES 9000 MULLION (HEAVY/LIGHT)



P.O. BOX 826
MCCOMB, MS 39649
PH: 601-684-6121 FX: 601-783-3188

TITLE: SERIES 9000 VERTICAL
MULLIONS
MULLION INSTALLATION DETAILS
& ANCHORING
PREPARED BY:
BUILDING DROPS, INC.
398 EAST DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478 FX: (954) 744-4738

REVISIONS		NO.	DESCRIPTION	BY	DATE
A	REVISION TO MULLIONS & CLIPS	MTJ	6.3.13		



DATE: 04.18.12
DWN BY: MSS
CHK BY: HFN
SCALE: NTS

DWG #:
CRF011
SHEET: **2 OF 5**

SERIES 9100 WOODBUCK MULL DESIGN PRESSURE CHART

Maximum design pressure capacity chart (psf)

Series 9100 Woodbuck Mullion

Design pressures are limited either by mullion or anchor screws or anchor clip capacity


Height (in)	18.0	21.0	24.0	27.0	30.0	32.0	36.0	42.0	48.0
24.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
30.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
36.0	150.0	150.0	143.0	135.5	130.7	128.7	127.1	127.1	127.1
42.0	138.6	124.5	114.4	107.0	101.7	99.0	95.3	93.4	93.4
48.0	117.3	104.6	95.3	88.4	83.2	80.4	76.2	72.6	71.5
54.0	101.7	90.1	81.7	75.3	70.4	67.7	63.5	59.4	57.2
60.0	89.7	79.2	71.5	65.6	61.0	58.5	54.5	50.3	47.7
66.0	80.3	70.7	63.5	58.1	53.8	51.2	46.7	41.9	38.8
72.0	65.3	56.5	49.9	44.9	41.0	38.8	35.3	31.4	28.8
78.0	51.2	44.2	39.0	35.0	31.9	30.2	27.3	24.2	22.0
84.0	40.8	35.2	31.1	27.9	25.3	23.9	21.6	19.0	17.2
90.0	33.1	28.6	25.2	22.5	20.5	19.3	17.4	15.3	13.7
96.0	27.2	23.5	20.7	18.5	16.8	15.8	14.2	12.4	11.2

NOTES FOR SERIES 9100 WOODBUCK MULLION FOR TWIN WINDOW AND MULLION CLIP INSTALLATIONS


- THE DESIGN PRESSURES IN THIS CHART ARE FOR THE MULLIONS LISTED ABOVE WHEN USED WITH THE CLIP LISTED ABOVE.
- FOR VERTICAL MULL CLIPS IN WOOD FRAMING INSTALLATION USE TWO (2) #10 WOOD SCREWS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO FRAMING. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN STEEL FRAME INSTALLATION, USE (2) TWO #10-16 SELF-DRILLING SCREWS AT EACH ANCHOR CLIP WITH SUFFICIENT LENGTH TO ACHIEVE A MINIMUM 3 THREAD PENETRATION BEYOND STEEL SUBSTRATE. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN CONCRETE OR CMU INSTALLATION USE TWO (2) 3/16" ITW TAPCONS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1" MINIMUM EMBEDMENT INTO CMU (HOLLOW BLOCK) OR 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS. FOR ALTERNATE INSTALLATION TO CONCRETE, SEE NOTE 5 BELOW.
- FOR VERTICAL MULL CLIPS IN CONCRETE INSTALLATION USE ONE (1) 1/4" ITW TAPCON AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS.
- CHART APPLIES ONLY TO SERIES 9100 WOODBUCK MULLION AS SPECIFIED ABOVE WHEN USED TO MULL WINDOWS SIDE BY SIDE.
- READ WINDOW WIDTH AND MULL SPAN IN INCHES. DESIGN PRESSURE VALUES ON THIS CHART ARE POSITIVE AND NEGATIVE POUNDS PER SQUARE FOOT (PSF).
- DESIGN PRESSURE VALUES APPLY TO MULLION WHERE TWO OR MORE WINDOWS ARE LISTED IN A SINGLE OPENING. LESSER DESIGN PRESSURE OF INDIVIDUAL WINDOW OR MULLION OF INSTALLATION SHALL GOVERN.
- REFER TO EVALUATION REPORT# 3214 FOR MORE MULLION SPECIFICATIONS.



P.O. BOX 826
MCCOMB, MS 39649
PH: 601-684-6121 FX: 601-783-3188

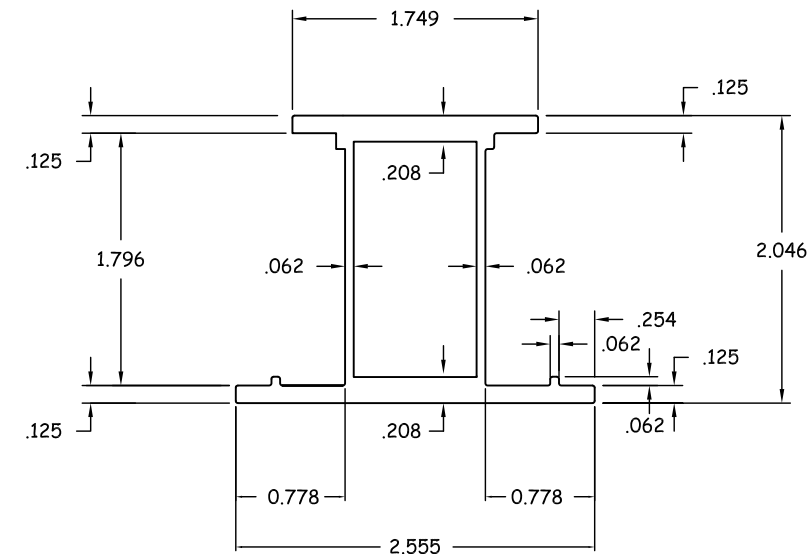

SERIES 9100 WOODBUCK MULL DETAIL

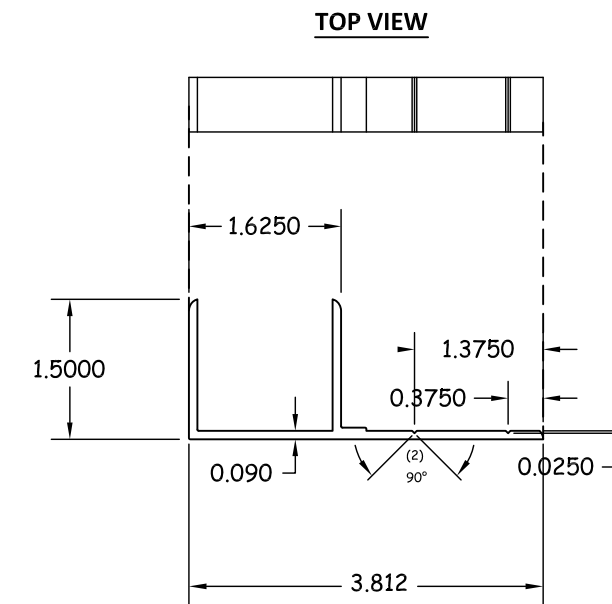


SERIES 9000 MULLION CLIP DETAIL
FOR USE WITH ALL SERIES 9000 MULLIONS

TITLE: SERIES 9000 VERTICAL MULLIONS
SERIES 9100 WOODBUCK MULL DP CHART & DETAILS
PREPARED BY:
BUILDING DROPS, INC.
398 EAST DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478 FX: (954) 744-4738

REVISIONS

NO.	DESCRIPTION	BY	DATE
A	REVISION TO MULLIONS & CLIPS	MTJ	6.3.13
B	REV. TO MULL WALL THICKNESS	MSS	11.7.13

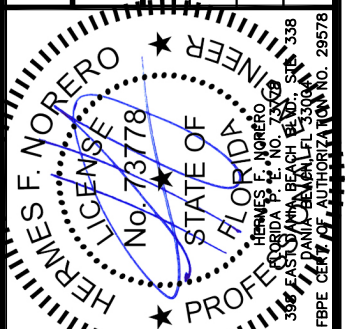

DATE: 04.18.12
DWN BY: MSS
CHK BY: HFN
SCALE: NTS

DWG #: CRF011
SHEET: 3 OF 5


SERIES 9100 MULLION-HEAVY DUTY DESIGN PRESSURE CHART

Maximum design pressure capacity chart (psf)

Series 9100 Heavy Duty Mullion

Design pressures are limited either by mullion or anchor screws or anchor clip capacity

Height (in)	Unit Width (in)								
	18.0	21.0	24.0	27.0	30.0	32.0	36.0	42.0	48.0
24.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
30.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
36.0	150.0	150.0	143.0	135.5	130.7	128.7	127.1	127.1	127.1
42.0	138.6	124.5	114.4	107.0	101.7	99.0	95.3	93.4	93.4
48.0	117.3	104.6	95.3	88.4	83.2	80.4	76.2	72.6	71.5
54.0	101.7	90.1	81.7	75.3	70.4	67.7	63.5	59.4	57.2
60.0	89.7	79.2	71.5	65.6	61.0	58.5	53.5	48.2	44.9
66.0	79.7	69.0	61.0	54.9	50.1	47.5	43.2	38.5	35.4
72.0	66.7	57.6	50.9	45.7	41.6	39.3	35.6	31.6	28.8
78.0	56.7	48.9	43.1	38.7	35.1	33.2	30.0	26.4	23.9
84.0	48.8	42.0	37.0	33.1	30.1	28.4	25.6	22.4	20.2
90.0	42.4	36.5	32.1	28.7	26.1	24.6	22.1	19.3	17.3
96.0	36.5	31.5	27.7	24.8	22.5	21.2	19.1	16.7	15.0

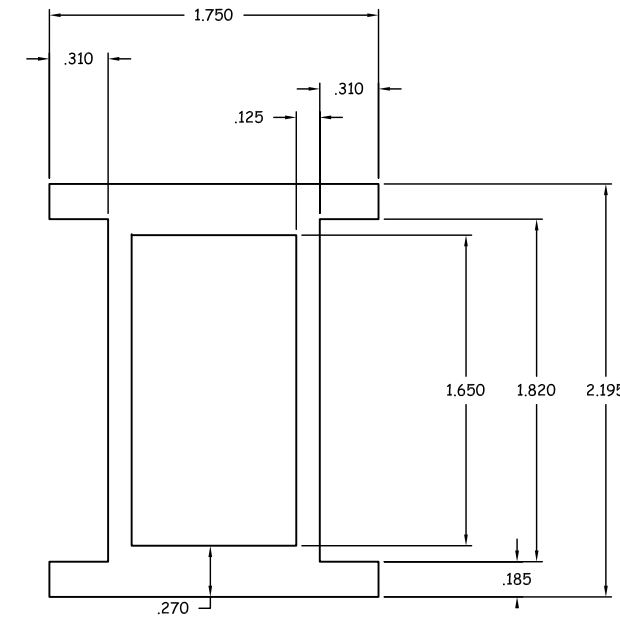

SERIES 9100 MULLION-HEAVY DUTY DETAIL

NOTES FOR SERIES 9100 HEAVY-DUTY MULLION FOR TWIN WINDOW AND MULLION CLIP INSTALLATIONS

- THE DESIGN PRESSURES IN THIS CHART ARE FOR THE MULLIONS LISTED ABOVE WHEN USED WITH THE CLIP LISTED ABOVE.
- FOR VERTICAL MULL CLIPS IN WOOD FRAMING INSTALLATION USE TWO (2) #10 WOOD SCREWS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO FRAMING. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN STEEL FRAME INSTALLATION, USE (2) TWO #10-16 SELF-DRILLING SCREWS AT EACH ANCHOR CLIP WITH SUFFICIENT LENGTH TO ACHIEVE A MINIMUM 3 THREAD PENETRATION BEYOND STEEL SUBSTRATE. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN CONCRETE OR CMU INSTALLATION USE TWO (2) 3/16" ITW TAPCONS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1" MINIMUM EMBEDMENT INTO CMU (HOLLOW BLOCK) OR 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS. FOR ALTERNATE INSTALLATION TO CONCRETE, SEE NOTE 5 BELOW.
- FOR VERTICAL MULL CLIPS IN CONCRETE INSTALLATION USE ONE (1) 1/4" ITW TAPCON AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS.
- CHART APPLIES ONLY TO SERIES 9100 HEAVY DUTY MULLION AS SPECIFIED ABOVE WHEN USED TO MULL WINDOWS SIDE BY SIDE.
- READ WINDOW WIDTH AND MULL SPAN IN INCHES. DESIGN PRESSURE VALUES ON THIS CHART ARE POSITIVE AND NEGATIVE POUNDS PER SQUARE FOOT (PSF).
- DESIGN PRESSURE VALUES APPLY TO MULLION WHERE TWO OR MORE WINDOWS ARE LISTED IN A SINGLE OPENING. LESSER DESIGN PRESSURE OF INDIVIDUAL WINDOW OR MULLION OF INSTALLATION SHALL GOVERN.
- REFER TO EVALUATION REPORT# 3214 FOR MORE MULLION SPECIFICATIONS.




P.O. BOX 826
MCCOMB, MS 39649
PH: 601-684-6121 FX: 601-783-3188

TITLE: SERIES 9000 VERTICAL MULLIONS
SERIES 9100 HEAVY-DUTY MULL DP CHART & DETAIL
PREPARED BY:
BUILDING DROPS, INC.
398 EAST DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478 FX: (954) 744-4738

REVISIONS

NO.	DESCRIPTION	BY	DATE
A	REVISION TO MULLIONS & CLIPS	MTJ	6.3.13
B	REV. TO MULL WALL THICKNESS	MSS	11.7.13

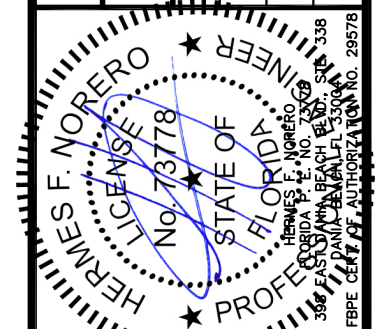

DATE: 04.18.12
DWN BY: MSS
CHK BY: HFN
SCALE: NTS

DWG #: **CRF011**
SHEET: **4 OF 5**



P.O. BOX 826
MCCOMB, MS 39649
PH: 601-684-6121 FX: 601-783-3188

SERIES 9100 MULLION-HEAVY DUTY (LIGHT) DESIGN PRESSURE CHART

Maximum design pressure capacity chart (psf)


Series 9100 Heavy Duty (Light) Mullion

Design pressures are limited either by mullion or anchor screws or anchor clip capacity

Height (in)	Unit Width (in)								
	18.0	21.0	24.0	27.0	30.0	32.0	36.0	42.0	48.0
24.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
30.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0	150.0
36.0	150.0	150.0	137.2	127.8	121.6	119.0	116.8	116.8	116.8
42.0	121.9	107.0	96.3	88.5	82.8	79.8	75.8	73.6	73.6
48.0	91.9	80.2	71.7	65.3	60.5	57.9	53.9	50.4	49.3
54.0	71.9	62.5	55.6	50.4	46.3	44.1	40.6	37.2	35.2
60.0	57.8	50.1	44.4	40.1	36.7	34.9	31.9	28.7	26.7
66.0	47.5	41.1	36.4	32.7	29.9	28.3	25.7	23.0	21.1
72.0	39.8	34.4	30.3	27.2	24.8	23.5	21.2	18.8	17.1
78.0	33.8	29.2	25.7	23.0	20.9	19.8	17.9	15.7	14.2
84.0	29.1	25.0	22.1	19.8	17.9	16.9	15.2	13.4	12.0
90.0	25.0	21.5	19.0	17.0	15.4	14.5	13.1	11.5	10.3
96.0	20.5	17.7	15.6	13.9	12.6	11.9	10.7	9.4	8.4

NOTES FOR SERIES 9100 HEAVY-DUTY (LIGHT) MULLION FOR TWIN WINDOW AND MULLION CLIP INSTALLATIONS


- THE DESIGN PRESSURES IN THIS CHART ARE FOR THE MULLIONS LISTED ABOVE WHEN USED WITH THE CLIP LISTED ABOVE.
- FOR VERTICAL MULL CLIPS IN WOOD FRAMING INSTALLATION USE TWO (2) #10 WOOD SCREWS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 1/2" MINIMUM EMBEDMENT INTO FRAMING. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN STEEL FRAME INSTALLATION, USE (2) TWO #10-16 SELF-DRILLING SCREWS AT EACH ANCHOR CLIP WITH SUFFICIENT LENGTH TO ACHIEVE A MINIMUM 3 THREAD PENETRATION BEYOND STEEL SUBSTRATE. SEE SHEET 2 FOR DETAILS.
- FOR VERTICAL MULL CLIPS IN CONCRETE OR CMU INSTALLATION USE TWO (2) 3/16" ITW TAPCONS AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1" MINIMUM EMBEDMENT INTO CMU (HOLLOW BLOCK) OR 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS. FOR ALTERNATE INSTALLATION TO CONCRETE, SEE NOTE 5 BELOW.
- FOR VERTICAL MULL CLIPS IN CONCRETE INSTALLATION USE ONE (1) 1/4" ITW TAPCON AT EACH MULLION CLIP. ANCHORS MUST BE OF SUFFICIENT LENGTH TO ACHIEVE A 1 3/4" EMBEDMENT INTO CONCRETE. SEE SHEET 2 FOR DETAILS.
- CHART APPLIES ONLY TO SERIES 9100 HEAVY DUTY MULLION (LIGHT) AS SPECIFIED ABOVE WHEN USED TO MULL WINDOWS SIDE BY SIDE.
- READ WINDOW WIDTH AND MULL SPAN IN INCHES. DESIGN PRESSURE VALUES ON THIS CHART ARE POSITIVE AND NEGATIVE POUNDS PER SQUARE FOOT (PSF).
- DESIGN PRESSURE VALUES APPLY TO MULLION WHERE TWO OR MORE WINDOWS ARE LISTED IN A SINGLE OPENING. LESSER DESIGN PRESSURE OF INDIVIDUAL WINDOW OR MULLION OF INSTALLATION SHALL GOVERN.
- REFER TO EVALUATION REPORT# 3214 FOR MORE MULLION SPECIFICATIONS.

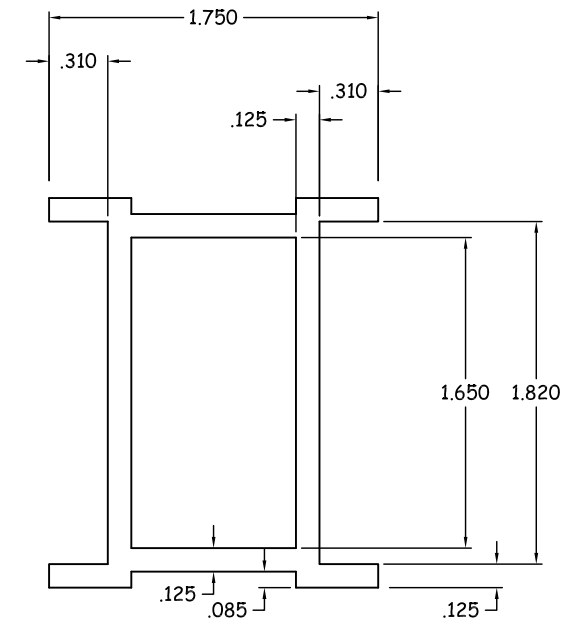

SERIES 9100 MULLION-HEAVY DUTY (LIGHT) DETAIL

TITLE: SERIES 9000 VERTICAL MULLIONS
SERIES 9100 HEAVY-DUTY (LIGHT) MULL DP CHART & DETAIL
PREPARED BY: BUILDING DROPS, INC.
398 EAST DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478 FX: (954) 744-4738

NO.	DESCRIPTION	BY	DATE
		A	REVISION TO MULLIONS & CLIPS

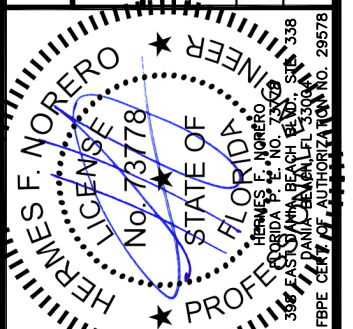

DATE: 04.18.12
DWN BY: MSS
CHK BY: HFN
SCALE: NTS

DWG #: **CRF011**
SHEET: **5 OF 5**