






POLYCARBONATE STORM PANELS (Non-HVHZ)

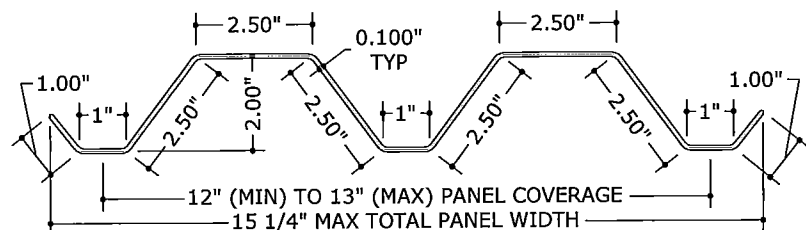


1 FULL PANEL PROFILE
3" = 1'-0" (SEE GEN NOTE 7)
MOUNT WITH FASTENERS OR STUDS AT 13" O.C. MAX

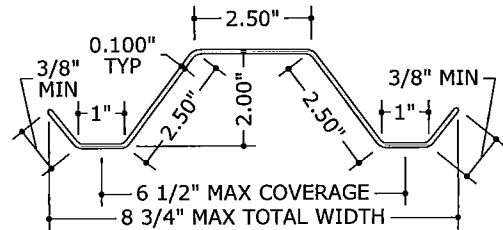


2 HALF PANEL PROFILE
3" = 1'-0" (SEE GEN NOTE 7)
MOUNT WITH FASTENERS OR STUDS AT 6-1/2" O.C. MAX

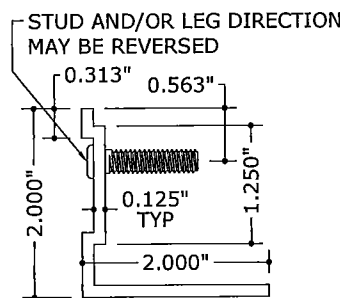


3 STUD ANGLE
6" = 1'-0"

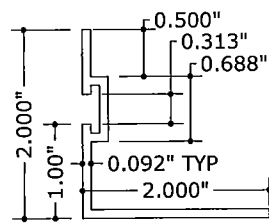


4 REVERSE 'F' ANGLE
6" = 1'-0"

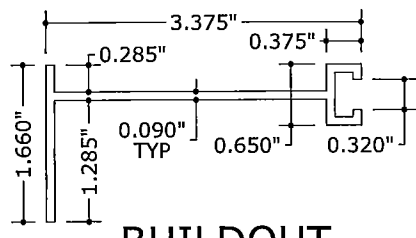


5 BUILDOUT 'F' TRACK
6" = 1'-0"

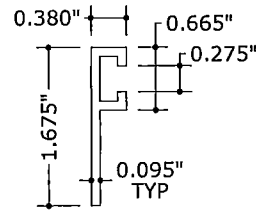

6 'F' TRACK
6" = 1'-0"

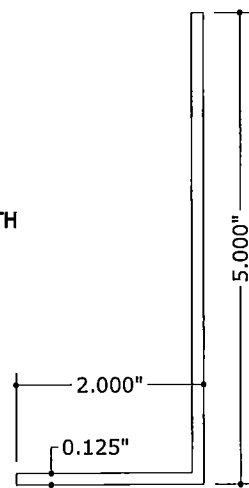


7 CLOSURE ANGLE
6" = 1'-0"

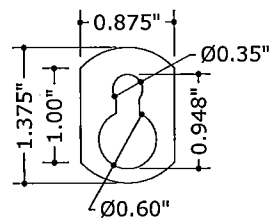


8 KEYHOLE WASHER
6" = 1'-0"




9 WASHERED WINGNUT
6" = 1'-0"

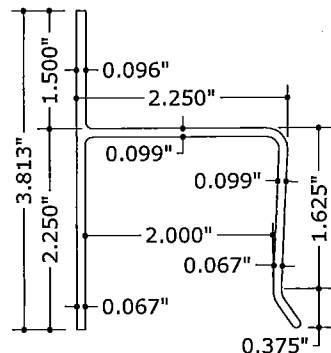


10 'H' HEADER
6" = 1'-0"

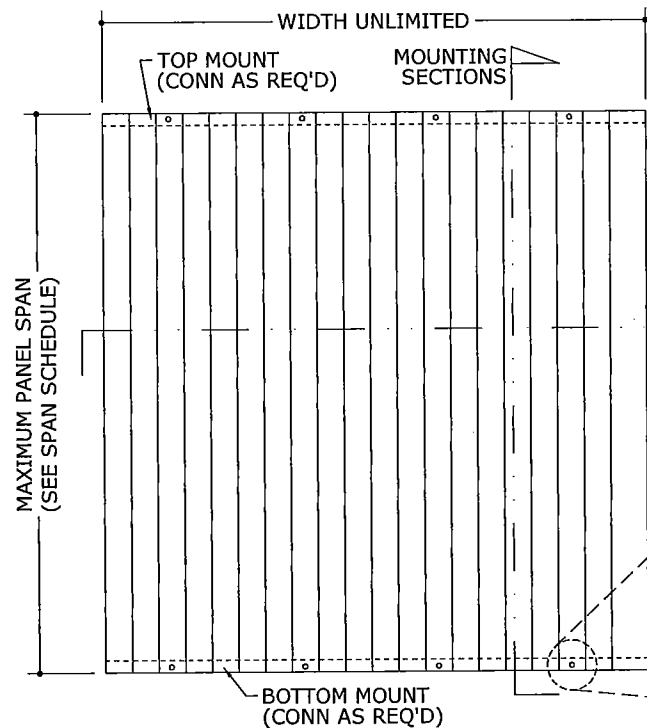

1 TYPICAL ELEVATION
1 N.T.S.

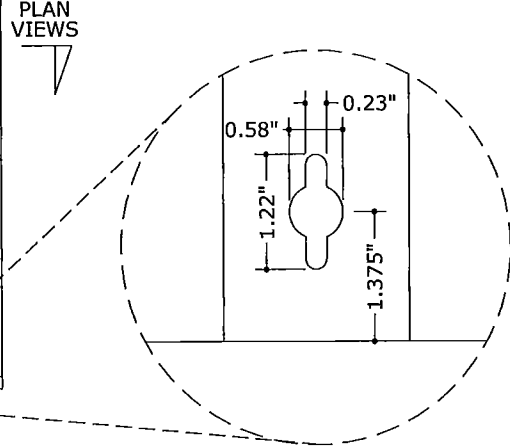

2 KEYHOLE DETAIL
1 N.T.S. ALT: FIELD DRILL Ø3/8" HOLE (OR Ø5/8" HOLE W/ KEYHOLE WASHER)

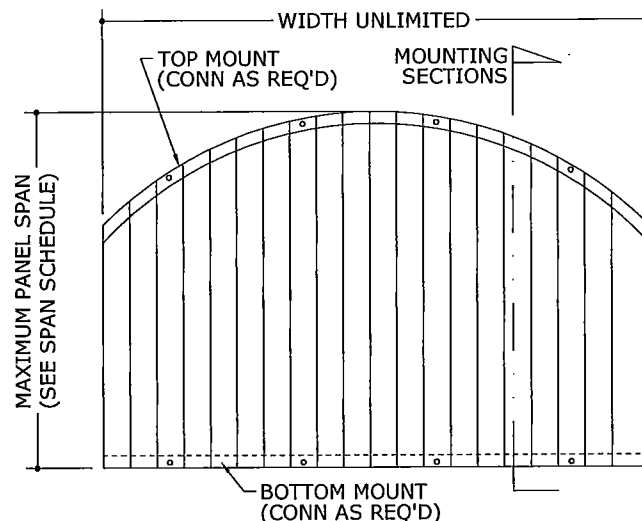

3 ALT. ARCH TOP*
1 N.T.S.

GENERAL NOTES:

- THIS SYSTEM HAS BEEN TESTED AND EVALUATED AS A LARGE MISSILE IMPACT PROTECTIVE SYSTEM IN ACCORDANCE WITH THE REQUIREMENTS OF THE 2010 FLORIDA BUILDING CODE AND THE 2009 INTERNATIONAL BUILDING/RESIDENTIAL CODE PER ASTM STANDARDS E330, E1886, & E1996. PANELS ARE APPROVED FOR USE IN FLORIDA OUTSIDE THE HIGH VELOCITY HURRICANE ZONE, OR THROUGHOUT OTHER AREAS GOVERNED BY THE 2009 IBC/IRC.
- NO 33-1/3% INCREASE IN ALLOWABLE STRESS HAS BEEN USED IN THE DESIGN OF THIS PRODUCT.
- POSITIVE AND NEGATIVE DESIGN PRESSURES CALCULATED FOR USE WITH THIS SYSTEM SHALL BE DETERMINED BY OTHERS ON A JOB-SPECIFIC BASIS IN ACCORDANCE WITH THE GOVERNING CODE. SITE-SPECIFIC PRESSURE REQUIREMENTS AS DETERMINED IN ACCORDANCE WITH ASCE 7-10 AND CHAPTER 1609 OF THE 2010 FLORIDA BUILDING CODE SHALL BE LESS THAN OR EQUAL TO THE POSITIVE OR NEGATIVE DESIGN PRESSURE CAPACITY VALUES LISTED HEREIN FOR ANY ASSEMBLY AS SHOWN.
- DESIGN PRESSURES NOTED HEREIN ARE BASED ON MAXIMUM TESTED PRESSURES DIVIDED BY A 1.5 SAFETY FACTOR.
- THE SYSTEM DETAILED HEREIN IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SPECIFIC SITE. IF SITE CONDITIONS DEVIATE FROM THE CONDITIONS DETAILED HEREIN, A LICENSED ENGINEER OR REGISTERED ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS TO BE USED IN CONJUNCTION WITH THIS DOCUMENT.
- THE ADEQUACY OF THE EXISTING STRUCTURE TO WITHSTAND SUPERIMPOSED LOADS IS OUTSIDE THE SCOPE OF THIS CERTIFICATION AND SHALL BE VERIFIED BY OTHERS.
- CLEAR POLYCARBONATE STORM PANELS (FULL, HALF, & DOUBLE-WIDE) MAY VARY IN "COVERAGE" WIDTH UP TO THE RESPECTIVE MAXIMA SHOWN HEREIN, PROVIDED THAT THE PANEL PROFILE HEIGHT BE MAINTAINED. PANELS SHALL BE MOUNTED WITH FASTENERS OR STUDS AT MAXIMUM SPACING SHOWN FOR EACH PROFILE.
- ALL POLYCARBONATE PANELS SHALL BE MANUFACTURED BY TRANSPARENT PROTECTION SYSTEMS, Inc.
- THIS PRODUCT APPROVAL IS FOR THE USE OF CLEAR POLYCARBONATE PANELS ONLY. ALL POLYCARBONATE PANELS SHALL BE EXTRUDED WITH THICKNESS $t=0.100"$ ($\pm 0.010"$) AND SHALL BE MANUFACTURED FROM 100% SYNTHETIC THERMOPLASTIC POLYMER RESIN (UV STABILIZED). TYPICAL SYNTHETIC THERMOPLASTIC POLYMER TENSILE STRENGTH $F_y=8.908$ KSI, FLEXURAL STRENGTH $F_{by}=12.90$ KSI, & FLEXURAL MODULUS IS 328.7 KSI.
- ALL EXTRUSIONS SHALL BE 6063-T6 ALUMINUM ALLOY, U.N.O.
- PANELS SHALL BE PERMANENTLY LABELED WITH A MINIMUM OF ONE LABEL PER PANEL CONTAINING THE FOLLOWING:
TRANSPARENT PROTECTION SYSTEMS, INC.
WEST PALM BEACH, FLORIDA
ASTM E330, E1886 & E1996
PRODUCT APPROVAL NUMBER

12) STORM PANELS HAVE BEEN DESIGNED AND TESTED TO THE MAXIMUM SPANS AND CORRESPONDING LOADS SHOWN HEREIN. REFERENCE CONSTRUCTION TESTING CORPORATION (CTC OF MIAMI, FL) TEST REPORTS #04-09-FE-ASTM & #04-09-LE-ASTM, AS WELL AS HURRICANE TEST LAB (HTL OF RIVIERA BEACH, FL) TEST REPORTS #0239-0107-05, #0239-1013-07, #0239-0312-06, #0239-0110-07 & #0239-0813-06.


13) TOP & BOTTOM MOUNTING SECTIONS MAY BE INTERCHANGED AS FIELD CONDITIONS DICTATE. PANELS MAY BE MOUNTED VERTICALLY OR HORIZONTALLY AS APPLICABLE.

14) USE OF KEYHOLE WASHERS IS OPTIONAL IN CONJUNCTION WITH ANY MOUNTING CONDITION. HOLES MAY BE FIELD DRILLED AT Ø3/8" (OR Ø5/8" WITH KEYHOLE WASHER) WITH ANY FASTENER TYPE. WASHERED WINGNUTS SHALL HAVE 0.865" MINIMUM WASHER DIAMETER.

15) ALL BOLTS & WASHERS SHALL BE ZINC COATED STEEL, GALVANIZED STEEL, OR STAINLESS STEEL WITH A MINIMUM TENSILE YIELD STRENGTH OF 60 KSI.

16) THE HURRI-OUT EGRESS STORM PANEL DETAILS ARE INTENDED TO ALLOW THE POSSIBILITY OF REMOVING PANELS FROM INSIDE OF DWELLING. RESULTS MAY VARY ACCORDING TO INSTALLATION, END-USER, AND TRAINING, ETC. ENGINEERING EXPRESS AND TRANSPARENT PROTECTION SYSTEMS DO NOT ASSUME ANY RESPONSIBILITY OR LIABILITY ASSOCIATED WITH USE OF THIS INSTALLATION AND OR ITS APPLICATIONS.

*NOTE: FOR ALTERNATE ARCH TOP INSTALLATIONS, THE TOP TRACK OR U-HEADER SHALL BE CUT INTO 6" MINIMUM ADJACENT SEGMENTS. EACH SEGMENT SHALL HAVE ANCHORS SPACED PER THE ANCHOR SCHEDULE, WITH A MINIMUM OF (2) ANCHORS PER SEGMENT. ANCHORS SHALL BE 1-1/2" MIN FROM ENDS OF EACH SEGMENT AND SPACED 3" MINIMUM FROM ADJACENT ANCHORS. FOR STUDDED TRACKS ONLY, THERE SHALL BE A MINIMUM OF (1) STUD PER SEGMENT FASTENED TO THE STORM PANEL. STUDS SHALL BE LOCATED 2" MINIMUM FROM ENDS OF EACH SEGMENT.

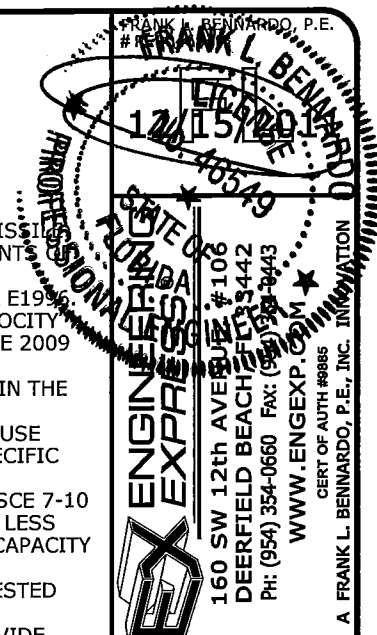

Transparent Protection Systems, Inc.
6643 42nd Terrace North
West Palm Beach, FL 33407
CLEARGUARD POLYCARBONATE STORM PANELS
FOR USE OUTSIDE THE HVHZ
FLORIDA STATEWIDE APPROVAL


REMARKS	DRWN	CHKD	DATE
ORIG ISSUE	CL	FLB	8/17/04
2004 FBC	CL	FLB	8/05/05
ClearMAX PROFILE ADDED	CL	FLB	2/06/06
2007 FBC REVISION	CL	KL	12/29/08
2010 FBC REVISIONS	EFT	KL	12/12/11

THIS DOCUMENT IS THE PROPERTY OF FRANK L. BENARDO, P.E. ANY REPRODUCTION OR DISTRIBUTION OF THIS DOCUMENT IS NOT PERMITTED AND WILL BE PURSUED TO THE FULL EXTENT OF THE LAW.

COPYRIGHT FRANK L. BENARDO, P.E.
08-TPS-0008
SCALE: 1/8"
PAGE DESCRIPTION: 06


1 OF 7

12/15/2011 4:38pm keithl F:\01 Project Files\Transparent Protection (TPS)\2008\08-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg

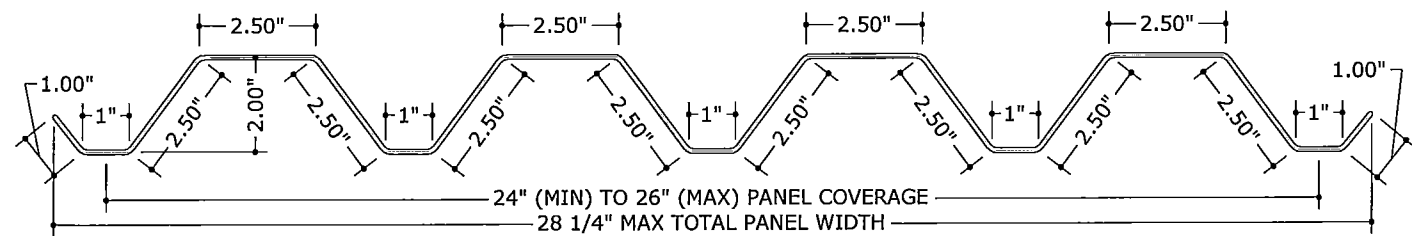


11 "CLEARMAX™" DOUBLE-WIDE PANEL PROFILE
 3" = 1'-0" (SEE GEN NOTE 6)

MOUNT WITH FASTENERS OR STUDS AT 13" O.C. MAX

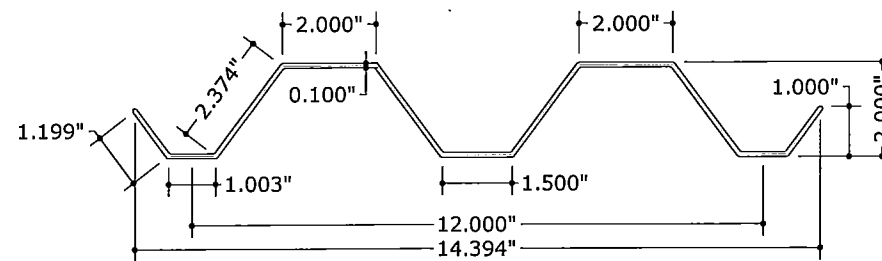


12 ALT. FULL PANEL PROFILE
 N.T.S. (SEE GEN NOTE 6)


MOUNT WITH FASTENERS OR STUDS AT 13" O.C. MAX

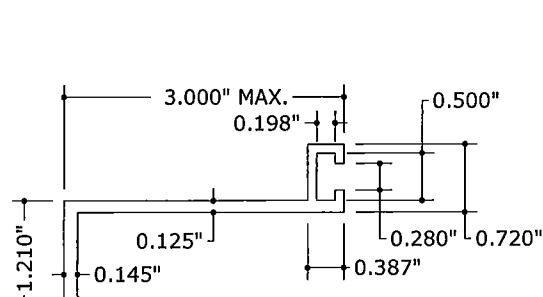


13 ALTERNATE B.O. 'F' TRACK
 6" = 1'-0"

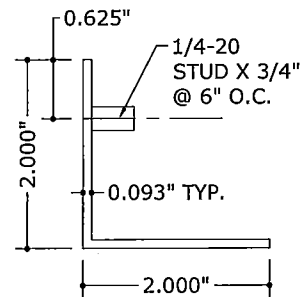

14 ALTERNATE STUD ANGLE
 6" = 1'-0"

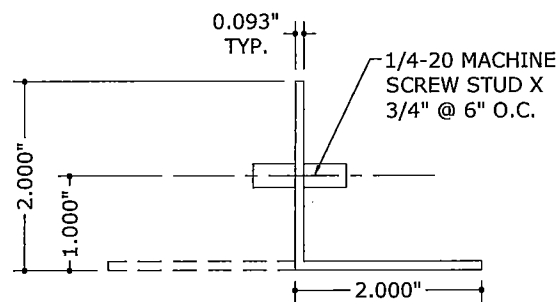

15 STUDDED ANGLE
 6" = 1'-0"

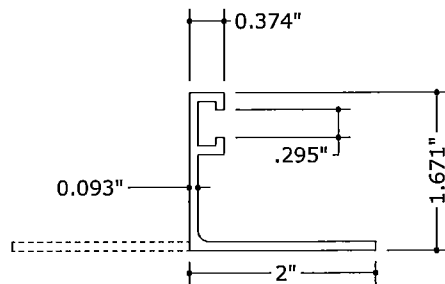

20 'F' TRACK ANGLE
 6" = 1'-0"

MAXIMUM PANEL SPAN SCHEDULE (POSITIVE CONN.)

LOAD (psf)	MAX SPAN (ft)
38	12'-0"
40	11'-5"
45	10'-1"
50	9'-1"
55	8'-3"
60	7'-7"
65	7'-0"
70	6'-7"
75	6'-1"
80	5'-9"
90	5'-1"
100	4'-7"
110	4'-2"
120	3'-10"

MAXIMUM PANEL SPAN SCHEDULE (W/ "H" HEADER)


LOAD (psf)	MAX SPAN (ft)
17.3	8'-7"
24.2	7'-9"
34.6	7'-0"
41.6	6'-0"
55.4	5'-0"
104	4'-0"

MAXIMUM PANEL SPAN SCHEDULE (W/ "U" HEADER)


MAX SPAN (ft)	MAX DESIGN PRESSURES	
	POSITIVE (psf)	NEGATIVE (psf)
6'-3"	35	38
5'-3"	48	48
4'-4"	78	80

MAXIMUM SPAN SCHEDULE NOTES:


1. SPANS SHOWN IN "MAX PANEL SPAN SCHEDULES" ARE MAXIMUM ALLOWABLE SPANS AT EACH RESPECTIVE DESIGN PRESSURE.
2. THE <POSITIVE CONNECTION> SPAN SCHEDULE MAY BE USED TO DETERMINE MAXIMUM ALLOWABLE SPANS FOR PANELS INSTALLED USING ANY COMBINATION OF MOUNTING EXTRUSIONS INVOLVING A POSITIVE CONNECTION - i.e. ALL INSTALLATIONS WHICH DO NOT INCLUDE AN "H" OR "U" HEADER.
3. THE <WITH "H" HEADER> SPAN SCHEDULE SHALL BE USED FOR ALL INSTALLATIONS WHICH INCLUDE AN "H" HEADER.
4. THE <WITH "U" HEADER> SPAN SCHEDULE SHALL BE USED FOR ALL INSTALLATIONS WHICH INCLUDE A "U" HEADER.
5. TABLES ARE VALID FOR PANELS MOUNTED HORIZONTALLY OR VERTICALLY. SPAN DIRECTION IS ALWAYS PERPENDICULAR TO LINE OF ANCHORAGE.

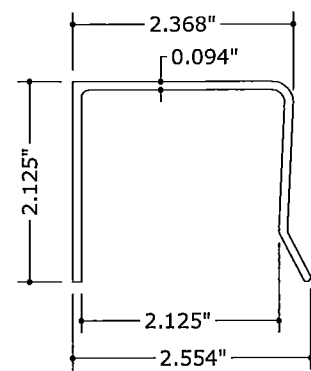


16 U-HEADER
 N.T.S. 6063-T6

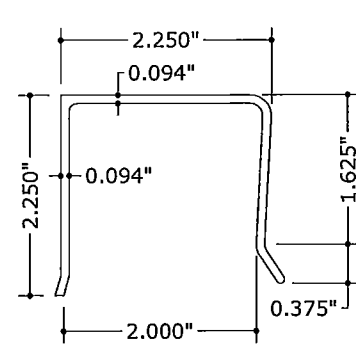

17 ALTERNATE U-HEADER
 N.T.S. 6063-T6

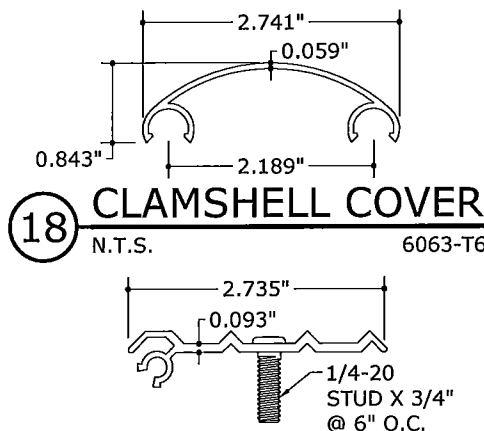

18 CLAMSHELL COVER
 N.T.S. 6063-T6

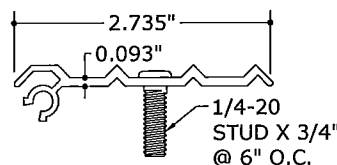

19 CLAMSHELL TRACK
 N.T.S. 6063-T6

FRANK L. BENNARDO, P.E.
 #PE0043946

NO. 12151200

STATE OF FLORIDA
 PROFESSIONAL ENGINEER

ENGINEERING EXPRESS, INC.
 160 SW 12th Avenue, Suite 105
 Deerfield Beach, FL 33442
 Ph: (954) 354-0660 Fax: (954) 354-0648
 WWW.ENGEXP.COM

A FRANK L. BENNARDO, P.E., INC. INNOVATION

TPS Transparent Protection Systems, Inc.
 6643 42nd Terrace North
 West Palm Beach, FL 33407

CLEARGUARD POLYCARBONATE STORM PANELS
 FOR USE OUTSIDE THE HVHZ
 FLORIDA STATEWIDE APPROVAL

REMARKS	DRWN	CHKD	DATE
ORIG ISSUE	CL	FLB	8/17/04
2004 FBC	CL	FLB	8/05/05
ClearMAX PROFILE ADDED	CL	FLB	2/09/06
2010 FBC REVISIONS	KL	CL	12/29/08
2010 FBC REVISIONS	LEFT	KL	12/12/11


THIS DOCUMENT IS THE PROPERTY OF FRANK L. BENNARDO, P.E. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT WRITTEN CONSENT OF FRANK L. BENNARDO, P.E. IS STRICTLY PROHIBITED. ANY REPRODUCTION OR TRANSMISSION OF THIS DOCUMENT WITHOUT WRITTEN CONSENT OF FRANK L. BENNARDO, P.E. IS STRICTLY PROHIBITED AND WILL INVALIDATE OUR CERTIFICATION.

COPYRIGHT FRANK L. BENNARDO, P.E.
08-TPS-0008
 SCALE: 1/8" = 1'-0"
 PAGE DESCRIPTION: 06


OF 7

2


12/14/2011 - 8:05pm keithl F:\01 Project Files\Transparent Protection (TPS)\2008\06-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg F:\01 Project Files\Transparent Protection (TPS)\2008\06-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg 06 20108-TPS-0008_06 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg

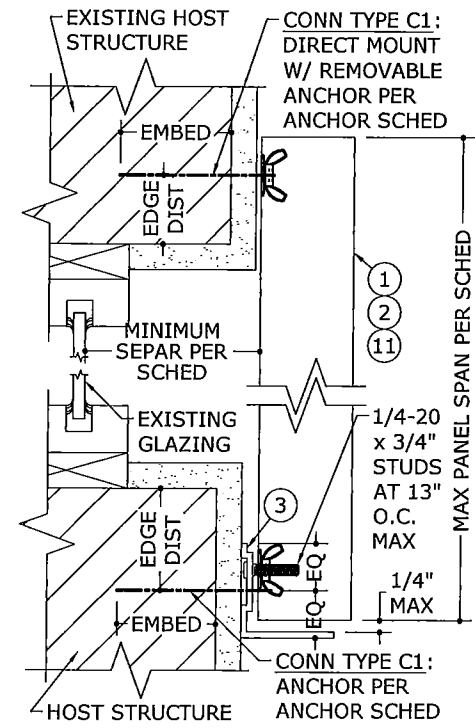


1 MOUNTING SECTION
3 3" = 1'-0" VERT SECTION

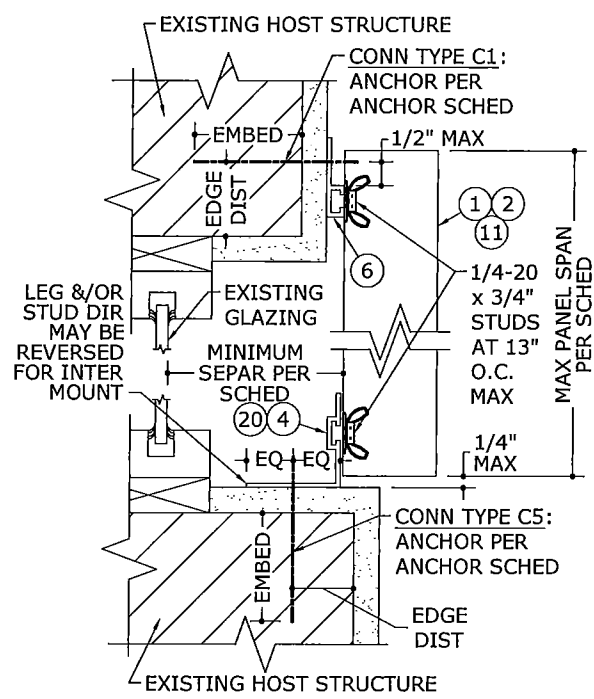

2 MOUNTING SECTION
3 3" = 1'-0" VERT SECTION

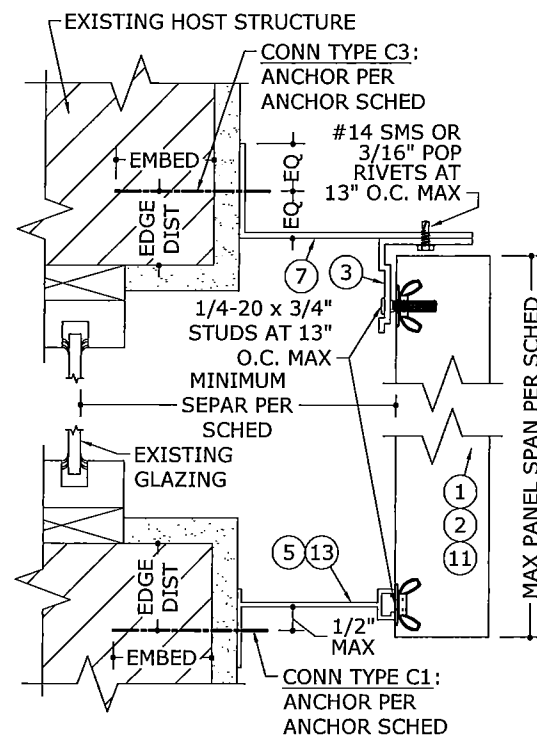


3 MOUNTING SECTION
3 3" = 1'-0" VERT SECTION

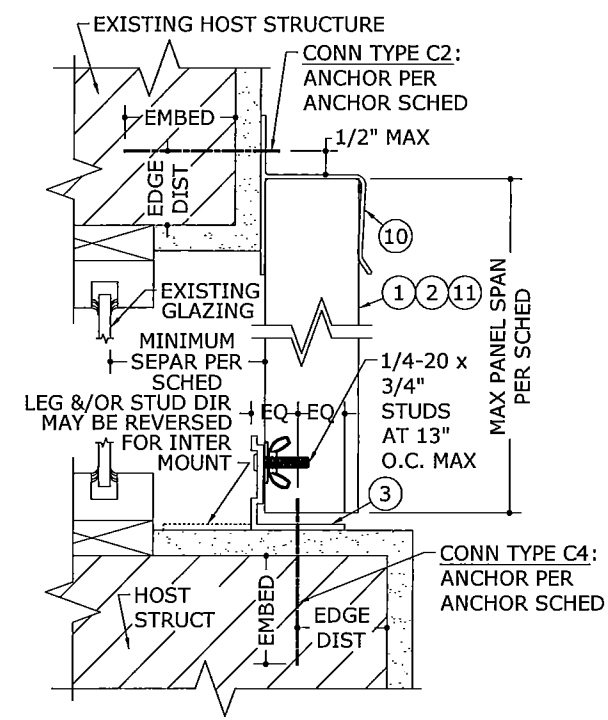


4 MOUNTING SECTION
3 3" = 1'-0" VERT SECTION

HURRI-OUT™ EGRESS STORM PANEL DETAILS*

(*NOTE: SEE GENERAL NOTE #15)

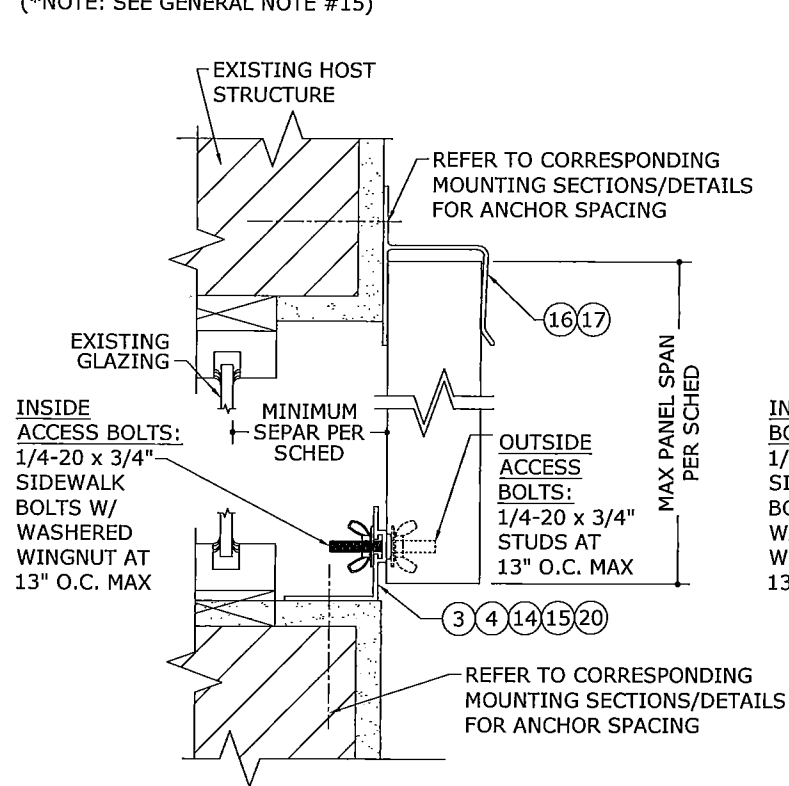


5 MOUNTING SECTION
3 N.T.S. VERT SECTION

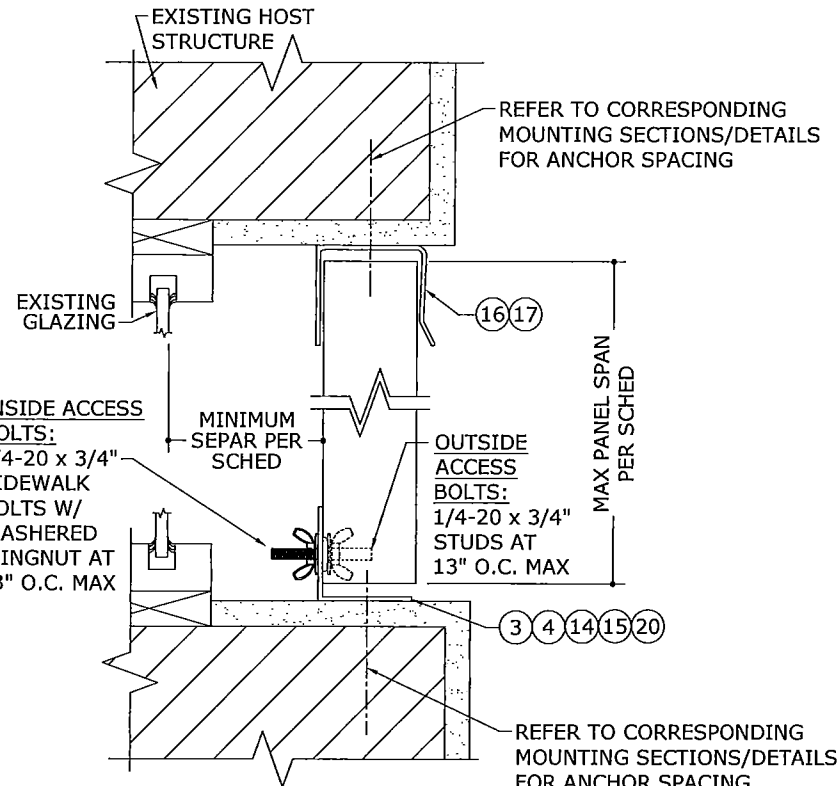

6 MOUNTING SECTION
3 N.T.S. VERT SECTION

- ALUMINUM OR GALVANIZED STEEL SPACER:
- REQUIRED ONLY FOR EIFS, ICF, OR OTHER MALLEABLE FINISHES.
 - OPTIONAL FOR STUCCO, BRICK, OR OTHER RIGID FINISHES.

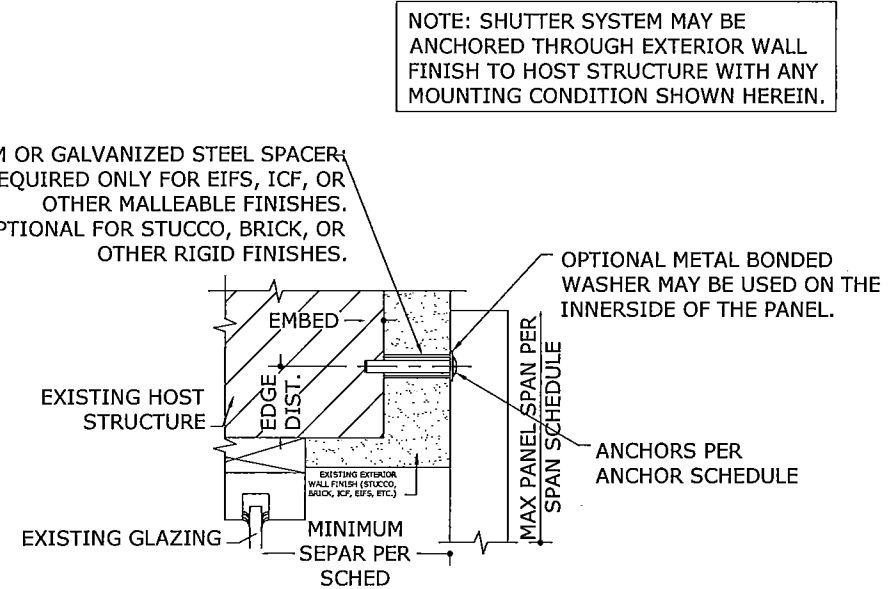

7 MOUNTING SECTION THRU EXTERIOR WALL FINISH (BRICK, ICF, EIFS, ETC.)
3 N.T.S. VERT SECTION

NOTE: SHUTTER SYSTEM MAY BE ANCHORED THROUGH EXTERIOR WALL FINISH TO HOST STRUCTURE WITH ANY MOUNTING CONDITION SHOWN HEREIN.

FRANK L. BENNARDO, P.E.
PE0046549

ENGINEERING EXPRESS

PROFESSIONAL ENGINEER
FLORIDA STATEWIDE APPROVAL

160 SW 12th Avenue, #106
Deerfield Beach, FL 33442
Ph: (954) 354-0660 Fax: (954) 354-0443
WWW.ENGEXP.COM

CERT OF AUTH #9885
A FRANK L. BENNARDO, P.E., INC., INNOVATION

TPS Transparent Protection Systems, Inc.

6643 42nd Terrace North
West Palm Beach, FL 33407

CLEARGUARD POLYCARBONATE STORM PANELS
FOR USE OUTSIDE THE HVHZ
FLORIDA STATEWIDE APPROVAL

DRWN	CHKD	DATE
CL	FLB	8/17/04
CL	FLB	8/05/05
CL	FLB	2/06/06
KL	CL	12/29/08
LEFT	KL	12/12/11

REVISIONS:
2004 FBC
2007 FBC REVISION
2010 FBC REVISIONS

REMARKS:
THIS DOCUMENT IS NOT PERMITTED TO BE REPRODUCED IN WHOLE OR IN PART WITHOUT WRITTEN CONSENT OF FRANK L. BENNARDO, P.E. ALL VARIATIONS, ADDITIONS, DELETIONS, OR OTHER MODIFICATIONS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

COPYRIGHT FRANK L. BENNARDO, P.E.

08-TPS-0008


SCALE: 1/8" = 1'-0"

PAGE DESCRIPTION: 06


OF 7

3


12/14/2011 - 8:05pm keithl F:\01 Project Files\Transparent Protection (TPS)\2008\08-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg
 F:\01 Project Files\Transparent Protection (TPS)\2008\08-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA)\FSA.06 20108-TPS-0008-06b ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg

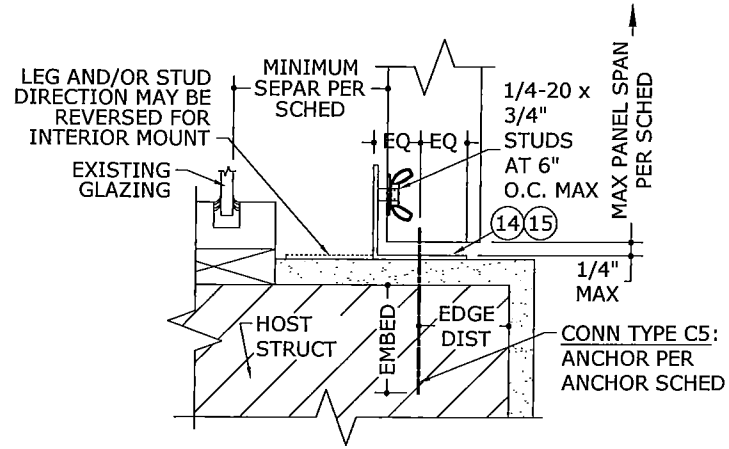


1 MOUNTING SECTION
 4 3" = 1'-0" VERT SECTION

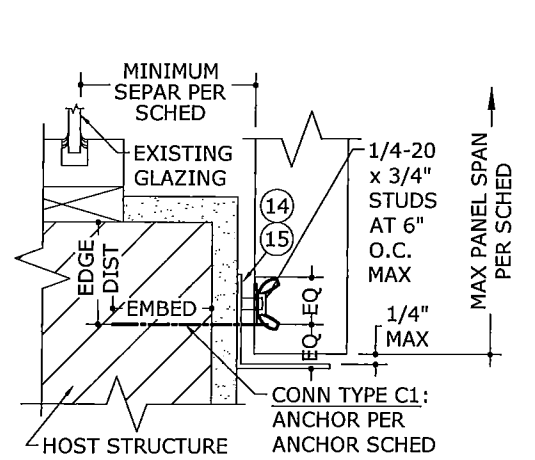

2 MOUNTING SECTION
 4 3" = 1'-0" VERT SECTION


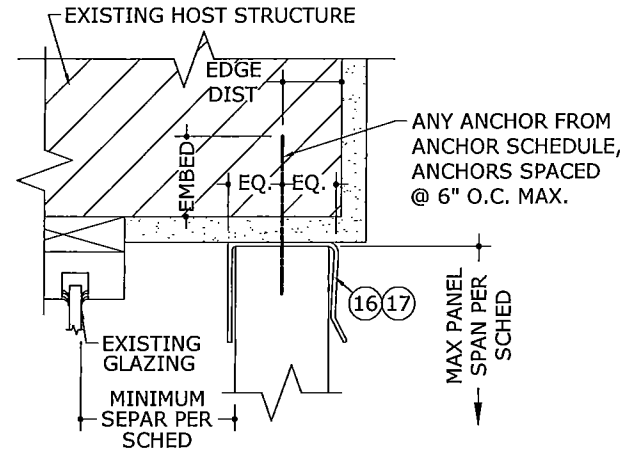


3 MOUNTING SECTION
 4 N.T.S. VERT SECTION

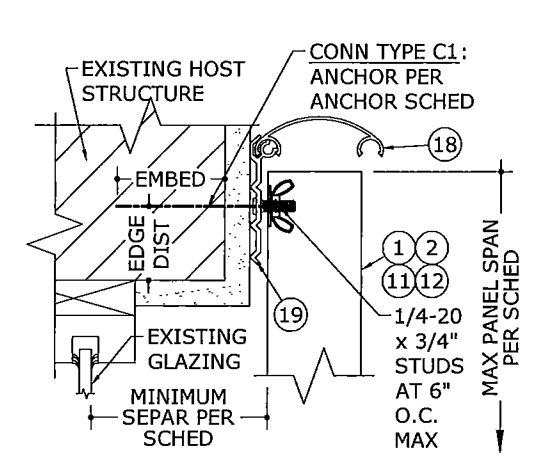

4 MOUNTING SECTION
 4 N.T.S. VERT SECTION

BUILDOUT MOUNTING DETAILS

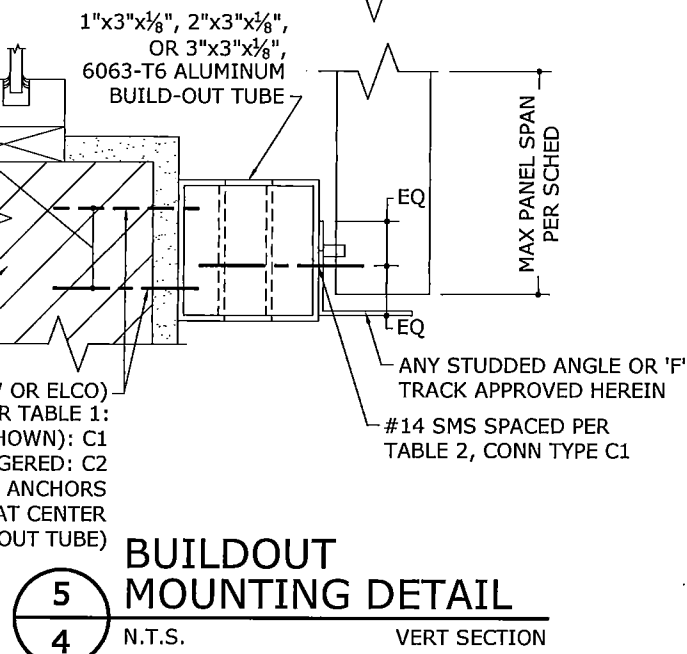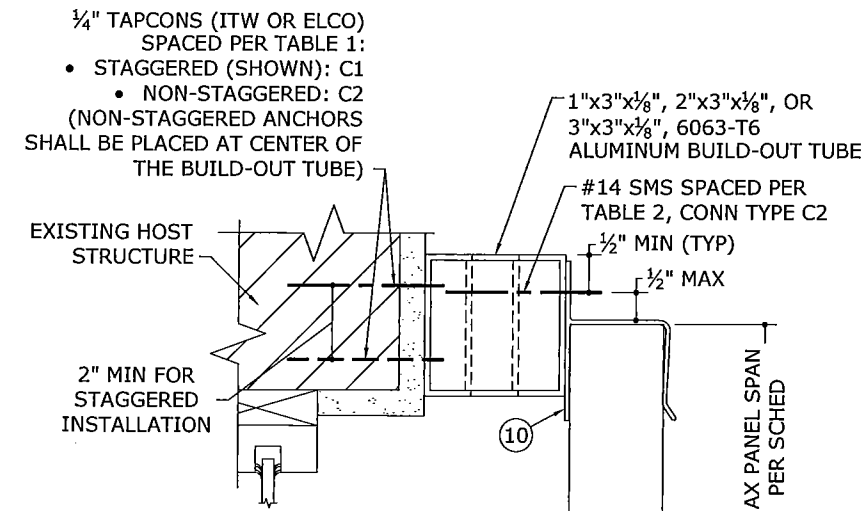

5 BUILDOUT MOUNTING DETAIL
 4 N.T.S. VERT SECTION


TABLE 1*: BUILDOUT ONLY

HOST STRUCT.	LOAD (psf)	Spans Up To 6'-0"		Spans Up To 8'-6"		Spans Up To 11'-4"	
		CONN TYPE C1	CONN TYPE C2	CONN TYPE C1	CONN TYPE C2	CONN TYPE C1	CONN TYPE C2
CONCRETE	30	13.0"	13.0"	13.0"	13.0"	13.0"	11.8"
	38	13.0"	13.0"	13.0"	12.4"	13.0"	9.3"
	47	13.0"	13.0"	13.0"	10.1"	13.0"	8.5"
	54	13.0"	12.4"	13.0"	8.8"	13.0"	8.5"
	120	13.0"	8.5"	13.0"	8.5"	13.0"	8.5"
HOLLOW BLOCK	30	10.9"	6.6"	7.7"	4.6"	5.8"	3.5"
	38	8.6"	5.2"	6.1"	3.7"	4.6"	
	47	7.0"	4.2"	4.9"	3.0"	4.2"	
	54	6.1"	3.6"	4.3"		4.2"	
	120	4.2"		4.2"		4.2"	
WOOD	30	13.0"	8.5"	10.0"	6.0"	7.5"	4.5"
	38	11.2"	6.7"	7.9"	4.7"	5.9"	3.6"
	47	9.1"	5.4"	6.4"	3.8"	5.4"	3.3"
	54	7.9"	4.7"	5.6"	3.3"	5.4"	3.3"
	120	5.4"	3.3"	5.4"	3.3"	5.4"	3.3"

TABLE 2*: BUILDOUT ONLY

LOAD (psf)	Spans Up To 6'-0"		Spans Up To 8'-6"		Spans Up To 11'-4"	
	CONN TYPE C1	CONN TYPE C2	CONN TYPE C1	CONN TYPE C2	CONN TYPE C1	CONN TYPE C2
30	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"
38	13.0"	13.0"	13.0"	13.0"	11.3"	8.1"
47	13.0"	13.0"	12.2"	9.4"	10.3"	6.8"
54	13.0"	13.0"	10.6"	7.2"	10.3"	6.8"
120	10.3"	6.8"	10.3"	6.8"	10.3"	6.8"


NOTES:
 1. TABLE 1 AND 2 APPLY ONLY TO BUILDOUT MOUNTING DETAIL (7/3).
 2. TAPCONS SHALL BE INSTALLED WITH THE FOLLOWING MINIMUM EMBEDMENT:
 • TO CONCRETE: 1 3/4" MIN
 • TO HOLLOW BLOCK: 1 1/4" MIN
 • TO WOOD: 1 1/2" MIN
 3. REFER TO SHT 6 FOR ADDITIONAL ANCHOR NOTES.
 4. THESE MOUNTING CONDITIONS MAY BE USED INDEPENDENTLY OF ONE ANOTHER AND IN CONJUNCTION WITH OTHER MOUNTING CONDITIONS/DETAILS DEPICTED HEREIN.

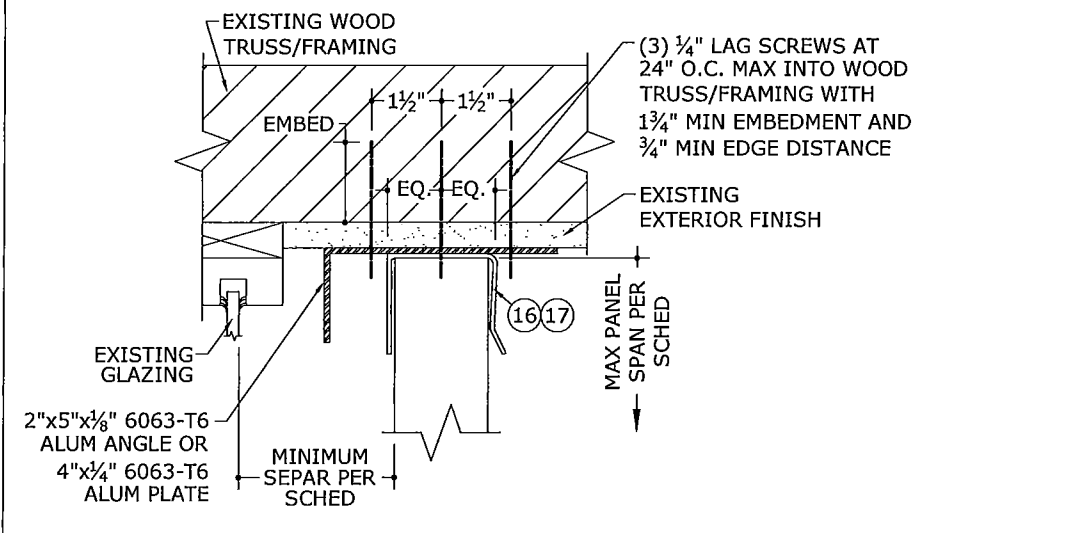

6 WOOD TRUSS MOUNT DETAIL
 4 N.T.S. VERT SECTION

TABLE 3:

1/4" ITW TAPCONS WITH 1 1/4" MIN EMBED		1/4" ALL POINTS SOLID-SET WITH 7/8" MIN EMBED		#14 WOOD SCREWS WITH 1 1/2" MIN PENETRATION	
CONC	CMU	CONC	CMU	WOOD	
12" O.C.	8" O.C.	12" O.C.	11" O.C.	12" O.C.	

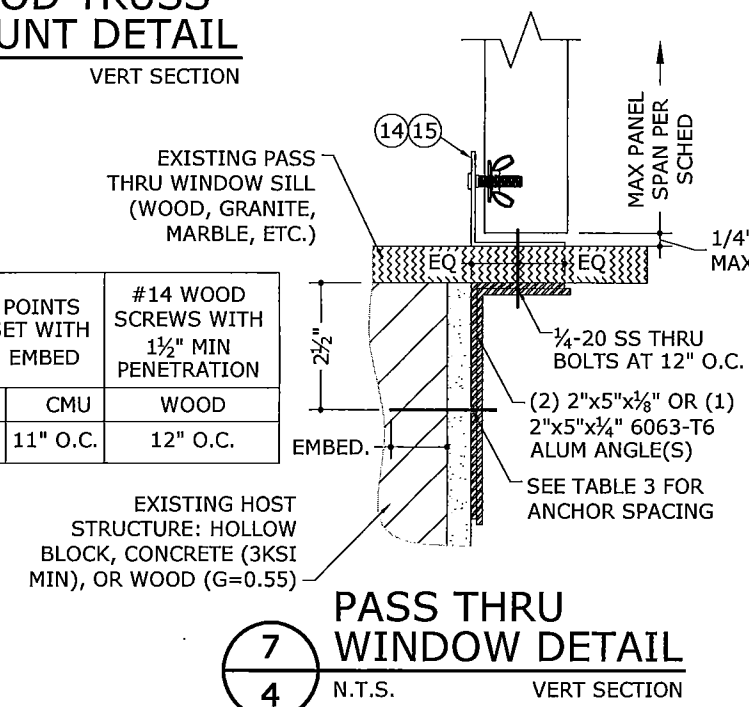

7 PASS THRU WINDOW DETAIL
 4 N.T.S. VERT SECTION

FRANK L. BENNARDI, P.E.
 PROFESSIONAL ENGINEER
 STATE OF FLORIDA
 ENGINEER NO. 1060759
 160 SW 12th AVENUE, #1060759
 DEERFIELD BEACH, FL 33442
 Ph: (954) 354-0660 FAX: (954) 354-0443
 WWW.ENGP.COM
 CERT OF AUTH #9885
 A FRANK L. BENNARDI, P.E., INC. INNOVATION


TPS Transparent Protection Systems, Inc.
 6643 42nd Terrace North
 West Palm Beach, FL 33407
 CLEARGUARD POLYCARBONATE STORM PANELS
 FOR USE OUTSIDE THE HVHZ
 FLORIDA STATEWIDE APPROVAL

DRWN	CHKD	DATE
CL	FLB	8/17/04
CL	FLB	8/05/05
CL	FLB	2/06/08
CL	FLB	12/29/08
EFT	KL	12/12/11


REMARKS: 2004 FBC, 2007 FBC REVISION, 2010 FBC REVISIONS
 PREPARED BY THE PROPERTY OF FRANK L. BENNARDI, P.E. AND SHALL NOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF FRANK L. BENNARDI, P.E. ALTERNATIONS, ADDITIONS, DELETIONS, OR OTHER MODIFICATIONS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

COPYRIGHT FRANK L. BENNARDI, P.E.
08-TPS-0008
 SCALE: 1/4" = 1'-0"
 PAGE DESCRIPTION: 06
 OF 7


CLOSURE DETAILS

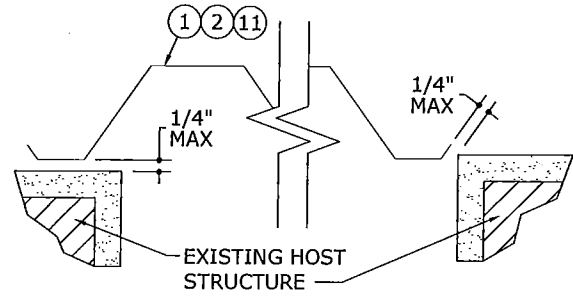


1 WALL MOUNT CLOSURE
5 3" = 1'-0" PLAN VIEW

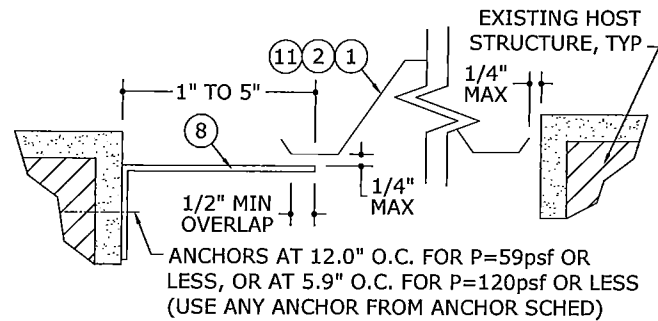


2 TRAP MOUNT CLOSURE
5 3" = 1'-0" PLAN VIEW

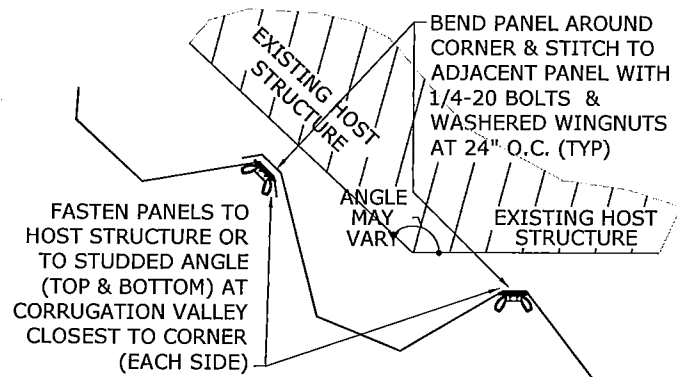


3 CORNER CLOSURE
5 N.T.S. PLAN VIEW

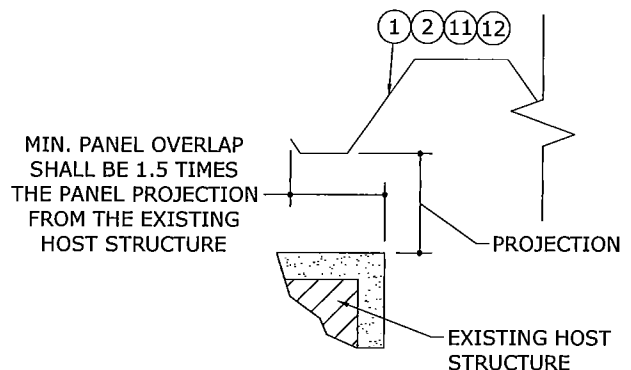

4 PANEL OVERLAP
5 N.T.S. PLAN VIEW

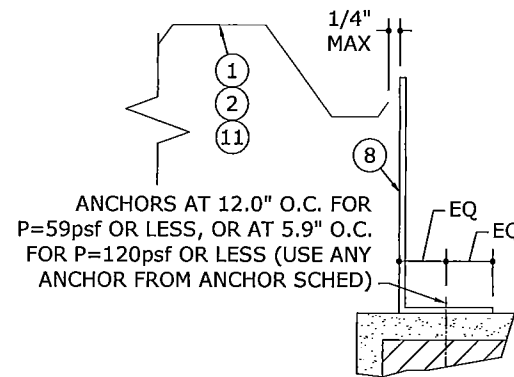

5 BUILD-OUT CLOSURE
5 3" = 1'-0" PLAN VIEW

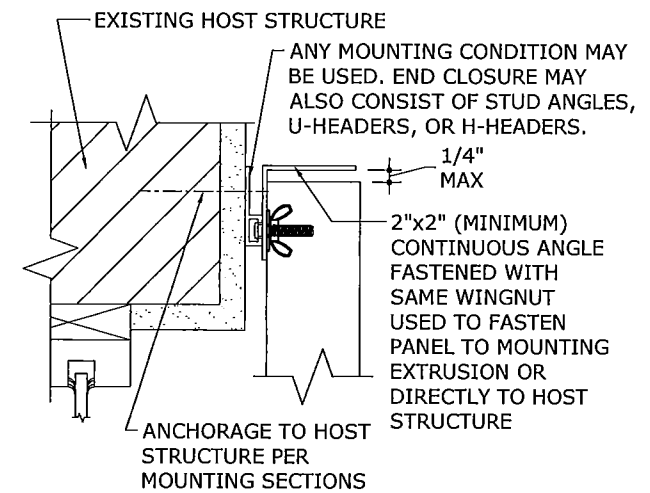

6 TOP/BOTTOM CLOSURE
5 N.T.S. VERT SECTION

MINIMUM SPAN SCHEDULE

ONE (1) CLOSURE AT TOP OR BOTTOM

TOP OR BOTTOM WITH CLOSURE	TOP OR BOTTOM MOUNT WITHOUT CLOSURE							
	DIRECT MOUNT	STUD ANGLE (WALL MOUNT)	"F" TRACK	REVERSE "F" ANGLE	B.O. 2x5 + STUD ANGLE	B.O. "F" TRACK	"H" HEADER	STUD ANGLE (TRAP MOUNT)
DIRECT MOUNT	32"	30"	33"	30"	30"	32"	30"	30"
STUD ANGLE (WALL MOUNT)	32"	30"	33"	30"	30"	32"	30"	30"
"F" TRACK	33"	30"	35"	30"	30"	33"	30"	30"
REVERSE "F" ANGLE	32"	30"	33"	30"	30"	32"	30"	30"
B.O. 2x5 + STUD ANGLE	32"	30"	33"	30"	30"	32"	30"	30"
B.O. "F" TRACK	32"	30"	33"	30"	30"	32"	30"	30"
"H" HEADER	30"	30"	30"	30"	30"	30"	30"	30"
STUD ANGLE (TRAP MOUNT)	32"	30"	33"	30"	30"	32"	30"	30"

MINIMUM SPAN SCHEDULE

NO TOP/BOTTOM CLOSURES

TOP MOUNT	BOTTOM MOUNT							
	DIRECT MOUNT	STUD ANGLE (WALL MOUNT)	"F" TRACK	REVERSE "F" ANGLE	B.O. 2x5 + STUD ANGLE	B.O. "F" TRACK	"H" HEADER	STUD ANGLE (TRAP MOUNT)
DIRECT MOUNT	53"	32"	55"	32"	32"	53"	30"	32"
STUD ANGLE (WALL MOUNT)	32"	30"	33"	30"	30"	32"	30"	30"
"F" TRACK	55"	33"	57"	33"	33"	55"	30"	33"
REVERSE "F" ANGLE	32"	30"	33"	30"	30"	32"	30"	30"
B.O. 2x5 + STUD ANGLE	32"	30"	33"	30"	30"	32"	30"	30"
B.O. "F" TRACK	53"	32"	55"	32"	32"	53"	30"	32"
"H" HEADER	30"	30"	30"	30"	30"	30"	30"	30"
STUD ANGLE (TRAP MOUNT)	32"	30"	33"	30"	30"	32"	30"	30"

MINIMUM SPAN SCHEDULE NOTES:

- SPANS SHOWN ABOVE ARE MINIMUM ALLOWABLE SPANS BASED ON ANY COMBINATION OF MOUNTING CONDITIONS AT TOP OR BOTTOM. PANEL LENGTHS LESS THAN THOSE NOTED IN TABLES ABOVE ARE NOT ACCEPTABLE.
- NO SEPARATION FROM GLASS IS REQUIRED WHEN PANEL LENGTH IS GREATER THAN THAT NOTED FOR RESPECTIVE MOUNTING COMBINATIONS ABOVE.
- SIDE CLOSURES REQUIRED IF GAP BETWEEN PANEL AND STRUCTURE EXCEEDS DISTANCE SHOWN IN HORIZONTAL SECTION DETAILS (REF. DETAILS 6/3, 7/3 AND 9/3).
- TABLES ABOVE ARE VALID FOR PANELS MOUNTED HORIZONTALLY OR VERTICALLY.
- TOP/BOTTOM CLOSURES MAY CONSIST OF NON-STRUCTURAL 28ga (0.018" MIN) GALV STEEL OR 0.022" MIN SHEET ALUMINUM OF ALLOY 5052-H32 OR 3004-H34. REFERENCE DETAILS HEREIN FOR DEPICTION OF TOP/BOTTOM CLOSURE MOUNTING REQUIREMENTS.
- STORM PANELS MAY BE INSTALLED WITH A 12" MINIMUM SPAN WHEN INSTALLED WITH A CLOSURE ANGLE AT BOTH TOP AND BOTTOM.

FRANK L. BENNARDO, P.E.
 #00006549
 PROFESSIONAL ENGINEER
 FLORIDA STATE ENGINEERING EXPRRESS
 12/11/2011
 160 SW 12th AVENUE, #1087594
 DEERFIELD BEACH, FL 33442
 Ph: (954) 354-0660 FAX: (954) 354-0661
 WWW.ENGP.COM
 CERT. OF AUTH #9885
 FRANK L. BENNARDO, P.E., INC.
 A FRANK L. BENNARDO, P.E., INC. INVENTION

Transparent Protection Systems, Inc.
TPS
 6643 42nd Terrace North
 West Palm Beach, FL 33407
 CLEARGUARD POLYCARBONATE STORM PANELS
 FOR USE OUTSIDE THE HVHZ
 FLORIDA STATEWIDE APPROVAL

REVISIONS	DRWN	CHKD	DATE
2004 FBC	CL	FLB	8/17/04
2007 FBC	CL	FLB	8/05/05
2010 FBC	CL	FLB	2/06/08
2011 FBC	CL	FLB	12/29/08
2012 FBC	CL	FLB	12/12/11

ANY MOUNTING CONDITION MAY BE USED. END CLOSURE MAY ALSO CONSIST OF STUD ANGLES, U-HEADERS, OR H-HEADERS.
 2"x2" (MINIMUM) CONTINUOUS ANGLE FASTENED WITH SAME WINGNUT USED TO FASTEN PANEL TO MOUNTING EXTRUSION OR DIRECTLY TO HOST STRUCTURE
 ANCHORAGE TO HOST STRUCTURE PER MOUNTING SECTIONS
 1/4" MAX
 EQ EQ

COPYRIGHT FRANK L. BENNARDO P.E.
08-TPS-0008
 SCALE: 1/8" = 1'-0"
 PAGE DESCRIPTION:

12/14/2011 - 8:05pm keith F:\01 Project Files\Transparent Protection (TPS)\2008108-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA)\FSA_08 20108-TPS-0008_ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA).dwg

12/14/2011 - 8:05pm keithl F:\01 Project Files\Transparent Protection (TPS)\2008\08-TPS-0008 ClearGuard Polycarbonate Storm Panels, Non-HVHZ (FSA) drawings

ANCHOR SCHEDULES

HOST STRUCT.	ANCHOR	LOAD (psf)	2" MIN EDGE DISTANCE																			
			Spans Up To 6'-0" CONN TYPE					Spans Up To 8'-6" CONN TYPE					Spans Up To 12'-0" CONN TYPE									
			C1	C2	C3	C4	C5	C1	C2	C3	C4	C5	C1	C2	C3	C4	C5					
CONCRETE	1/4" TAPCON (ELCO OR ITW) WITH 1-3/4" EMBED (3192psi MIN CONC)	30	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"

HOLLOW BLOCK	1/4" TAPCON (ELCO OR ITW) WITH 1-1/4" EMBED	30	10.9"	10.9"	10.9"	10.9"	10.9"	7.7"	7.7"	7.7"	7.7"	7.7"	5.8"	5.5"	5.8"	5.8"	5.8"					
--------------	---	----	-------	-------	-------	-------	-------	------	------	------	------	------	------	------	------	------	------	--	--	--	--	--

ANCHOR SCHEDULE NOTES:

- 1/4" TAPCONS MAY BE BY ITW OR BY ELCO. "ELCO PANELMATE" ANCHORS MAY BE MALE, FEMALE, OR PANELMATE PLUS, AS ILLUSTRATED. HEAD STYLE MAY BE STD 13/32" OR WASHERED 5/8" HEX HEAD.
- ENSURE MINIMUM 2" EDGE DISTANCE FOR ALL ANCHORS TO CONCRETE & TO HOLLOW BLOCK. EDGE DISTANCE OF 3/4" IS ACCEPTABLE FOR ANCHORS TO WOOD.
- MINIMUM EMBEDMENT SHALL BE AS NOTED IN ANCHOR SCHEDULE. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDES STUCCO, FOAM, BRICK, AND OTHER WALL FINISHES.
- ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURERS' RECOMMENDATIONS.
- WHERE EXISTING STRUCTURE IS WOOD FRAMING, EXISTING CONDITIONS MAY VARY. FIELD VERIFY THAT FASTENERS ARE INTO ADEQUATE WOOD FRAMING MEMBERS, NOT INTO PLYWOOD.
- WHERE ANCHORS FASTEN TO NARROW FACE OF STUD FRAMING, ANCHOR SHALL BE LOCATED IN CENTER OF NOMINAL 2x4 (MIN) WOOD STUD (i.e. 3/4" EDGE DISTANCE IS ACCEPTABLE FOR ANCHORS TO WOOD FRAMING). WOOD STUD SHALL BE "SOUTHERN PINE" (FOR G=0.55 OR GREATER DENSITY) OR "SPRUCE-PINE-FIR" (FOR G=0.42 OR GREATER DENSITY).
- ANCHOR SCHEDULE APPLIES FOR ALL PRODUCTS CERTIFIED HEREIN, BUT ONLY PROVIDES MAXIMUM ALLOWABLE ANCHOR SPACING. MAXIMUM ALLOWABLE SPANS AND PRESSURES INDICATED IN SPAN SCHEDULE SHALL APPLY.
- MACHINE SCREWS SHALL HAVE MINIMUM OF 1/2" ENGAGEMENT OF THREADS IN BASE ANCHOR AND MAY HAVE EITHER A PAN HEAD, TRUSS HEAD, OR WAFER HEAD ("SIDEWALK BOLT") U.N.O.
- * DESIGNATES REMOVABLE ANCHORS. PANELS SHALL BE MOUNTED DIRECTLY TO THE HOST STRUCTURE ONLY WITH THESE ANCHORS, LOCATED AT KEYHOLES AND LESS THAN OR EQUAL TO ALLOWABLE SPACING SHOWN IN ANCHOR SCHEDULE.
- DESIGNATES ANCHOR CONDITIONS WHICH ARE NOT ACCEPTABLE FOR USE.

HOST STRUCT.	ANCHOR	LOAD (psf)	3/4" MIN EDGE DISTANCE																			
			Spans Up To 6'-0" CONN TYPE					Spans Up To 8'-6" CONN TYPE					Spans Up To 12'-0" CONN TYPE									
			C1	C2	C3	C4	C5	C1	C2	C3	C4	C5	C1	C2	C3	C4	C5					
WOOD (G=0.55 MIN)	1/4" TAPCON (ELCO OR ITW) OR #14 WOOD SCREW W/ 1-1/2" EMBED	30	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"

WOOD (G=0.42 MIN)	1/4" TAPCON (ELCO OR ITW) OR #14 WOOD SCREW W/ 1-1/2" EMBED	30	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"	13.0"
-------------------	---	----	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------	-------

ENGINEERING EXPRESS
 160 SW 12th Avenue, #109750
 DEERFIELD BEACH, FL 33442
 Ph: (954) 354-0660 FAX: (954) 354-0661
 WWW.ENGP.COM
 CERT OF AUTH #9895
 A FRANK L. BENNARDO, P.E., INC.

TPS Transparent Protection Systems, Inc.
 6643 42nd Terrace North
 West Palm Beach, FL 33407

REMARKS	DRWN	CHKD	DATE
	CL	FLB	8/17/04
2004 FRC	CL	FLB	8/05/05
ChartMAX PROFILE ADDED	CL	FLB	2/06/08
2010 FRC REVISIONS	EFT	KL	12/29/11

ALL REVISIONS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.
 COPYRIGHT FRANK L. BENNARDO P.E.

08-TPS-0008
 SCALE: 1/8" = 1'-0"
 PAGE DESCRIPTION:
 OF 7

POSITIVE CONNECTION MINIMUM GLASS SEPARATION SCHEDULE

LOAD (PSF)	SPAN LESS THAN	MINIMUM SEPARATION AT OR BELOW 30' ABOVE GRADE	MINIMUM SEPARATION AT ELEVATION > 30' ABOVE GRADE
38	4'-0"	7.73"	1.65"
	7'-0"	7.73"	4.38"
	12'-0"	8.78"	8.78"
40	4'-0"	7.73"	1.69"
	7'-0"	7.73"	4.56"
	11'-5"	8.33"	8.33"
45	4'-0"	7.73"	1.77"
	7'-0"	7.73"	5.01"
	10'-1"	7.73"	7.39"
50	4'-0"	7.73"	1.86"
	7'-0"	7.73"	5.45"
	9'-1"	7.73"	6.87"
60	4'-0"	7.73"	2.03"
	7'-0"	7.73"	6.34"
	7'-7"	7.73"	6.57"
70	4'-0"	7.73"	2.20"
	6'-7"	7.73"	6.38"
120	3'-10"	7.73"	2.74"

H-HEADER MINIMUM GLASS SEPARATION SCHEDULE


SPAN LESS THAN	MINIMUM SEPARATION AT OR BELOW 30' ABOVE GRADE	MINIMUM SEPARATION AT ELEVATION > 30' ABOVE GRADE
8'-7"	8.60"	7.17"
7'-9"	8.60"	6.69"
7'-0"	8.60"	5.97"
6'-0"	8.60"	4.94"
5'-0"	8.60"	4.10"
4'-0"	8.60"	3.58"

U-HEADER MINIMUM GLASS SEPARATION SCHEDULE

SPAN LESS THAN	MINIMUM SEPARATION AT OR BELOW 30' ABOVE GRADE	MINIMUM SEPARATION AT ELEVATION > 30' ABOVE GRADE
6'-3"	3.98"	3.21"
5'-3"	3.98"	2.58"
4'-4"	3.98"	2.24"

GLASS SEPARATION SCHEDULE NOTES:

1. GLASS SEPARATION SCHEDULE PROVIDES MINIMUM SEPARATION DISTANCE REQUIRED BETWEEN EXTERIOR FACE OF GLAZING (OR OTHER PRODUCT BEING PROTECTED) AND INTERIOR FACE OF INSTALLED STORM PANEL.
2. SEPARATION DISTANCE PER THIS SCHEDULE IS REQUIRED FOR USE WITH POSITIVE LOADS ONLY.
3. SEPARATION FROM GLASS IS REQUIRED ONLY WHEN INSTALLED WITHIN ASTM WIND ZONE 4 AND ESSENTIAL FACILITIES.

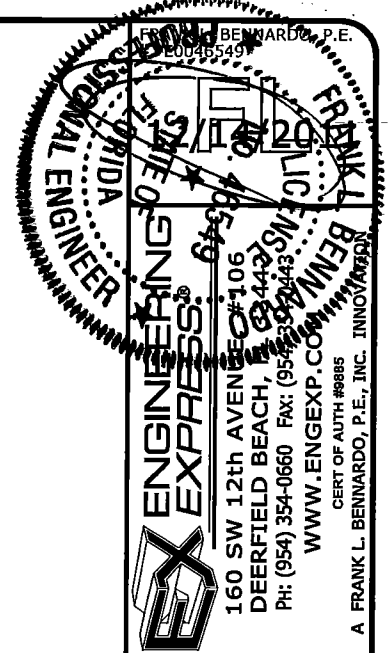

TPS Transparent Protection Systems, Inc.
 6643 42nd Terrace North
 West Palm Beach, FL 33407

CLEARGUARD POLYCARBONATE STORM PANELS
 FOR USE OUTSIDE THE HVHZ
 FLORIDA STATEWIDE APPROVAL

REMARKS	DRWN	CHKD	DATE
ORIG ISSUE	CL	FLB	8/17/04
2004 FBC	CL	FLB	8/05/05
CLEARMAX PROFILE ADDED	CL	FLB	2/06/06
2007 FBC REVISIONS	KL	CL	12/29/08
2010 FBC REVISIONS	EFT	KL	12/12/11

THIS DOCUMENT IS THE PROPERTY OF FRANK L. BENARDO, P.E. AND SHALL NOT BE REPRODUCED IN WHOLE OR PART WITHOUT WRITTEN CONSENT OF FRANK L. BENARDO, P.E. ALTERATIONS, ADDITIONS, REVISIONS, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE OUR CERTIFICATION.

COPYRIGHT FRANK L. BENARDO P.E.
08-TPS-0008
 SCALE: 06
 PAGE DESCRIPTION:
 7 OF 7