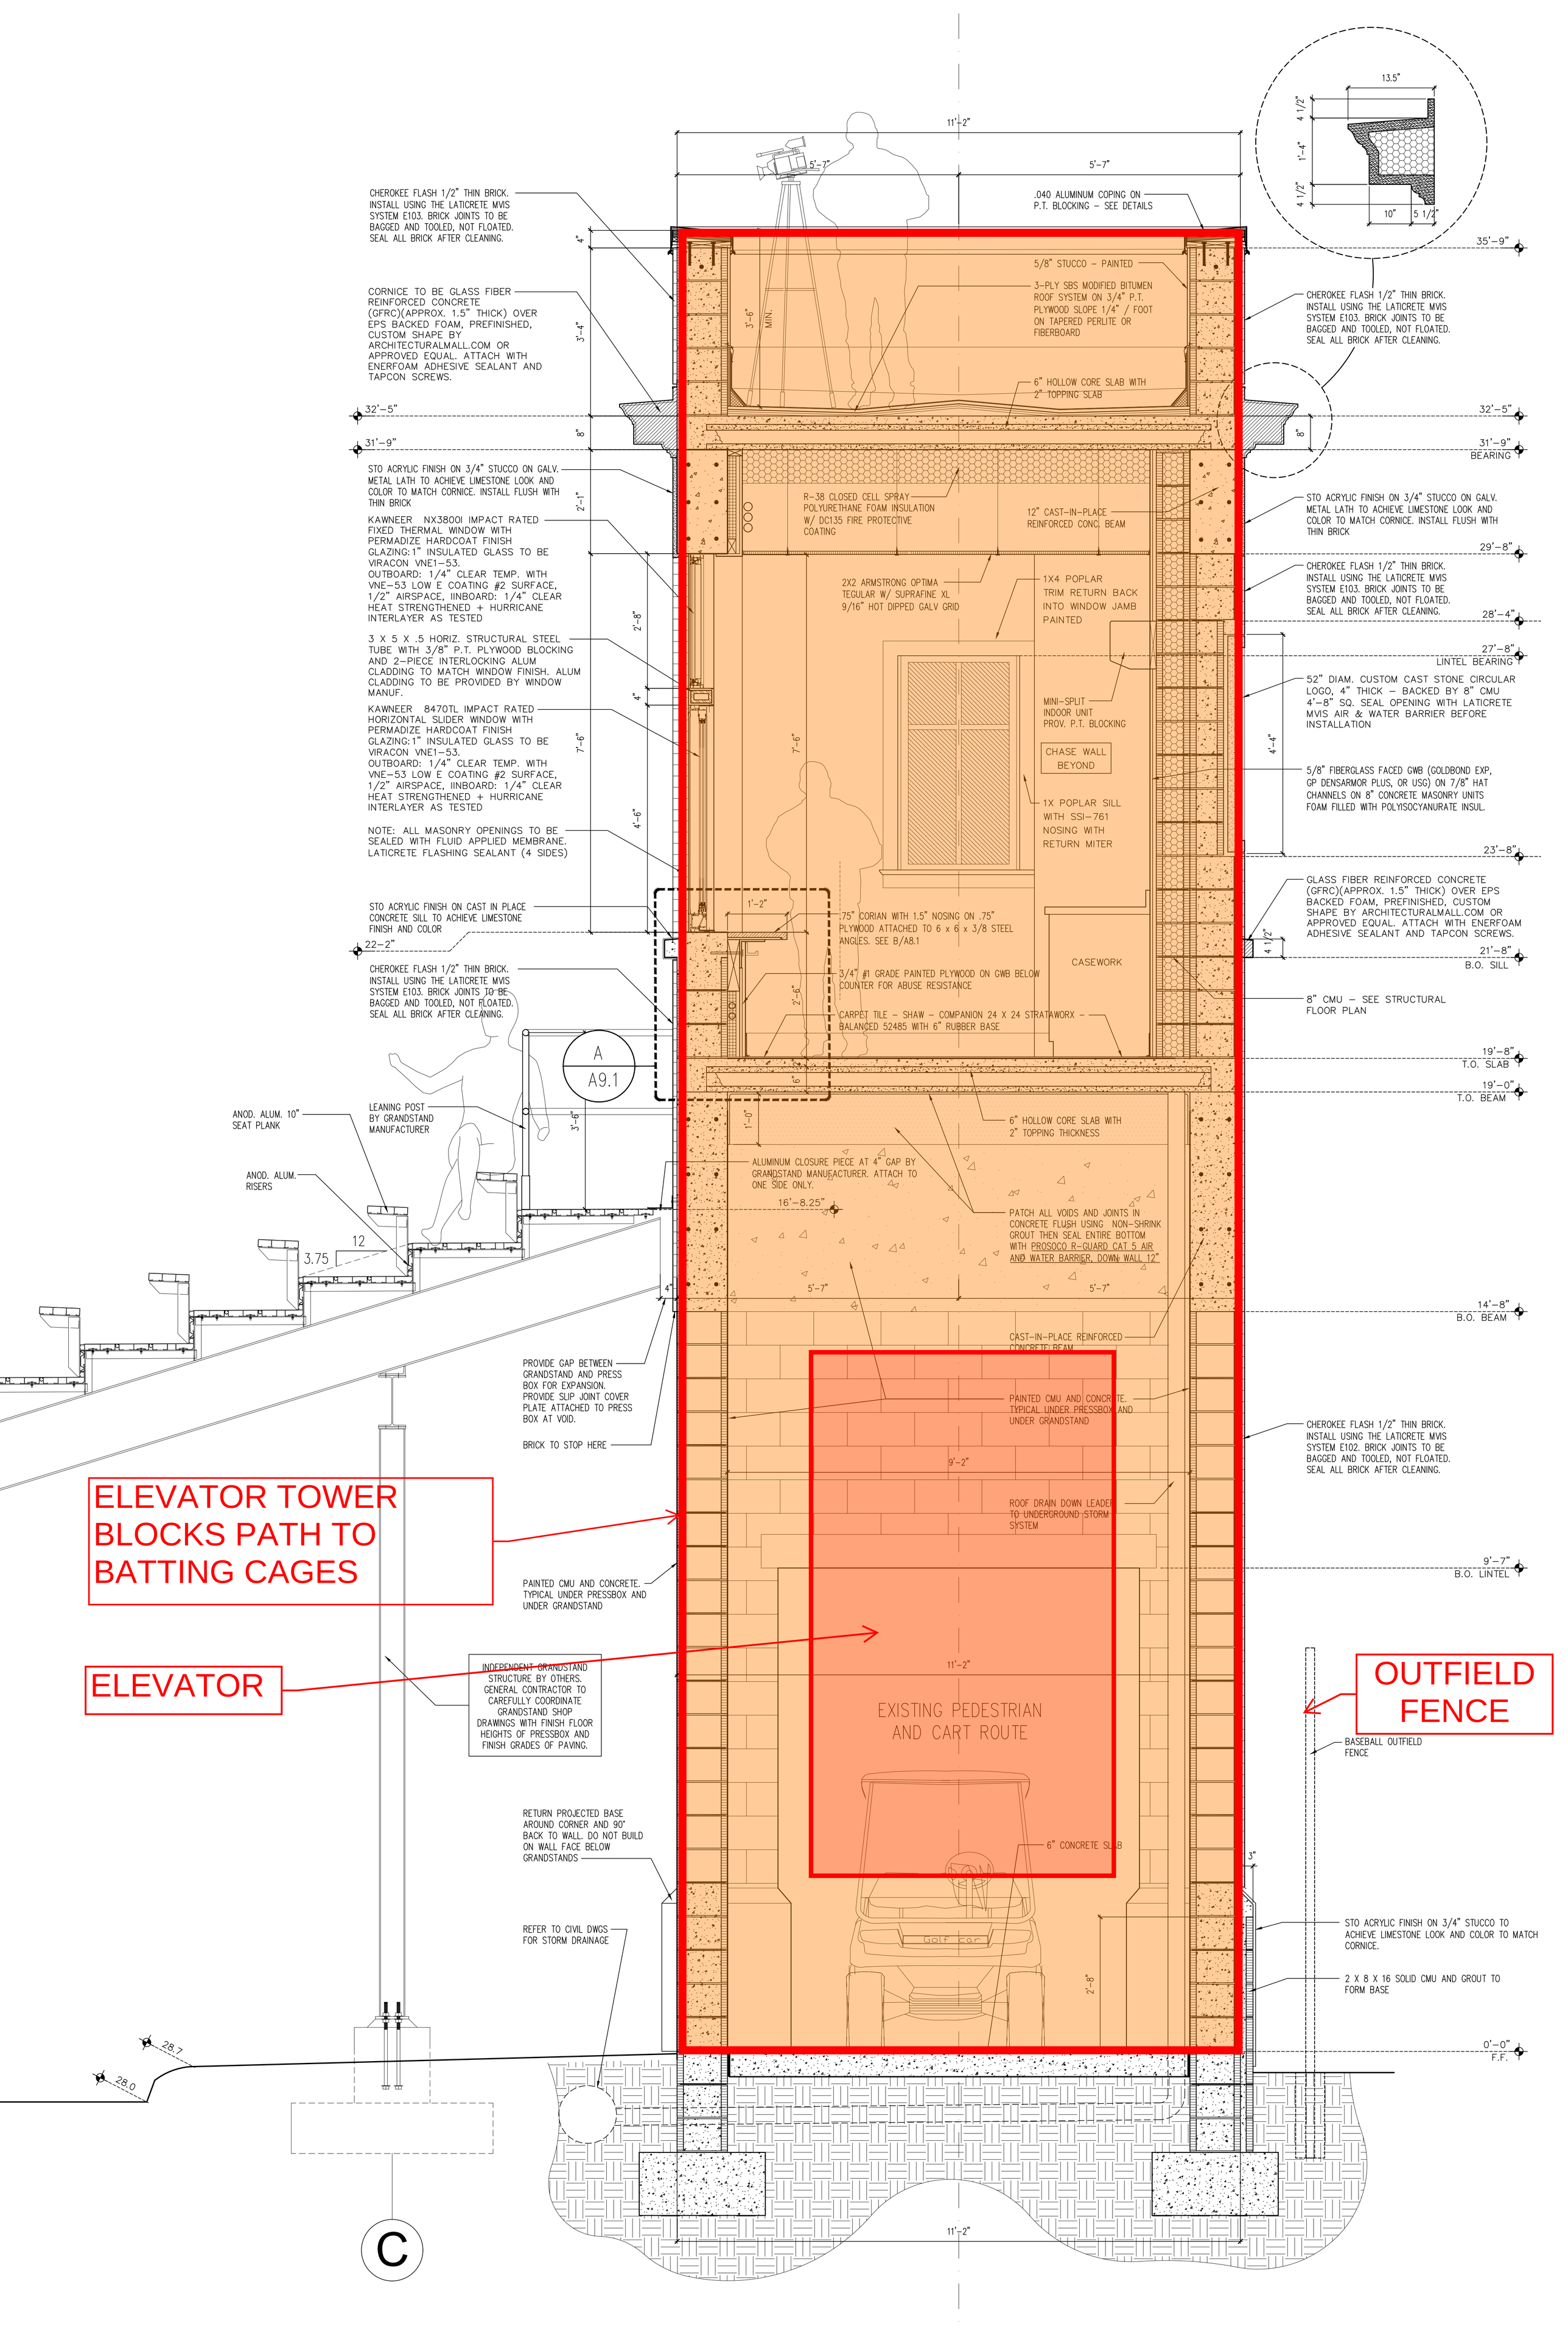
CHEROKEE FLASH 1/2" THIN BRICK. INSTALL USING THE LATICRETE MVIS SYSTEM E103. BRICK JOINTS TO BE BAGGED AND TOOLED, NOT FLOATED. SEAL ALL BRICK AFTER CLEANING.
CORNICE TO BE GLASS FIBER REINFORCED CONCRETE (GFRC)(APPROX. 1.5" THICK) OVER EPS BACKED FOAM, PREFINISHED, CUSTOM SHAPE BY ARCHITECTURALMALL.COM OR APPROVED EQUAL. ATTACH WITH ENERFOAM ADHESIVE SEALANT AND TAPCON SCREWS.
STO ACRYLIC FINISH ON 3/4" STUCCO ON GALV. METAL LATH TO ACHIEVE LIMESTONE LOOK AND COLOR TO MATCH CORNICE. INSTALL FLUSH WITH THIN BRICK
KAWNEER NX3800I IMPACT RATED FIXED THERMAL WINDOW WITH PERMADIZE HARDCOAT FINISH GLAZING:1" INSULATED GLASS TO BE VIRACON VNE1-53. OUTBOARD: 1/4" CLEAR TEMP. WITH VNE-53 LOW E COATING #2 SURFACE, 1/2" AIRSPACE, IINBOARD: 1/4" CLEAR HEAT STRENGTHENED + HURRICANE INTERLAYER AS TESTED
3 X 5 X .5 HORIZ. STRUCTURAL STEEL TUBE WITH 3/8" P.T. PLYWOOD BLOCKING AND 2-PIECE INTERLOCKING ALUM CLADDING TO MATCH WINDOW FINISH. ALUM CLADDING TO BE PROVIDED BY WINDOW MANUF.
KAWNEER 8470TL IMPACT RATED HORIZONTAL SLIDER WINDOW WITH PERMADIZE HARDCOAT FINISH GLAZING:1" INSULATED GLASS TO BE VIRACON VNE1-53. OUTBOARD: 1/4" CLEAR TEMP. WITH VNE-53 LOW E COATING #2 SURFACE, 1/2" AIRSPACE, IINBOARD: 1/4" CLEAR HEAT STRENGTHENED + HURRICANE INTERLAYER AS TESTED
NOTE: ALL MASONRY OPENINGS TO BE SEALED WITH FLUID APPLIED MEMBRANE. LATICRETE FLASHING SEALANT (4 SIDES)
STO ACRYLIC FINISH ON CAST IN PLACE CONCRETE SILL TO ACHIEVE LIMESTONE FINISH AND COLOR
CHEROKEE FLASH 1/2" THIN BRICK. INSTALL USING THE LATICRETE MVIS SYSTEM E103. BRICK JOINTS TO BE BAGGED AND TOOLED, NOT FLOATED. SEAL ALL BRICK AFTER CLEANING.
ANOD. ALUM. 10" SEAT PLANK
LEANING POST BY GRANDSTAND MANUFACTURER
ANOD. ALUM. RISERS
PROVIDE GAP BETWEEN GRANDSTAND AND PRESS BOX FOR EXPANSION. PROVIDE SLIP JOINT COVER PLATE ATTACHED TO PRESS BOX AT VOID.
BRICK TO STOP HERE
ELEVATOR TOWER BLOCKS PATH TO BATTING CAGES
ELEVATOR
INDEPENDENT GRANDSTAND STRUCTURE BY OTHERS. GENERAL CONTRACTOR TO CAREFULLY COORDINATE GRANDSTAND SHOP DRAWINGS WITH FINISH FLOOR HEIGHTS OF PRESSBOX AND FINISH GRADES OF PAVING.
RETURN PROJECTED BASE AROUND CORNER AND 90° BACK TO WALL. DO NOT BUILD ON WALL FACE BELOW GRANDSTANDS
REFER TO CIVIL DWGS FOR STORM DRAINAGE
A
A9.1
C
12
3.75
28.7
28.0
11'-2"
5'-7"
5'-7"
.040 ALUMINUM COPING ON P.T. BLOCKING - SEE DETAILS
5/8" STUCCO - PAINTED
3-PLY SBS MODIFIED BITUMEN ROOF SYSTEM ON 3/4" P.T. PLYWOOD SLOPE 1/4" / FOOT ON TAPERED PERLITE OR FIBERBOARD
6" HOLLOW CORE SLAB WITH 2" TOPPING SLAB
R-38 CLOSED CELL SPRAY POLYURETHANE FOAM INSULATION W/ DC135 FIRE PROTECTIVE COATING
12" CAST-IN-PLACE REINFORCED CONC. BEAM
2X2 ARMSTRONG OPTIMA TEGULAR W/ SUPRAFINE XL 9/16" HOT DIPPED GALV GRID
1X4 POPLAR TRIM RETURN BACK INTO WINDOW JAMB PAINTED
MINI-SPLIT INDOOR UNIT PROV. P.T. BLOCKING
CHASE WALL BEYOND
1X POPLAR SILL WITH SSI-761 NOSING WITH RETURN MITER
.75" CORIAN WITH 1.5" NOSING ON .75" PLYWOOD ATTACHED TO 6 x 6 x 3/8 STEEL ANGLES. SEE B/A8.1
3/4" #1 GRADE PAINTED PLYWOOD ON GWB BELOW COUNTER FOR ABUSE RESISTANCE
CASEWORK
CARPET TILE - SHAW - COMPANION 24 X 24 STRATAWORX - BALANCED 52485 WITH 6" RUBBER BASE
6" HOLLOW CORE SLAB WITH 2" TOPPING THICKNESS
ALUMINUM CLOSURE PIECE AT 4" GAP BY GRANDSTAND MANUFACTURER. ATTACH TO ONE SIDE ONLY.
PATCH ALL VOIDS AND JOINTS IN CONCRETE FLUSH USING NON-SHRINK GROUT THEN SEAL ENTIRE BOTTOM WITH PROSOCO R-GUARD CAT 5 AIR AND WATER BARRIER, DOWN WALL 12"
CAST-IN-PLACE REINFORCED CONCRETE BEAM
PAINTED CMU AND CONCRETE. TYPICAL UNDER PRESSBOX AND UNDER GRANDSTAND
ROOF DRAIN DOWN LEADER TO UNDERGROUND STORM SYSTEM
EXISTING PEDESTRIAN AND CART ROUTE
6" CONCRETE SLAB
Golf car
3'-6" MIN.
7'-6"
2'-6"
6"
1'-0"
3'-6"
4"
2'-8"
4'-6"
2'-1"
8"
3'-4"
4"
1'-2"
22'-2"
32'-5"
31'-9"
35'-9"
29'-8"
28'-4"
27'-8" LINTEL BEARING
23'-8"
21'-8" B.O. SILL
19'-8" T.O. SLAB
19'-0" T.O. BEAM
16'-8.25"
14'-8" B.O. BEAM
9'-2"
9'-7" B.O. LINTEL
0'-0" F.F.
13.5"
4 1/2"
1'-4"
4 1/2"
10"
5 1/2"
52" DIAM. CUSTOM CAST STONE CIRCULAR LOGO, 4" THICK - BACKED BY 8" CMU 4'-8" SQ. SEAL OPENING WITH LATICRETE MVIS AIR & WATER BARRIER BEFORE INSTALLATION
5/8" FIBERGLASS FACED GWB (GOLDBOND EXP, GP DENSARMOR PLUS, OR USG) ON 7/8" HAT CHANNELS ON 8" CONCRETE MASONRY UNITS FOAM FILLED WITH POLYISOCYANURATE INSUL.
GLASS FIBER REINFORCED CONCRETE (GFRC)(APPROX. 1.5" THICK) OVER EPS BACKED FOAM, PREFINISHED, CUSTOM SHAPE BY ARCHITECTURALMALL.COM OR APPROVED EQUAL. ATTACH WITH ENERFOAM ADHESIVE SEALANT AND TAPCON SCREWS.
8" CMU - SEE STRUCTURAL FLOOR PLAN
CHEROKEE FLASH 1/2" THIN BRICK. INSTALL USING THE LATICRETE MVIS SYSTEM E102. BRICK JOINTS TO BE BAGGED AND TOOLED, NOT FLOATED. SEAL ALL BRICK AFTER CLEANING.
OUTFIELD FENCE
BASEBALL OUTFIELD FENCE
STO ACRYLIC FINISH ON 3/4" STUCCO TO ACHIEVE LIMESTONE LOOK AND COLOR TO MATCH CORNICE.
2 X 8 X 16 SOLID CMU AND GROUT TO FORM BASE
3"
4'-4"
4 1/2"
2'-8"