


NOT LESS THAN 90 PERCENT OF THE LAMPS IN PERMANENTLY INSTALLED LUMINARIES SHALL HAVE AN EFFICACY OF AT LEAST 45 LUMENS-PER-WATT OR SHALL UTILIZE LAMPS WITH AN EFFICACY OF NOT LESS THAN 65 LUMENS PER WATT

MAKE AND MODEL AS PER OWNER'S SELECTION

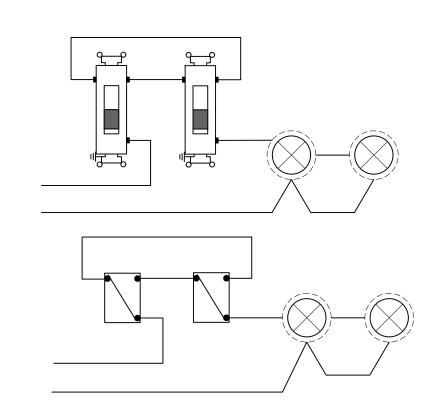

3-WAY SWITCH WIRING DETAIL


- 1. SECOND FLOOR NOT IN SCOPE OF WORK. PANELS AND CIRCUITS TO REMAIN THE SAME.
- 2. FIELD VERIFY ALL ELECTRICAL EQUIPMENT IS PROPERLY LABELED. IF NOT LABELED, PROPERLY LABEL EQUIPMENT ACCORDINGLY.
- 3. EMERGENCY AND EXIT LIGHTS BATTERY POWERED.
- 4. CONTROL EXHAUST FAN WITH LIGHTS IN RESTROOM
- 5. SEE RISER DIAGRAM FOR INFORMATION

SCOPE OF WORK	
DISCIPLINE	1
	2920 NW
ELECTRICAL	FIRST FLOOR REMODEL. NO WORK TO BE DONE ON SECOND FLOOR.
REFER TO E-00 FOR ELECTRICAL GENERAL NOTES	

NOTES:

CONFERENCE/MEETING/MULTIPURPOSE ROOMS, COPY/PRINT ROOMS, LOUNGES/BREAKROOMS, ENCLOSED OFFICES, OPEN PLAN OFFICE AREAS, RESTROOMS, STORAGE ROOMS, LOCKER ROOMS, AND ROOMS LESS THAN 300 SQUARE FEET MUST CONTAIN OCCUPANCY SENSORS WITH MANUAL ON/OFF CONTROL

ALL OTHER AREAS WITHOUT OCCUPANCY SENSORS MUST CONTAIN TIME SWITCH CONTROL. AN OVERRIDE SWITCH SHALL BE PROVIDED THAT ALLOWS THE OCCUPANT TO REDUCE THE CONNECTED LIGHTING LOAD IN A REASONABLY UNIFORM ILLUMINATION PATTERN BY AT LEAST 50 PERCENT.

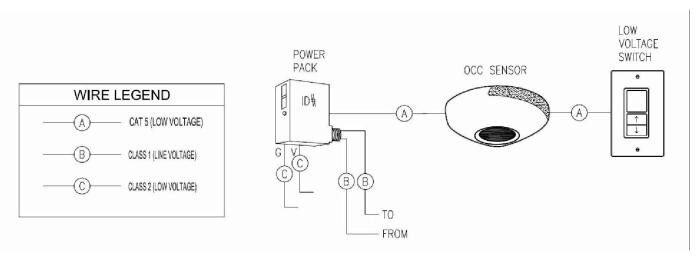

3 OCCUPANCY SWITCH DETAIL

VECTOR Engineering Services

DATE 10/10/2022 11/04/2022 12/23/2022 01/27/2023

1. CITY (2. CITY (3. CITY (4. CITY (

AMERICANO

MEDIA GROUP

STUDIO

2920 NW 7 ST

MIAMI, FL 33125

PROPOSED

LIGHT PLAN

7875 NW 12th Street, Ste. 101 Doral, FL 33126 (786)762-2204 www.ves-us.com C.A. #32810

FELIX F. RODRIGUEZ, PE, SE FLORIDA PE #74481 Civil, Structural, Mechanical admin@ves-us.com

VDES PROJECT #22D078

11/04/2022

SHEET

E-11

LIGHTING FLOOR PLAN

AN SCALE: 3/16" = 1'-0"