

5V CRIMP 26 GA. LOAD TABLE OVER PLYWOOD

COASTAL METAL ROOFING

Buildings having a Roof Mean Height \leq 20'-0"; Roof Slope: 2"/12" -6"/12" Gable Roof
Wind Speeds 120-150 mph, Exp C, I = 1.0, based on FLORIDA BUILDING CODE 2007

5 V CRIMP 26 GA. FASTENER SPACING						
ZONE	FASTENER	SUBSTRATE	WIND SPEED ZONE			
			120	130	140	150
			ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING	ON CENTER SPACING
ZONE 1	#9-15-1-1/2"	15/32" CDX/ 19/32" CDX	12"	12"	12"	12"
ZONE 2	#9-15-1-1/2"	15/32" CDX/ 19/32" CDX	12"	12"	12"	12"
ZONE 3	#9-15-1-1/2"	15/32" CDX/ 19/32" CDX	6"	6"	6"	6"



PANEL DESCRIPTION: 5V CRIMP, MIN. 26 GA. GRADE 50, 24" COVERAGE, 3/8" TALL.

PANEL FASTENER: (1) #9-15 x 1-1/2" WOODGRIP W/ ZAC HEAD AND SEALING WASHER THROUGH RIB OF PANEL.

MAXIMUM ALLOWABLE PANEL UPLIFT PRESSURE: 108.5 PSF @ 12" FASTENER SPACING, 156.5 PSF @ 6" FASTENER SPACING BASED ON TAS 125, UL 580/UL 1897 TESTING.


PLYWOOD DECKING: MIN. 15/32" PLYWOOD. PLYWOOD MUST BE DESIGNED IN ACCORDANCE WITH FBC.

PANEL ROLLFORMER: MODEL 5V BY ROLL FORMER CORP

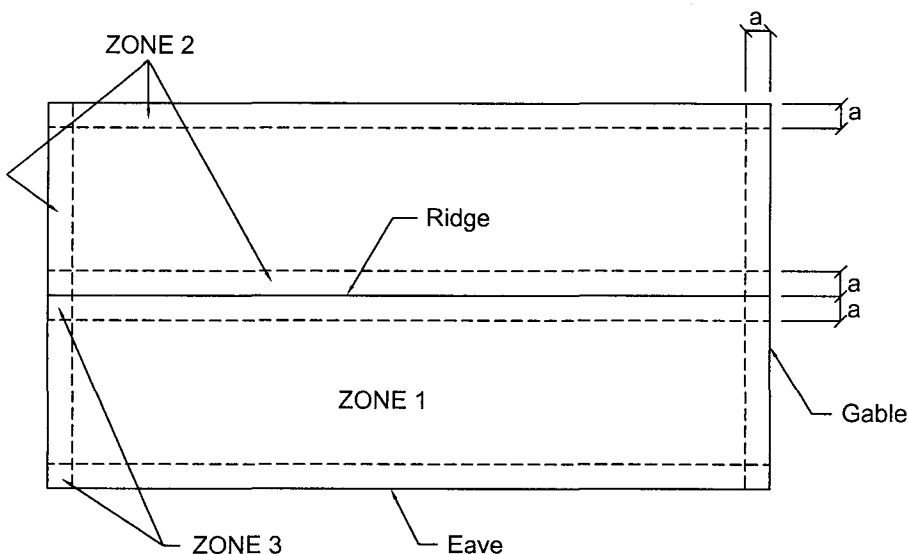

Note: Dimension (a) is defined as 10% of the minimum width of the building or 40% of the mean height of the roof, whichever is smaller, however, (a) cannot be less than either 4% of the minimum width of the building or 3 feet.

State of Florida
C.O.A.
26778

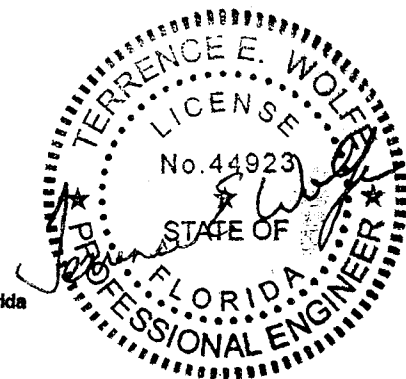

OCT 29 2008