

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER) BOARD AND CODE ADMINISTRATION DIVISION

# **NOTICE OF ACCEPTANCE (NOA)**

MIAMI-DADE COUNTY PRODUCT CONTROL SECTION

11805 SW 26 Street, Room 208 Miami, Florida 33175-2474 T (786) 315-2590 F (786) 315-2599

www.miamidade.gov/economy

DAB Door Company, Inc. 12195 NW 98<sup>th</sup> Avenue Hialeah Gardens, FL 33018

# SCOPE:

This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami-Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).

This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami-Dade County) and/or the AHJ (in areas other than Miami-Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.

This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Hurricane Master Model 824/811 Steel Sectional Garage Door up to 16'-2" Wide w/ Window Lite Option (DP +56.0, -64.0 PSF)

**APPROVAL DOCUMENT:** Drawing No. **00-18**, titled "Sectional Garage Door", sheets 1 through 5 of 5, dated 08/24/2000, with last revision **K** dated 06/19/2023, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. on 06/22/2023, bearing the Miami-Dade County Product Control revision stamp with the Notice of Acceptance number and the expiration date by the Miami-Dade County Product Control Section.

# MISSILE IMPACT RATING: Large and Small Missile Impact Resistant

**LABELING:** A permanent label with the manufacturer's name or logo, manufacturing address, model number, the positive and negative design pressure rating, indicate impact rated if applicable, installation instruction drawing reference number, approval number (NOA), the applicable test standards, and the statement reading 'Miami-Dade County Product Control Approved' is to be located on the door's side track, bottom angle, or inner surface of a panel.

**RENEWAL** of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

**TERMINATION** of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

**ADVERTISEMENT:** The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

**INSPECTION:** A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA revises NOA #20-0929.12 and consists of this page 1 and evidence pages E-1, E-2, E-3 and E-4, as well as approval document mentioned above.

The submitted documentation was reviewed by Helmy A. Makar, P.E., M.S.

MIAMI-DADE COUNTY
APPROVED

HelgA. M. lo 08/10/2023 NOA No. 23-0710.18 Expiration Date: 02/22/2025 Approval Date: 08/10/2023

Page 1

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

# 1. Evidence submitted under previous NOA's

## A. DRAWINGS "Submitted under NOA # 15-0304.02"

Drawing No. **00-18**, titled "Sectional Garage Door", sheets 1 through 5 of 5, dated 08/24/2000, with last revision I dated 03/09/2015, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

# B. TESTS "Submitted under NOA # 09-0128.03"

1. Test report of Tensile Test per ASTM E 8, Report No. **HETI 08-T182**, along with marked-up drawings and installation diagram of a DAB 824 24 GA Sectional Garage Door with Fixed Windows prepared by Hurricane Engineering & Testing, Inc., dated 12/23/2008, signed and sealed by Candido F. Font, P.E.

#### "Submitted under NOA # 08-1106.05"

- 2. Test reports on 1) Uniform Static Air Pressure Test Loading per FBC TAS 202-94
  - 2) Large Missile Impact Test per FBC, TAS 201-94
  - 3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
  - 4) Forced Entry Test per FBC 2411 3.2.1, TAS 202-94

along with marked-up drawings and installation diagram of a DAB 824 24 GA Sectional Garage Door with Fixed Windows, prepared by Hurricane Engineering & Testing, Inc, Test Reports No. **HETI-08-2149A/B**, dated 06/27/2008, signed and sealed by Candido F. Font, P.E.

#### "Submitted under NOA # 00-1121.01"

- 3. Test report of Uniform Static Air Pressure and Force Entry Resistance Test, per FBC, TAS 202-94 on "Sectional Residential Garage Doors", prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 00-903**, dated 08/11/2000, signed and sealed by Hector M. Medina, P.E.
- 4. Test report of Large Missile Impact Test, per FBC, TAS 201-94 and Cyclic Wind Pressure Test per, per FBC, TAS 203-94 on "Sectional Residential Garage Doors", prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 00-904**, dated 08/17/2000, signed and sealed by Hector M. Medina, P.E.
- 5. Test report on Salt Spray (Corrosion) Test per ASTM B 117 of a painted G-40 steel panels, prepared by Celotex Corporation, Test Report No. 258592, dated 08/17/1998, signed by W. A. Jackson, P.E. "Submitted under NOA # 03-0210.04"

# C. CALCULATIONS "Submitted under NOA # 14-0814.05"

1. Anchor verification calculations prepared by Al-Farooq Corporation, dated 09/22/2014 and 07/24/2014, signed and sealed by Javad Ahmad, P.E.

2. Anchor verification calculations prepared by Al-Farooq Corporation, complying with F.B.C 2007, dated 12/19/2008, signed and sealed by Humayoun Farooq, P.E. "Submitted under NOA # 09-0128.03"

Helmy A. Makar, P.E., M.S. Product Control Section Supervisor NOA No. 23-0710.18

Expiration Date: 02/22/2025 Approval Date: 08/10/2023

# NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

# E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 13-0717.01, issued to SABIC Innovative Plastics, for their Lexan Sheet Products, approved on 11/28/2013 and expiring on 07/17/2018.
- 2. Notice of Acceptance No. 14-0311.08, issued to Insulfoam, LLC, for their Insulfoam Expanded Polystyrene Insulation, approved on 08/14/2014 and expiring on 11/29/2017.
- 3. Notice of Acceptance No. 11-0926.07, issued to Dyplast Products, LLC, for their Expanded Polystyrene Block Type Insulation, approved on 11/10/2011 and expiring on 01/11/2017.
- 4. Notice of Acceptance No. 11-0926.06, issued to Dyplast Products, LLC, for their Dyplast ISO-C1 Polyisocyanurate Insulation, approved on 11/10/2011 and expiring on 01/11/2017.
- 5. Notice of Acceptance No. **10-1129.04**, issued to Cellofoam North America Inc, for their Expanded Polystyrene Block Insulation, approved on 02/24/2011 and expiring on 02/24/2016.

### "Submitted under NOA # 05-0228.02"

- 6. Test Report on Accelerated Weathering Using Xenon Arc Light Apparatus Test per ASTM G155 of "PVC Extrusion Material", prepared by Hurricane Engineering & Testing, Inc., Report No. **HETI 04-A002**, dated 09/27/2004, signed and sealed by Rafael E. Droz-Seda, P.E.
- 7. Test Reports on Tensile Test per ASTM D638 of "PVC Extrusion Material", prepared by Hurricane Engineering & Testing Inc., Report No. **HETI 04-T251**, dated 11/29/2004 signed and sealed by I. Ghia, P.E.
- 8. Test Report on Self-Ignition Temperature Test, Rate of Burn Test and Smoke Density Test of "REHAU non-foam PVC extrusion material", prepared by ETC Laboratories, Report No. **04-761-15019.0**, dated 05/06/2004, signed and sealed by J. L. Doldan, P.E.

# F. STATEMENTS "Submitted under NOA # 14-0814.05"

1. Statement letter of code conformance to the 5<sup>th</sup> edition (2014) FBC and of no financial interest, issued by Al-Farooq Corporation, dated 05/13/2014, signed and sealed by Javad Ahmad, P.E.

Helmy A. Makar, P.E., M.S.

**Product Control Section Supervisor** 

NOA No. 23-0710.18 Expiration Date: 02/22/2025

Approval Date: 02/22/2023

# DAB Door Company, Inc.

# NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### 2. EVIDENCE SUBMITTED UNDER PREVIOUS NOA # 19-1105.05

# A. DRAWINGS "Submitted under NOA #17-1108.30"

1. Drawing No. 00-18, titled "Sectional Garage Door", sheets 1 through 5 of 5, dated 08/24/2000, with last revision J dated 10/31/2017, prepared by Al-Farooq Corporation, signed and sealed by Javad Ahmad, P.E.

### B. TESTS

1. None.

# C. CALCULATIONS

1. None.

# D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

### E. MATERIAL CERTIFICATIONS

- 1. Notice of Acceptance No. 15–0915.08 issued to Sabic Innovative Plastic, US, LLC for their "LEXAN® Polycarbonate Sheet Products" dated 12/10/15, expiring on 07/17/18.
- 2. Notice of Acceptance No. 17-0221.06, issued to Insulfoam, LLC, a Div. of Carlisle Const. Materials, for their Insulfoam Expanded Polystyrene Insulation, approved on 06/01/2017 and expiring on 11/29/2022.
- 3. Notice of Acceptance No. 16-1129.05, issued to Dyplast Products, LLC, for their Expanded Polystyrene Block Type Insulation, approved on 01/19/2017 and expiring on 01/11/2022.
- 4. Notice of Acceptance No. **16-1108.04**, issued to Dyplast Products, LLC, for their Dyplast ISO-C1 Polyisocyanurate Insulation, approved on 01/19/2017 and expiring on 01/11/2022.
- 5. Notice of Acceptance No. 15-1203.04, issued to Cellofoam North America, Inc., for their Expanded Polystyrene Block Insulation, approved on 03/17/2016 and expiring on 02/24/2021.

### F. STATEMENTS

1. Statement letter of code conformance to the 6<sup>th</sup> Edition (2017) FBC prepared by Al-Farooq Corporation, dated 10/31/2019, signed and sealed by Javad Ahmad, P.E.

Helmy A. Makar, P.E., M.S.

Product Control Section Supervisor

NOA No. 23-0710.18

**Expiration Date: 02/22/2025 Approval Date: 08/10/2023** 

#### DAB Door Company, Inc.

## NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

### 3. EVIDENCE SUBMITTED UNDER PREVIOUS NOA # 20-0929.12

#### A. DRAWINGS

1. Drawing No. **00-18**, titled "Sectional Garage Door", sheets 1 through 5 of 5, dated 08/24/2000, with last revision **J** dated 10/31/2017, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. on 12/02/2020.

### B. TESTS

1. None.

### C. CALCULATIONS

1. None.

# D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

# E. MATERIAL CERTIFICATIONS

1. None.

# F. STATEMENTS

1. Conformance Letter to the 6<sup>th</sup> edition (2017) and 7<sup>th</sup> edition (2020) FBC and of no financial interest issued by Al-Farooq Corporation, dated 07/15/2020, signed and sealed by Jalal Farooq, P.E.

### 4. NEW EVIDENCE SUBMITTED

# A. DRAWINGS

Drawing No. **00-18**, titled "Sectional Garage Door", sheets 1 through 5 of 5, dated 08/24/2000, with last revision **K** dated 06/19/2023, prepared by Al-Farooq Corporation, signed and sealed by Jalal Farooq, P.E. on 06/22/2023.

#### B. TESTS

1. None.

# C. CALCULATIONS

1. None.

### D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

#### E. MATERIAL CERTIFICATIONS

1. None.


### F. STATEMENTS


1. Conformance Letter to the 8<sup>th</sup> edition (2023) and 7<sup>th</sup> edition (2020) FBC and of no financial interest issued by Al-Farooq Corporation, dated 06/20/2023, signed and sealed by Jalal Farooq, P.E.


Helmy A. Makar, P.E., M.S.


Product Control Section Supervisor NOA No. 23-0710.18

**Expiration Date: 02/22/2025 Approval Date: 08/10/2023** 

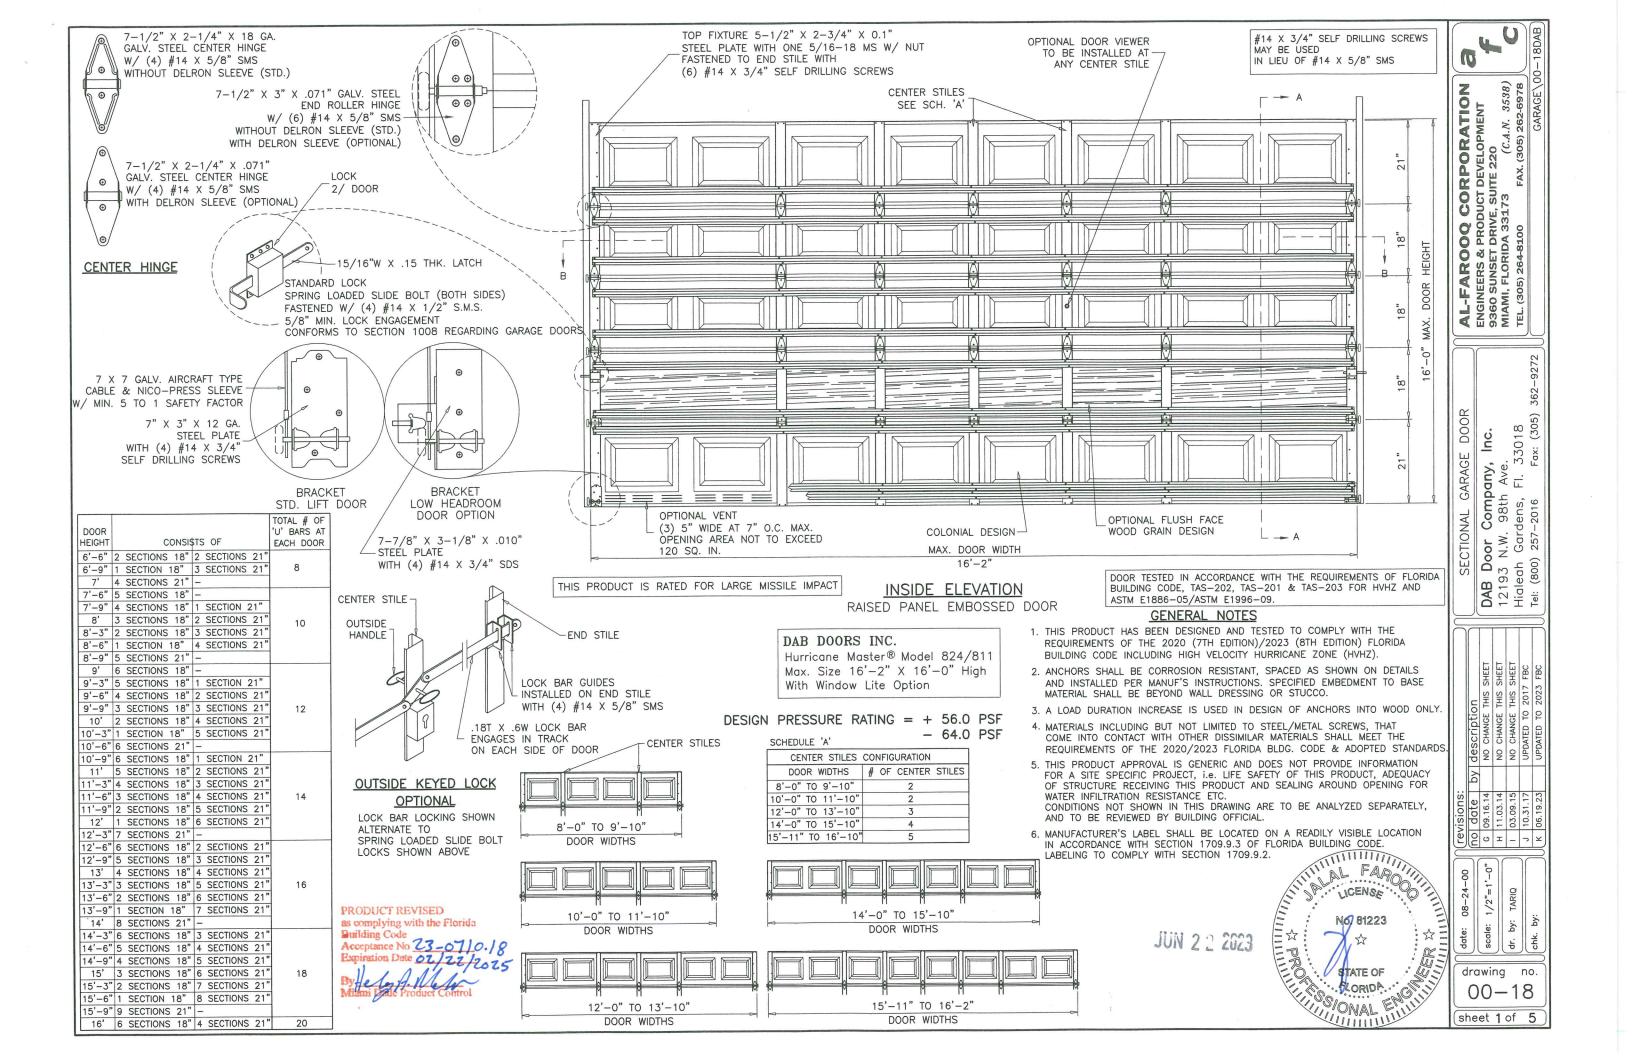

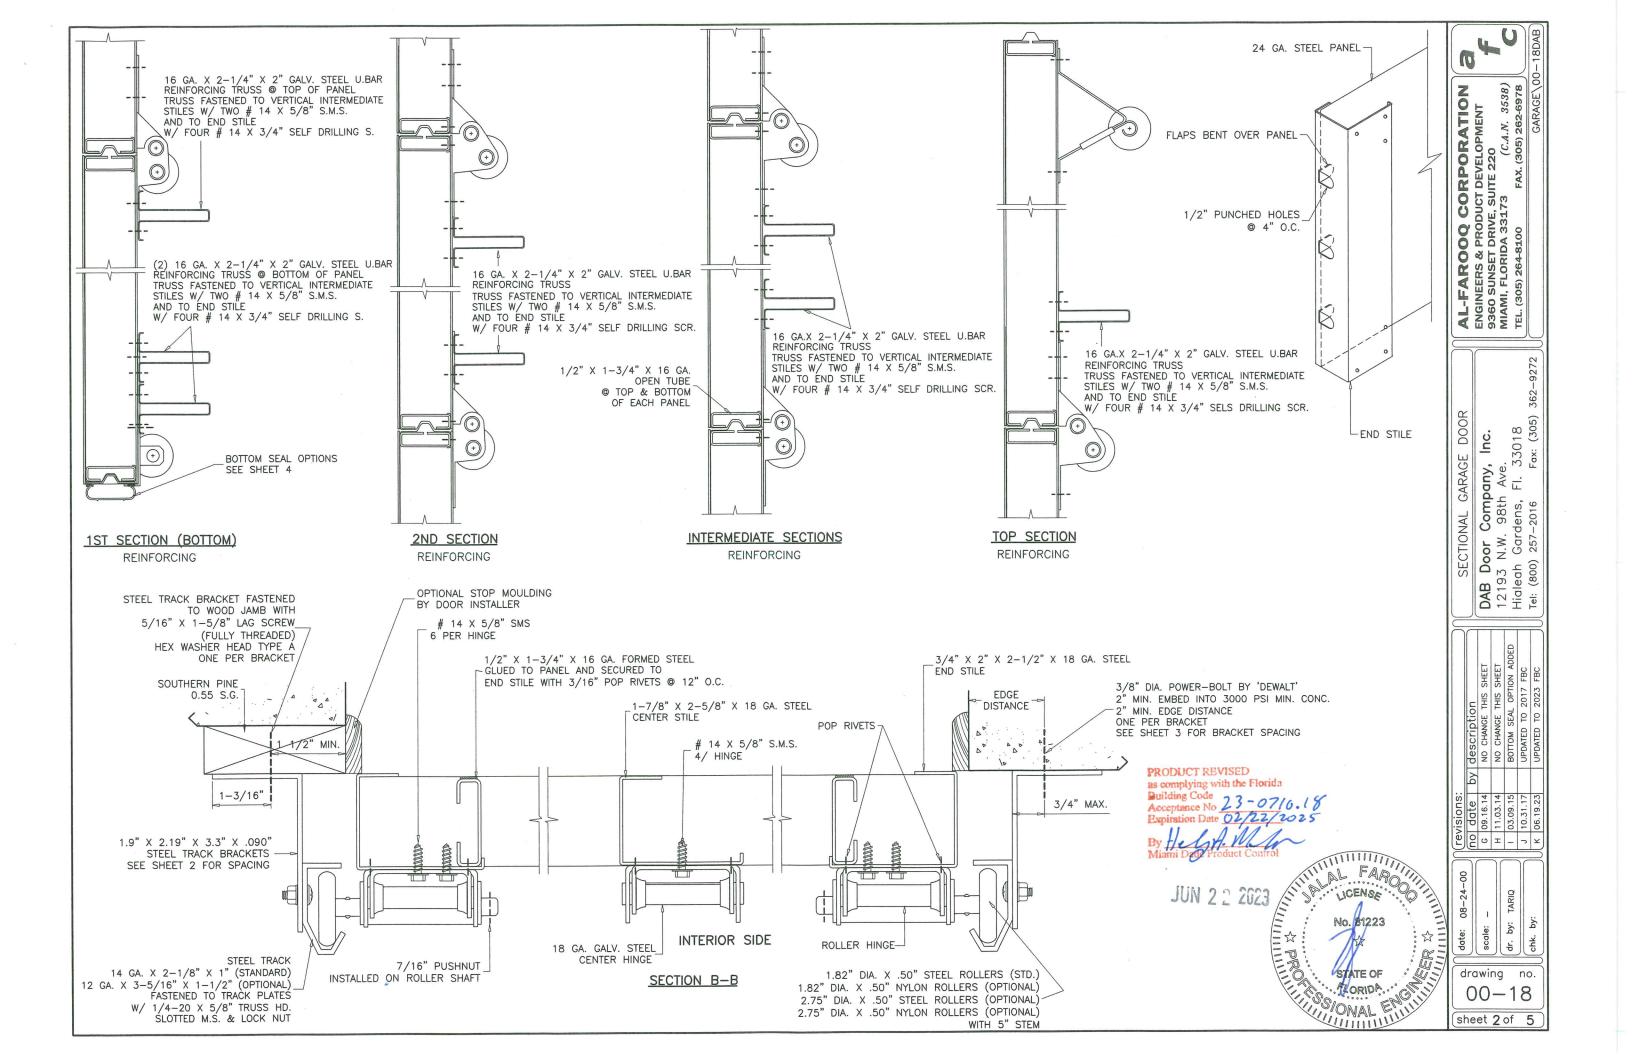

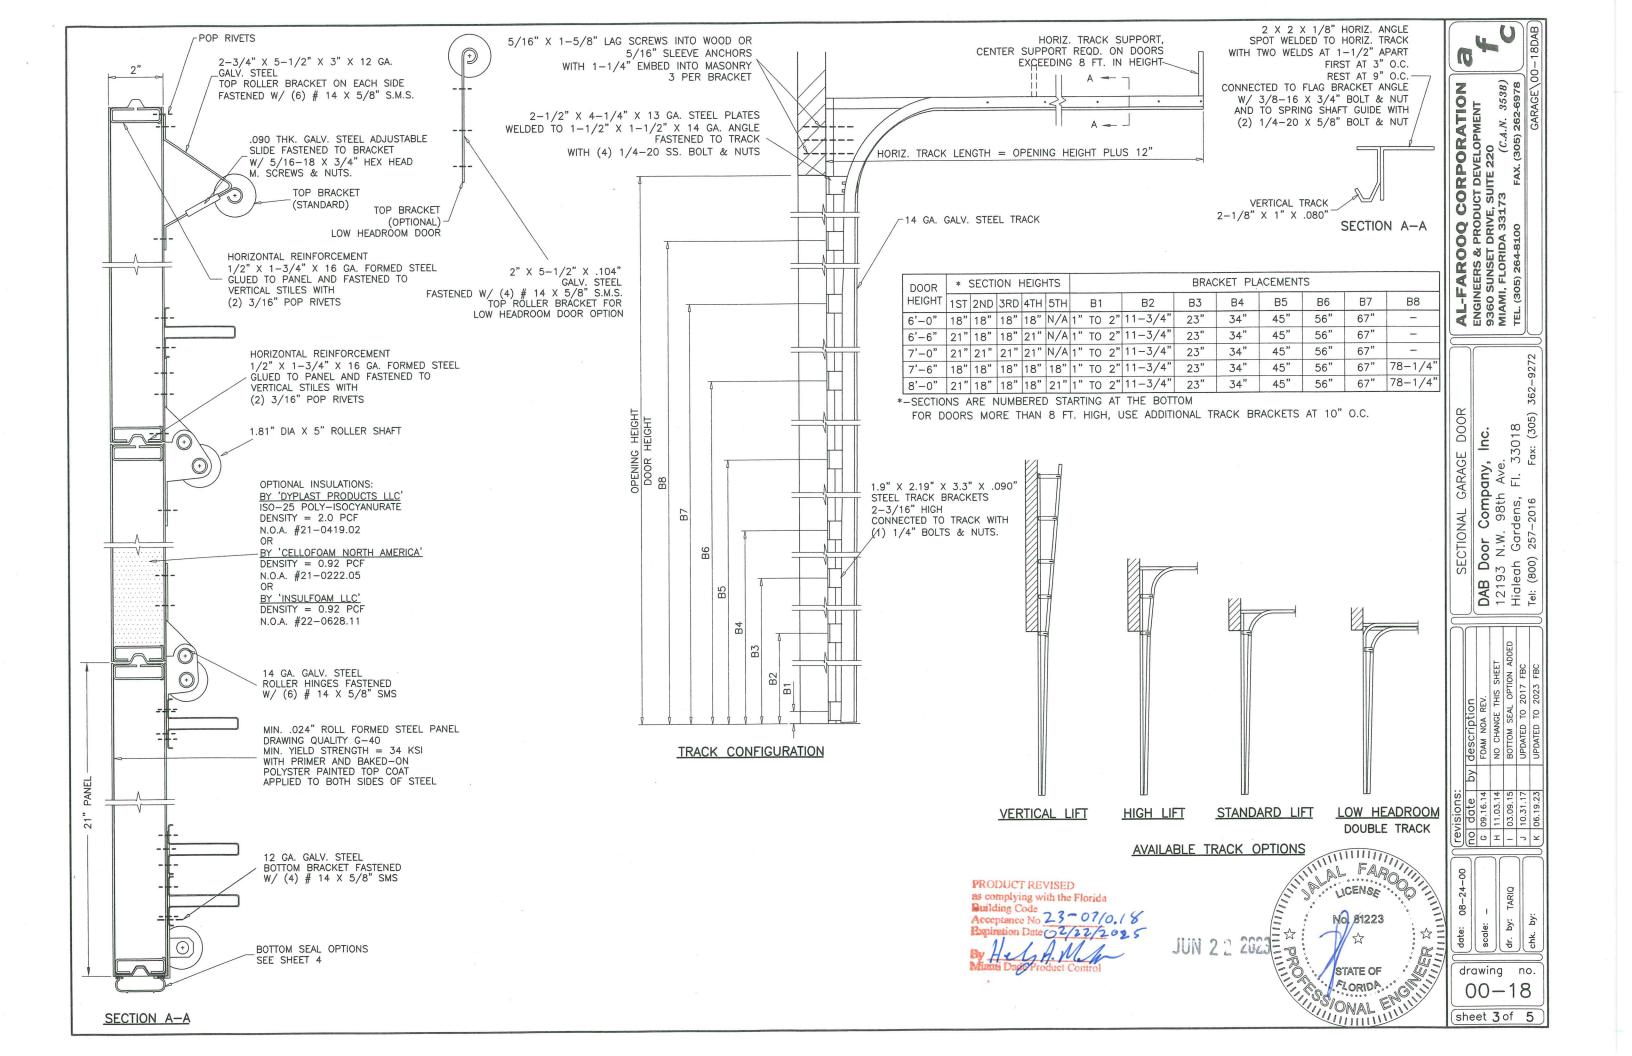

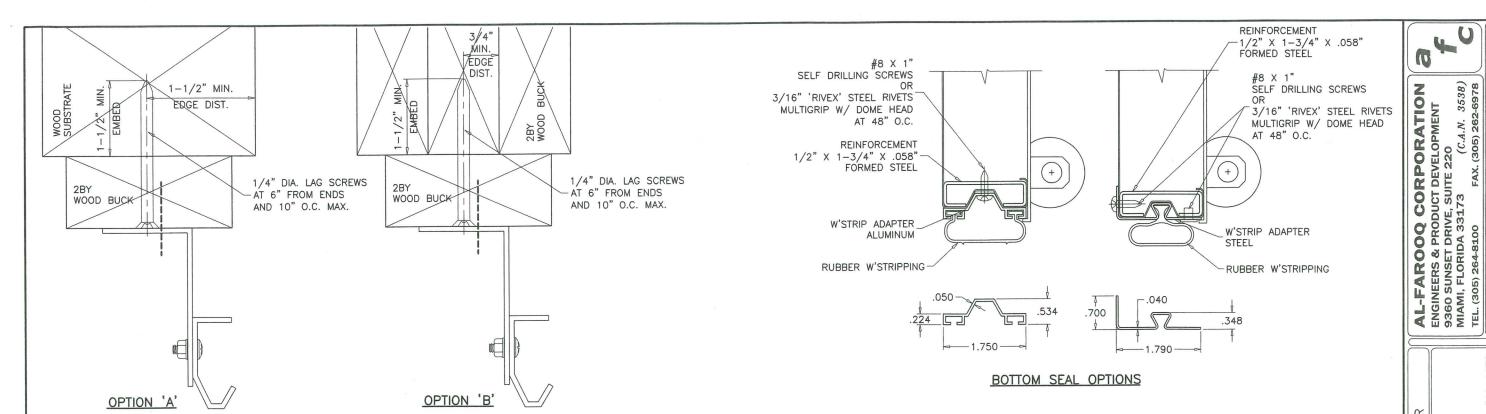

# WOOD BUCK CONNECTION TO WOOD SUBSTRATE (WOOD SPECIFIC GRAVITY SG=0.55 MIN.)

THE INSTALLATION METHODS SHOWN ABOVE SHOWS 2X6 SYP WOOD BUCK ATTACHMENT TO WOOD STRUCTURES. IF THESE METHODS ARE FOLLOWED NO ADDITIONAL CALCULATIONS/DESIGN WILL BE REQUIRED FOR DESIGN OF GARAGE DOOR ANCHORAGE. FOR DOOR REPLACEMENT APPLICATIONS WITH NO ENGINEER OF RECORD, INSTALLATION MAY BE VERIFIED AND APPROVED BY THE BUILDING OFFICIAL UPON INSPECTION.

# WOOD BUCK CONNECTION TO MASONRY

PRESSURE TREATED 2X6 SYP WOOD JAMBS WHICH SHALL BE ANCHORED TO GROUTED REINFORCED MASONRY BLOCK WALL OR CONC. COLUMN WITH

1/4" ULTRACON+ BY 'DEWALT' WITH SPACING OF 8" O.C. INTO GROUT FILLED BLOCK WALL, WITH 2-1/4" MIN. EMBED 8" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED

2-1/2" MIN. EDGE DISTANCE 1/4" TAPPER BY 'DEWALT' WITH SPACING OF

7" O.C. INTO GROUT FILLED BLOCK WALL, WITH 1-1/2" MIN. EMBED 8" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED

3" MIN. EDGE DISTANCE

3/8" CONFLEX BY 'ELCO'

8" O.C. INTO GROUT FILLED BLOCK WALL, WITH 2" MIN. EMBED 8" O.C. INTO 3000 PSI CONCRETE, WITH 1-3/4" MIN. EMBED 3-3/4" MIN. EDGE DISTANCE

3/8" LDT BY 'ITW' WITH SPACING OF 18" O.C. INTO 3000 PSI CONCRETE, WITH 2-1/2" MIN. EMBED 3" MIN. EDGE DISTANCE


3/8" HLC SLEEVE BY 'HILTI' WITH SPACING OF 9" O.C. INTO 3000 PSI CONCRETE, WITH 1-1/4" MIN. EMBED AND 2-1/2" MIN. EDGE DISTANCE

#### PREPARATION OF JAMBS BY OTHERS

FOR NEW CONSTRUCTION ENGINEER OF RECORD OR ARCHITECT TO VERIFY ADEQUACY OF SUPPORTING STRUCTURE TO SUPPORT LOADS IMPOSED BY DOOR SYSTEM.

FOR DOOR REPLACEMENT IN RETROFIT BUILDINGS WITH NO ENGINEER OF RECORD, DOOR INSTALLATION MAY BE REVIEWED AND APPROVED BY BUILDING OFFICIAL UPON INSPECTION.

MAXIMUM EXTERIOR(+) LOAD PER JAMB =  $(16.16' \times 56 \text{ PSF})/2 = 452.5 \text{ Lbs per Ft.}$ MAXIMUM INTERIOR(-) LOAD PER JAMB =  $(16.16' \times 64 \text{ PSF})/2 = 517.1 \text{ Lbs per Ft.}$ 

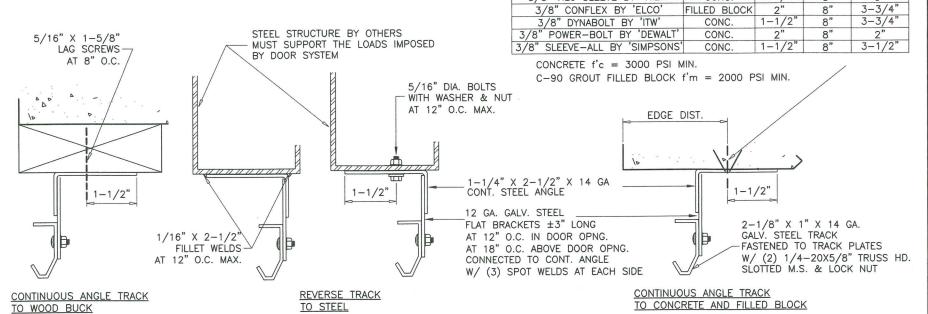

### ALTERNATE TRACK INSTALLATION

PRODUCT REVISED as complying with the Florida Acceptance No 23-07/0.18 JUN 2 2 2023 No. 81223

ANCHOR SPACING

ANCHORS

3/8" HLC SLEEVE BY 'HILTI'

STRUCTURE

CONC.

EMBED | SPACING EDGE DIST.

1-1/4"

description
ANCHORS REVISI
REV. PER RER (
BOTTOM SEAL 0
UPDATED TO 20
UPDATED TO 20 revisions:
no date
G 09.16.14
H 11.03.14
I 03.09.15
J 10.31.17
K 06.19.23 08 by: 후. drawing no. 00 - 18

sheet 4 of 5

33018 Fax: (305)

Gardens, 257–2016

Company, . 98th Ave. rdens, Fl. 33

DAB Door C 12193 N.W. Hialeah Gard Tel: (800) 257-

D00I

SECTIONAL

