


EMR Series 1000

1" Nailstrip (16" Wide)

Standard Size

Approved for installation inside the
HVHZ (Miami-Dade & Broward
counties)



Panel Material (as tested):

26ga (min) steel. *Corrosion resistant per FBC 1507.4.3 where required.*

Panel Description:

Snaplock standing seam panel with integrated nailstrip. Nominally 1" tall rib and 16" (max) coverage.

Deck/Substrate:

15/32" (min) plywood or 3/4" (min) thick wood plank (*min S.G. of 0.42*).

Available Options:

24ga also available and acceptable (*24ga is thicker than 26ga min*).

12" or 14" width also available and acceptable (*14" and 12" are less than 16" max*).

EVALUATED BY:

David Eng, PE

Timberlake Cove, LLC

FL PE 81377 • FL CA 37675


1317 Edgewater Dr Ste 2339

Orlando FL

timberlakecove.com


Digitally signed by
David E Eng
Date: 2024.04.16
07:08:50-04'00'

This item has been digitally signed and sealed by
David Eng, PE on the date indicated. Printed copies of
this document are not considered signed and sealed
and the signature must be verified on any electronic
copies.

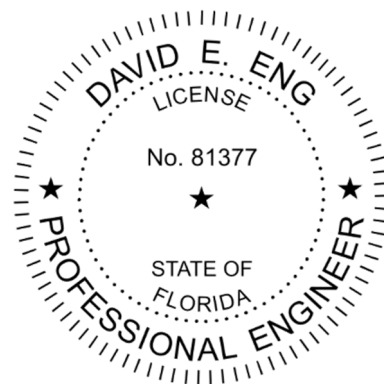

ELITE METAL ROOFING SUPPLY LLC

PO BOX 938

PORT SALERNO, FL 34992

Non-High Velocity Hurricane Zone (Non-HVHZ):

This product *is approved for installation outside* the HVHZ (Miami-Dade & Broward counties). References to HVHZ sections of the FBC (e.g. Fire Barrier) generally do not apply when the product is installed outside of the HVHZ.

High Velocity Hurricane Zone (HVHZ):

This product *is approved for installation inside* the HVHZ (Miami-Dade & Broward counties), and other jurisdictions which require HVHZ or NOA approvals. Comply with HVHZ elements of the FBC where required.

Underlayment:

Comply with local building code or FBC 1507.1.1/1518.2 where required.

Slope:

Comply with local building code or FBC 1507.4.2/FBC 1515.2 where required.

OUTSIDE the HVHZ, FBC 1507.4.2 minimum slope is 1/4:12.

INSIDE the HVHZ, FBC 1515.2 minimum slope is 1:12 (this product has passed the requirements of ASTM E2140).

Trim and Flashing Details:

Outside the scope of this approval; refer to manufacturer's recommendations. Comply with RAS 133 where required.

Re-Roofing:

This panel may be installed over a single layer of existing shingles as permitted by local building code or FBC 1511/1521, provided the existing roof meets the conditions required by the applicable code. Size fasteners to fully penetrate ¼" (min) through substrate.

Fire Barrier:

Comply with FBC 1516.1 and 1516.2 where required. Optional where not required by code.

Maximum Allowable Loads:

	Option #1	Option #2
Max. Design Pressure (<i>allowable</i>)	-116 psf	-176 psf
Min. Fastener (<i>larger diameter and longer fasteners are acceptable</i>)	#10 x 1"	#10 x 1"
Fastener Spacing	3" from ends, 6" max o.c.	3" from ends, 6" max o.c.
Panel Sealant (<i>all installations</i>)	Not required	Continuous bead of Geocel 2300/2320 or similar
Panel Sealant (<i>HVHZ with slope below 2:12</i>)	Continuous bead of Geocel 2300/2320 or similar	Continuous bead of Geocel 2300/2320 or similar

Notes:

Options #1 and #2 may be referred to as "field" and "corner" conditions, respectively.

Fasteners are installed through the metal flange, NOT the pre-punched slots.

Compare allowable pressures required for the project to the maximum allowable design pressure above and select any option which meets or exceeds the pressures required for the project.

Technical Documentation:

This product has been tested to the TAS 125 / UL 580 standard by Intertek Testing (TST-1527), report G3443.40-450-44 and to TAS 100 under report G3443.14-450-44. Tests are owned by Lara IP, and used with permission.

Compliance Statement:

This product as described has demonstrated compliance with Florida Building Code 2023, 1504.3.2 (**non-HVHZ**) and 1518.9.1/1523.6.5.2.4 (**HVHZ**), as required by FL Rule 61G20-3, method 1D.

This product as described has been tested and demonstrated compliance with:

- UL580 – Test for Uplift Resistance of Roof Assemblies
- UL 1897 – Uplift test for roof covering systems
- ASTM E2140 – Static Water Leakage Test criteria only
- TAS 125 – Standard Requirements for Metal Roofing Systems
- TAS 100 - Wind and Wind-Driven Rain

Panel Labeling:

Products sold in the HVHZ that require labeling shall bear the following or similar label. Other labeling in accordance with FBC 1523.5 shall also be permitted.



City, State
EMR Series 1000 FL #46670.01

Approved for
Miami-Dade County

Design Process:

Compare the maximum allowable loads to the ASD uplift pressures for the project to determine sufficiency and installation requirements. Determine project uplift pressures using ASCE 7-22, FBC R301, project design documents, guidance from local building department, or other design professionals. Engineering analysis may be completed by other licensed engineers for project specific approval by local authorities having jurisdiction.

Certification of Independence:

David Eng, PE and Timberlake Cove, LLC do not have, nor will acquire a financial interest in any company manufacturing or distributing products under this evaluation. The same entities do not have, nor will acquire, a financial interest in any other entity involved in the approval process of the product.

Exclusions and Limitations:

Design of deck and roof structure (to include attachment of substrate) shall be completed by others. Fire classification and shear diaphragm design are outside the scope of this evaluation. Accelerated weathering/salt spray is outside the scope of this evaluation.

This report is limited to compliance with structural wind load requirements of FBC 1504.3.2, as required by Rule 61G20-3. Neither Timberlake Cove nor the manufacturer shall be responsible for any conclusions, interpretations, or designs made by others based on this evaluation report. This report is limited solely to documenting compliance with Rule 61G20-3, and makes no express or implied warranty regarding performance of this product. Installation shall be subject to the local building code and authority having jurisdiction; this report shall not be construed to supersede local codes in force.

Panel Detail

