

RIGID GLOBAL BUILDINGS, LLC.

26 GA. R / PBR WALL PANEL


ALLOWABLE UNIFORM LOADS IN POUNDS PER SQUARE FOOT
26 Gauge R / PBR (Fy = 80 ksi)

SPAN TYPE	LOAD TYPE	SPAN IN FEET								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	6.5	7.0
SINGLE	NEGATIVE WIND LOAD	92.6	68.0	51.8	36.4	26.5	19.9	15.4	12.1	9.7
	POSITIVE WIND LOAD	65.5	48.1	36.8	29.1	23.6	19.5	15.5	12.2	9.8
2-SPAN	NEGATIVE WIND LOAD	65.5	48.1	36.8	29.1	23.6	19.5	16.4	13.9	12.0
	POSITIVE WIND LOAD	64.3	47.4	36.4	28.9	23.4	19.4	16.3	13.9	12.0
3-SPAN	NEGATIVE WIND LOAD	81.9	60.1	46.0	36.4	42.5	24.4	20.5	17.4	15.0
	POSITIVE WIND LOAD	79.7	58.9	45.3	35.9	55.0	24.2	20.3	17.3	15.0
4-SPAN	NEGATIVE WIND LOAD	76.4	56.1	43.0	34.0	27.5	22.7	19.1	16.3	14.0
	POSITIVE WIND LOAD	74.6	55.2	42.4	33.6	27.3	22.6	19.0	16.2	14.0

NOTES:

- 1) Section properties and allowable loads were computed in accordance with the 2007 edition of the North American Specification For Design Of Cold-Formed Steel Structural Members.
- 2) Allowable loads are based on uniform span lengths, Material thickness = .0180", Design thickness = .017", Fy = 80 ksi but reduced to 60 ksi for design per AISI.
- 3) POSITIVE LOAD is limited by bending, shear, combined shear & bending and web crippling and deflection of L/120.
- 4) NEGATIVE WIND LOAD is limited by bending, shear, combined shear and bending and deflection of L/120.
- 5) NEGATIVE WIND LOAD does not consider fastener pullout & pullover. Connection to framing must be evaluated for fastener pullout & pullover.
- 6) The weight of the panel has not been deducted from the allowable loads.
- 7) Panel Tested per ASTM E1592-01, Report #114-0228T-05, 3 Spans @ 5'-0" by Force Engineering & Testing, Inc.
- 8) Load Table by Force Engineering & Testing, Inc.

State of Florida
C.O.A.
26778

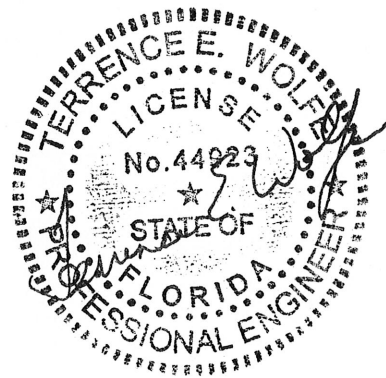

MAR 02 2012