




# NAILFIN/SCREW-WOOD INSTALLATION

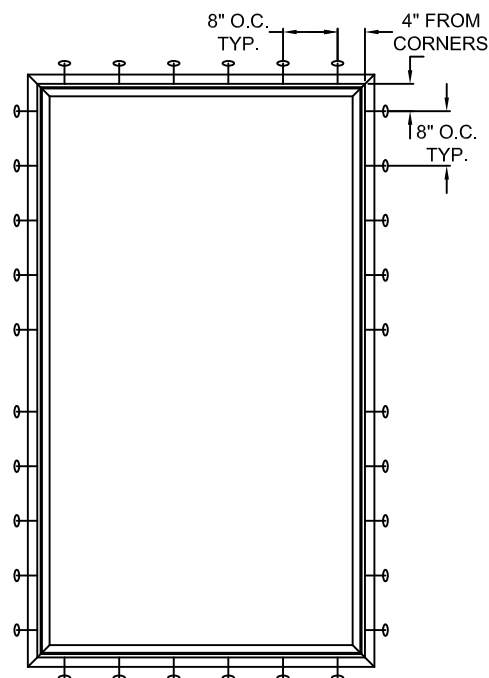

**TYPICAL ELEVATION WITH FASTENER SPACING**

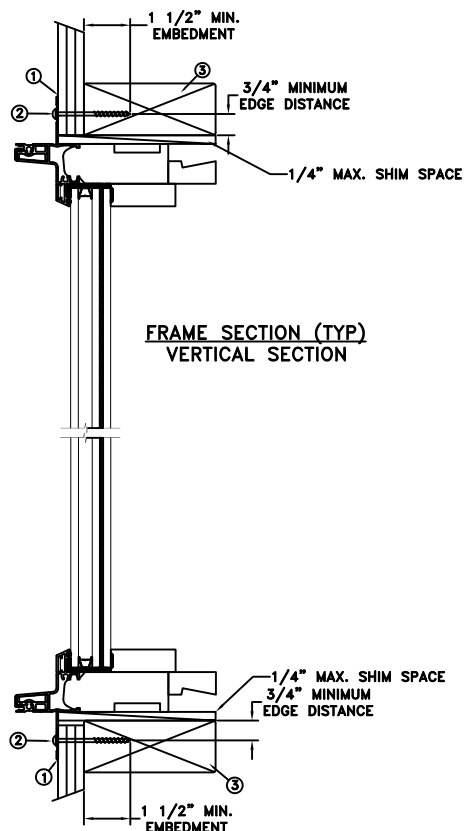

**FRAME SECTION (TYP)  
VERTICAL SECTION**

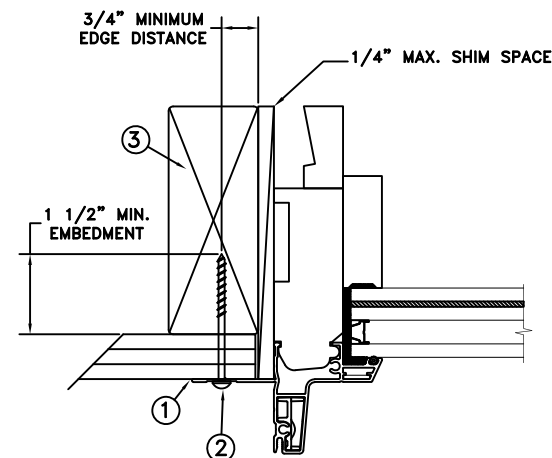

**FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION**

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

**WINDZONE 3**

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use #8 PH or greater fastener through the nailing flange with sufficient length to penetrate a minimum of 1-1/2" into the wood framing. For 2x wood frame substrate (min. S.G. = 0.42)
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:

1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).


## DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.


**MICAH SWARTZ**  
P.E.  
5134 Cambridge Ct.  
Klamath Falls, OR. 97603  
(541) 363-8075  
08/28/25

|                            |                                                        |                                                                                            |
|----------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------|
| DRAWN BY:<br>M.HAM         | DATE:<br>08/13/2025                                    | <b>JELD-WEN</b><br>3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |
| CHECKED BY:<br>M.HAM       | SCALE:<br>NTS                                          |                                                                                            |
| APPROVED BY:<br>J.GOOSSEN  | TITLE:<br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                            |
| RECORD No.:<br>D013273     |                                                        |                                                                                            |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                     | REV: A SHEET 1 of 10                                                                       |


# NAILFIN/NAIL-WOOD INSTALLATION

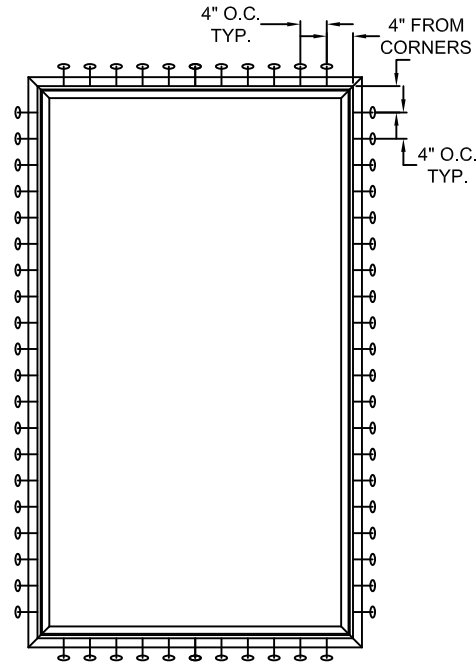

TYPICAL ELEVATION WITH FASTENER SPACING

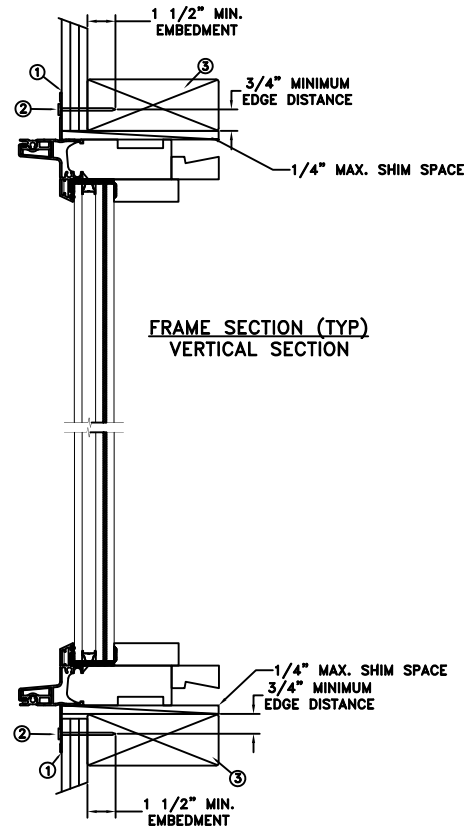

FRAME SECTION (TYP)  
VERTICAL SECTION

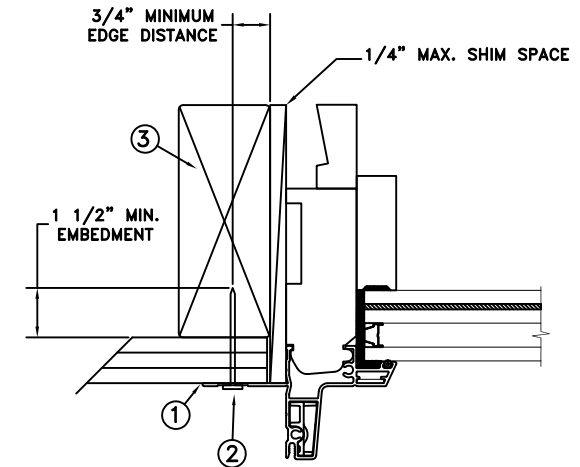

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use 6d (.113" diameter) x 2" nails through the nailing flange into the wood framing beyond. For 2x wood frame substrate (min. S.G. = 0.42).
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).


## DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.


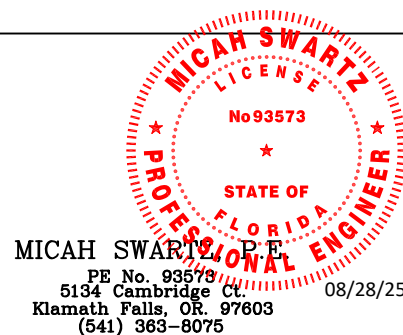


|                            |  |                                                            |                                                                                                          |  |        |               |  |
|----------------------------|--|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--|--------|---------------|--|
|                            |  | DATE:<br>08/13/2025                                        | <div>JELD-WEN</div> <div>3737 LAKEPORT BLVD.<br/>KLAMATH FALLS OR, 97601<br/>PHONE: (800) 535-3936</div> |  |        |               |  |
| DRAWN BY:<br>M.HAM         |  | SCALE:<br>NTS                                              |                                                                                                          |  |        |               |  |
| CHECKED BY:<br>M.HAM       |  | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                                          |  |        |               |  |
| APPROVED BY:<br>J.GOOSSEN  |  |                                                            |                                                                                                          |  |        |               |  |
| RECORD No.:<br>D013273     |  |                                                            |                                                                                                          |  |        |               |  |
| REPORT No.:<br>SJW2015-102 |  |                                                            | CAD DWG. No.:<br>—                                                                                       |  | REV: A | SHEET 2 of 10 |  |

# NAILFIN/SCREW-STEEL INSTALLATION

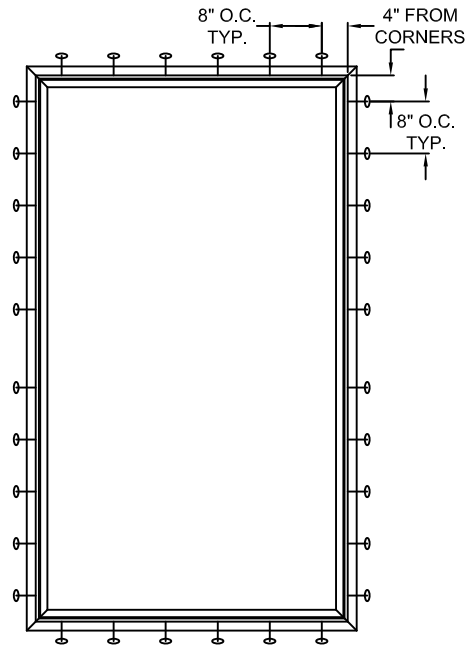

TYPICAL ELEVATION WITH FASTENER SPACING

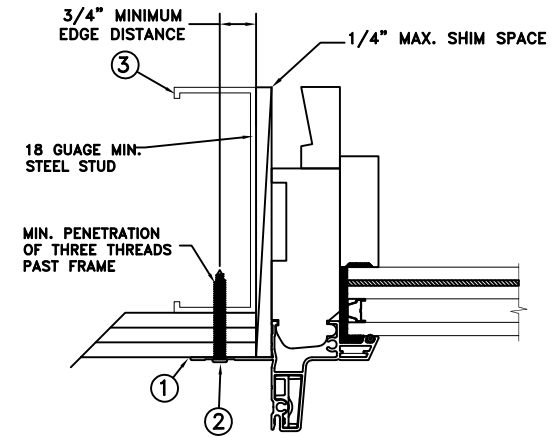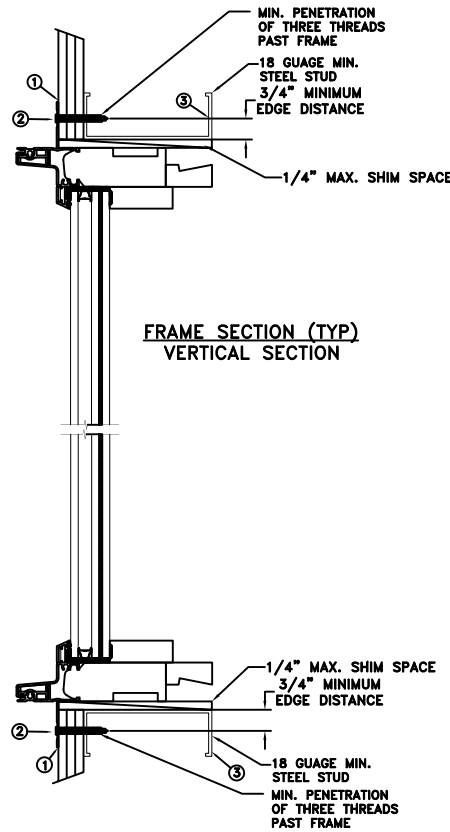

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use #10 TEK screws through the nail flange with sufficient length to achieve a minimum penetration of 3 threads past the frame thickness. Steel substrate min. 18ga., fy = 33 ksi.
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies


This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).

## DISCLAIMER:


This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.

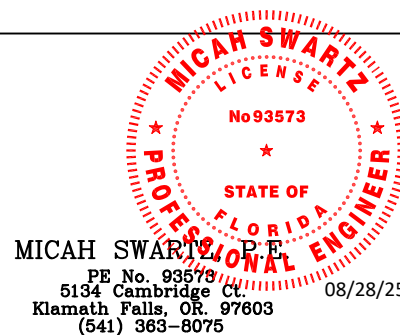


|                            |                                                        |                                                                                            |
|----------------------------|--------------------------------------------------------|--------------------------------------------------------------------------------------------|
| DRAWN BY:<br>M.HAM         | DATE:<br>08/13/2025                                    | <b>JELD-WEN</b><br>3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |
| CHECKED BY:<br>M.HAM       | SCALE:<br>NTS                                          |                                                                                            |
| APPROVED BY:<br>J.GOOSEN   | TITLE:<br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                            |
| RECORD No.:<br>D013273     |                                                        |                                                                                            |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                     | REV: A SHEET 3 of 10                                                                       |

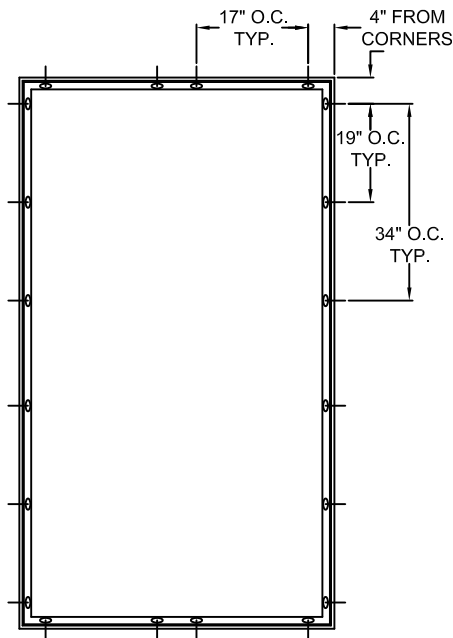

TYPICAL ELEVATION WITH FASTENER SPACING

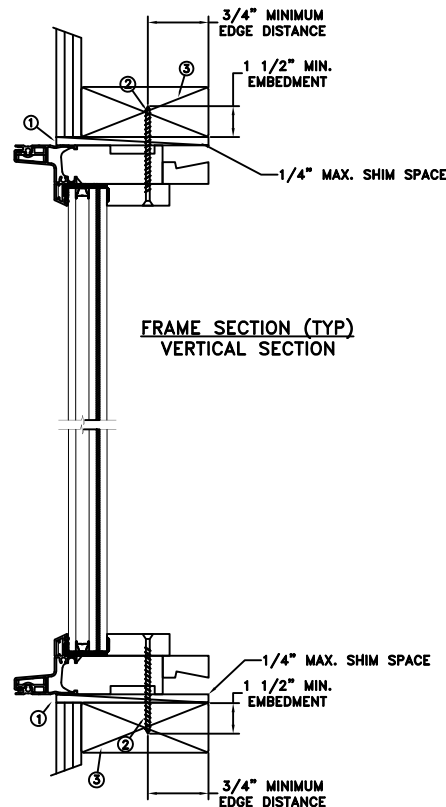

FRAME SECTION (TYP)  
VERTICAL SECTION

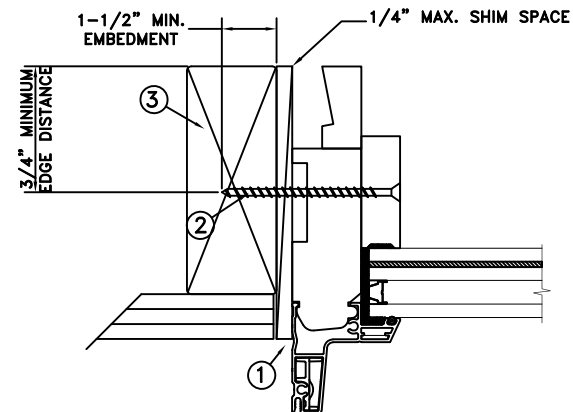

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

#### Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fasteners are used to anchor the sill (typical).
2. Use #8 PH or greater fastener through the head & side jambs with sufficient length to penetrate a minimum of 1-1/2" into the wood framing. For 2x wood frame substrate (min. S.G. = 0.42)
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

#### General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies


This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).

#### DISCLAIMER:


This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.

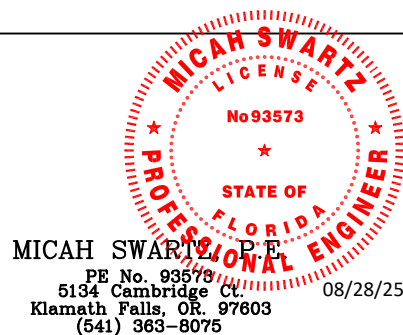


|                            |                                                            |                                                                                         |        |               |  |
|----------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------|---------------|--|
|                            | DATE:<br>08/13/2025                                        | <b>JELD-WEN</b> 3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |        |               |  |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                         |        |               |  |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                         |        |               |  |
| APPROVED BY:<br>J.GOOSSEN  |                                                            |                                                                                         |        |               |  |
| RECORD No.:<br>D013273     |                                                            |                                                                                         |        |               |  |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                         |                                                                                         | REV: A | SHEET 4 of 10 |  |

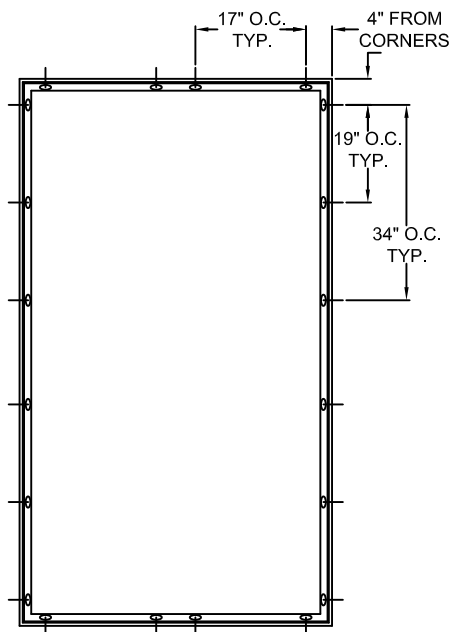

TYPICAL ELEVATION WITH FASTENER SPACING

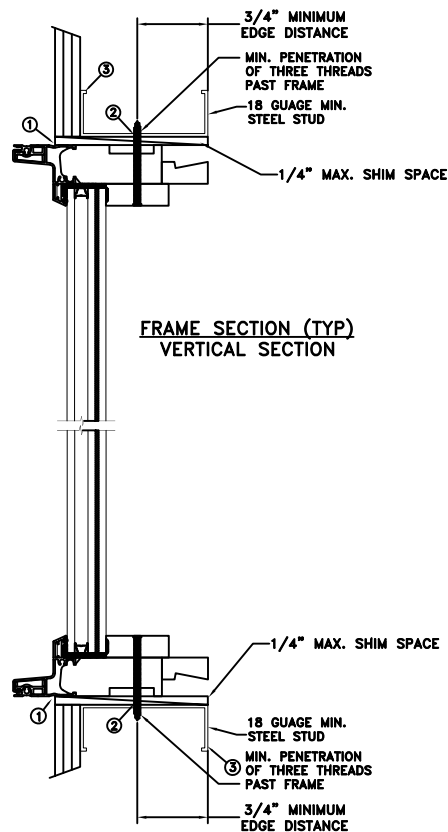

FRAME SECTION (TYP)  
VERTICAL SECTION

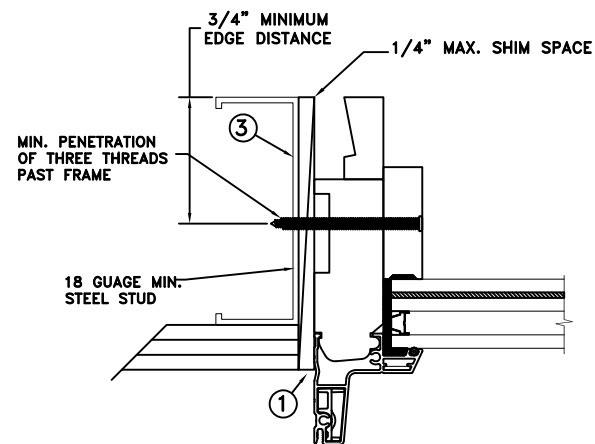

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

#### Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. For anchoring through head and side jambs into metal framing use #10 TEK Self-Tapping screws with sufficient length to achieve a minimum penetration of three threads past the frame thickness. Steel substrate min. 18ga.,  $f_y = 33$  ksi.
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

#### General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies


This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).

#### DISCLAIMER:


This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.

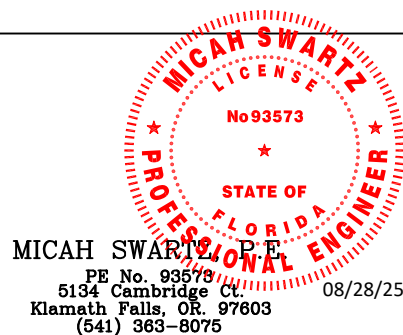


|                            |                                                            |                                                                                                          |        |               |
|----------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------|---------------|
|                            | DATE:<br>08/13/2025                                        | <div>JELD-WEN</div> <div>3737 LAKEPORT BLVD.<br/>KLAMATH FALLS OR, 97601<br/>PHONE: (800) 535-3936</div> |        |               |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                                          |        |               |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                                          |        |               |
| APPROVED BY:<br>J.GOOSSEN  |                                                            |                                                                                                          |        |               |
| RECORD No.:<br>D013273     |                                                            |                                                                                                          |        |               |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                         |                                                                                                          | REV: A | SHEET 5 of 10 |

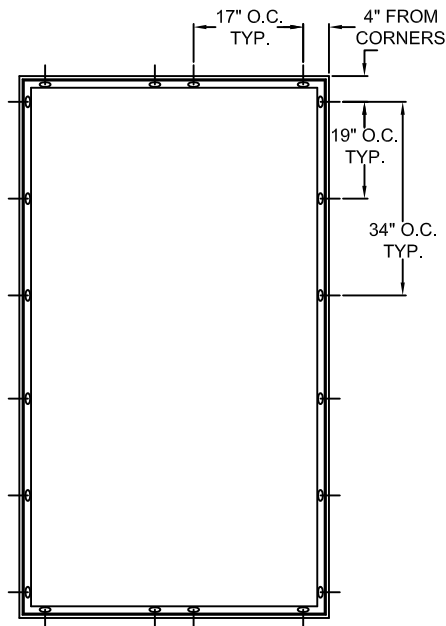

**TYPICAL ELEVATION WITH FASTENER SPACING**

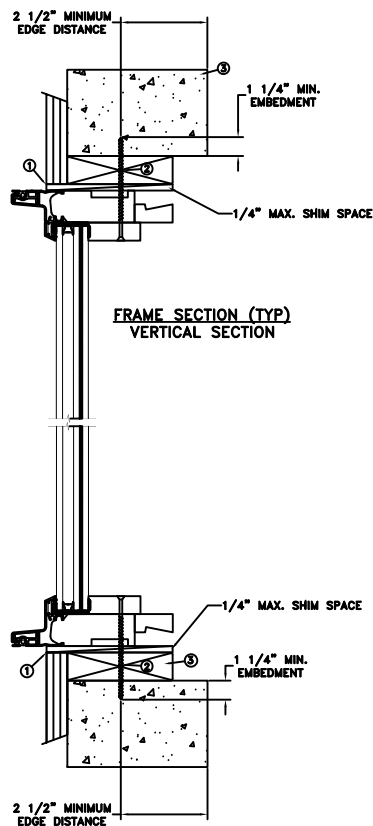

**THROUGH FRAME/SCREW  
CONCRETE INSTALLATION**

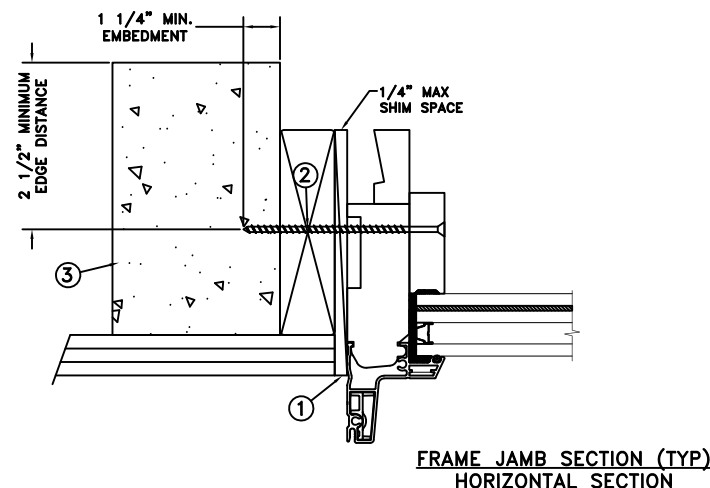

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

**WINDZONE 3**

**Installation Notes:**

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use 3/16" Tapcon or equivalent fasteners through the head and side jambs with sufficient length to penetrate a minimum of 1-1/4" into concrete or masonry at each location with a 2-1/2" min. from edge distance. For concrete (min.  $f_c = 3000$  psi) or masonry substrate (CMU shall be ASTM C90).
3. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

**General Notes:**


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).


**DISCLAIMER:**

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.


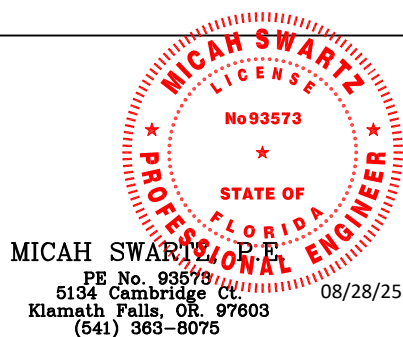


|                            |                                                            |                                                                                                          |           |                  |
|----------------------------|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|-----------|------------------|
|                            | DATE:<br>08/13/2025                                        | <div>JELD-WEN</div> <div>3737 LAKEPORT BLVD.<br/>KLAMATH FALLS OR, 97601<br/>PHONE: (800) 535-3936</div> |           |                  |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                                          |           |                  |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                                          |           |                  |
| APPROVED BY:<br>J.GOOSSEN  |                                                            |                                                                                                          |           |                  |
| RECORD No.:<br>D013273     |                                                            |                                                                                                          |           |                  |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                         |                                                                                                          | REV:<br>A | SHEET<br>6 of 10 |

# MASONRY STRAP WOOD/SCREW INSTALLATION

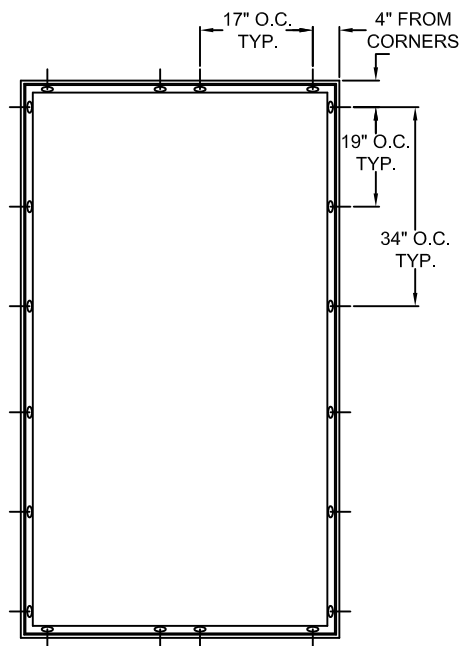

TYPICAL ELEVATION WITH FASTENER SPACING

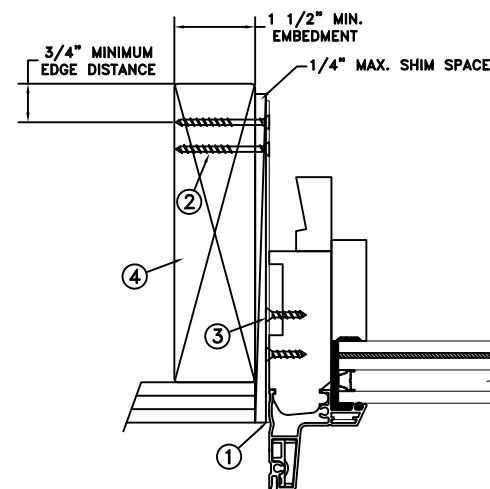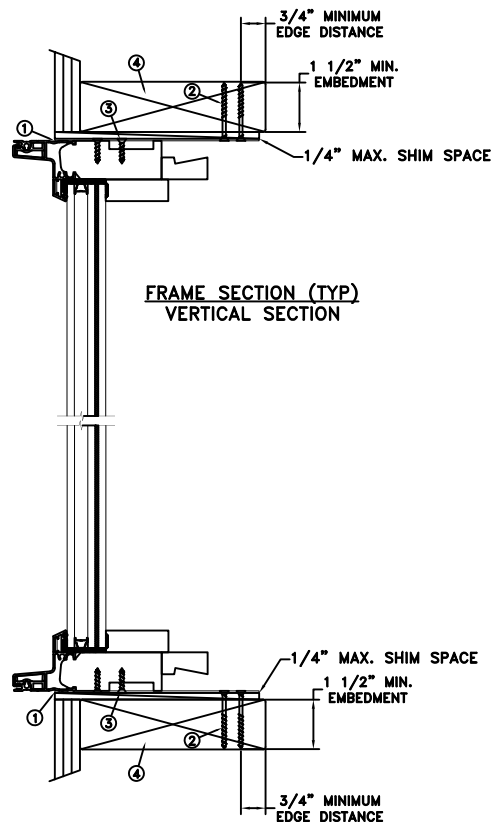

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use two (2) - #8 PFH or larger fasteners through masonry strap with sufficient length to penetrate a minimum of 1-1/2" into the buck. For 2x wood frame substrate (min. S.G. = 0.42).
3. Use two (2) - #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visibility or collateral damage to product.
4. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.
5. Masonry strap specifications: 20 Ga. galvanized steel, .036" min. thickness x 1.5" min. width

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).


## DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.


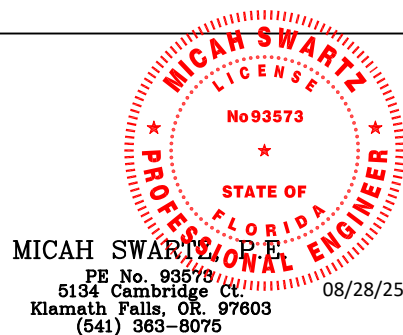


|                            |                                                            |                                                                                         |        |               |  |
|----------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------|--------|---------------|--|
|                            | DATE:<br>08/13/2025                                        | <b>JELD-WEN</b> 3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |        |               |  |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                         |        |               |  |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                         |        |               |  |
| APPROVED BY:<br>J.GOOSSEN  |                                                            |                                                                                         |        |               |  |
| RECORD No.:<br>D013273     |                                                            |                                                                                         |        |               |  |
| REPORT No.:<br>SJW2015-102 |                                                            | CAD DWG. No.:<br>—                                                                      | REV: A | SHEET 7 of 10 |  |

# MASONRY STRAP WOOD/NAIL INSTALLATION

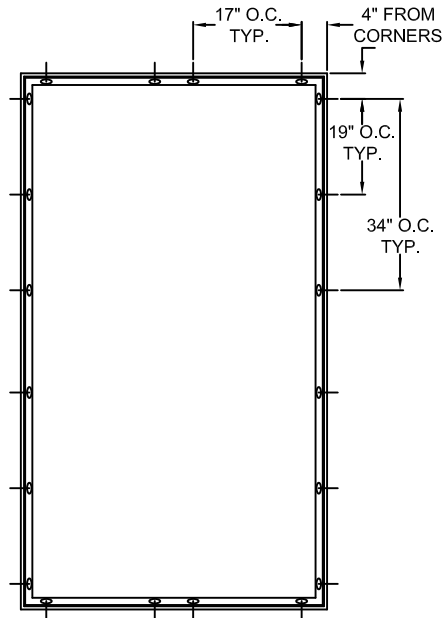

TYPICAL ELEVATION WITH FASTENER SPACING

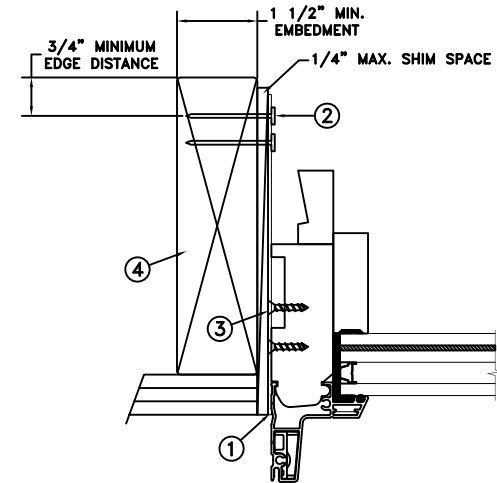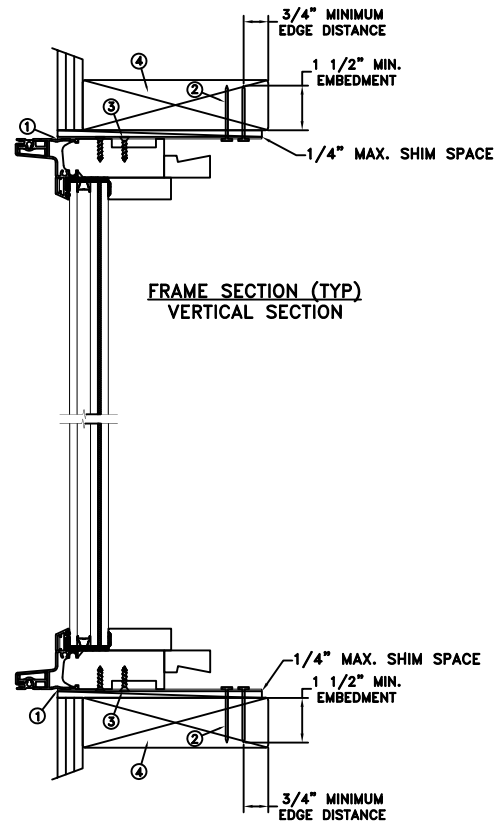

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use two (2) - 6d x 2" fasteners through masonry strap with sufficient length to penetrate a minimum of 1-1/2" into the buck. For 2x wood frame substrate (min. S.G. = 0.42).
3. Use two (2) - #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visibility or collateral damage to product.
4. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.
5. Masonry strap specifications: 20 Ga. galvanized steel, .036" min. thickness x 1.5" min. width

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).

## DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.




MICAH SWARTZ, P.E.  
PE No. 93573  
5134 Cambridge Ct.  
Klamath Falls, OR. 97603  
(541) 363-8075



08/28/25

|                            |                                                            |                                                                                            |                  |
|----------------------------|------------------------------------------------------------|--------------------------------------------------------------------------------------------|------------------|
|                            | DATE:<br>08/13/2025                                        | <b>JELD-WEN</b><br>3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |                  |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                            |                  |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                            |                  |
| APPROVED BY:<br>J.GOOSSEN  |                                                            |                                                                                            |                  |
| RECORD No.:<br>D013273     |                                                            |                                                                                            |                  |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                         | REV:<br>A                                                                                  | SHEET<br>8 of 10 |

# MASONRY STRAP STEEL/SCREW INSTALLATION

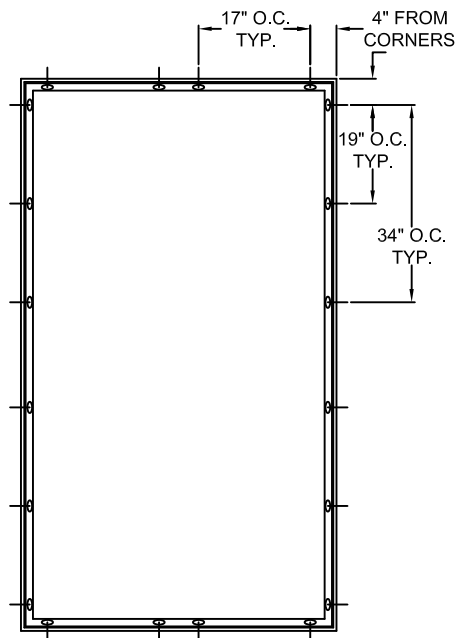

TYPICAL ELEVATION WITH FASTENER SPACING

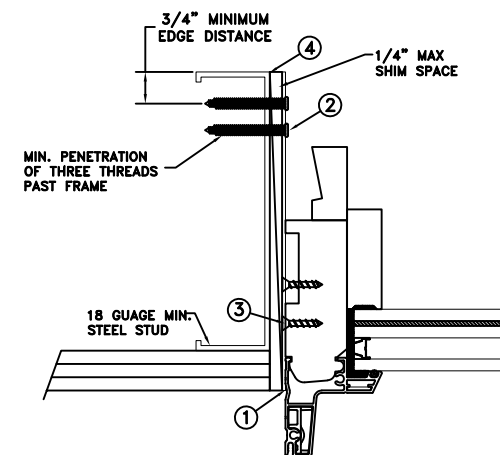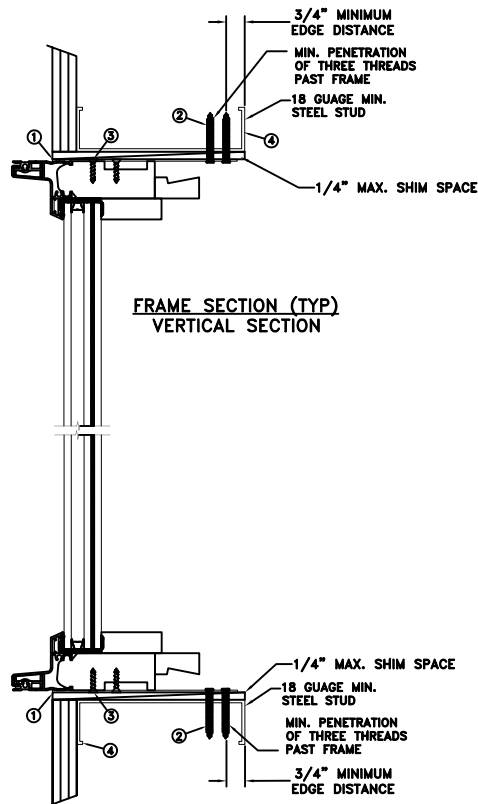

FRAME JAMB SECTION (TYP)  
HORIZONTAL SECTION

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

## Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use two (2) - #10 TEK Self-Tapping or larger screws through masonry strap with sufficient length to achieve a minimum penetration of three threads past the frame thickness. Steel substrate min. 18ga.,  $f_y = 33$  ksi.
3. Use two (2) - #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visibility or collateral damage to product.
4. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

## General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.
5. Masonry strap specifications: 20 Ga. galvanized steel, .036" min. thickness x 1.5" min. width

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).


## DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.


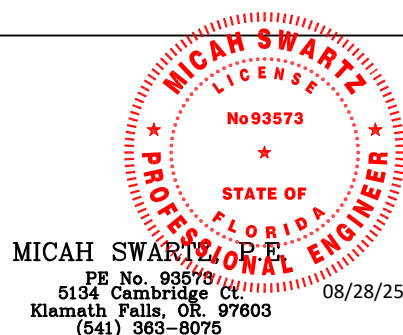


|                            |                                                            |                                                                                         |
|----------------------------|------------------------------------------------------------|-----------------------------------------------------------------------------------------|
|                            | DATE:<br>08/13/2025                                        | <b>JELD-WEN</b> 3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS                                              |                                                                                         |
| CHECKED BY:<br>M.HAM       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set |                                                                                         |
| APPROVED BY:<br>J.GOOSEN   |                                                            |                                                                                         |
| RECORD No.:<br>D013273     |                                                            |                                                                                         |
| REPORT No.:<br>SJW2015-102 | CAD DWG. No.:<br>—                                         | REV: A SHEET 9 of 10                                                                    |

MASONRY STRAP CONCRETE  
SCREW INSTALLATION

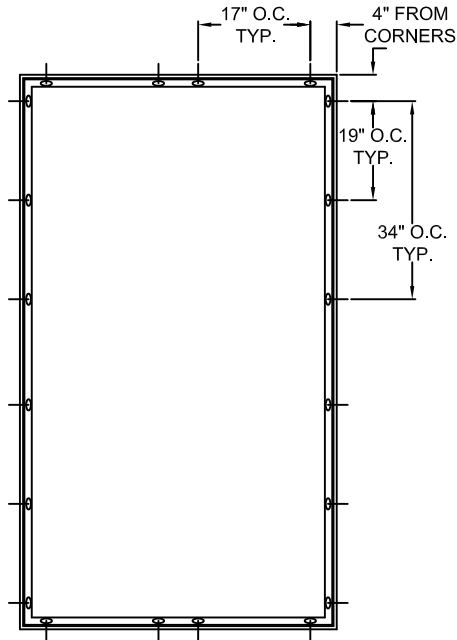

TYPICAL ELEVATION WITH FASTENER SPACING

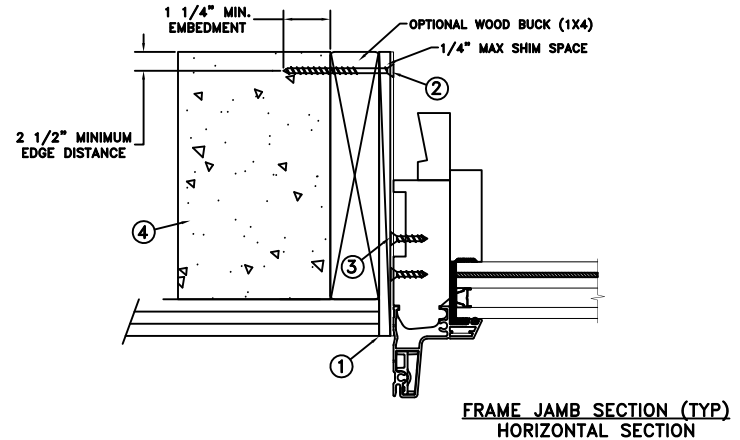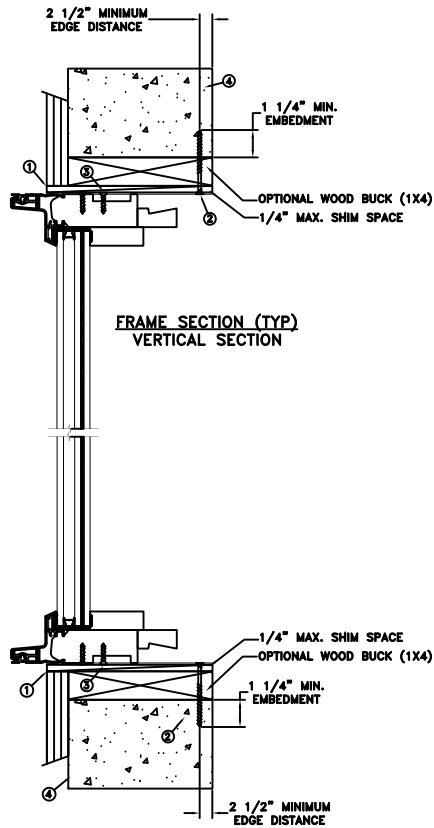

| Max Frame     | DP      | IMPACT |
|---------------|---------|--------|
| 48" x 84.125" | +50/-65 | YES    |

WINDZONE 3

Installation Notes:

1. Seal flange/frame to substrate. Sill shall be set on a continuous serpentine bead of structural grade silicone caulk when no fastener is used to anchor the sill (typical).
2. Use one (1) - 3/16" Tapcon or equivalent fasteners through masonry strap with sufficient length to penetrate a minimum of 1-1/4" into the buck or concrete. For 2x wood frame substrate (min. S.G. = 0.42). For concrete (min. fc = 3000 psi) or masonry substrate (CMU shall be ASTM C90).
3. Use two (2) - #8 PFH or larger fasteners through masonry strap into jamb without penetrating through the jamb into product causing visibility or collateral damage to product.
4. Host structure (wood buck, masonry, steel) to be designed and anchored to properly transfer all loads to the structure. The host structure is the responsibility of the architect or engineer of record for the project of installation.

General Notes:


1. The product shown herein is designed, tested and manufactured to comply with the wind load criteria of the adopted International Building Code (IBC), the International Residential Code (IRC), the current Florida Building Code (FBC) and the industry requirement for the stated conditions.
2. All glazing shall conform to ASTM E1300.
3. At minimum, glazing shall be 6mm annealed - 10.34mm airspace - 3mm annealed - 2.29mm SGP interlayer by DuPont - 3mm annealed glass.
4. Use structural or composite shims where required.
5. Masonry strap specifications: 20 Ga. galvanized steel, .036" min. thickness x 1.5" min. width

This item has been digitally signed and sealed by Micah Swartz, P.E. on the date adjacent to the seal. Printed copies of this document are not considered signed and sealed and the signature must be verified on any electronic copies

This schedule addresses only the fasteners required to anchor the unit to achieve the rated design pressure and impact performance (where applicable) up to the size limitations noted. It is not intended as a guide to the installation process and does not address the sealing consideration that may arise in different wall conditions. For the complete installation procedure, see the instructions packaged with the unit or go to [www.jeld-wen.com](http://www.jeld-wen.com).

DISCLAIMER:

This drawing and its contents are confidential and are not to be reproduced or copied in whole or in part or used or disclosed to others except as authorized by JELD-WEN Inc.

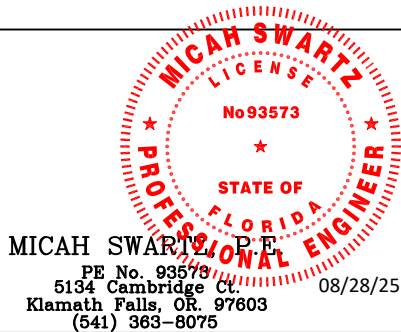

|                            |                     |                                                                                         |        |                |
|----------------------------|---------------------|-----------------------------------------------------------------------------------------|--------|----------------|
|                            | DATE:<br>08/13/2025 | <b>JELD-WEN</b> 3737 LAKEPORT BLVD.<br>KLAMATH FALLS OR, 97601<br>PHONE: (800) 535-3936 |        |                |
| DRAWN BY:<br>M.HAM         | SCALE:<br>NTS       | TITLE:<br><br>Siteline (W-5500) Clad Wood Fixed Direct Set                              |        |                |
| CHECKED BY:<br>M.HAM       |                     |                                                                                         |        |                |
| APPROVED BY:<br>J.GOOSEN   |                     |                                                                                         |        |                |
| RECORD No.:<br>D013273     |                     |                                                                                         |        |                |
| REPORT No.:<br>SJW2015-102 |                     | CAD DWG. No.:<br>—                                                                      | REV: A | SHEET 10 of 10 |