

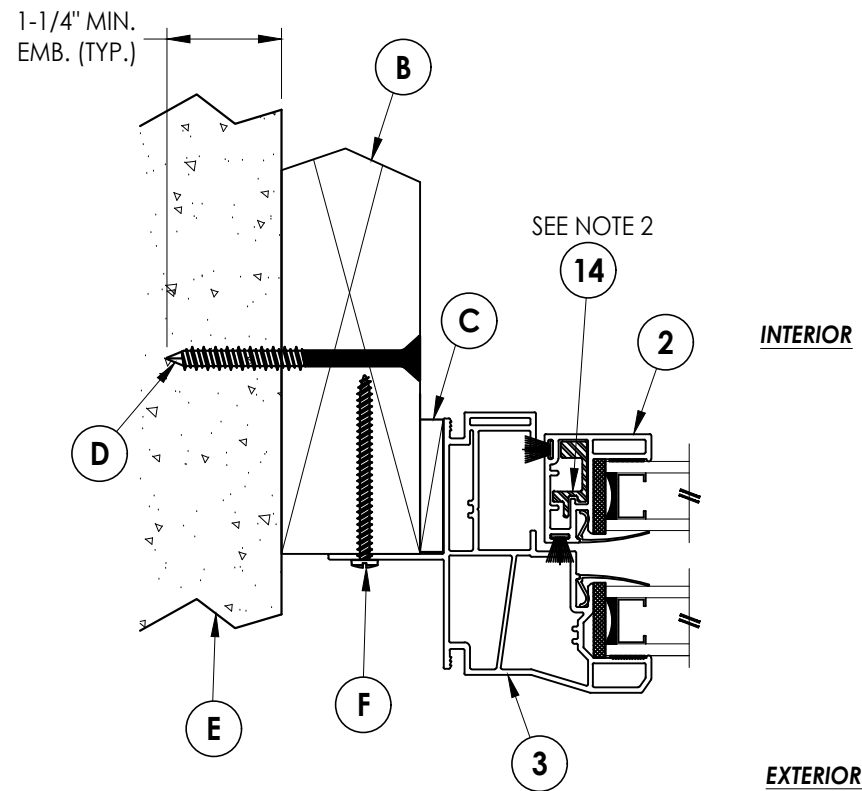
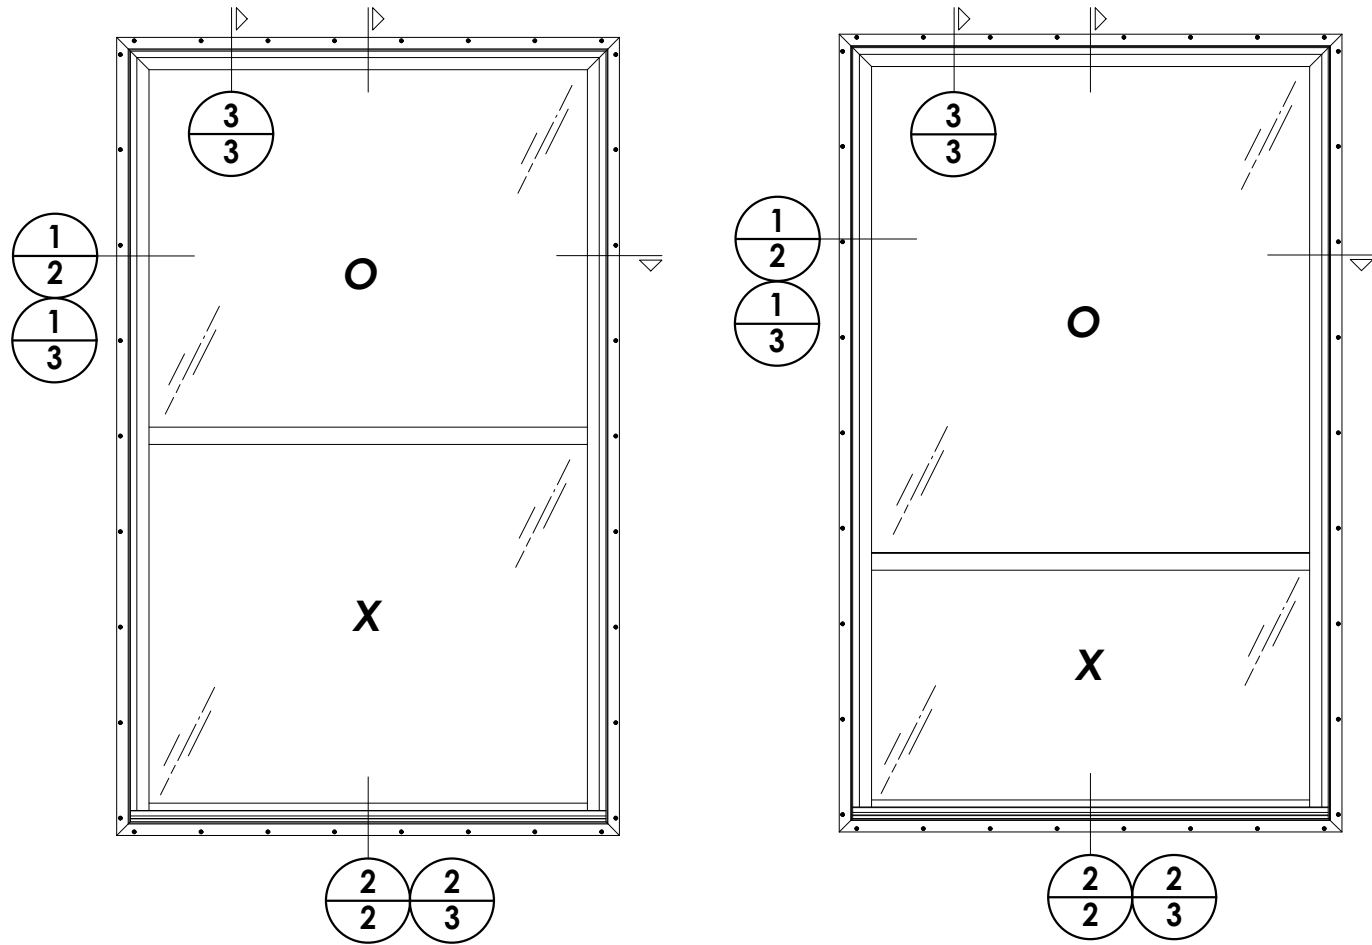
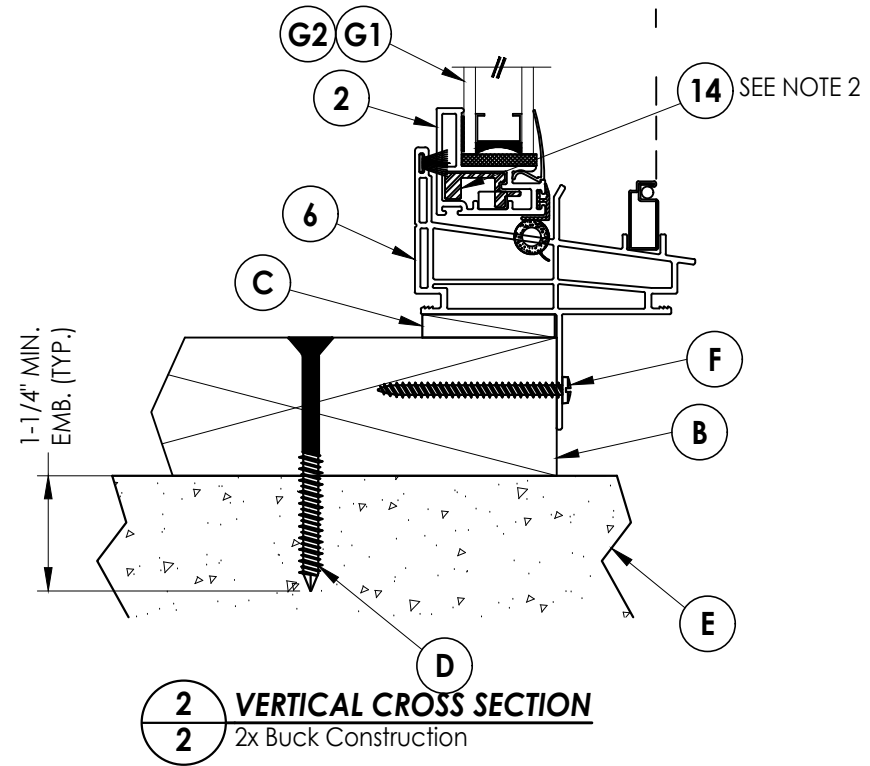
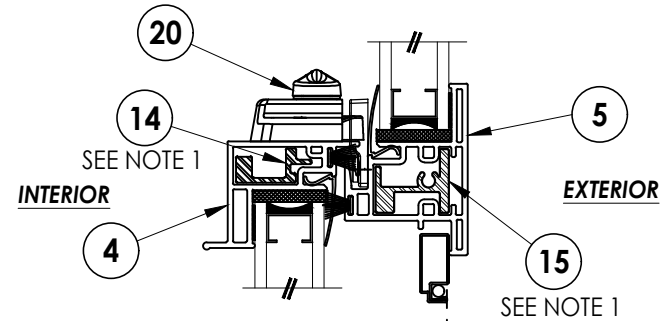


Z:\2023 FBC Drawings\Associated Materials, Inc\FL-10465 R15\FL-10465.11.dwg

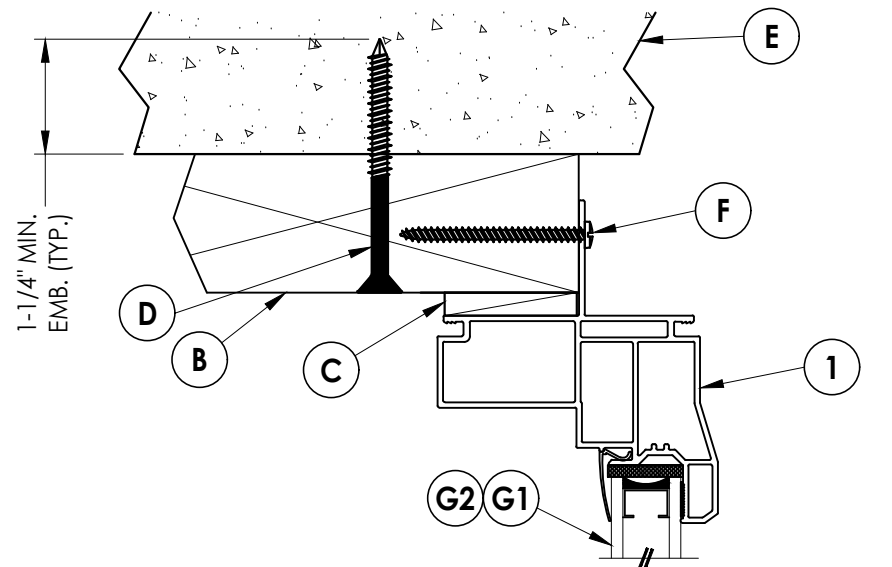

1 HORIZONTAL CROSS SECTION
2 2x Buck Construction

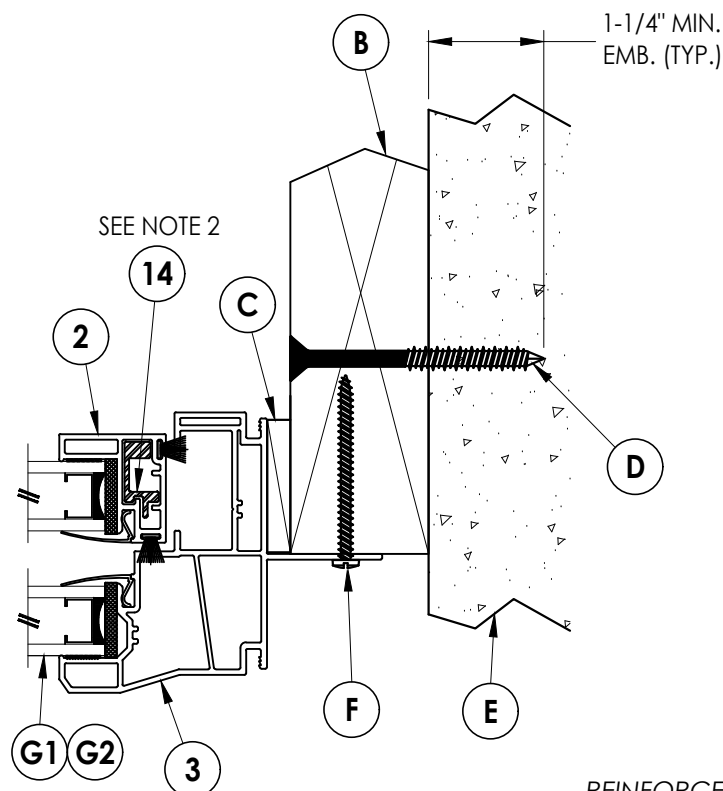

2 VERTICAL CROSS SECTION
2 2x Buck Construction

- REINFORCEMENT NOTES:**
- LOCK & MEETING RAIL REINFORCEMENTS ARE REQUIRED FOR ALL WINDOW FRAME SIZES.
 - SASH STILE & BOTTOM RAIL REINFORCEMENTS ARE REQUIRED FOR EACH OF THE FOLLOWING:
 - ALL WINDOW FRAME SIZES > 44" x 75".
 - ALL WINDOW FRAME SIZES WITH DESIGN PRESSURE > 20 PSF.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT:
SINGLE HUNG WINDOW

PART OR ASSEMBLY:
VERTICAL & HORIZONTAL
CROSS SECTIONS


REVISIONS		NO.	DATE	BY

DATE: 9/20/23
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-10465.11
SHEET 2 OF 6




Z:\2023 FBC Drawings\Associated Materials, Inc\FL-10465 R15\FL-10465.11.dwg

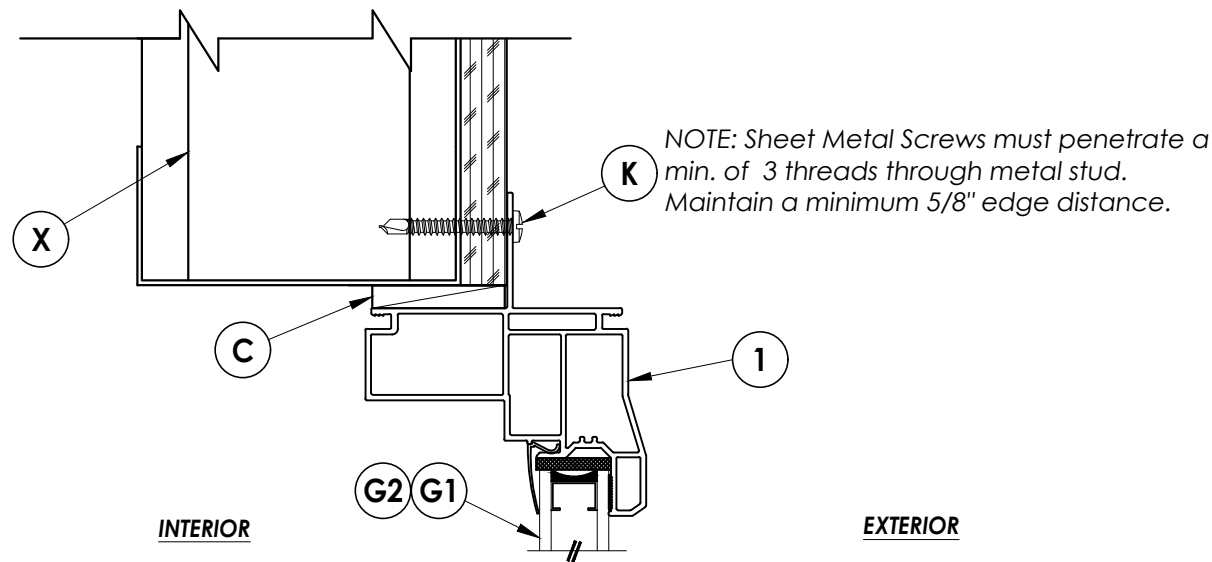

3 **VERTICAL CROSS SECTION**
3 Steel Stud Construction

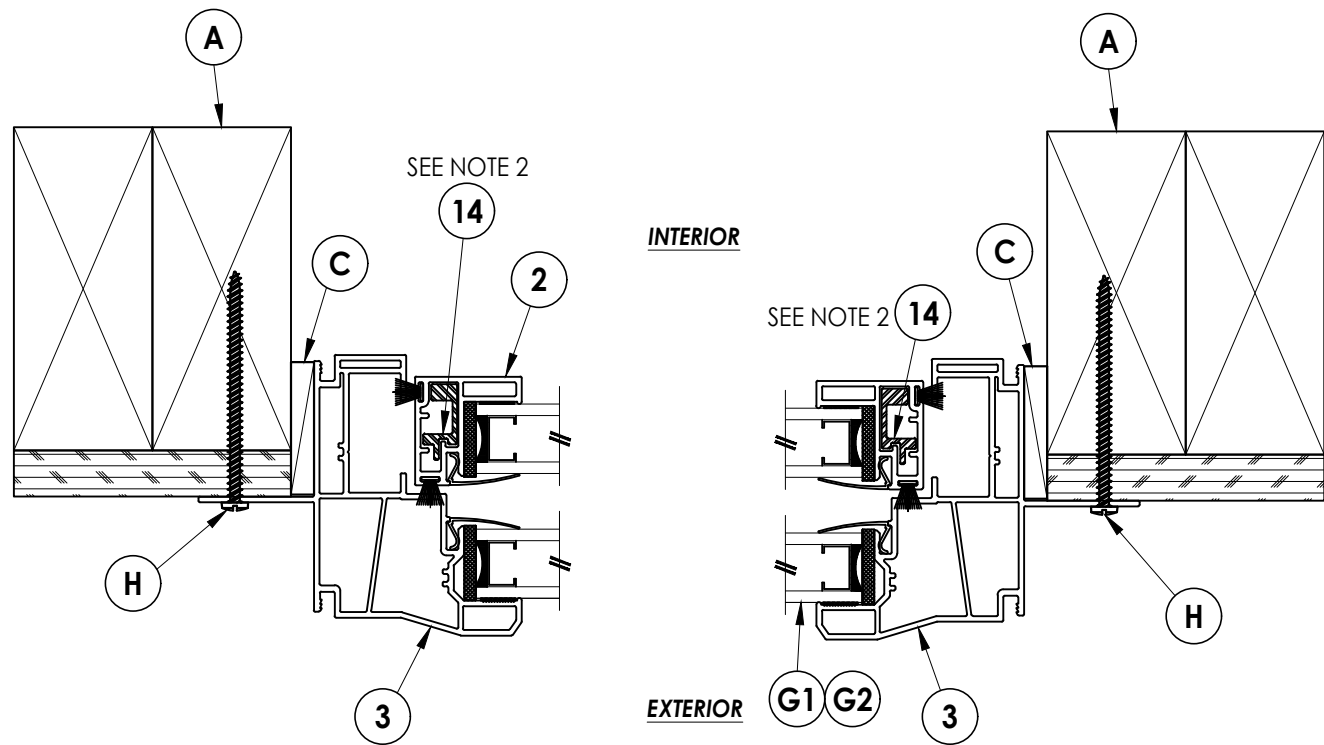

1 **HORIZONTAL CROSS SECTION**
3 Stud Construction

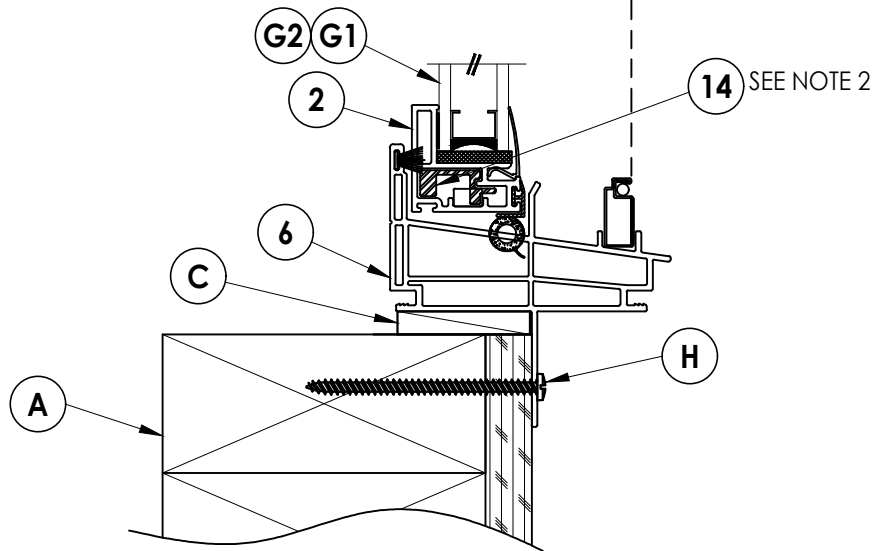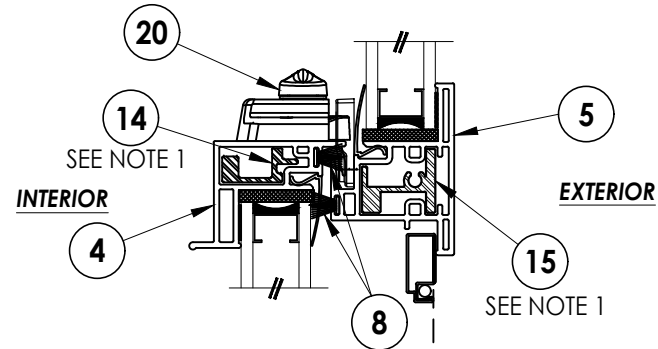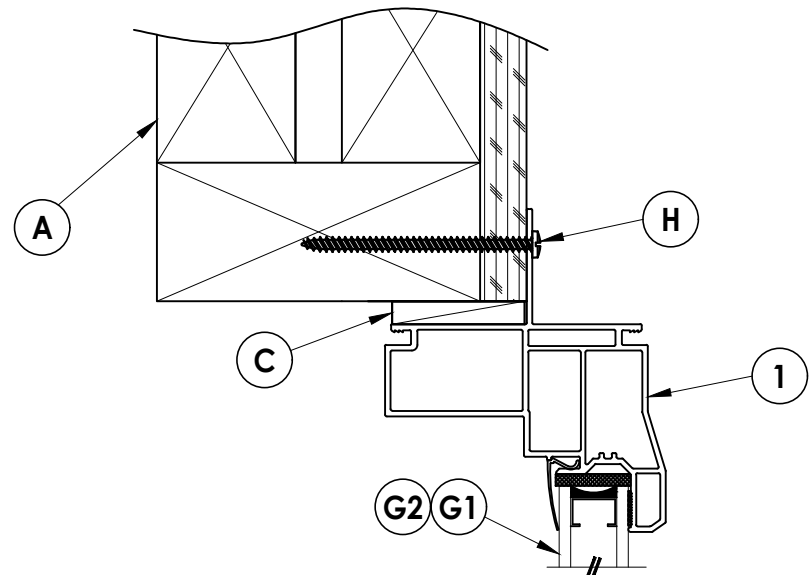

2 **VERTICAL CROSS SECTION**
3 Stud Construction


- REINFORCEMENT NOTES:**
- LOCK & MEETING RAIL REINFORCEMENTS ARE REQUIRED FOR ALL WINDOW FRAME SIZES.
 - SASH STILE & BOTTOM RAIL REINFORCEMENTS ARE REQUIRED FOR EACH OF THE FOLLOWING:
 - ALL WINDOW FRAME SIZES > 44" x 75".
 - ALL WINDOW FRAME SIZES WITH DESIGN PRESSURE > 20 PSF.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:	SINGLE HUNG WINDOW		
	PART OR ASSEMBLY:		
REVISIONS	VERTICAL & HORIZONTAL CROSS SECTIONS		
	NO.	DATE	BY

DATE: 9/20/23
SCALE: N.T.S.
DWG. BY: RW
CHK. BY: LFS
DRAWING NO.: FL-10465.11
SHEET 3 OF 6

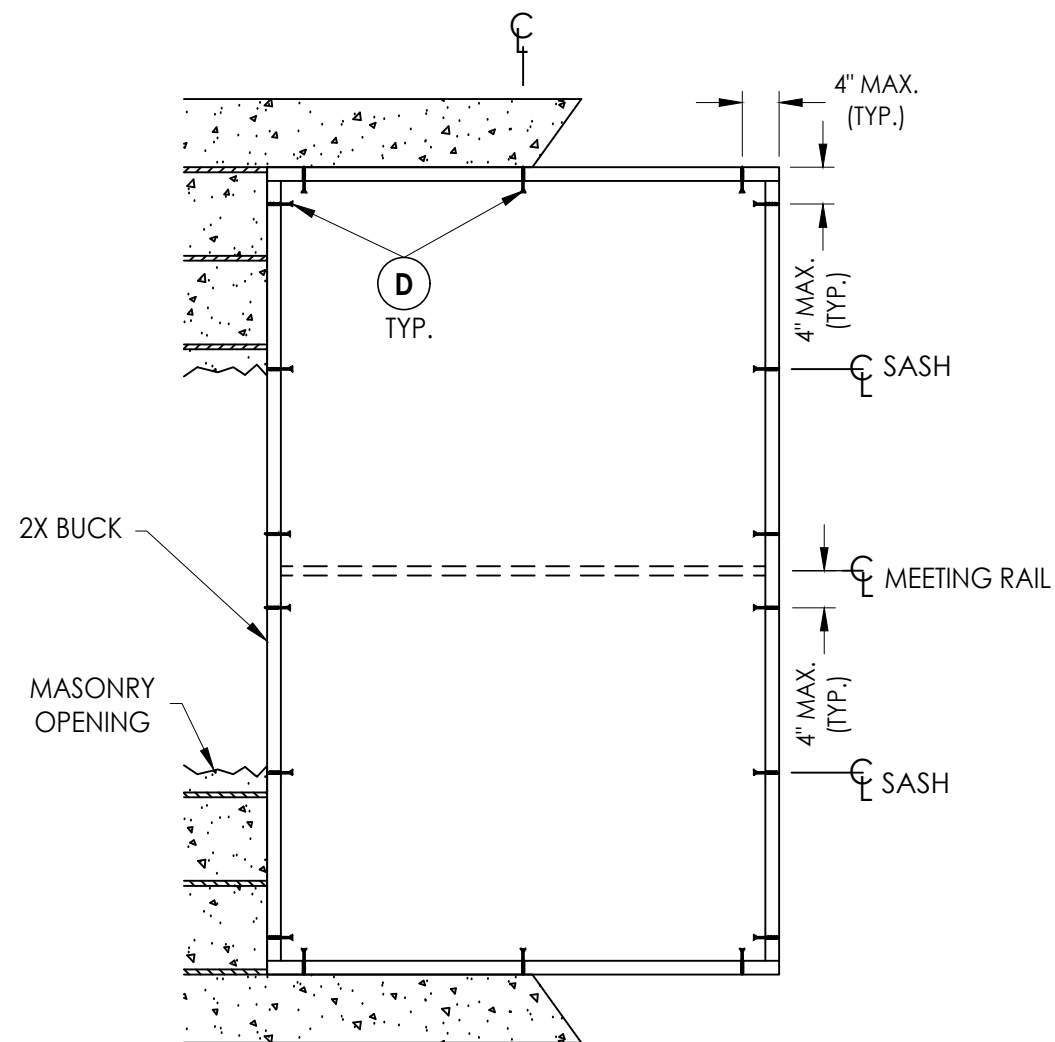

BUCK ANCHORING

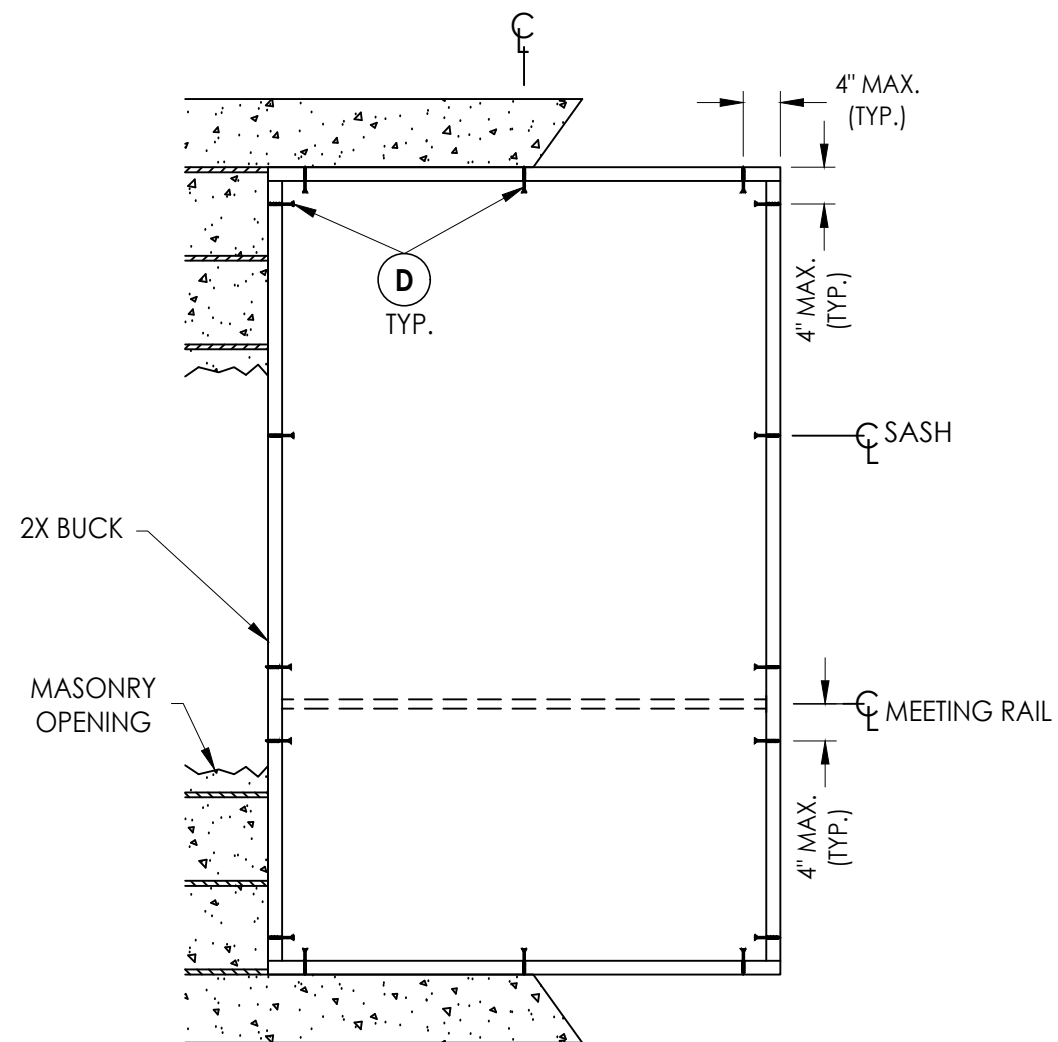

BUCK ANCHORING
Oriel

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA-CON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

CT:
SINGLE HUNG WINDOW

ASSEMBLY:
BUCK ANCHORING

[illegible]


DATE:	9/20/23
SCALE:	N.T.S.
DWG. BY:	RW
CHK. BY:	LFS
DRAWING NO.:	FL-10465.11
SHEET	4 OF 6

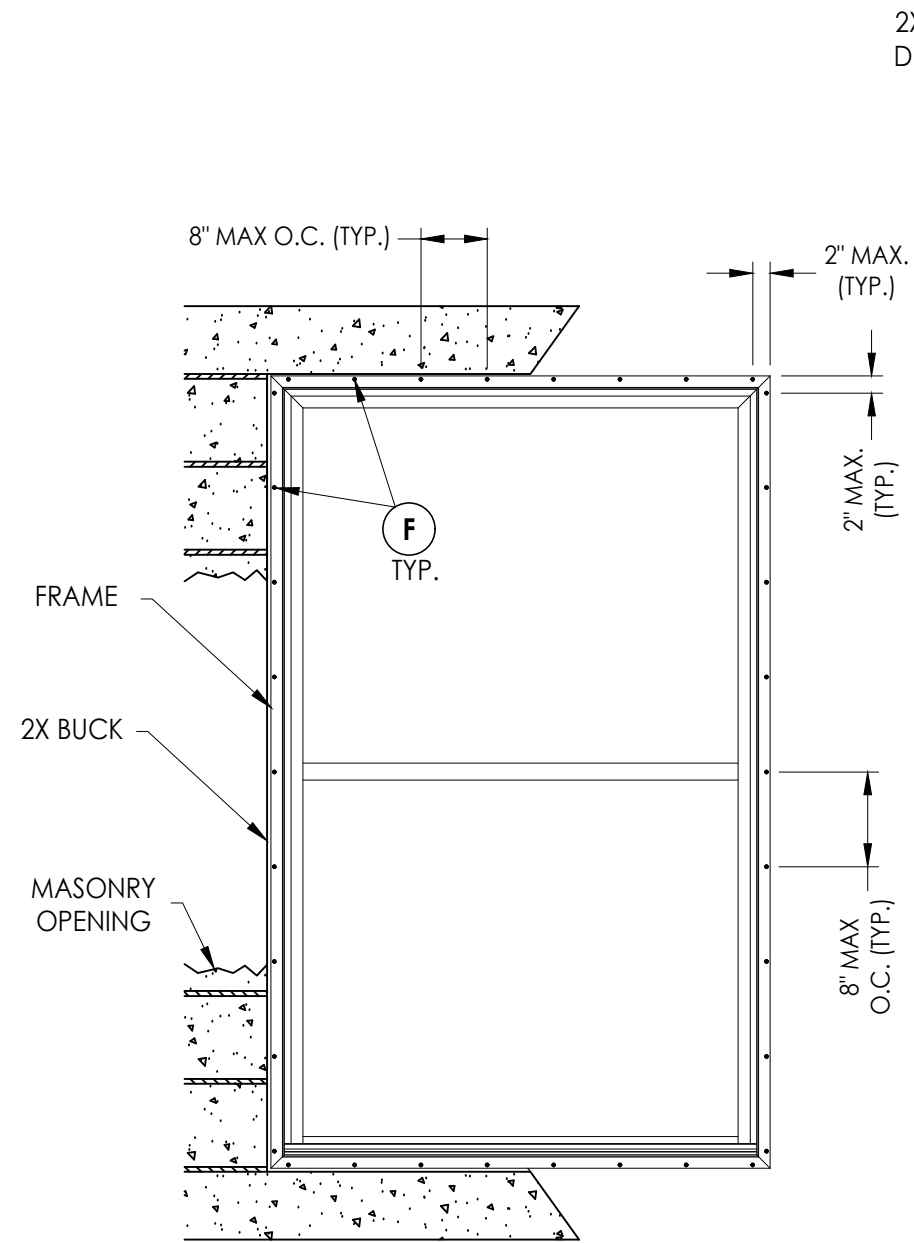

FRAME ANCHORING

Masonry 2X Buck Construction

2X WOOD STUD FRAMING OR STEEL STUD FRAMING TO BE
DESIGNED BY THE ENGINEER OR ARCHITECT OF RECORD.

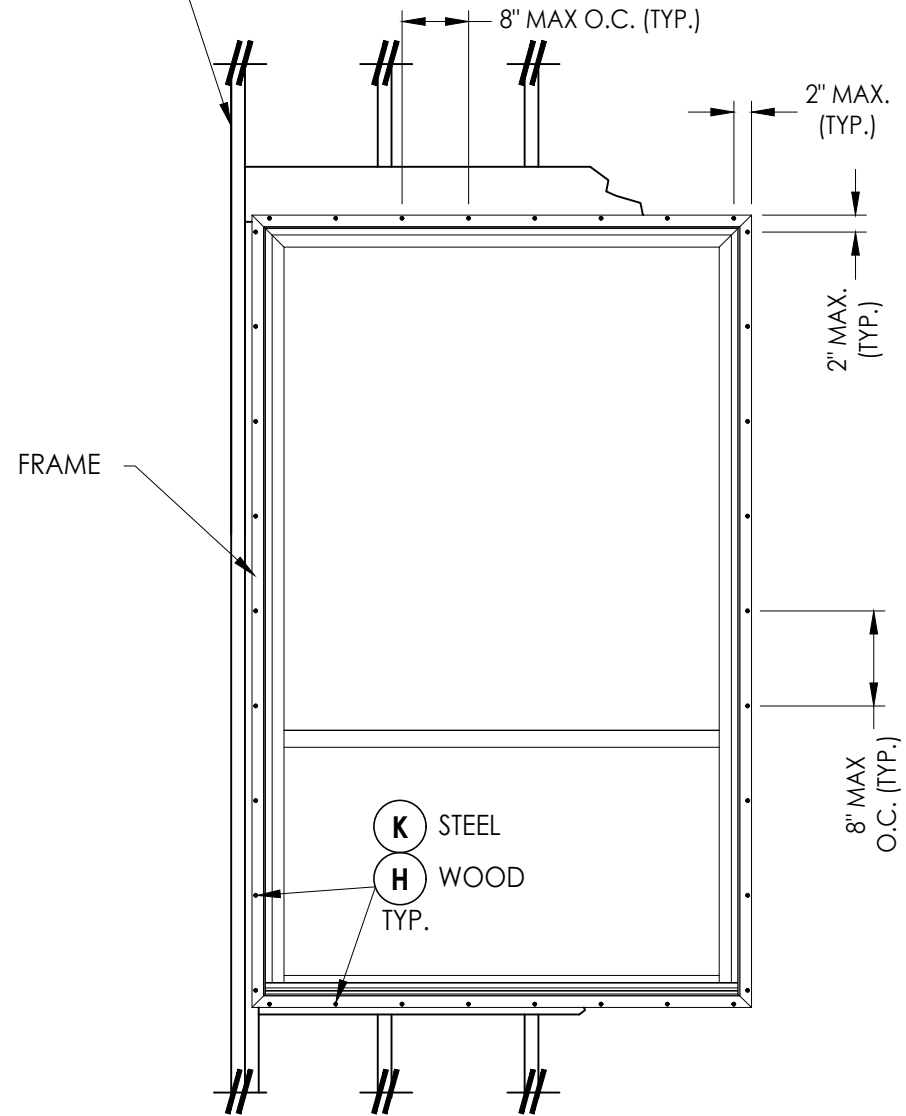

FRAME ANCHORING

[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

