




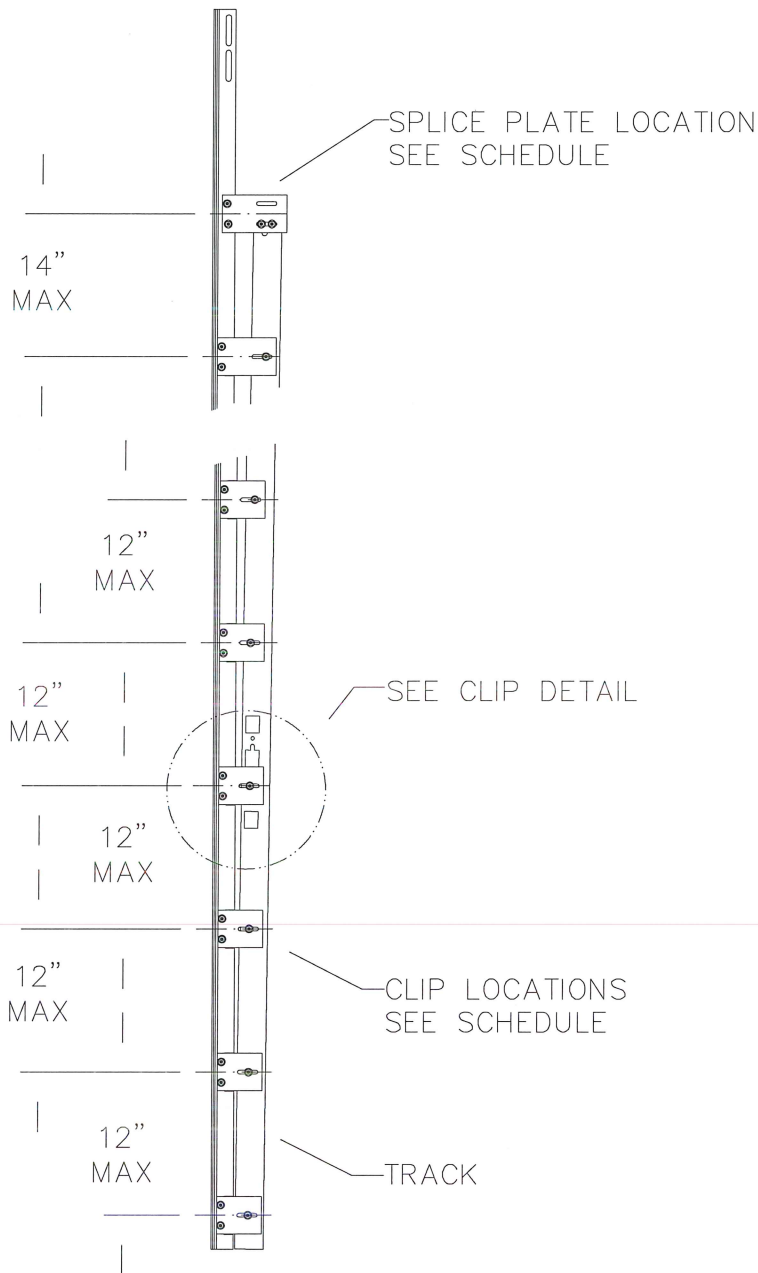


CLIPS TO BE EITHER
RIVETED, BOLTED, OR
WELDED. SEE DETAILS
THIS PAGE.

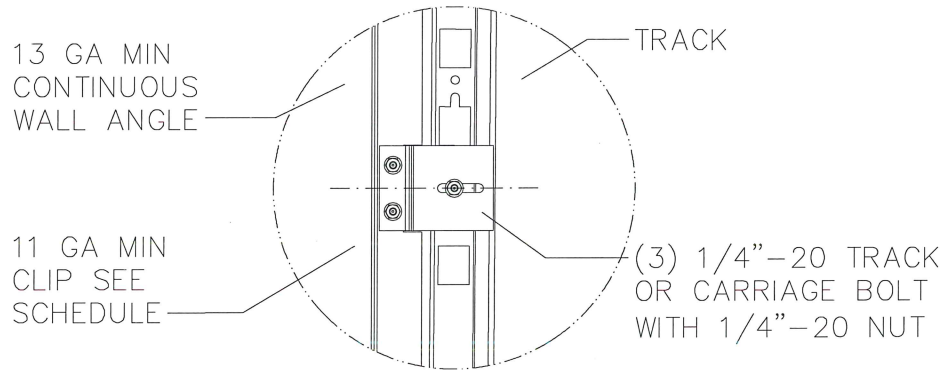

TYPICAL CLIP
BOLTING DETAIL

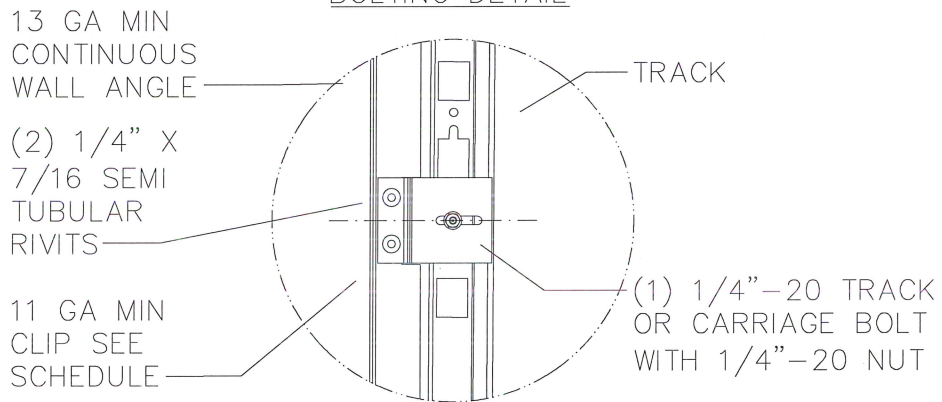

TYPICAL CLIP
RIVETING DETAIL

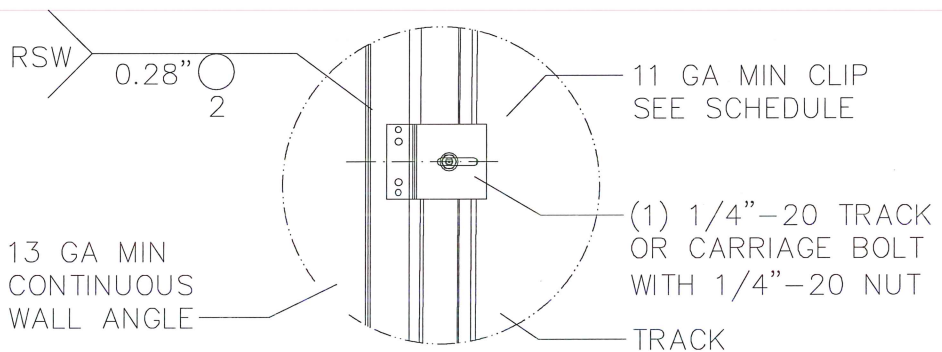

TYPICAL CLIP
WELDING DETAIL

REVISIONS

P2 2 INCH
TRACK-CLIPS-TEXAS
WALL ANGLE 12 FOOT
UPDATED
BPJ 6/11/03

P3 UPDATED FORMAT.
INCREASED ALLOWABLE
PRESSURES TO
+46.00/-52.00 PSF FOR
ALL DOOR WIDTHS.
CHANGED "TEXAS WALL
ANGLE" TO "CONTINUOUS
WALL ANGLE". ADDED
SUBSTRATE MOUNTING
DETAIL, CHANGED TO
TITEN HD ANCHORS
GRT 4/2/07

P4 CHANGED FORMAT.
ADDED MODELS 9800
AND 8024 WITH OVERLAY
TO TRACK CLIP
SCHEDULE.
GRT 8/21/07

P5 UPDATED MODELS
LISTED IN CHARTS.
UPDATED SPLICE & CLIP
SCHEDULES.
DLP 9/06/07

P6 UPDATE MOUNTING
DETAIL DRAWINGS.
GRT 10/05/07

P7 UPDATED CHARTS TO
ELIMINATE THE USE OF
THE #8 CLIP (REPLACED
WITH #9 ACROSS THE
BOARD).
DLP 10/24/07

P8 UPDATED STEEL
MOUNTING DETAIL
MRB 04/11/08


P9 EXPANDED 1-1/2" TO
1-3/8" DOOR THICKNESS
CHART UP TO 14' HIGH.
GRT 12/11/08

P10 UPDATED TITLE
BLOCK
GRT 6/2/10

P11 UPDATED TITLE
BLOCK. REMOVED CHART.
GRT 11/15/13

P12 UPDATED TITLE
BLOCK.
ESC 6/15/17

P13 UPDATED PSF CHART
DJK 8/31/20

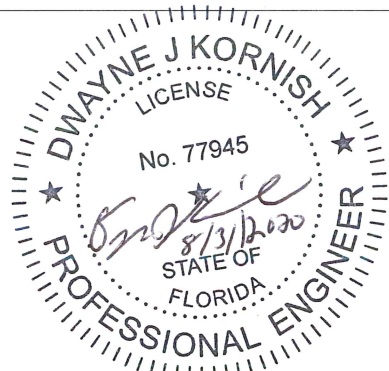

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR
VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.


DESIGN PRESSURE CHART	
MAX DOOR WIDTH	MAX PSF
9'-0"	+64.0 PSF/-72.0 PSF
16'-2"	+46.0 PSF/-52.0 PSF
18'-2"	+46.0 PSF/-52.0 PSF

TRACK SUPPLEMENT CHART




3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474-9890

	DATE	NAME
DRAWN	8/21/07	GRT
CHECKED	8/21/07	MRB
SHEET 1 OF 2		
DRAWING PART NO.	307494	REV. P13

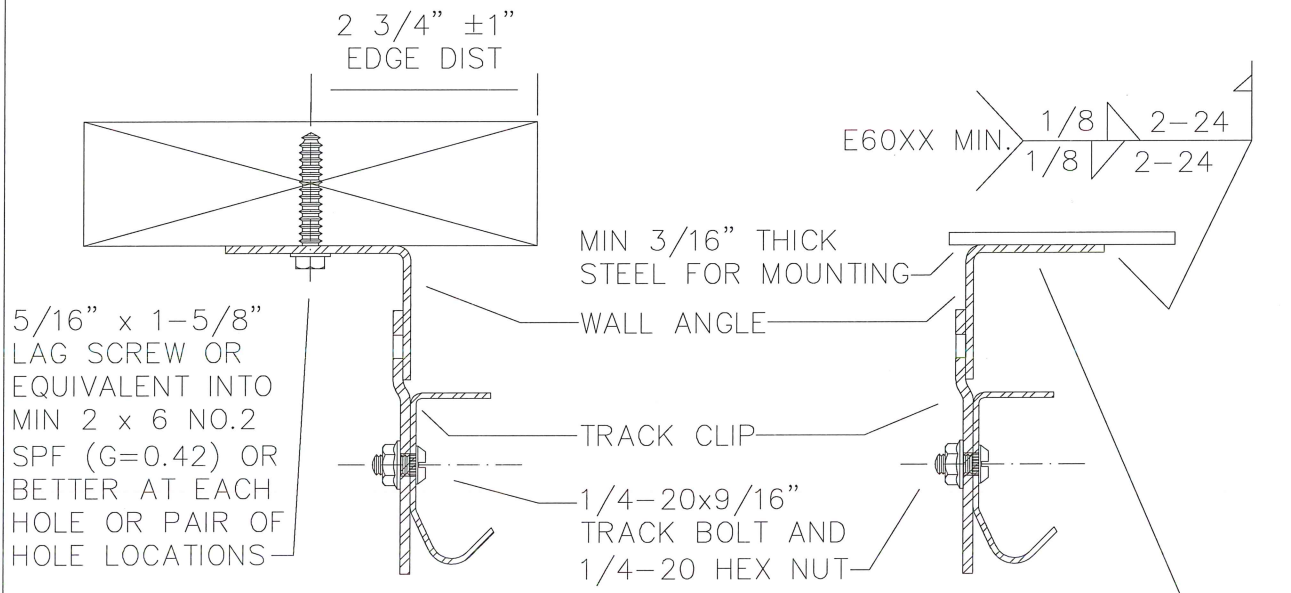

MOUNTING TO WOOD JAMB DETAIL


MOUNTING TO STEEL DETAIL

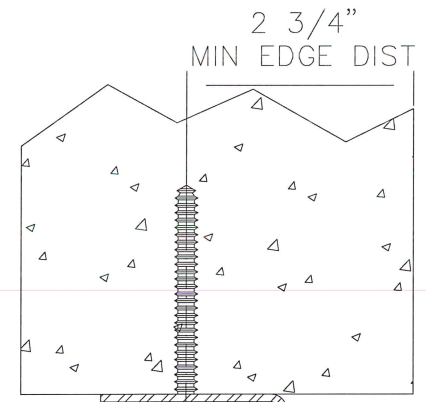

CONCRETE MOUNTING DETAIL

OPTIONAL: WALL ANGLE MAY BE ATTACHED TO SUPPORTING STEEL WITH MIN. (1) 1/4-20x7/8" SELF DRILLING SCREW WITH 1" O.D. WASHER AT EACH HOLE OR PAIR OF HOLE LOCATIONS IN LIEU OF WELDING

- 3/8" SIMPSON TITEN HD, 2-3/4" MIN EMBED INTO MIN 2000 PSI CONCRETE AT EACH HOLE OR PAIR OF HOLE LOCATIONS
- WALL ANGLE
- 1/4-20x9/16" TRACK BOLT AND 1/4-20 HEX NUT
- TRACK CLIP

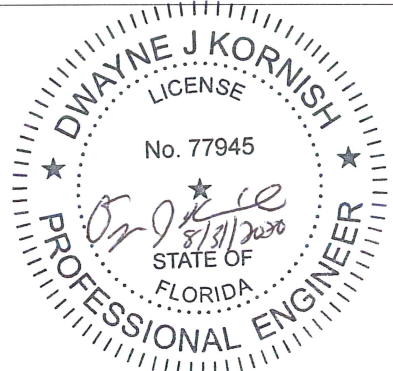

DWAYNE J. KORNISH, PE
4576 COUNTY ROAD 160
MOUNT HOPE, OHIO
FL PE 77945 TX PE 117868

PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

REVISIONS	
P2 2 INCH TRACK-CLIPS-TEXAS WALL ANGLE 12 FOOT UPDATED BPJ 6/11/03	
P3 UPDATED FORMAT. INCREASED ALLOWABLE PRESSURES TO +46.00/-52.00 PSF FOR ALL DOOR WIDTHS. CHANGED "TEXAS WALL ANGLE" TO "CONTINUOUS WALL ANGLE". ADDED SUBSTRATE MOUNTING DETAIL, CHANGED TO TITEN HD ANCHORS GRT 4/2/07	
P4 CHANGED FORMAT. ADDED MODELS 9800 AND 8024 WITH OVERLAY TO TRACK CLIP SCHEDULE. GRT 8/21/07	
P5 UPDATED MODELS LISTED IN CHARTS. UPDATED SPLICE & CLIP SCHEDULES. DLP 9/06/07	
P6 UPDATE MOUNTING DETAIL DRAWINGS. GRT 10/05/07	
P7 UPDATED CHARTS TO ELIMINATE THE USE OF THE #8 CLIP (REPLACED WITH #9 ACROSS THE BOARD). DLP 10/24/07	
P8 UPDATED STEEL MOUNTING DETAIL MRB 04/11/08	
P9 EXPANDED 1-1/2" TO 1-3/8" DOOR THICKNESS CHART UP TO 14' HIGH. GRT 12/11/08	
P10 ADDED MODEL 8700. UPDATED TITLE BLOCK GRT 6/2/10	
P11 UPDATED TITLE BLOCK. REMOVED CHART. GRT 11/15/13	
P12 UPDATED TITLE BLOCK. ESC 6/15/17	
P13 UPDATED PSF CHART DJK 8/31/20	



3395 ADDISON DRIVE
PENSACOLA, FLORIDA 32514
(850) 474-9890

	DATE	NAME
DRAWN	8/21/07	GRT
CHECKED	8/21/07	MRB
SHEET 2 OF 2		
DRAWING PART NO.	307494	REV. P13

TRACK SUPPLEMENT CHART