

c:\users\dylanwata\building drops, inc\building drops landing - common\projects\windsor windows and doors\fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg 6/13/2025 8:41 AM

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH BASED ON QUANTITIES IN DP CHARTS NOT TO EXCEED THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
5. **THROUGH FRAME:** FOR INSTALLATION INTO WOOD FRAMING USE #10 WOOD SCREWS OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
6. **THROUGH FRAME:** FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE 1/4 INCH DIAMETER ITW TAPCONS, ELCO ULTRACONS, ELCO CRETE-FLEX OR HILTI KWIK-CON II OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT.
7. **THROUGH FRAME:** FOR INSTALLATION INTO METAL STUD OR APPROVED MULLION USE #10 GR. 5 SELF TAPPING SCREWS OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM OF 3 THREADS PENETRATION BEYOND METAL FRAME SUBSTRATE.
8. **CLIP ANCHOR:** FOR INSTALLATION INTO WOOD FRAMING USE (2) #8 WOOD SCREWS PER CLIP OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2" MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
9. **CLIP ANCHOR:** FOR INSTALLATION INTO METAL STUD USE (2) #8 GR. 5 SELF-TAPPING SCREWS PER CLIP OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND THE METAL STRUCTURE.
10. **NAIL FIN:** FOR INSTALLATION INTO WOOD FRAMING USE (1) #8 WOOD SCREWS OR (1) 10D COMMON NAIL OR (1) 11 GAUGE ROOFING NAIL PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
11. **NAIL FIN:** FOR INSTALLATION INTO METAL STUD OR APPROVED MULLION USE #8 GR. 5 SELF TAPPING SCREWS OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM OF 3 THREADS PENETRATION BEYOND METAL FRAME SUBSTRATE.
12. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
13. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
14. FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
15. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

WINDSOR WINDOWS & DOORS

PINNACLE CLAD DOUBLE HUNG (NON-HVHZ) (NON-IMPACT)

CONTINUED INSTALLATION NOTES:

16. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

A. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.

C. GROUT-FILLED CMU- UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI AND GROUT CONFORMS TO ASTM C 476, MINIMUM GROUT COMPRESSIVE STRENGTH OF 2000 PSI.

D. HOLLOW BLOCK CMU - UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI.

E. STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM 18 GA. WALL THICKNESS.

F. ALUMINUM - MINIMUM ALLOY 6063-T5. MINIMUM WALL THICKNESS OF 1/8" (0.125").

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), EXCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:

AAMA/WDMA/CSA 101/I.S.2/A440-17
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY AND 2X FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: WOOD
WINDOW CLADDING MATERIAL: ALUMINUM 6063-T5
7. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E 1300 GLASS CHARTS. SEE SHEET 7 FOR GLAZING DETAILS.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATION
3	ANCHOR LAYOUT
4	VERTICAL AND HORIZONTAL SECTIONS - THROUGH FRAME
5	VERTICAL AND HORIZONTAL SECTIONS - CLIP
6	VERTICAL AND HORIZONTAL SECTIONS - NAIL FIN
7	MEETING RAIL & GLAZING DETAIL

DESIGN PRESSURE TABLE					
TYP. OVERALL SIZE		DESIGN PRESSURE	CONFIGURATION	INSTALLATION METHOD	MISSILE IMPACT RATING
WIDTH	HEIGHT				
66	88 3/4	+/- 25 PSF	X/X	THROUGH FRAME, NAIL FIN & CLIP	NON - IMPACT
41 3/8	88 3/4	+50/-65 PSF	X/X		
47 3/8	96 3/4	+/- 35 PSF	X/X		
45 3/8	80 3/4	+/- 50 PSF	X/X		
37 3/8	96 3/4	+/- 50 PSF	X/X		
37 3/8	72 3/4	+/- 50 PSF	X/X		
37 3/8	72 3/4	+/- 35 PSF	X/X		
45 3/8	60 3/4	+/- 35 PSF	X/X		
45 3/8	80 3/4	+/- 30 PSF	X/X		
41 3/8	64 3/4	+/- 50 PSF	X/X		
29 3/8	80 3/4	+/- 35 PSF	X/X		
37 3/8	76 3/4	+/- 35 PSF	X/X		



WINDSOR WINDOWS & DOORS
900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE:

PINNACLE CLAD DOUBLE HUNG (NON-HVHZ)(NON-IMPACT)

INSTALLATION AND GENERAL NOTES


PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2025.06.23 13:25:25 -04'00'

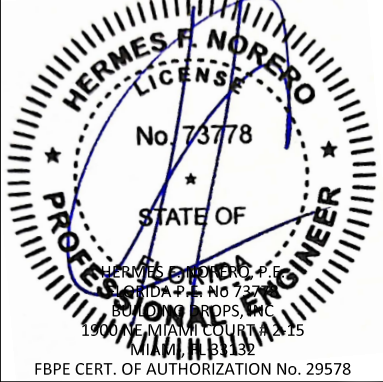

FL #:

FL11092

DATE:

06.12.20

DWG. BY:

YC

CHK. BY:

HFN

SCALE:

NTS

DWG. #:


WWD005

SHEET:

1

OF 7

c:\users\dylanwata\building drops landing - common\projects\windsor windows and doors\fbc submittal - fbc submittal - fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg 6/13/2025 8:41 AM

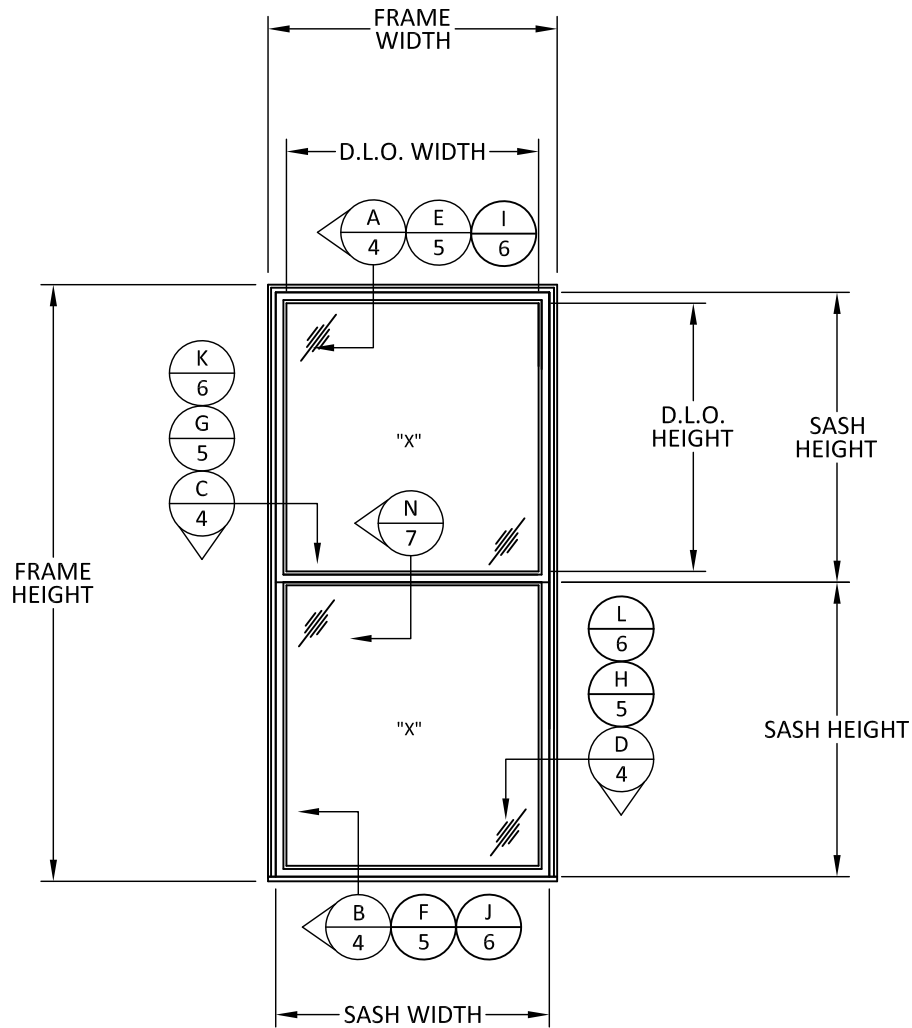

TYPICAL ELEVATION
DOUBLE HUNG

NOTE:
SASH HEIGHT = FRAME HEIGHT/2 - 1"
SASH WIDTH = FRAME WIDTH - 2 7/8"
D.L.O. HEIGHT = SASH HEIGHT - 4 3/8"
D.L.O. WIDTH = SASH WIDTH - 3 1/2"



**WINDSOR WINDOWS
& DOORS**

900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE: PINNACLE CLAD
DOUBLE HUNG
(NON-HVHZ)(NON-IMPACT)
ELEVATION


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

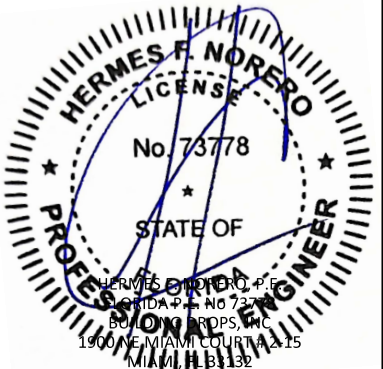

FBPE CERT. OF AUTHORIZATION No. 29578

FL #: **FL11092**

DATE: **06.12.20**

DWG. BY: **YC** CHK. BY: **HFN**

SCALE: **NTS**



DWG. #: **WWD005**

SHEET:

2

OF 7

c:\users\dylanwata\building drops, inc\building drops landing - common\projects\windsor windows and doors\fbc submittal - fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg
6/13/2025 8:41 AM

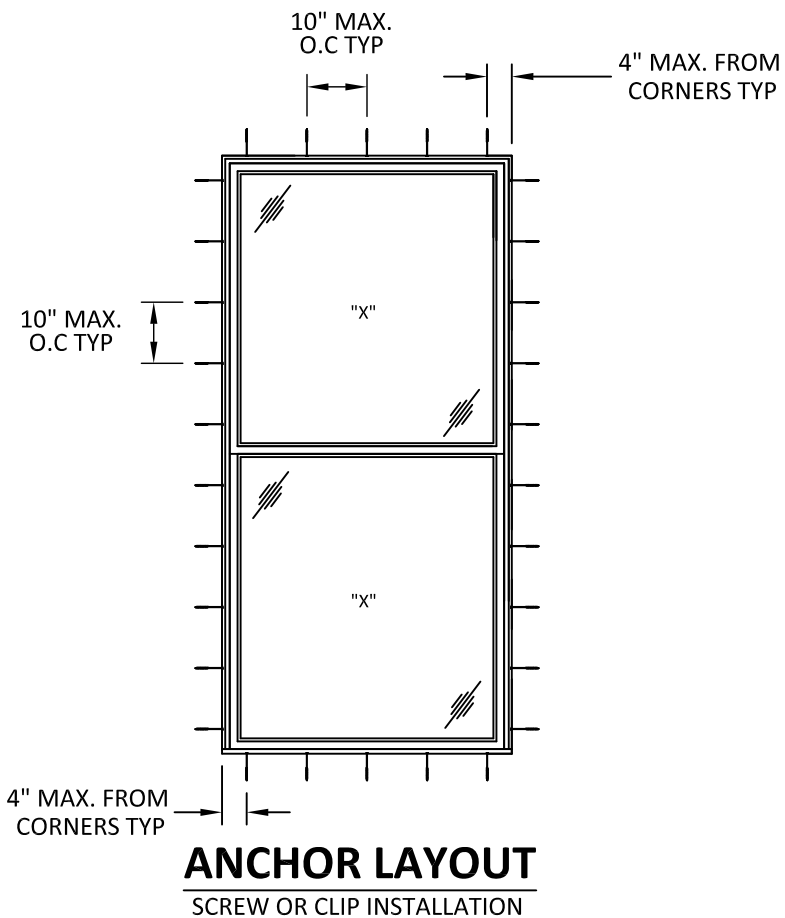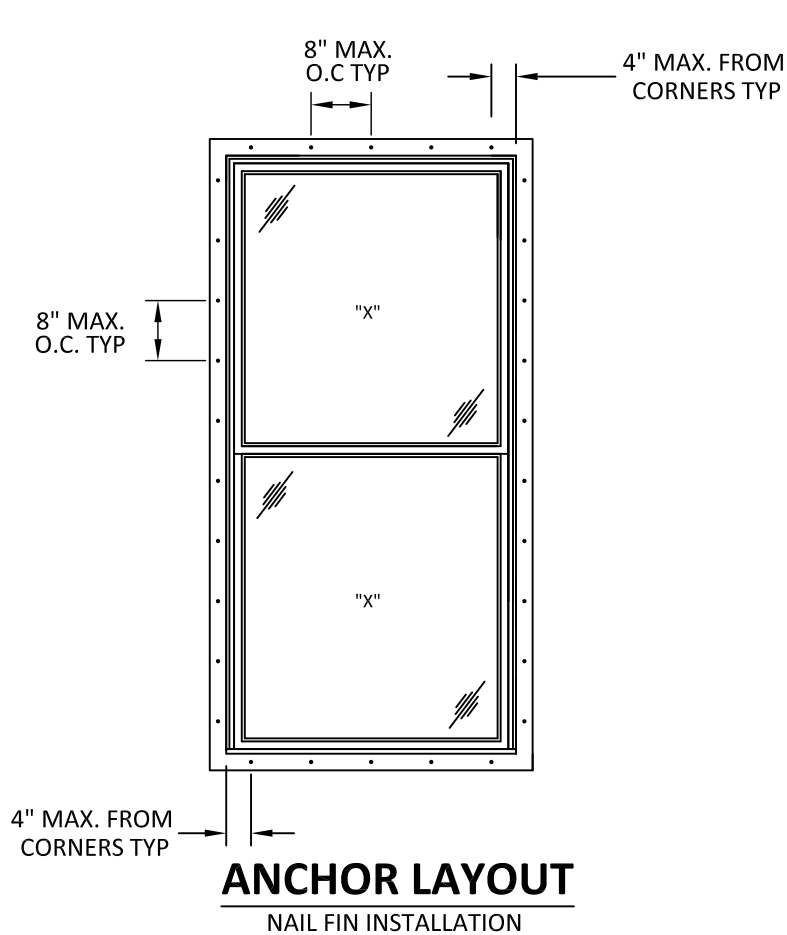

WINDSOR WINDOWS
& DOORS

900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE: PINNACLE CLAD
DOUBLE HUNG
(NON-HVHZ)(NON-IMPACT)
ANCHOR LAYOUT

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15

MIAMI, FL 33132

PH: (954)399-8478


FAX: (954)744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

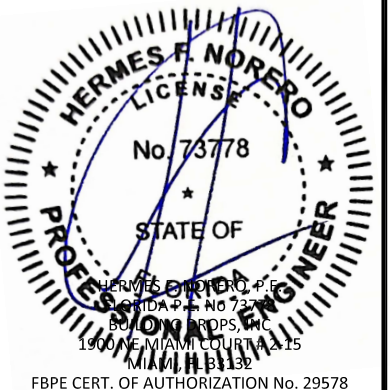


FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	FL11092
DATE:	06.12.20
DWG. BY:	CHK. BY:
YC	HFN
SCALE:	NTS
DWG. #:	WWD005
SHEET:	

3


OF 7

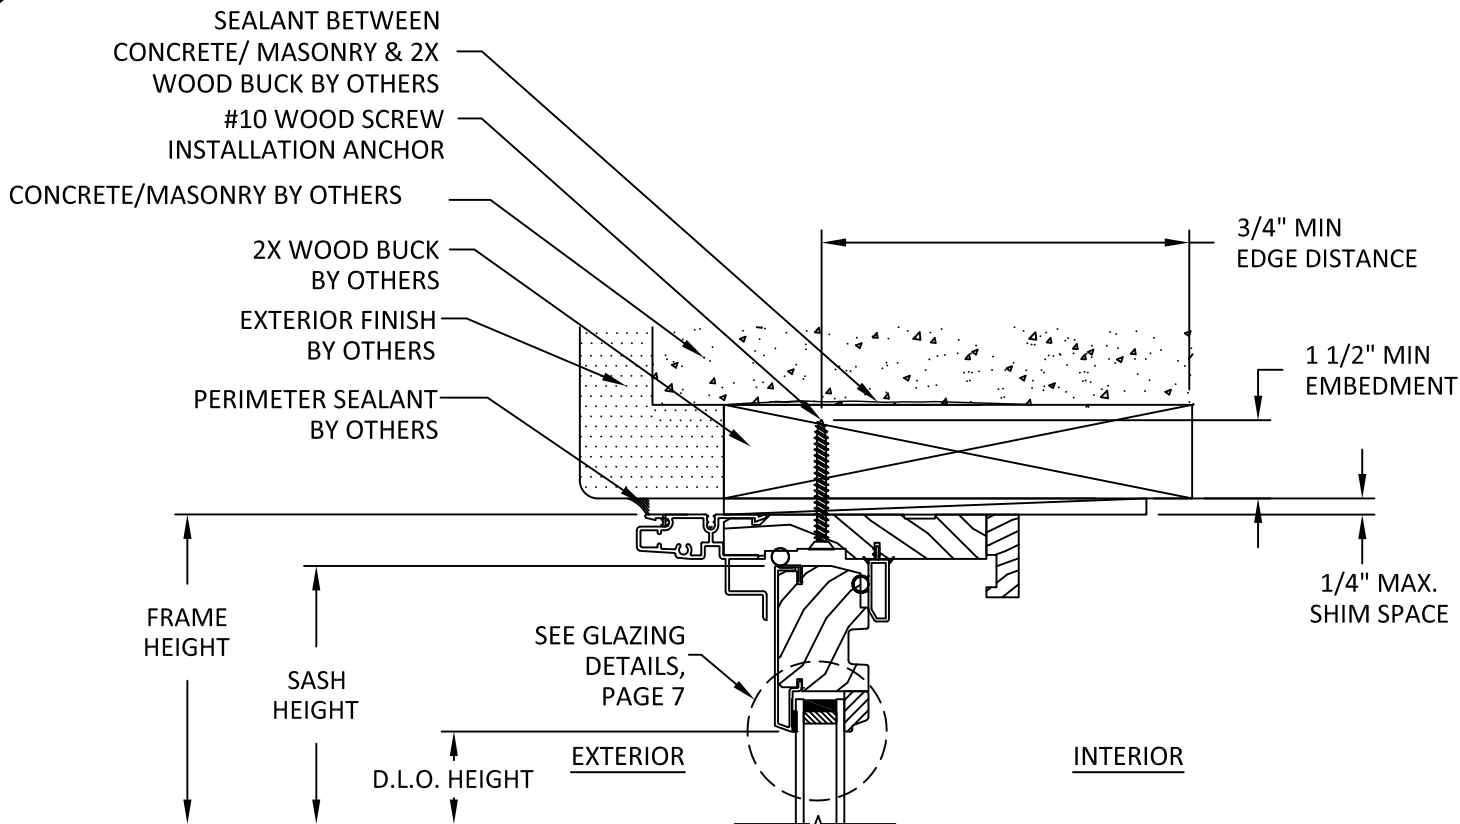

A


VERTICAL SECTION

HEAD - 2X WOOD BUCK THROUGH FRAME INSTALLATION

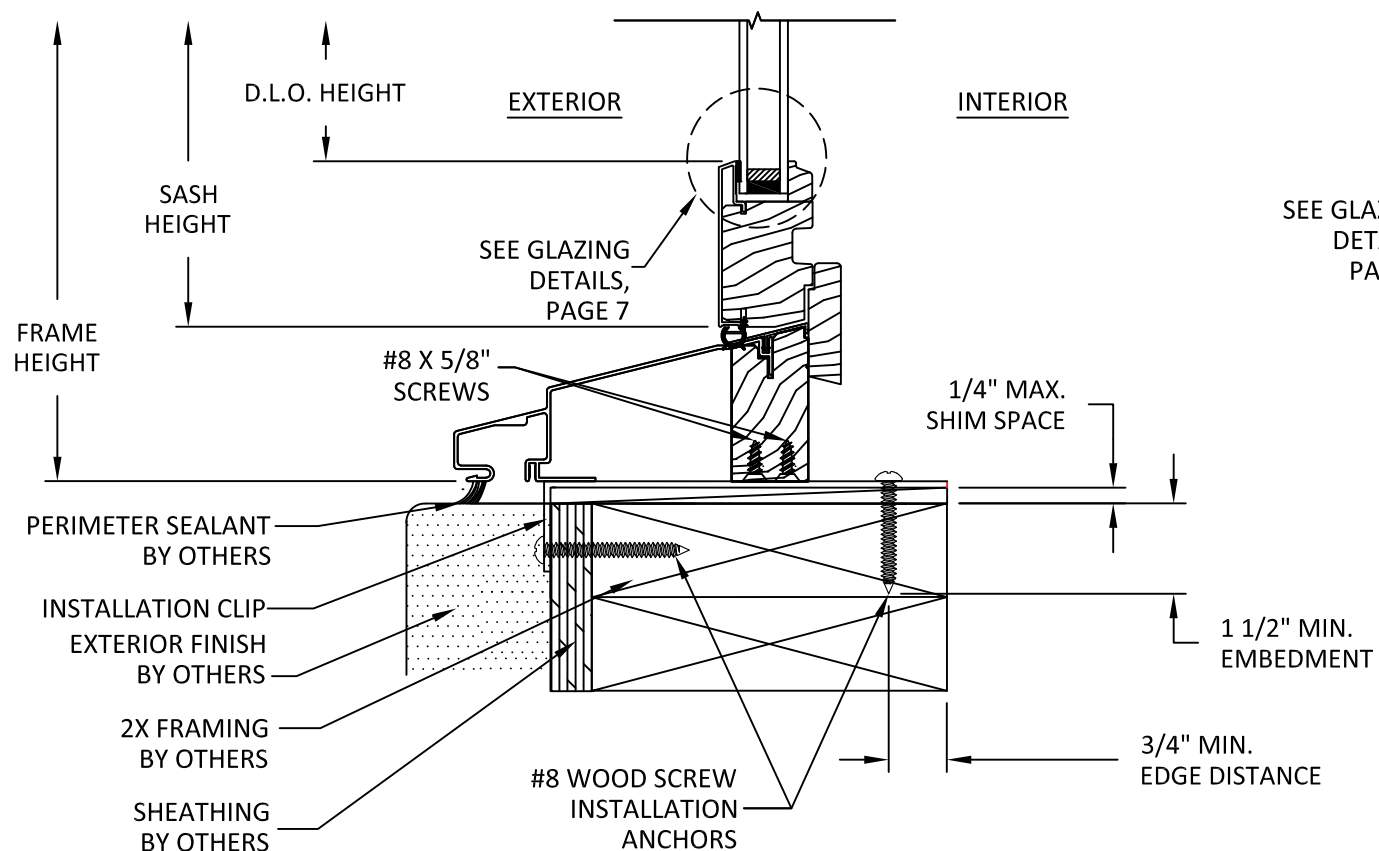


B 4 **VERTICAL SECTION** SILL - 2X FRAMING CLIP FRAME INSTALLATION

NOTE:
INSTALLATION AT SILL SHALL USE
CLIPS. THROUGH FRAME
INSTALLATION NOT PERMITTED.

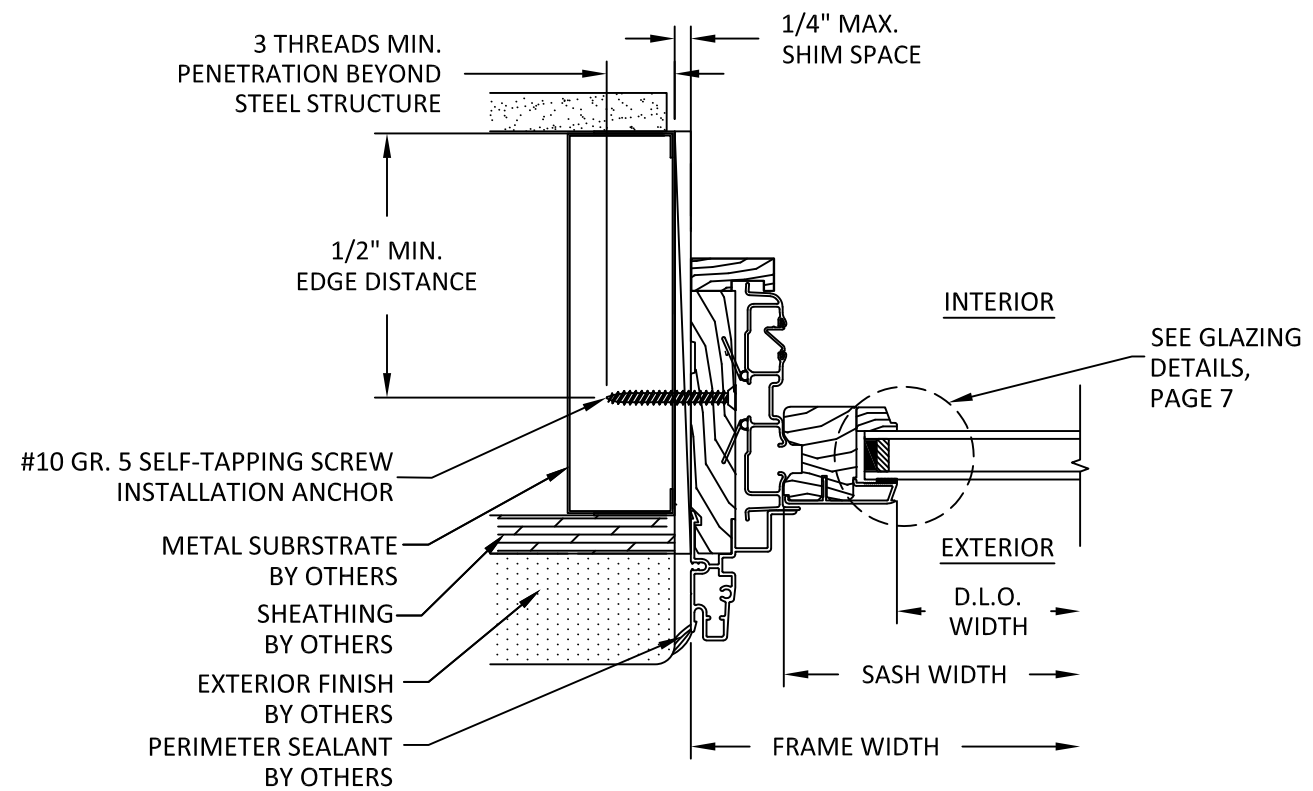

C 4 HORIZONTAL SECTION

JAMB - STEEL STUD FRAME THROUGH FRAME INSTALLATION

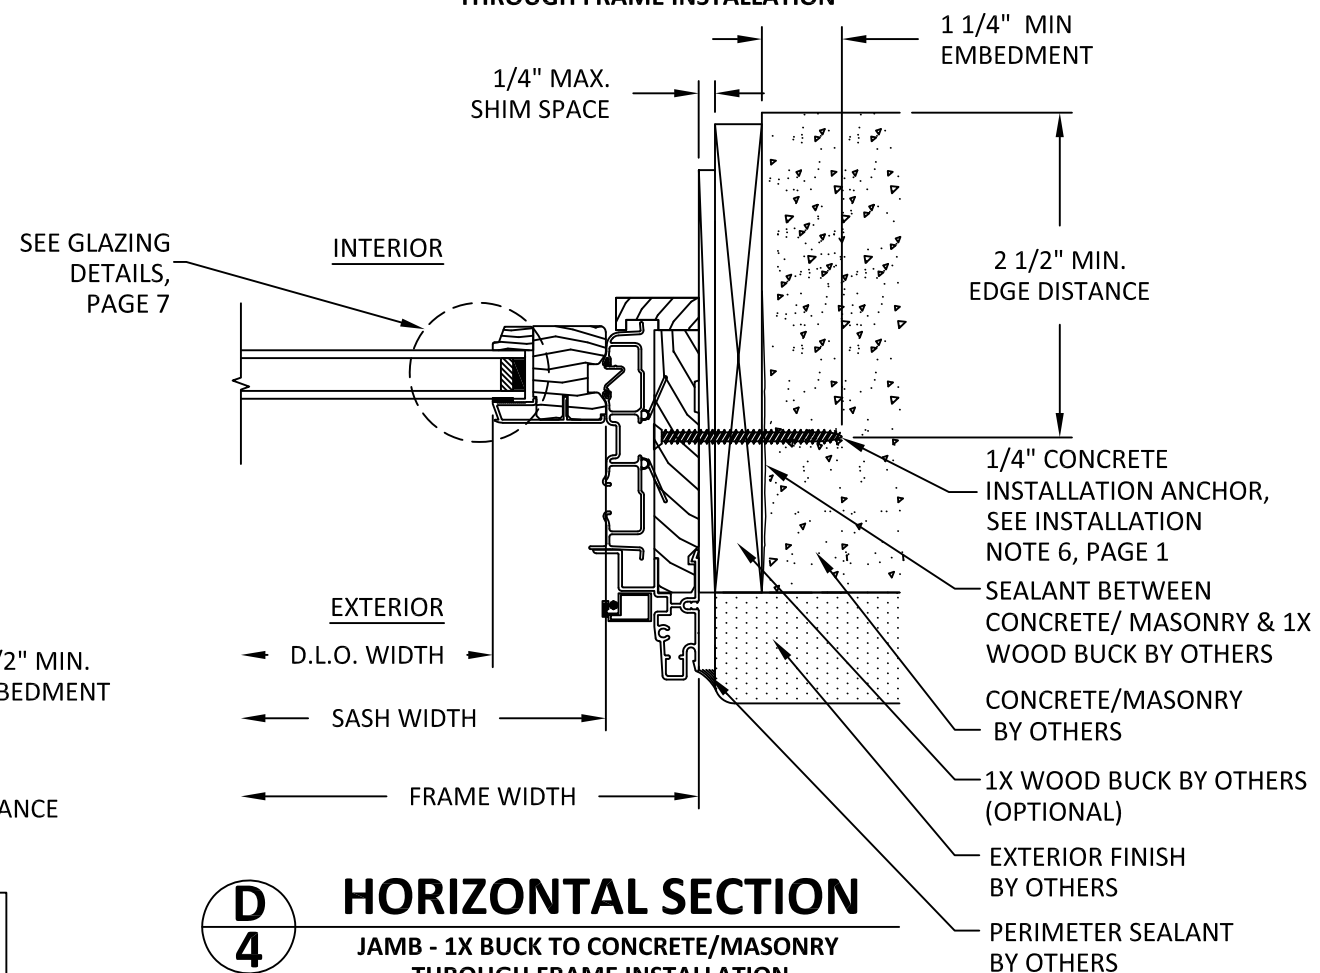

D 4 HORIZONTAL SECTION

JAMB - 1X BUCK TO CONCRETE/MASONRY
THROUGH FRAME INSTALLATION



WINDSOR WINDOWS
& DOORS

900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE: PINNACLE CLAD
DOUBLE HUNG
(NON-HVHZ)(NON-IMPACT)
VERTICAL AND HORIZONTAL SECTIONS -
THROUGH FRAME


PREPARED BY:

 **BUILDING DROPS**

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744, 4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERAL AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

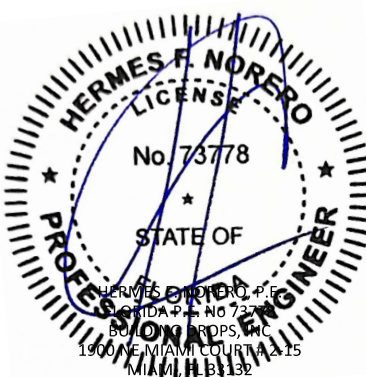

FBPE CERT. OF AUTHORIZATION No. 29578

FL #: **FL11092**

DATE: 06.12.20

DWG. BY: YC	CHK. BY: HFN
-----------------------	------------------------

SCALE: NTS


DWG. #: WWD005

SHEET:


4

OF 7


c:\users\dylanwata\building drops, inc\building drops landing - common\projects\windsor windows and doors\fbp submittal - fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg 6/13/2025 8:41 AM

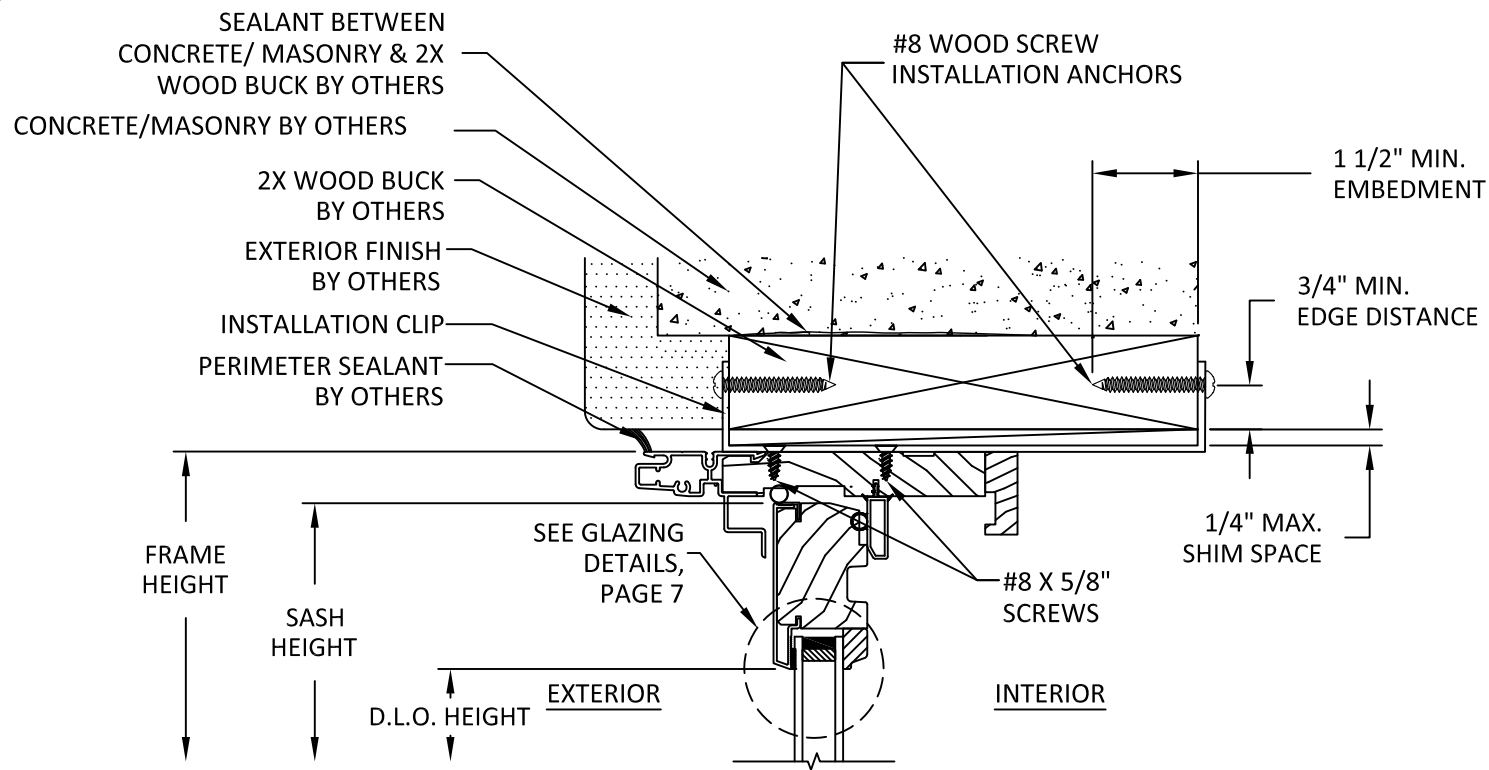


E
5
VERTICAL SECTION
HEAD - 2X WOOD BUCK
STANDARD CLIP INSTALLATION

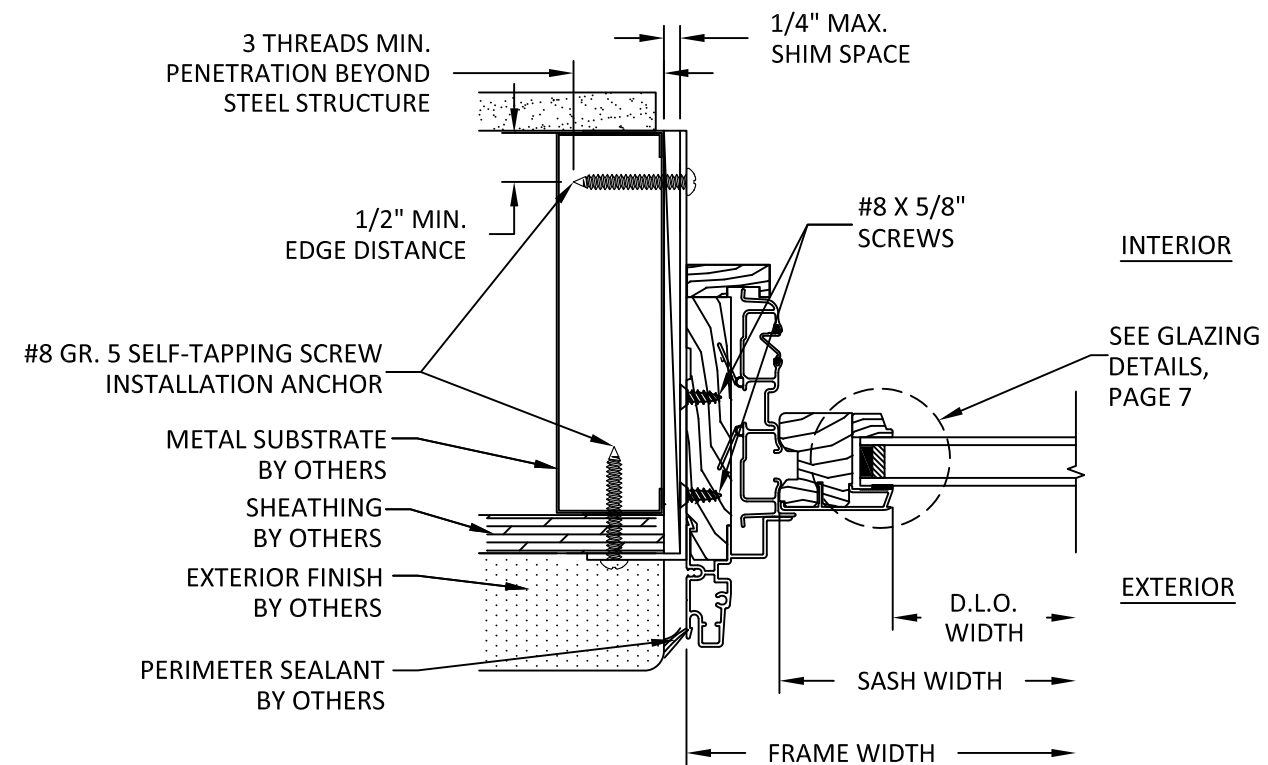

G
5
HORIZONTAL SECTION
JAMB - STEEL STUD FRAME
ALTERNATE CLIP INSTALLATION

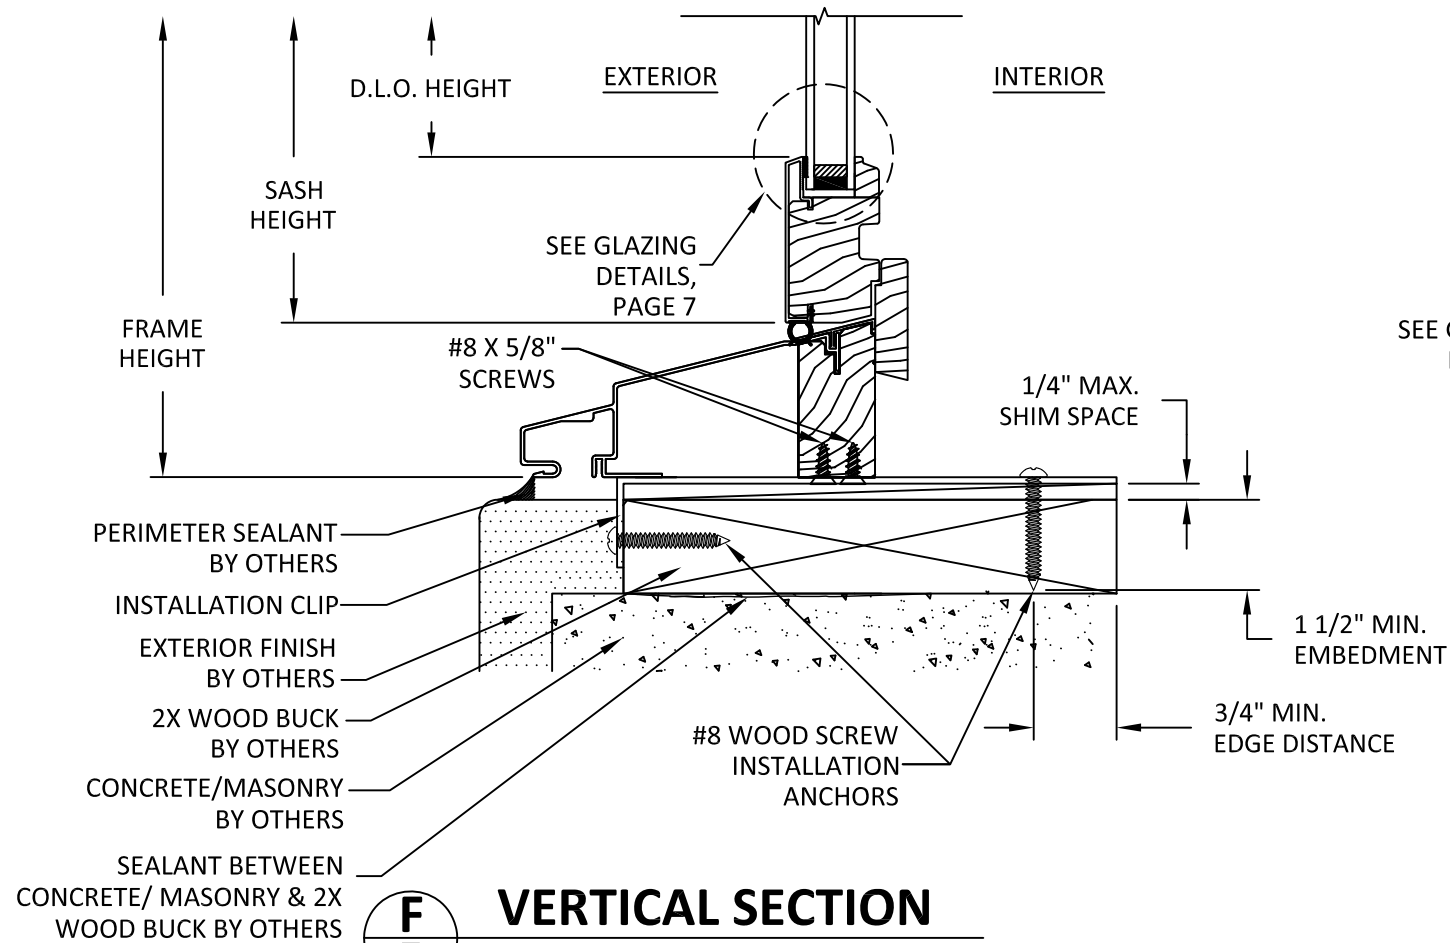

F
5
VERTICAL SECTION
SILL - 2X WOOD BUCK
ALTERNATE CLIP INSTALLATION

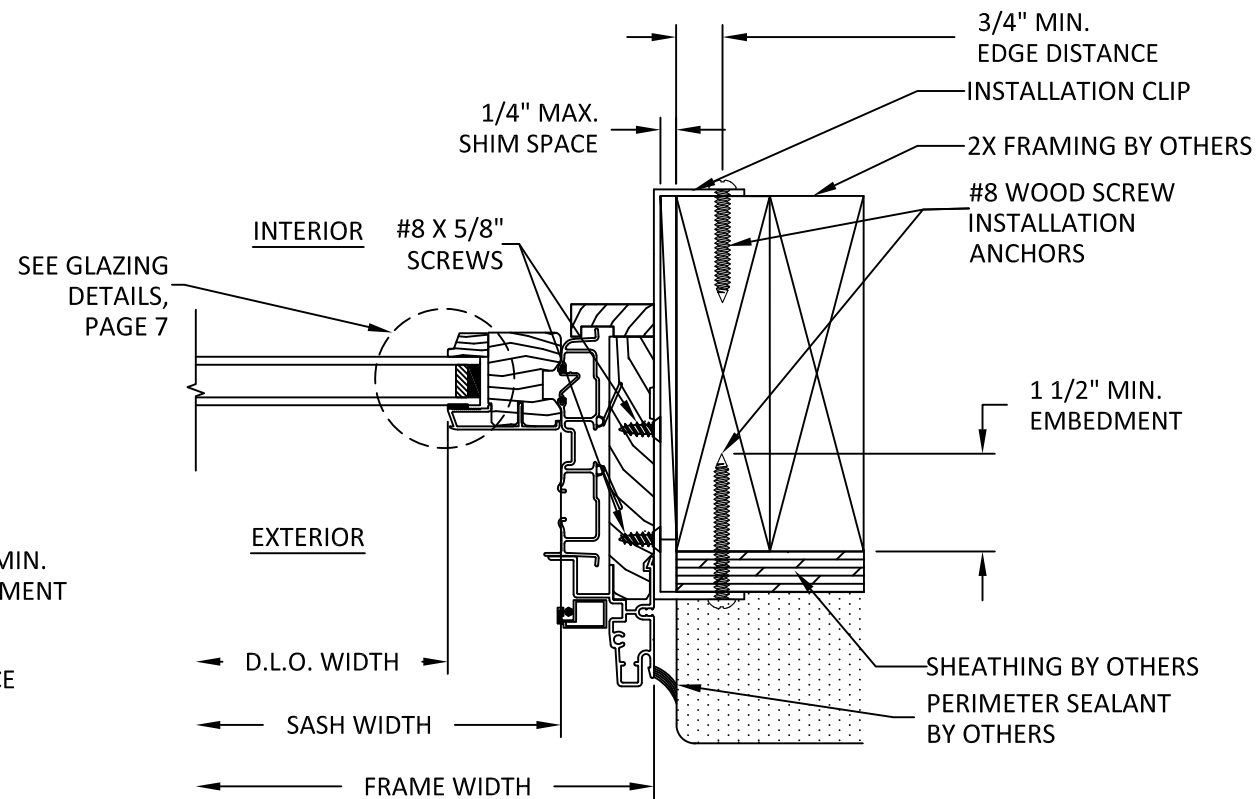

H
5
HORIZONTAL SECTION
JAMB - 2X FRAMING
STANDARD CLIP INSTALLATION




WINDSOR WINDOWS & DOORS
900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE: PINNACLE CLAD DOUBLE HUNG (NON-HVHZ)(NON-IMPACT)
VERTICAL AND HORIZONTAL SECTIONS - CLIP
PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com


REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

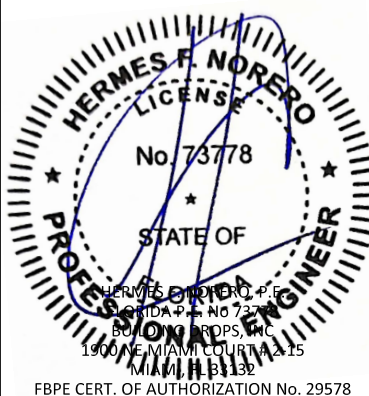


FL #: **FL11092**
DATE: **06.12.20**
DWG. BY: **YC** CHK. BY: **HFN**
SCALE: **NTS**
DWG. #: **WWD005**
SHEET:


c:\users\dylanwata\building drops, inc\building drops landing - common\projects\windsor windows and doors\lbc-25-0612 - fbc submittal - fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg
6/13/2025 8:41 AM

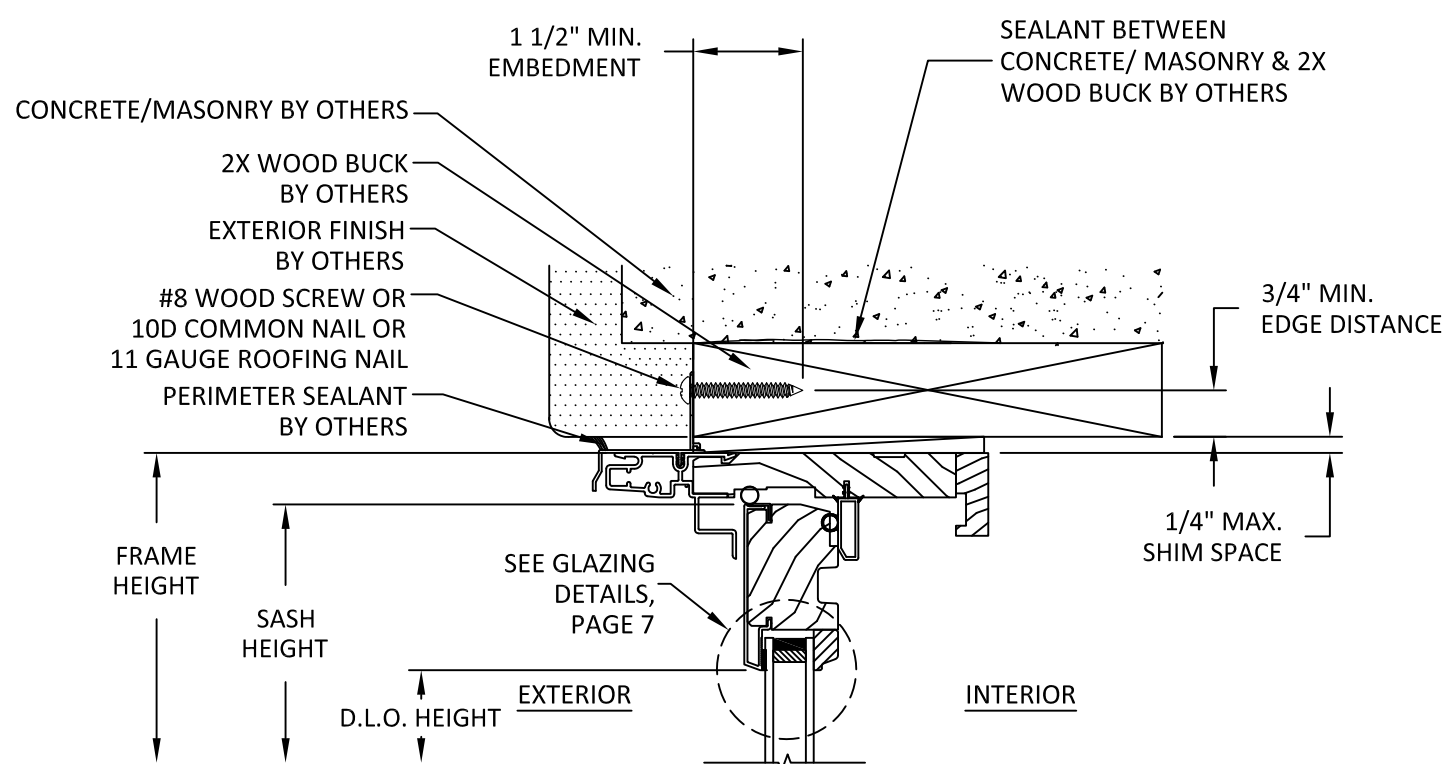


I
6 **VERTICAL SECTION**
HEAD - 2X WOOD BUCK
NAIL FIN INSTALLATION

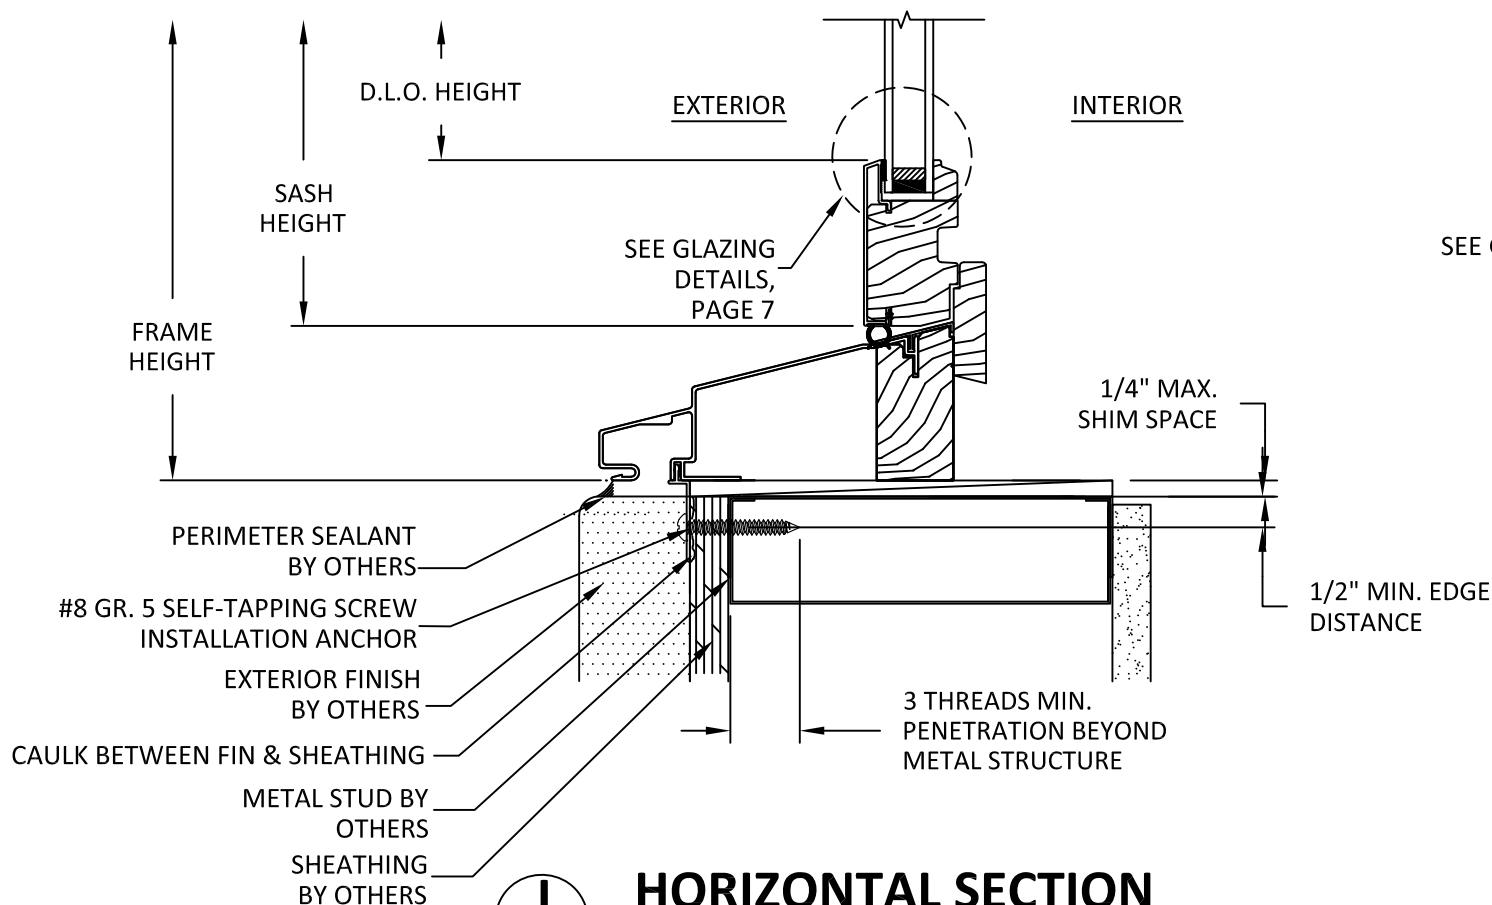

J
6 **HORIZONTAL SECTION**
SILL - STEEL STUD FRAME
NAIL FIN INSTALLATION

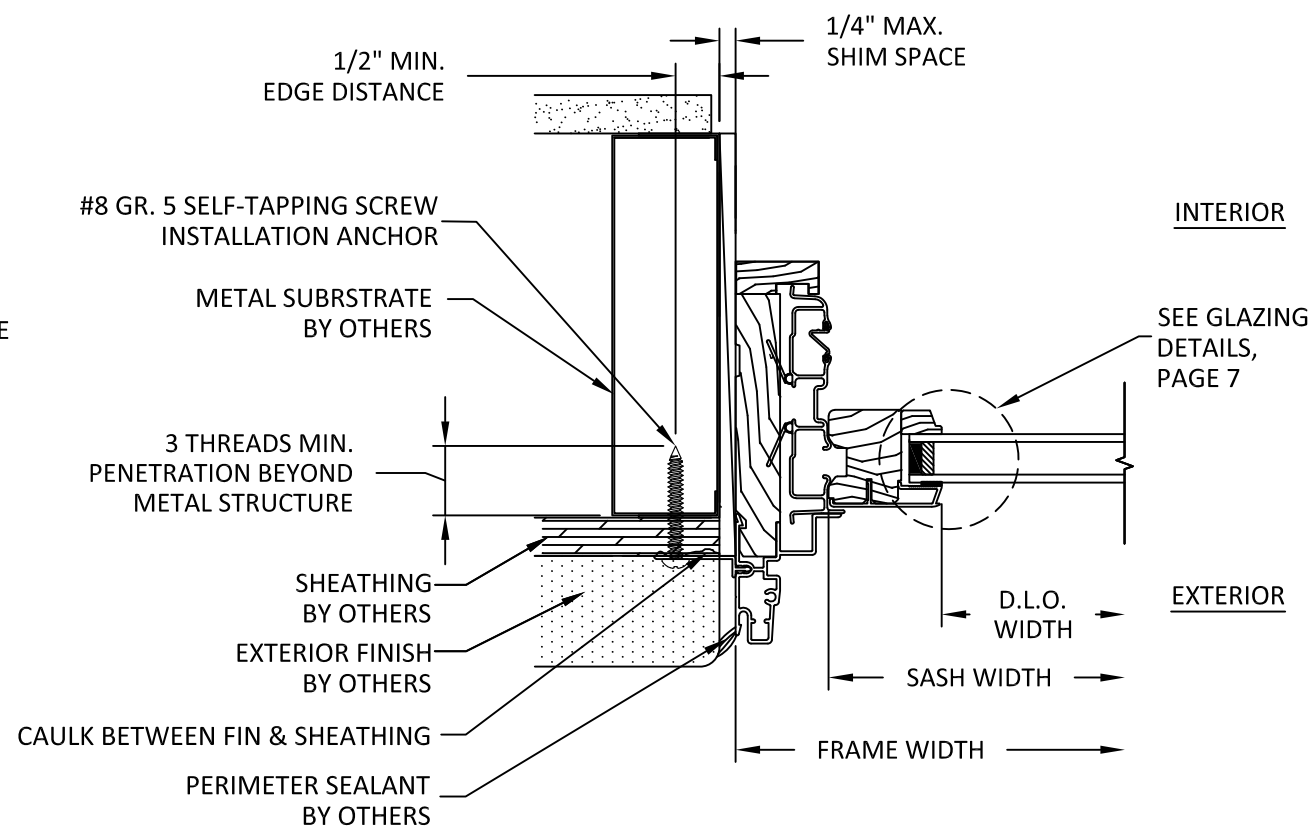

K
6 **HORIZONTAL SECTION**
JAMB - STEEL STUD FRAME
NAIL FIN INSTALLATION

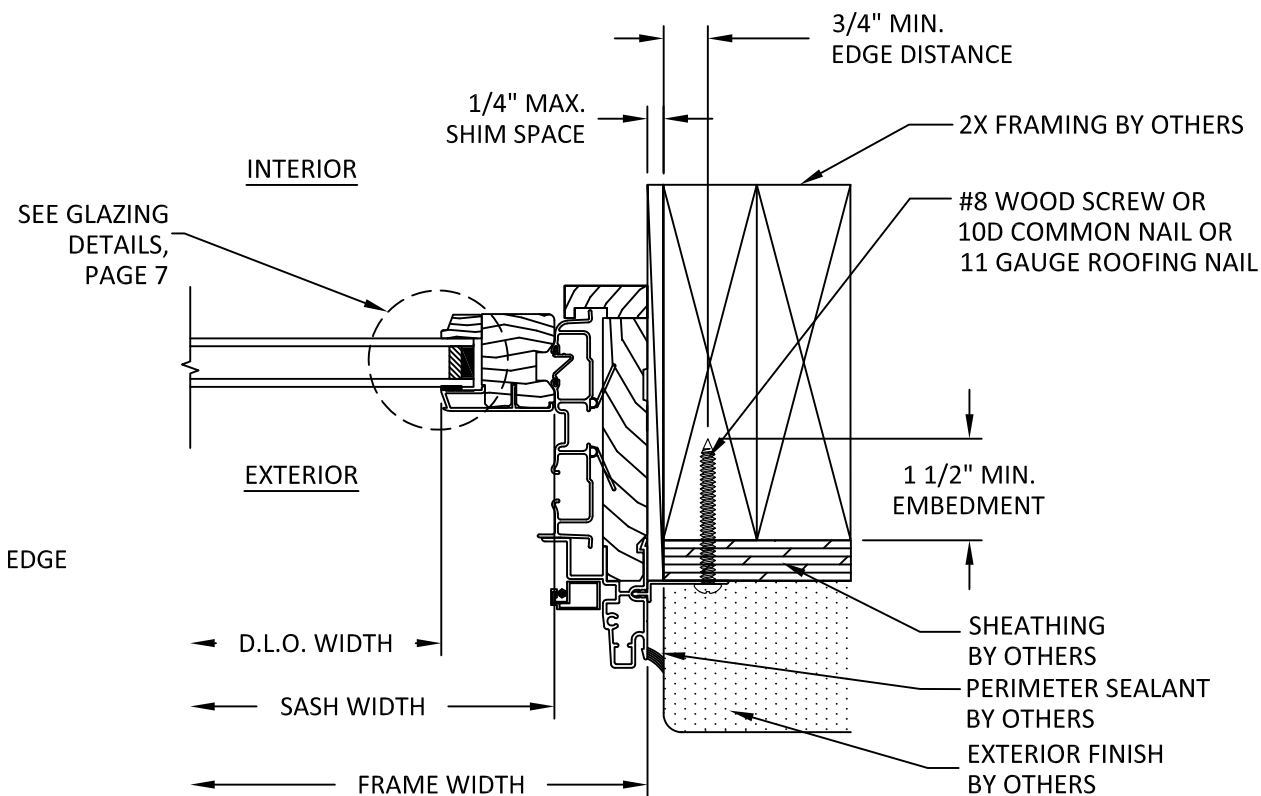

L
6 **HORIZONTAL SECTION**
JAMB - 2X FRAMING
NAIL FIN INSTALLATION



**WINDSOR WINDOWS
& DOORS**

900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938


TITLE: PINNACLE CLAD
DOUBLE HUNG
(NON-HVHZ)(NON-IMPACT)
VERTICAL AND HORIZONTAL SECTIONS -
NAIL FIN

PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

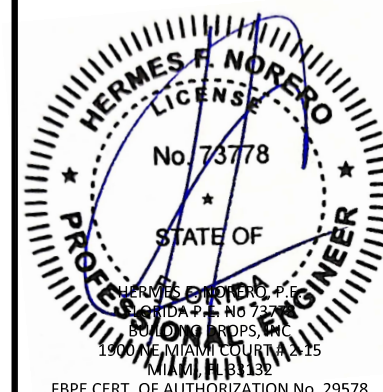

FL #:

FL11092

DATE: **06.12.20**

DWG. BY:
YC

CHK. BY:
HFN

SCALE: **NTS**


DWG. #: **WWD005**

SHEET:

6

OF 7


c:\users\dwaniwata\building drops, inc\building drops landing - common\projects\windsor windows and doors\fbp-25-0612 - fbc submittal - fl11092 pinnacle clad concealed double hung - revision\dwgs\wwd005.dwg 6/13/2025 8:41 AM

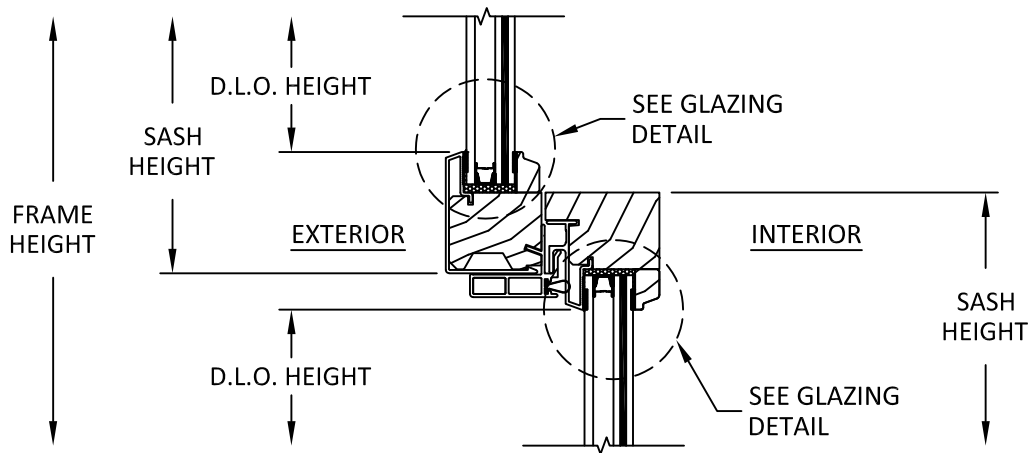

P
7

VERTICAL SECTION

MEETING RAIL

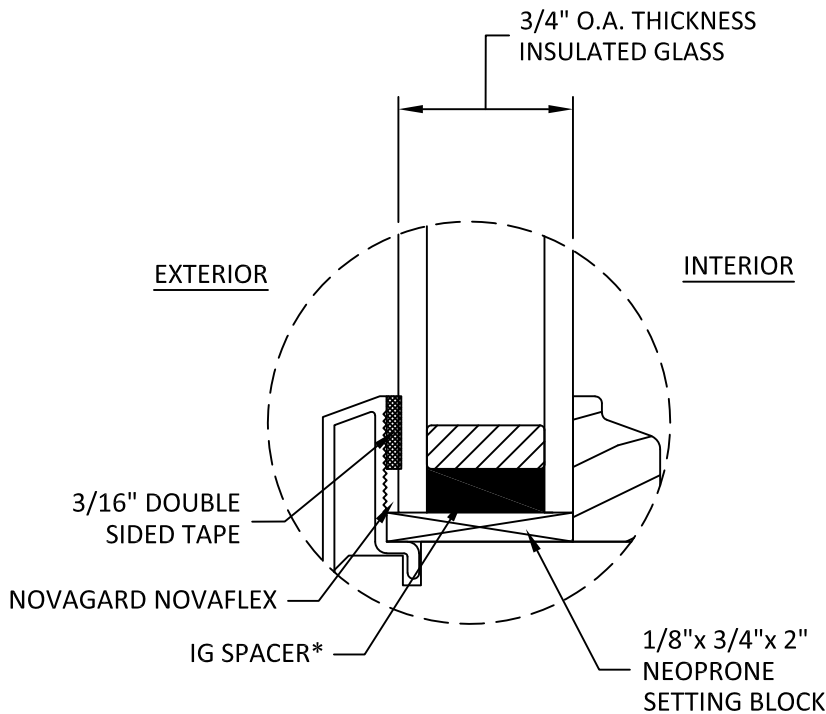

GLAZING DETAIL

GLAZING NOTES:

1. GLASS TYPE & THICKNESS SHALL COMPLY WITH ASTM E1300 REQUIREMENTS AS WELL AS APPLICABLE SAFETY GLAZING REQUIREMENTS PER THE FBC. TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
4. DESIGN PRESSURES MAY NOT EXCEED MAX VALUES IN DESIGN PRESSURE TABLES ON SHEET 1.
5. FOR GLASS THICKNESS UP TO 3.9 mm, USE QUANEX FOAM SUPER SPACER IG SPACER, FOR GLASS THICKNESS OVER 3.9 mm USE CARDINAL ENDURE STAINLESS STEEL IG SPACER.



WINDSOR WINDOWS & DOORS

900 S. 19TH STREET.
WEST DES MOINES, IA 50265
PH: (515)223-6660 FAX: (515)224-1938

TITLE:
PINNACLE CLAD
DOUBLE HUNG
(NON-HVHZ)(NON-IMPACT)
MEETING RAIL & GLAZING DETAIL

PREPARED BY:


BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
CODE CHANGE 2020	YC	06/20
CODE CHANGE 2023	MG	03/23
CERTIFICATE UPDATE	DI	06/25

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

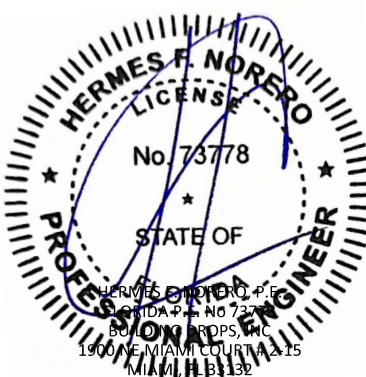

FBPE CERT. OF AUTHORIZATION No. 29578

FL #:

FL11092

DATE: 06.12.20

DWG. BY:
YC

CHK. BY:
HFN

SCALE: NTS

DWG. #: WWD005

SHEET:

7

OF 7