


SUNROOM ALUMINUM SINGLE OUT-SWING DOORS


(NON-IMPACT / NON-HVHZ)

-FOR USE IN NON-HABITABLE SUNROOMS ONLY AS DESCRIBED IN AAMA/NPEA/NSA 2100.

-FOR USE AS A CATEGORY IV SUNROOM IF SYSTEM MEETS THERMAL PERFORMANCE AS DESCRIBED IN SECTION 7 IN AAMA/NPEA/NSA 2100.

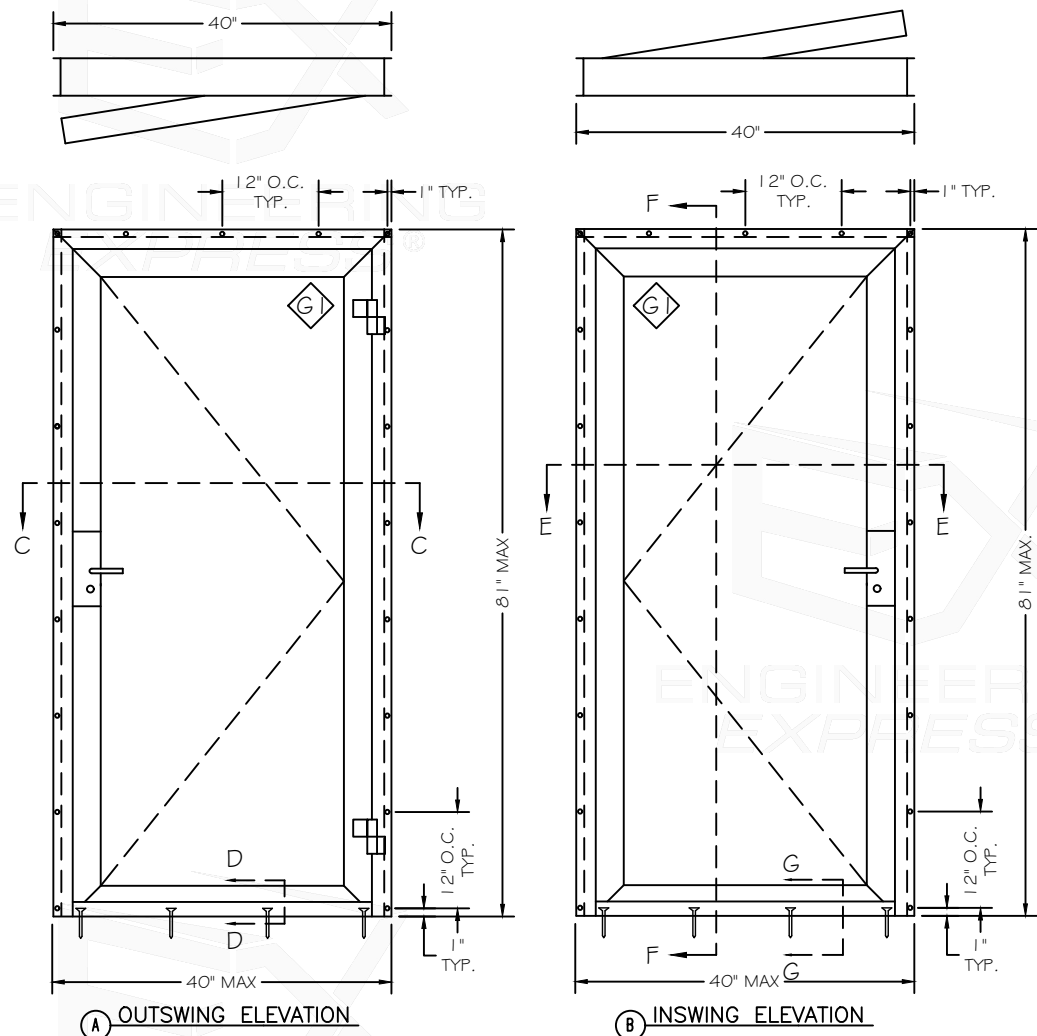

NOTE:
1. GLASS THICKNESS COMPLIES WITH ASTM E 1300 REQUIREMENTS.
2. SETTING BLOCK SHALL COMPLY WITH 2411.3.3.1 OF THE FLORIDA BUILDING CODE EIGHTH EDITION (2023)

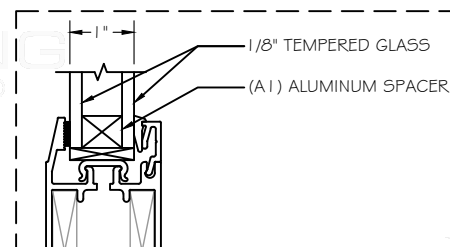

(G1) GLASS DETAIL
(NON IMPACT)

ALL ELEVATIONS ARE
LOOKING FROM THE OUTSIDE

OUTSWING DOOR
DESIGN PRESSURE CAPACITY
+/- 50.0 PSF A.S.D.

WATER PENETRATION PER ASTM E547: 7.5 PSF
AIR INFILTRATION PER ASTM E283

INSWING DOOR
DESIGN PRESSURE CAPACITY
+/- 40.0 PSF A.S.D.

WATER PENETRATION PER ASTM E547: 6.1 PSF
AIR INFILTRATION PER ASTM E283

NOTES:
1. THIS WINDOW IS APPROVED ONLY FOR INSTALLATION INTO SEPARATELY ENGINEERED FOUR SEASONS ALUMINUM SUNROOM. INSTALLATION INTO ANY OTHER SUBSTRATE SHALL REQUIRE A SEPARATE, SITE SPECIFIC DESIGN TO BE PREPARED BY A FL-REGISTERED PROFESSIONAL ENGINEER, AND SUBMITTED TO THE AUTHORITY HAVING JURISDICTION FOR APPROVAL.
2. ALL FASTENERS SHALL PENETRATE SHEET METAL WITH THREE FULL THREAD PITCHES.

REFER TO MFR. INFORMATION
& TEST DATA FOR MORE
INFORMATION ON EXTRUSIONS

VISIT [ECALC.IO/60813c](https://ecalculator.io/60813c)

FOR SITE-SPECIFIC DEVIATIONS
& MORE INFORMATION ABOUT THIS DOCUMENT
OR SCAN THIS QR CODE

**VISIT ENGINEERINGEXPRESS.COM/STORE
FOR ADDITIONAL PLANS, REPORTS & RESOURCES**



NOTE REGARDING USE OF THIS DOCUMENT & USE OUTSIDE FLORIDA:

THIS IS A NON-SITE-SPECIFIC STRUCTURAL PERFORMANCE EVALUATION. THIS PRODUCT EVALUATION IS VALID **IN FLORIDA ONLY**. USE OF THIS EVALUATION REQUIRES A REVIEW & CERTIFICATION BY A LOCAL DESIGN PROFESSIONAL WHO SHALL BE RESPONSIBLE FOR THE PROPER ADAPTATION OF THIS GENERAL PERFORMANCE EVALUATION TO ANY SITE-SPECIFIC PROJECT. CONTACT THIS OFFICE AT **ENGINEERINGEXPRESS.COM/QUOTE** FOR ASSISTANCE WITH YOUR PROJECT-SPECIFIC NEEDS & FOR ADAPTATION & CERTIFICATION OF THIS DOCUMENT OUTSIDE FLORIDA.

(NON IMPACT APPROVED)
MAXIMUM ALLOWABLE DESIGN PRESSURES (A.S.D.):

OUTSWING:
+ 50 PSF
- 50 PSF

INSWING:
+ 40 PSF
- 40 PSF

GENERAL NOTES:

1. THE SYSTEM AND GLASS TYPES DESCRIBED HEREIN COMPLY AND HAVE BEEN DESIGNED AND TESTED IN ACCORDANCE WITH THE FLORIDA BUILDING CODE 8TH EDITION (2023) PER
a. ANSI/AAMA/WDMA/CSA101/1.S.2/A440
2. FOR USE **OUTSIDE** THE HIGH VELOCITY HURRICANE ZONE (HVHZ).
3. GLASS UNIT(S) SHALL ME THE REQUIREMENTS OF ASTM E-1300.
4. DESIGN PRESSURES NOTED HEREIN ARE BASED ON MAXIMUM TESTED PRESSURES DIVIDED BY A 1.5 SAFETY FACTOR.
5. THE ARCHITECT/ENGINEER OF RECORD FOR THE PROJECT SUPERSTRUCTURE WITH WHICH THIS DESIGN IS USED SHALL BE RESPONSIBLE FOR THE INTEGRITY OF ALL SUPPORTING SURFACES TO THIS DESIGN WHICH SHALL BE COORDINATED BY THE PERMITTING CONTRACTOR. WOOD BUCKS (BY OTHERS) SHALL BE ANCHORED PROPERLY TO TRANSFER LOADS TO THE EXISTING STRUCTURE.
6. THE SYSTEM DETAILED HEREIN IS GENERIC AND DOES NOT PROVIDE INFORMATION FOR A SPECIFIC SITE. FOR SITE CONDITIONS DIFFERENT FROM THE CONDITIONS DETAILED HEREIN, A LICENSED ENGINEER OR REGISTERED ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE IN CONJUNCTION WITH THIS DOCUMENT.
7. THE CONTRACTOR IS RESPONSIBLE TO INSULATE ALL MEMBERS FROM DISSIMILAR MATERIALS TO PREVENT ELECTROLYSIS.
8. FASTENERS SHALL BE CADMIUM-PLATED OR OTHERWISE CORROSION-RESISTANT MATERIAL AND SHALL COMPLY WITH "SPECIFICATIONS FOR ALUMINUM STRUCTURES" SECTION J.3.7.2 BY THE ALUMINUM ASSOCIATION, INC., & ANY APPLICABLE FEDERAL, STATE, AND/OR LOCAL CODES.
9. REFER TO FASTENER MANUFACTURER'S PUBLISHED DATA SHEETS AND RECOMMENDATIONS FOR FASTENER INSTALLATION INSTRUCTIONS.
10. ENGINEER SEAL AFFIXED HERETO VALIDATE STRUCTURAL DESIGN AS SHOWN ONLY. USE OF THIS SPECIFICATION BY CONTRACTOR, et. al. INDEMNIFIES & SAVES HARMLESS THIS ENGINEER FOR ALL COST & DAMAGES INCLUDING LEGAL FEES & APPELLATE FEES RESULTING FROM MATERIAL FABRICATION, SYSTEM ERECTION, & CONSTRUCTION PRACTICES BEYOND THAT WHICH IS CALLED FOR BY LOCAL, STATE, & FEDERAL CODES & FROM DEVIATIONS OF THIS PLAN.
11. EXCEPT AS EXPRESSLY PROVIDED HEREIN, NO ADDITIONAL CERTIFICATIONS OR AFFIRMATIONS ARE INTENDED.
12. PRESSURE VALUES ON THIS APPROVAL ARE (ASD) ALLOWABLE DESIGN PRESSURES.
13. ALTERATIONS, ADDITIONS, OR OTHER MARKINGS TO THIS DOCUMENT ARE NOT PERMITTED AND INVALIDATE THIS CERTIFICATION.
14. SAFEGUARDS MUST BE OBSERVED (NOT IN THIS CERTIFICATION)
15. IF SLOPED GLAZING IS NEEDED, IT SHALL BE ALLOWED UNDER SITE SPECIFIC ENGINEERING. DESIGN MUST BE CHECKED AND APPROVED BY A PROFESSIONAL ENGINEER AND THE MANUFACTURER(S).
16. UNITS SHALL BE LABELED IN ACCORDANCE WITH THE FLORIDA BUILDING COMMISSION AND THE FLORIDA DEPARTMENT OF BUSINESS & PROFESSIONAL REGULATION SPECIFICATION.

FRANK BENNARDO, PE
PE# 0046549 CA# 9885

AUGUST 9, 2023

Digitally signed by

Frank Bennardo

Date: 2023.08.30

17:09:56 -04'00'

FL 12155.3

EXENGINEERING
EXPERIENCE

POSTAL ADDRESS:
401 W. ATLANTIC AVE R10 BOX 219
DELRAY BEACH, FL 33444
ENGINEERINGEXPRESS.COM

FOUR SEASONS SOLAR PRODUCTS, LLC.

5005 VETERANS MEMORIAL HIGHWAY

EVANS PERFORMANCE
COLBROOK, NY 11741

SUNROOM ALUMINUM SINGLE OUT-SWING DOOR
FLORIDA BUILDING CODE EIGHTH EDITION (2023)
FLORIDA STATEWIDE APPROVAL (FSA FL#12155.3)

REMARKS	DRWN	CHKD	DATE
FBC 2020 (21-39509)	TAE	AJP	04/24/21
FBC 2023 UPDATE	SQ	RS	07/13/23
-	-	-	-
-	-	-	-
-	-	-	-


COPYRIGHT ENGINEERING EXPRESS®

23-60813c

SCALE: NTS UNLESS NOTED

1

02

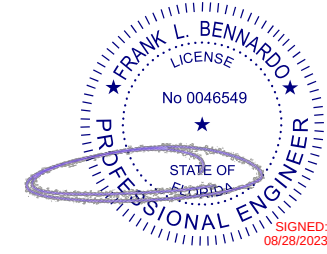

PE SEAL REQUIRED

FL

COPIES NOT VALID
FOR PERMIT

FL 12155.3

**ENGINEERING
EXPRESS®**

POSTAL ADDRESS:

401 W. ATLANTIC AVE R10 BOX 219
DELRAY BEACH, FL 33444
ENGINEERINGEXPRESS.COM

5005 VETERANS MEMORIAL HIGHWAY
HOLBROOK, NY 11741
PH: (631) 563-4000


SUNROOM ALUMINUM SINGLE OUT-SWING DOOR
FLORIDA BUILDING CODE EIGHTH EDITION (2023)
FLORIDA STATEWIDE APPROVAL (ESA E1 # 2155 3)

[illegible]

23-60813c


SCALE: NTS UNLESS NOTE

202

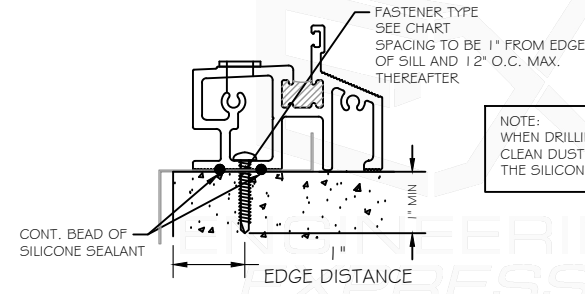


D-D OUTSWING SILL ANCHORING

NOTE:
WHEN DRILLING INTO CONCRETE
CLEAN DUST FROM AREA TO ALLOW
THE SILICONE TO ADHERE

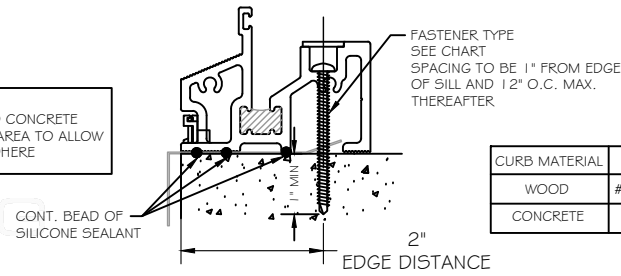


G-G INSWING SILL ANCHORING


CURB MATERIAL	FASTENER TYPE
WOOD	#10 PAN HEAD WOOD SCREW
CONCRETE	3/16" DIA. TAPCON SCREW

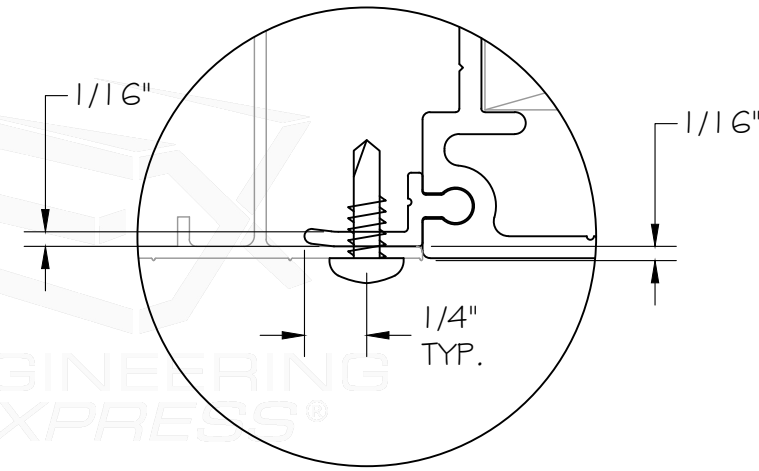


⊗ DETAIL

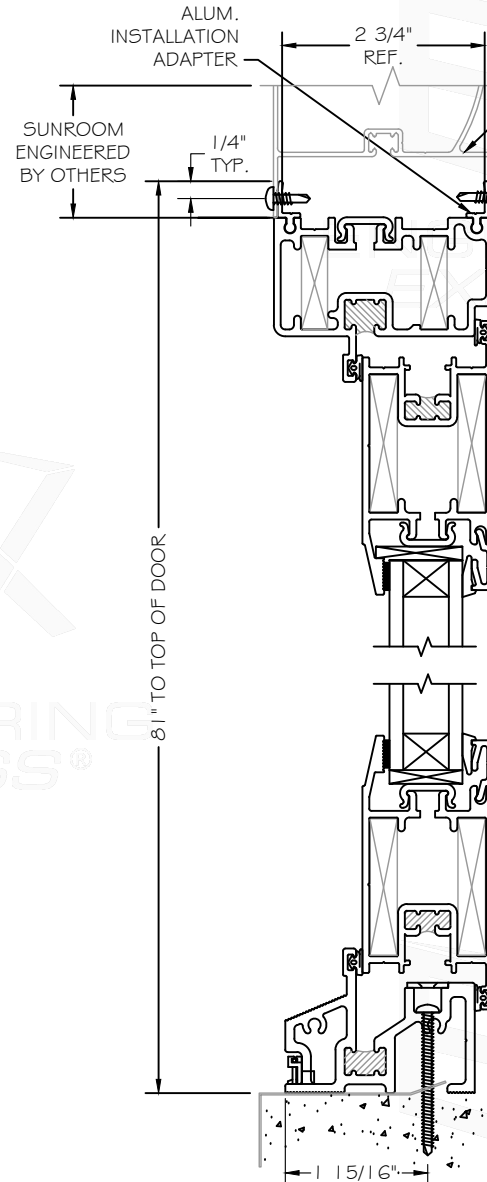

(F-F) HORIZONTAL SECTION

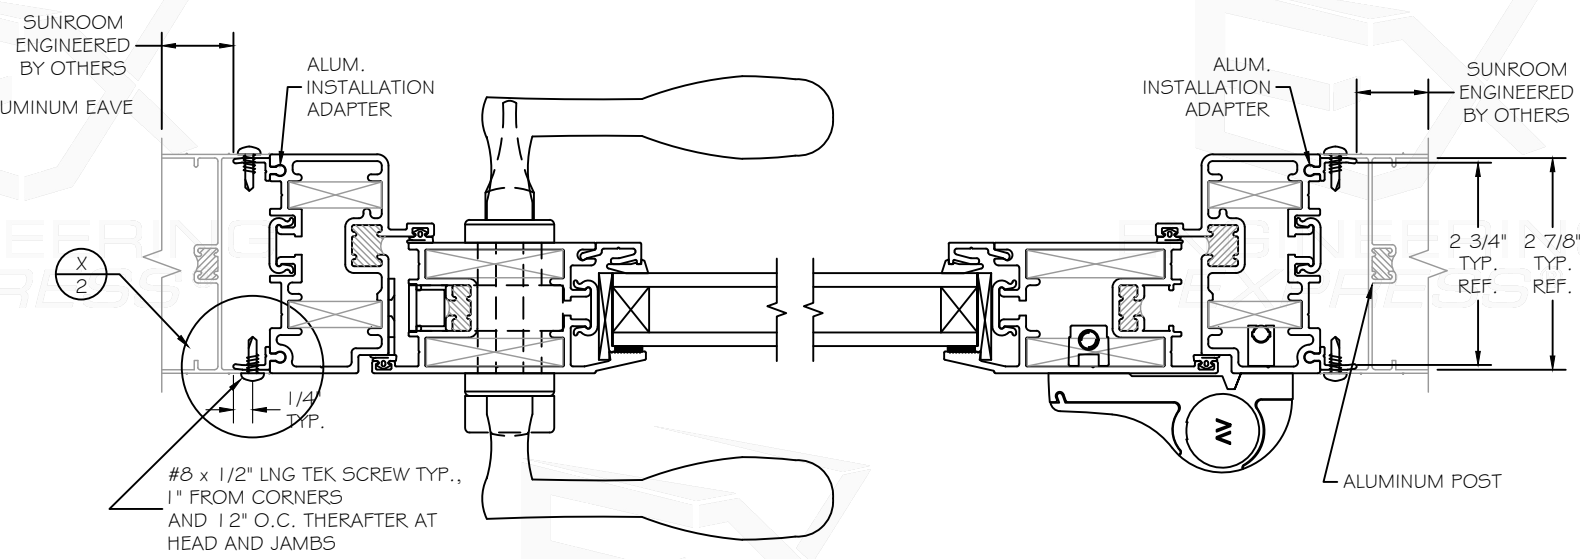

(C-C) HORIZONTAL SECTION

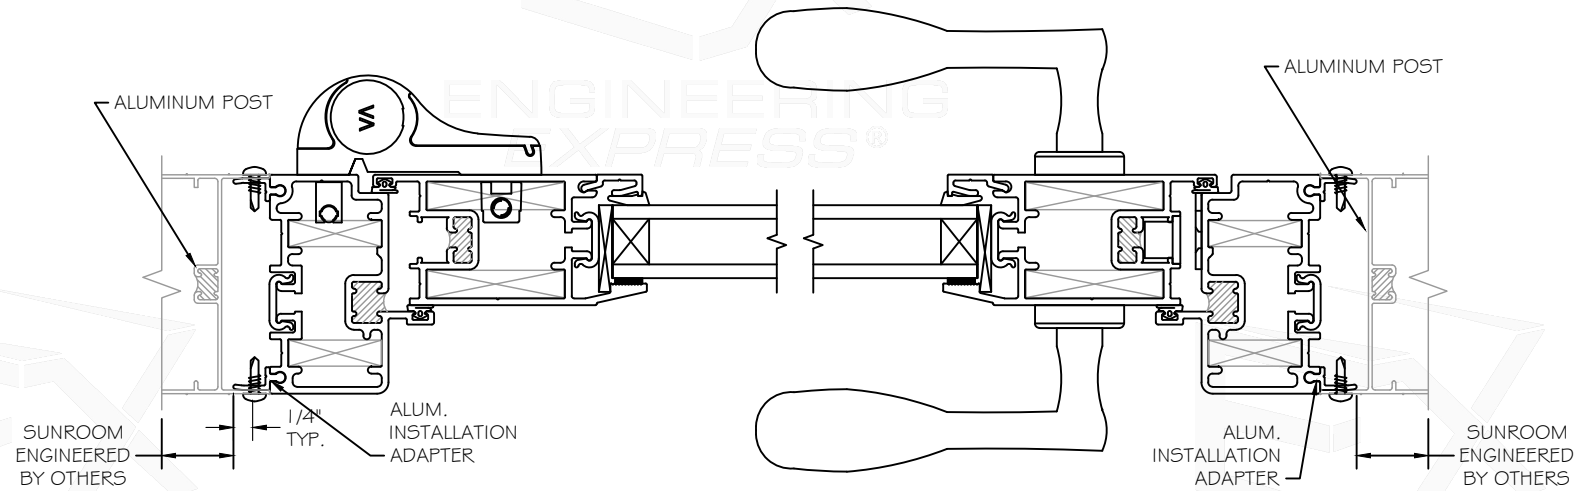

(E-E) HORIZONTAL IN-SWING SECTION

REFER TO MFR. INFORMATION
& TEST DATA FOR MORE
INFORMATION ON EXTRUSIONS