


# CABS

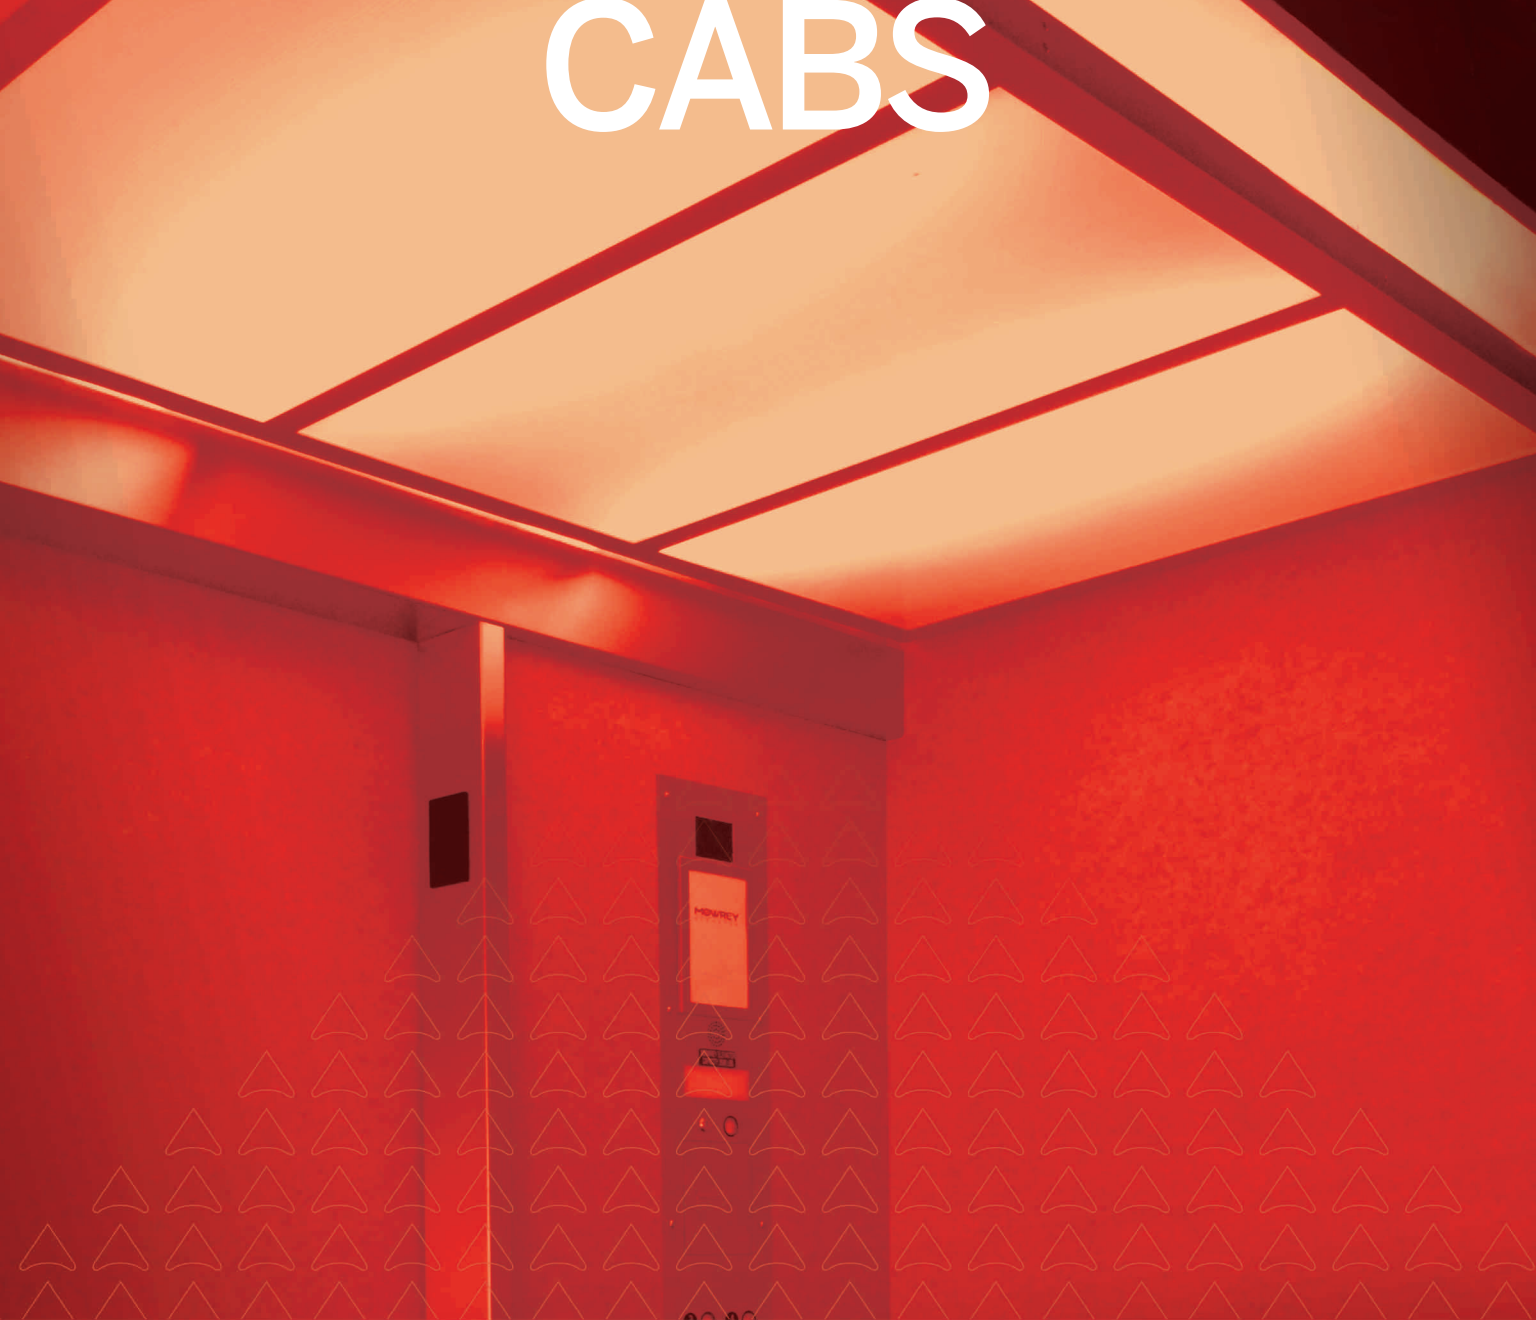

## **The Mowrey ME 200 and ME 225 Cabs**

are made with durable materials and completely fabricated by skilled technicians in our 350,000 square foot manufacturing facility in Marianna, Florida. We offer a wide variety of cab heights, ceiling styles,

flooring options and wall surface materials. Contact your Mowrey representative for a complete color brochure of finishing options. See reverse side for cab specs or learn more online at:

[www.mowreyelevator.com](http://www.mowreyelevator.com)

**MOWREY**  
E L E V A T O R


Ceilings

Our standard cab ceiling consists of suspended prismatic light diffuser ceiling panels in an aluminum frame with florescent lighting. Standard ceiling height is 7'-6" with 8'-0" cab height.

**AVAILABLE UPGRADE:** Six (6), nine (9) or 24 down lights with mica, enamel, stainless steel or muntz finishes. For 4000lb capacity cabs and larger, 30, 36 and 40 down lights ceiling options are available.



STANDARD  
Suspended Prismatic  
Light Diffuser

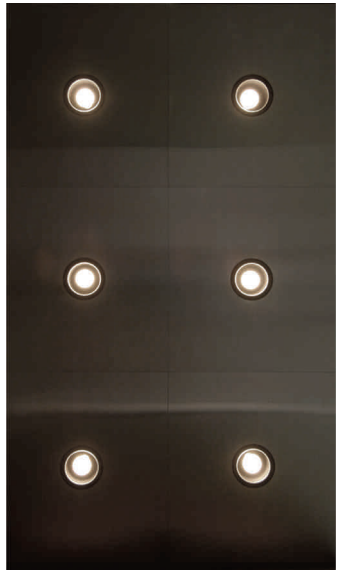

UPGRADE  
Down Light Units available in  
six (6), nine (9) and 24 lamps  
  
Mica, enamel, stainless  
steel or muntz finishes.

Handrails

Our standard handrail for the ME 200 and ME 225 cabs is our #4 stainless steel unit affixed to the back wall and is available in either cylindrical or flat bar (shown below).

**AVAILABLE UPGRADE:** Upgrade your finish to #8 stainless steel or muntz. Side wall handrails are also available as an optional upgrade.



Cylindrical Handrail ▶

◀ Flat Bar Handrail

	ME 200 CAB	ME 225 CAB	Upgrade Options
Walls	Durable wood construction walls for sound insulation, covered with 1/16 plastic laminate on cab interior. Many standard color options available.	Durable wood construction walls for sound insulation. Applied plastic laminate wall panels with a 2" plastic laminate reveal.	Steel construction with enamel finish, custom wall panels of stainless steel or muntz. Glassback.
Car Top	Wood construction. Includes emergency exit.	Wood construction. Includes emergency exit.	Steel construction.
Front Return	Applied #4 stainless steel car station with plastic laminate front wall.	Applied #4 stainless steel car station with plastic laminate front wall.	20 degree, swing return, enamel, stainless steel & muntz front wall.
Doors	Hollow metal, horizontal single sliding with plastic laminate finish. Standard door height is 7'-0".	Hollow metal, horizontal single sliding with plastic laminate finish. Standard door height is 7'-0".	Enamel, stainless steel & muntz.
Frames	Standard #4 stainless steel.	Standard #4 stainless steel.	Enamel, #8 stainless steel & muntz.
Ceiling	Suspended prismatic light diffuser ceiling panels in an aluminum frame with florescent lighting. Standard ceiling height is 7'-6" with 8'-0" cab height.	Suspended prismatic light diffuser ceiling panels in an aluminum frame with florescent lighting. Standard ceiling height is 7'-6" with 8'-0" cab height.	Six (6), nine (9) or 24 down lights with mica, enamel, stainless steel or muntz finishes. For 4000lb capacity cabs and larger, 30, 36 and 40 down lights ceiling options are available.
Sills	Die cast aluminum.	Die cast aluminum.	Nickel silver, muntz.
Handrails	Cylindrical or flat bar. #4 stainless steel on back wall.	Cylindrical or flat bar. #4 stainless steel on back wall.	#8 stainless steel, muntz. Side walls.
Flooring	1/16 vinyl composition tile is standard, or commercial grade carpeting in a standard selection of colors. For other custom floor finishes, we will prepare the sub-floor to meet your requirements.	1/16 vinyl composition tile is standard, or commercial grade carpeting in a standard selection of colors. For other custom floor finishes, we will prepare the sub-floor to meet your requirements.	In addition to the standard options shown above, our elevators can accept a variety of custom floor finishes. We will prepare the sub-floor and set the base height to accommodate your requirements.



ME 200 CAB ▶



ME 225 CAB ▶

**CAB & CEILING HEIGHTS:**  
8'-0" cab height with 7'-6" ceiling

# Doors

Mowrey Elevator Doors are constructed at our 350,000 square foot manufacturing facility in a variety of finishes and sizes. Our doors are laboratory tested and labeled to meet all state and local code requirements.



**Single Slide door**  
*(standard for most applications)*

Door is available in either right or left opening.



**Center Opening door**



**Two-Speed door**

Allows for a wider opening width with one door sliding behind the other. Door is available in either right or left opening.



Mowrey Elevator Company has operated under the same name and ownership since 1976 and is now one of the largest privately owned elevator companies in the United States.

800.441.4449  
TOLL FREE

850.482.2482  
FACSIMILE: CONSTRUCTION/SERVICE

850.526.2375  
FACSIMILE: SALES

4518 LAFAYETTE STREET  
MARIANNA, FLORIDA 32446

800.432.2966  
TOLL FREE - WITHIN FL

954.581.8900  
LOCAL

954.583.1119  
FACSIMILE

3300 SOUTHWEST 50TH AVE  
DAVIE, FLORIDA 33314

[WWW.MOWREYELEVATOR.COM](http://WWW.MOWREYELEVATOR.COM)