

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
5. ALLOWABLE STRESS INCREASE OF 1/3 WAS NOT USED IN THE DESIGN OF THE PRODUCT SHOWN HEREIN. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
6. FRAME MATERIAL: WOOD WITH G=.46 MINIMUM SPECIFIC GRAVITY, OR COMPOSITE, OR FRAMESAVER, OR FUSION FRAME.
DOOR SKIN MATERIAL: STEEL .033” THICK (MINIMUM), FIBERGLASS .085” THICK (MINIMUM)
SIDELITE SKIN MATERIAL: STEEL .022” THICK (MINIMUM)
7. UNITS MUST BE GLAZED PER ASTM E1300, WITH SAFETY GLAZING.
8. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
9. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.

10. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
11. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
12. FOR ANCHORING INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
13. ALL FASTENERS TO BE CORROSION RESISTANT.
14. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

14.1. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42

14.2. CONCRETE – MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.

14.3. MASONRY – GROUT FILLED STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).

14.4. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .048” THICK MINIMUM
15. DOOR CONSTRUCTION MAYBE CONTINUOUS HEAD FRAME AND CONTINUOUS THRESHOLD OR BOX CONSTRUCTION.

SIGNED: 11/27/2023

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 – 3	ELEVATIONS
4	ANCHORING LAYOUTS
5 – 10	INSTALLATION DETAILS
11 – 14	APPROVED SLABS, MULLION DETAILS AND COMPONENTS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
NOTES

DRAWN:
J.L.

DWG NO.
08-02069

REV
J

SCALE NTS


DATE 06/19/13

SHEET 1 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com




Luis R. Lomas P.E.
FL No.: 62514

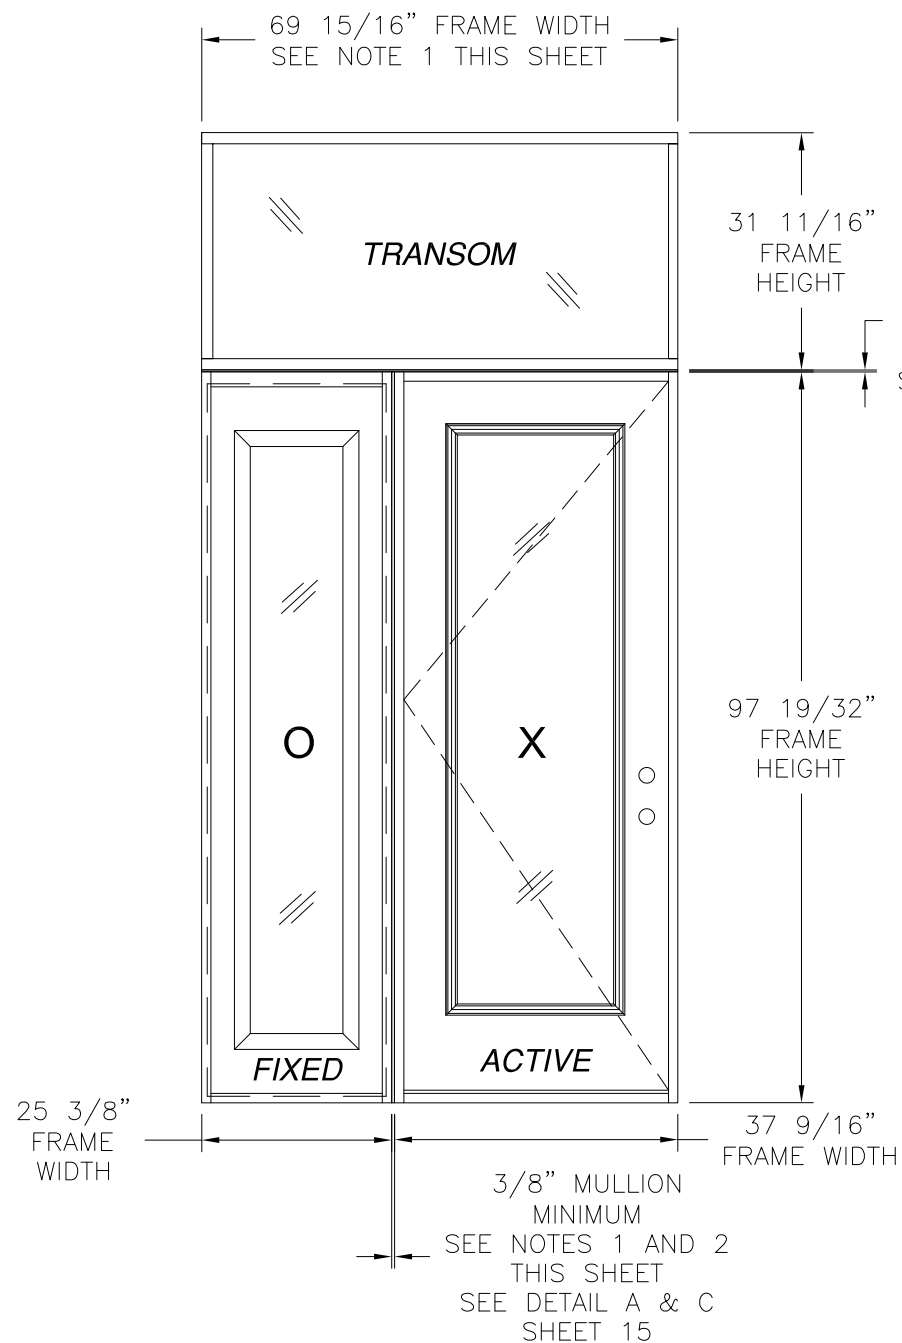

SINGLE W/ STD SIDELITE AND TRANSOM
EXTERIOR VIEW
OX SHOWN XO ALSO APPROVED

35 3/4" x 94 15/16" PANEL SIZE SHOWN. OTHER SIZES ARE APPROVED
AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 23.56 FT²

- D.L.O. NOTES:
1. DOOR D.L.O.: 20 3/8" X 78 1/2"
 2. STD. SIDELITE D.L.O.: 12 3/8" X 78 3/8"
 3. DIRECT SET SIDELITE D.L.O.: 18 5/8" X 93 3/4"
 4. TRANSOM D.L.O. WIDTH: 91 5/16"
 5. TRANSOM D.L.O. HEIGHT: 28 11/16"

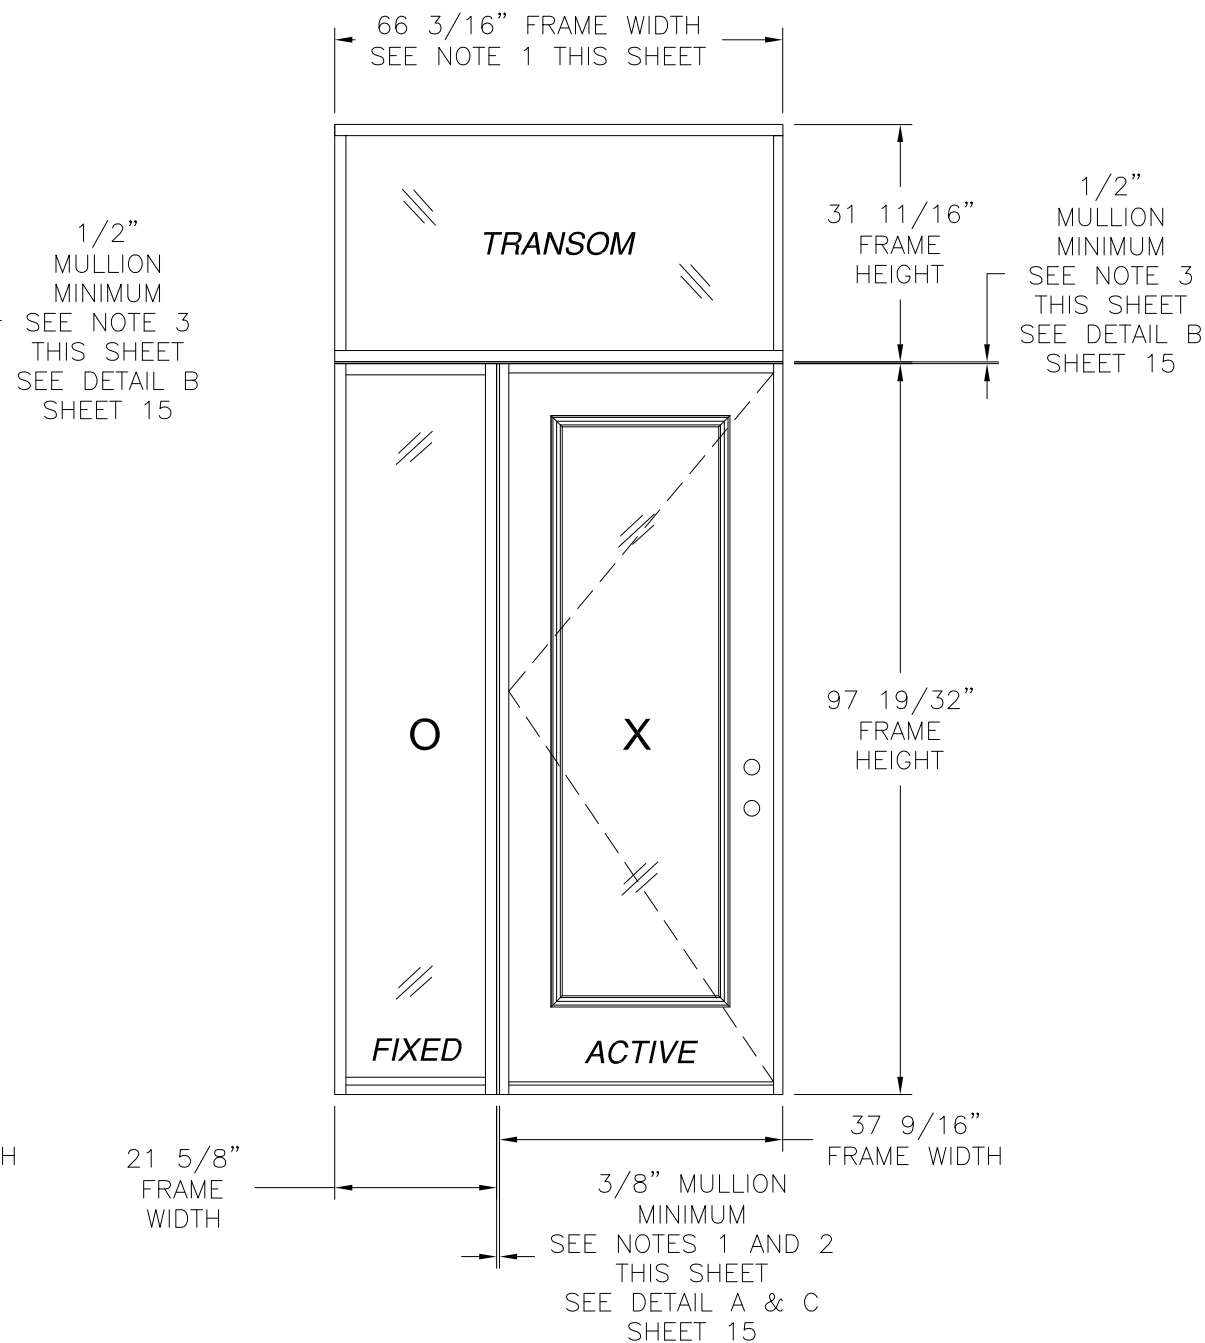

SINGLE W/ DIRECT SET SIDELITE AND TRANSOM
EXTERIOR VIEW
OX SHOWN XO ALSO APPROVED

- NOTES:
1. MAXIMUM ALLOWED BUILDUP TO BE 7".
 2. IF SIDELITE WIDTH IS 16" OR LESS NO VERTICAL MULLION IS REQUIRED.
 3. IF TRANSOM HEIGHT IS 16" OR LESS NO HORIZONTAL MULLON IS REQUIRED.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

DESIGN PRESSURE RATING	IMPACT RATING
±55.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-52.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	


WITH STEEL SLAB AND PANOLOCK MULTI-POINT

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-50.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB AND PANOLOCK MULTI-POINT


SIGNED: 11/27/2023

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS IS GLAZED SINGLE DOOR W/SIDELITES & TRANSOM NON-IMPACT ELEVATIONS		
DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 2 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

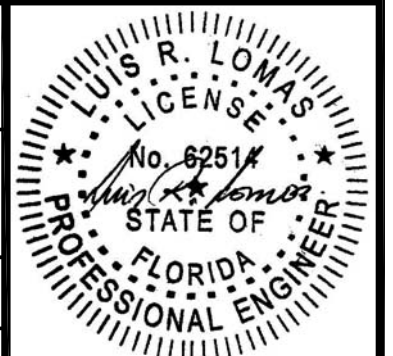


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

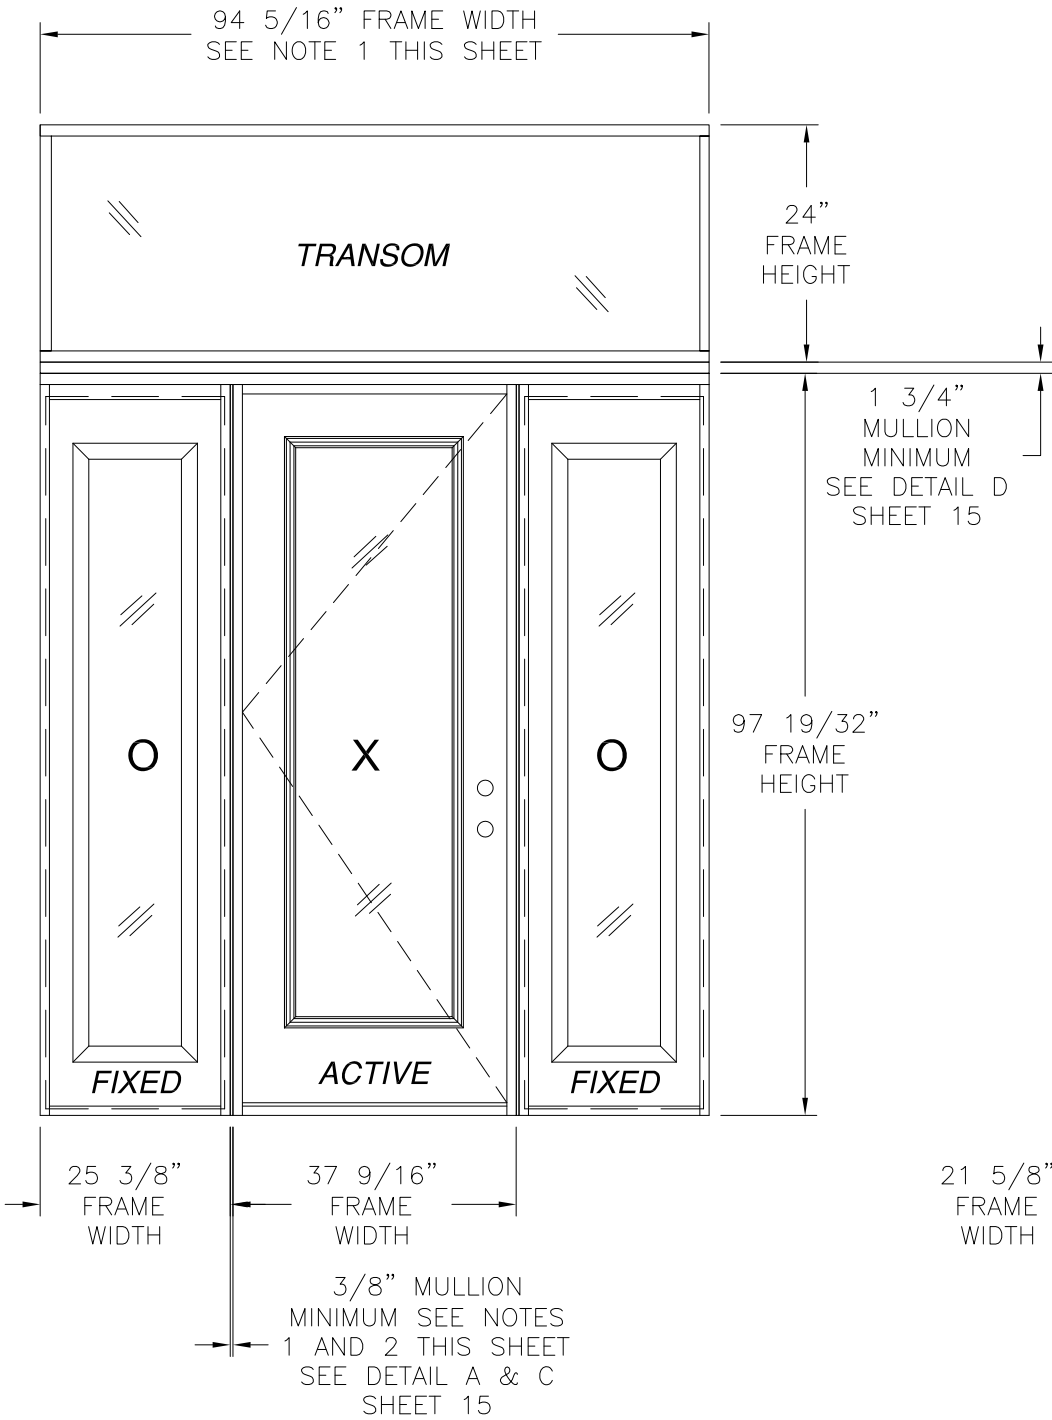

SINGLE W/ STD SIDELITES AND TRANSOM
EXTERIOR VIEW

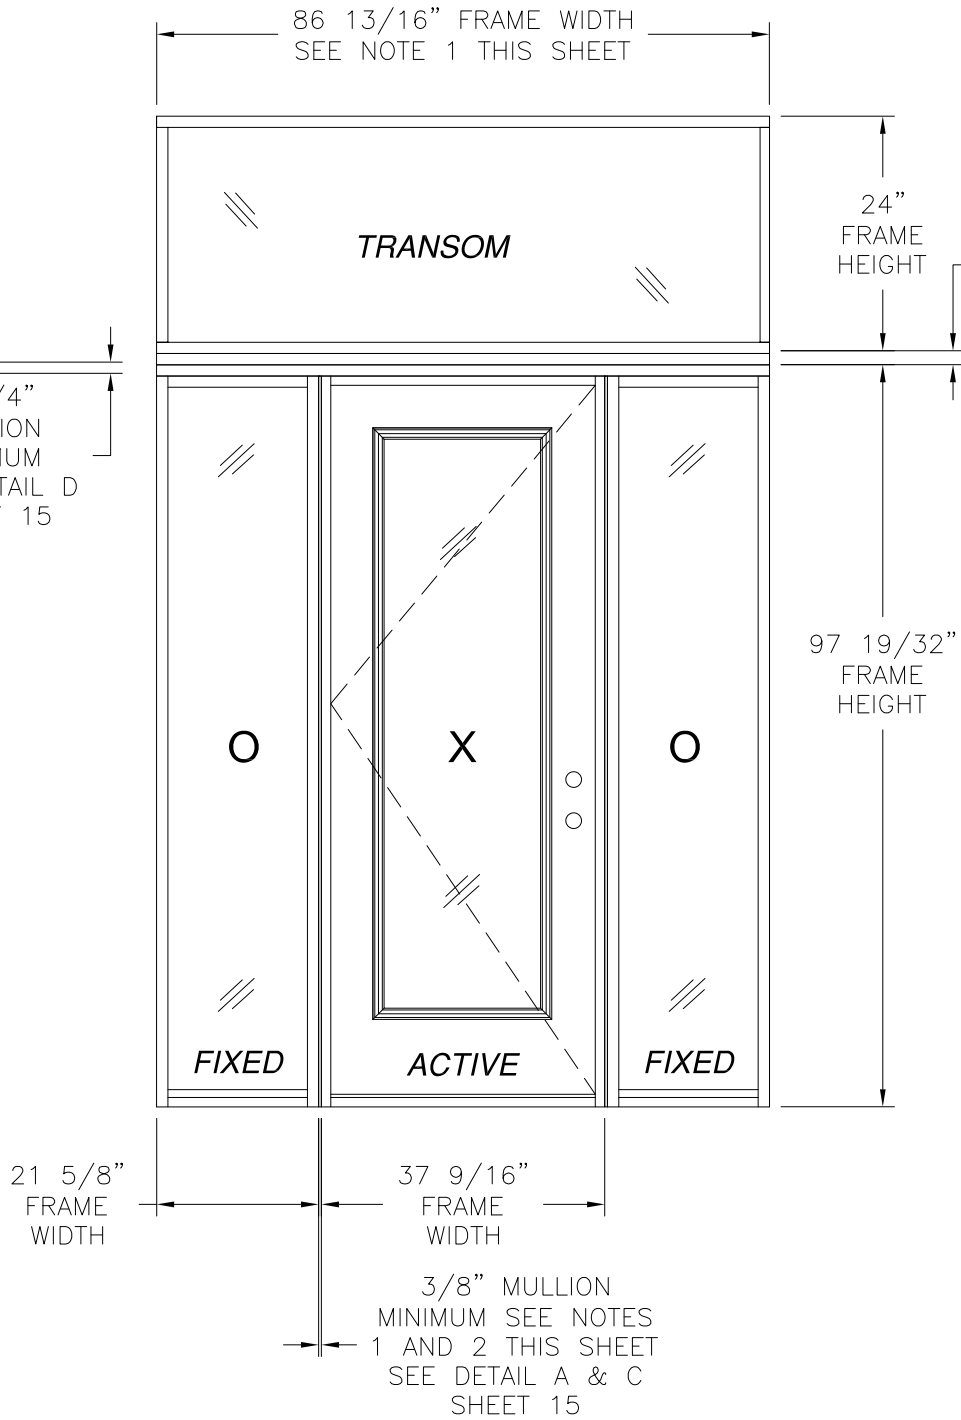

SINGLE W/ DIRECT SET SIDELITES AND TRANSOM
EXTERIOR VIEW

35 3/4" x 94 15/16" PANEL SIZE SHOWN. OTHER SIZES ARE APPROVED
AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 23.56 FT²

- NOTES:
1. MAXIMUM ALLOWED BUILDUP TO BE 3" AT EACH VERTICAL MULLION.
 2. IF SIDELITE WIDTH IS 16" OR LESS NO VERTICAL MULLION IS REQUIRED

1 3/4"
MULLION
MINIMUM
SEE DETAIL D
SHEET 15

DESIGN PRESSURE RATING	IMPACT RATING
±55.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-52.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	


WITH STEEL SLAB AND PANOLOCK MULTI-POINT

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-50.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	



WITH FIBERGLASS SLAB AND PANOLOCK MULTI-POINT

SIGNED: 11/27/2023



PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS IS GLAZED SINGLE DOOR W/SIDELITES & TRANSOM NON-IMPACT ELEVATIONS		
DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 3 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

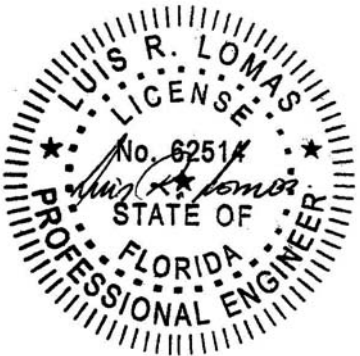



Luis R. Lomas P.E.
FL No.: 62514

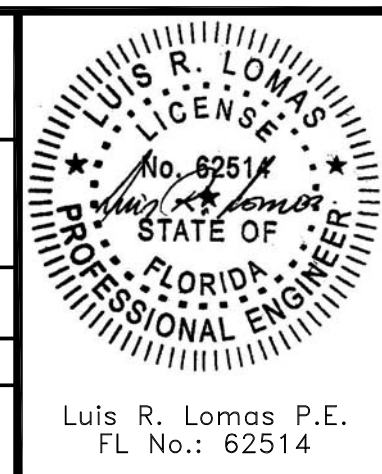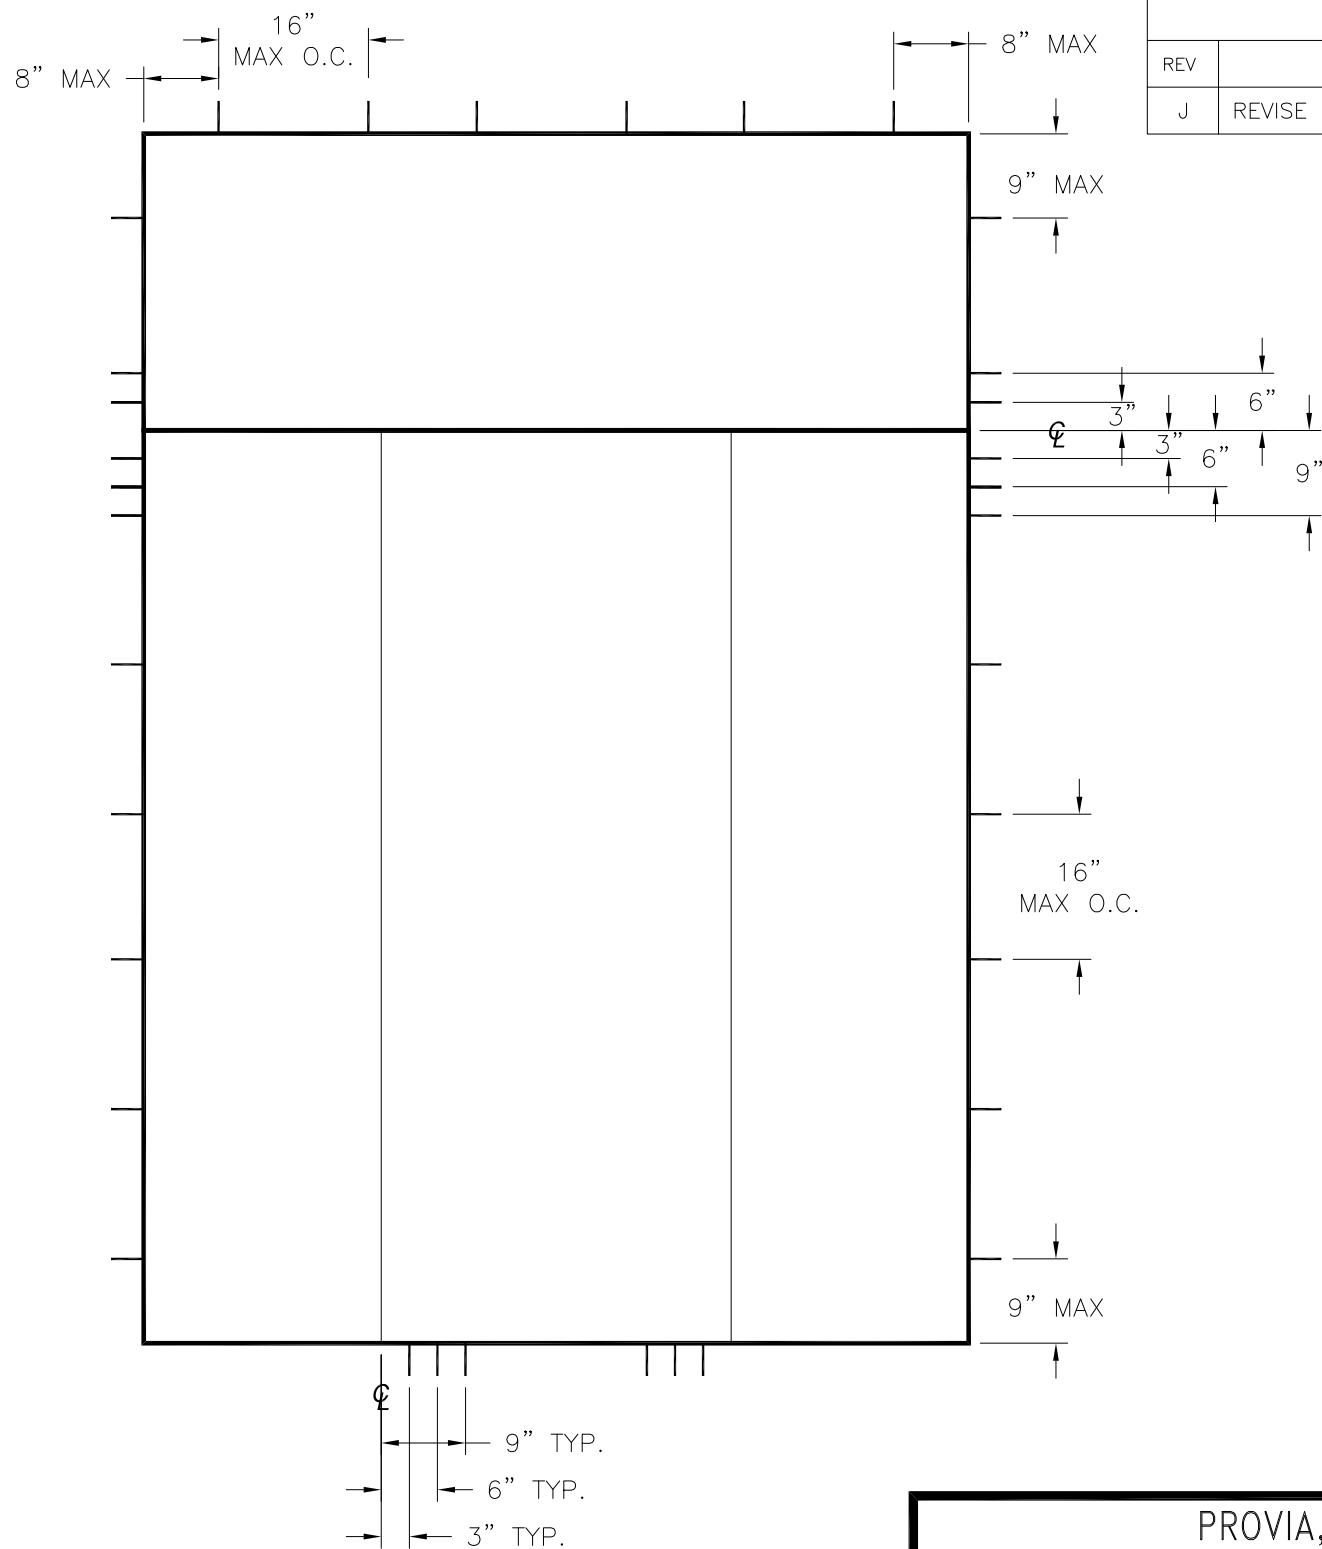

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

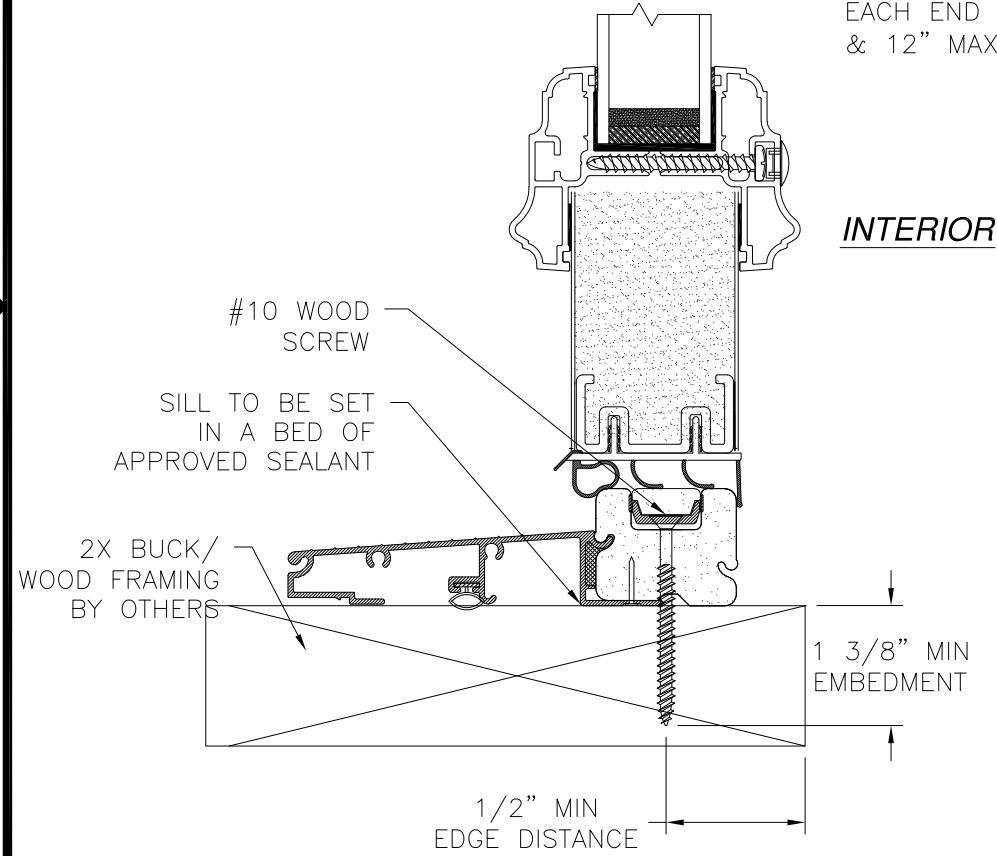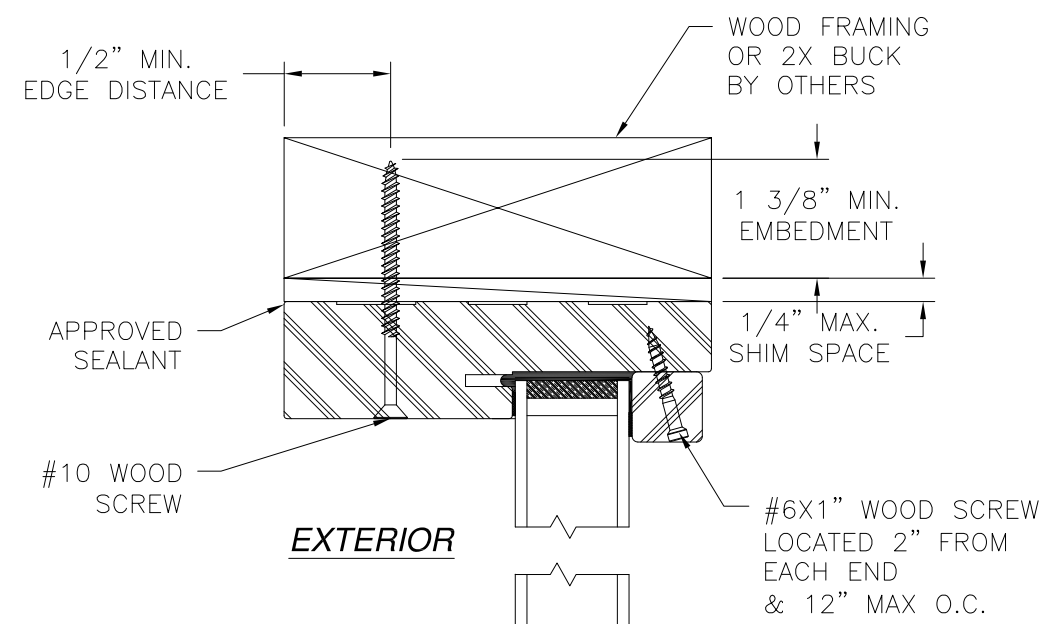


VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION - 2X BUCK/WOOD FRAMING
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

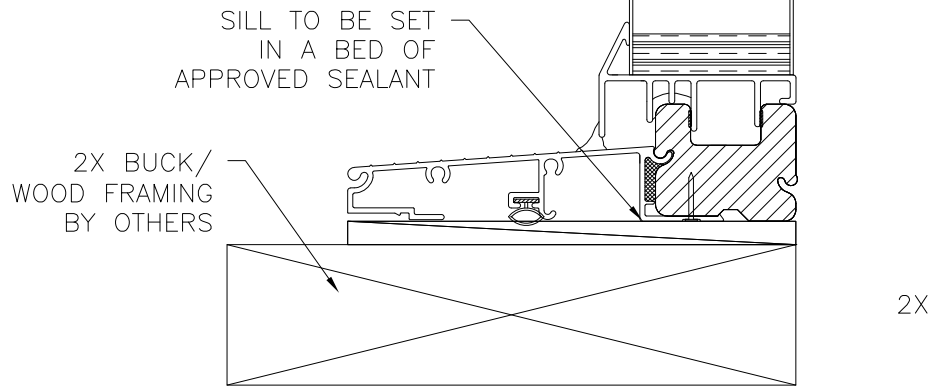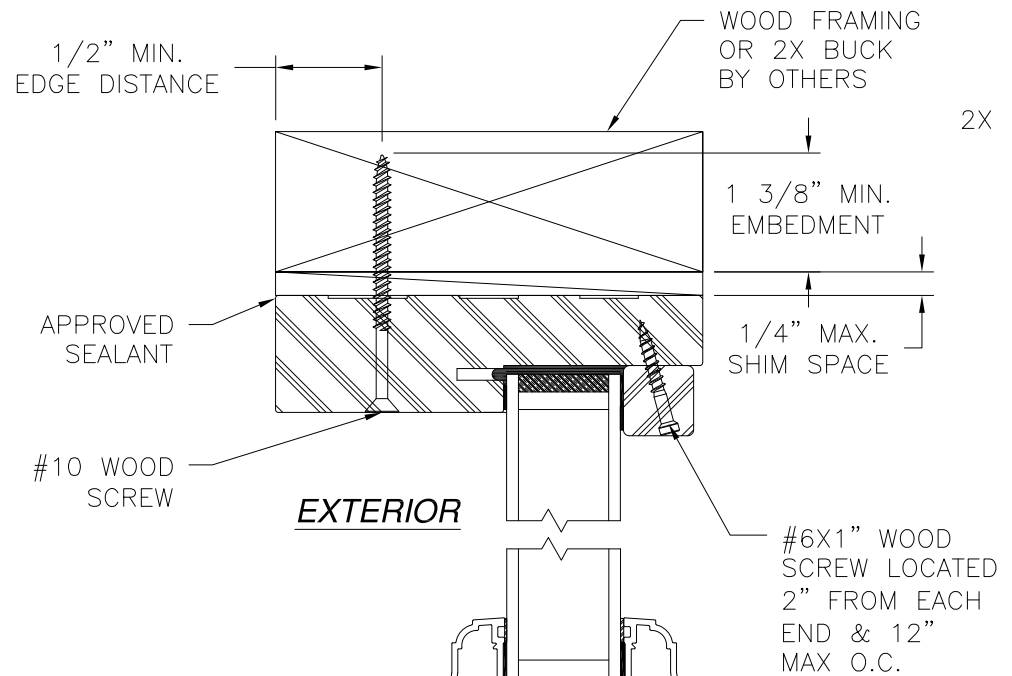


VERTICAL CROSS SECTION
SIDELITE AND TRANSOM INSTALLATION 2X BUCK/WOOD FRAMING
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

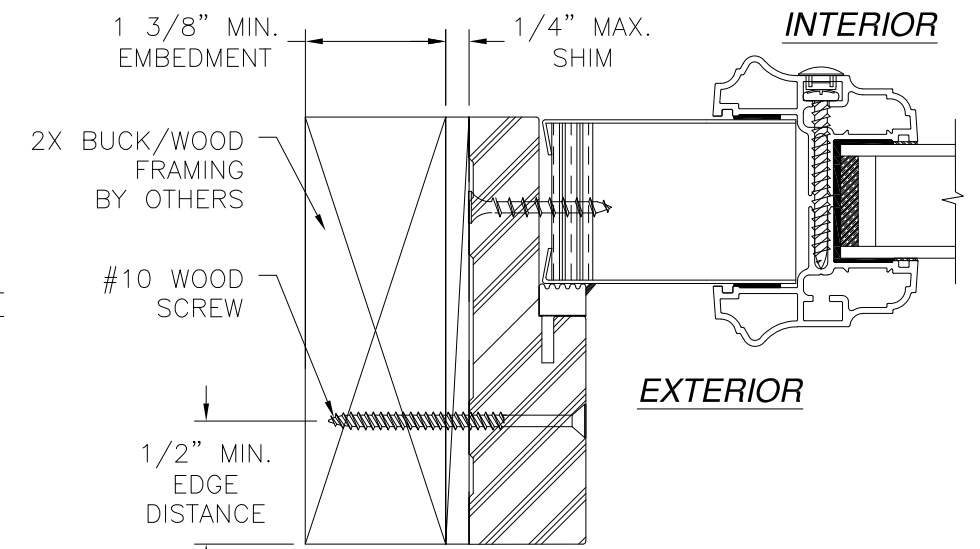

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION 2X BUCK/WOOD FRAMING
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

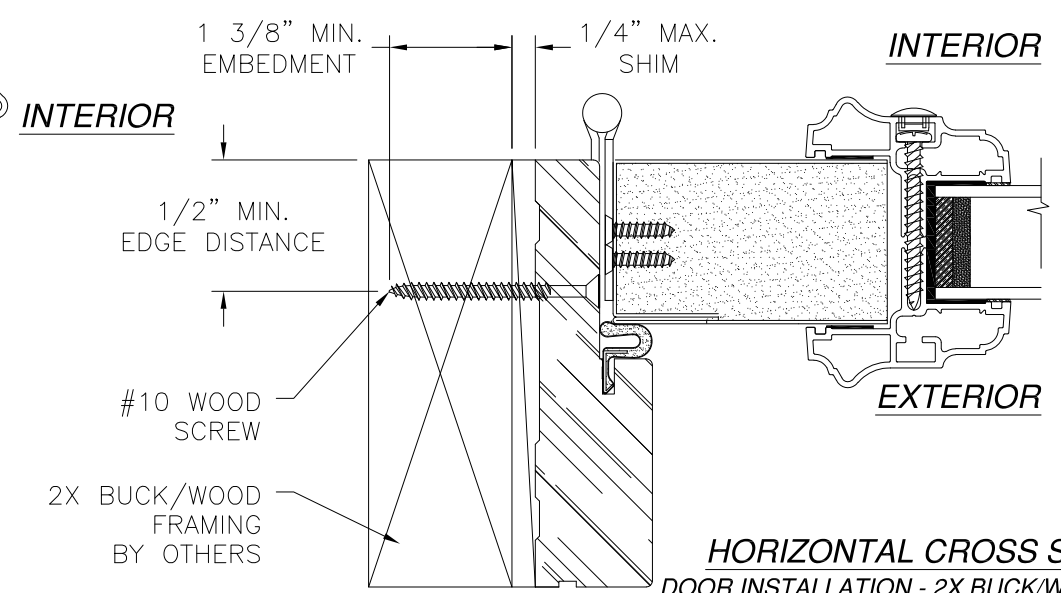

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - 2X BUCK/WOOD FRAMING
SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
INSTALLATION DETAILS



DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 5 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com



Luis R. Lomas P.E.
FL No.: 62514

PROFESSIONAL ENGINEER
STATE OF FLORIDA
No. 62514
L. R. LOMAS

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

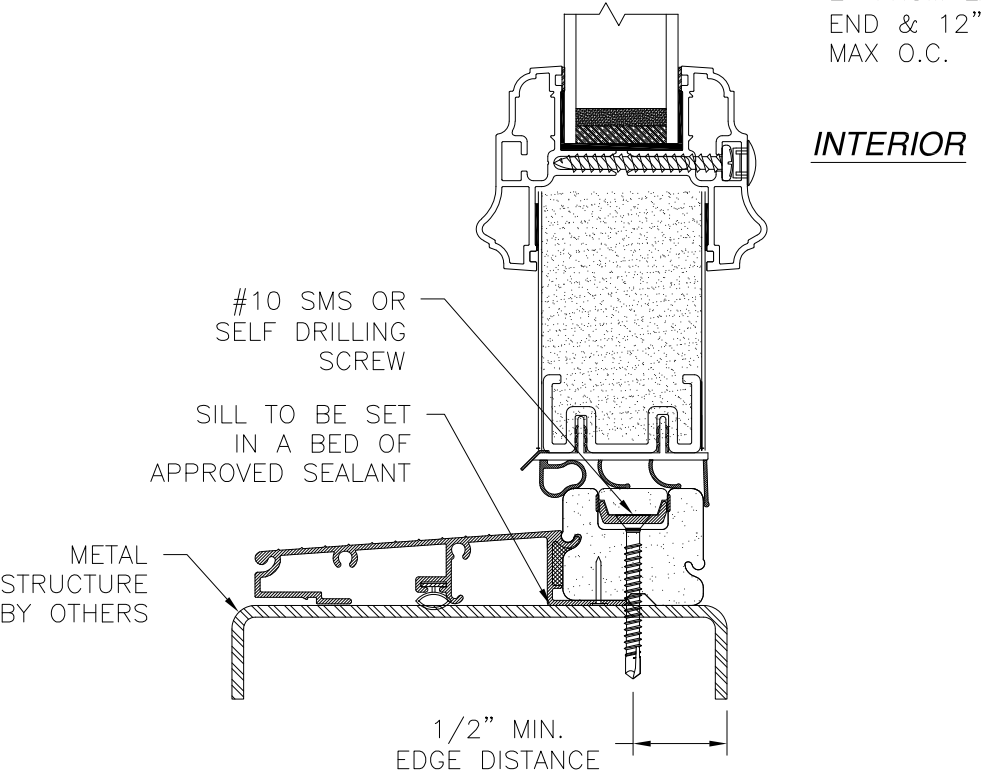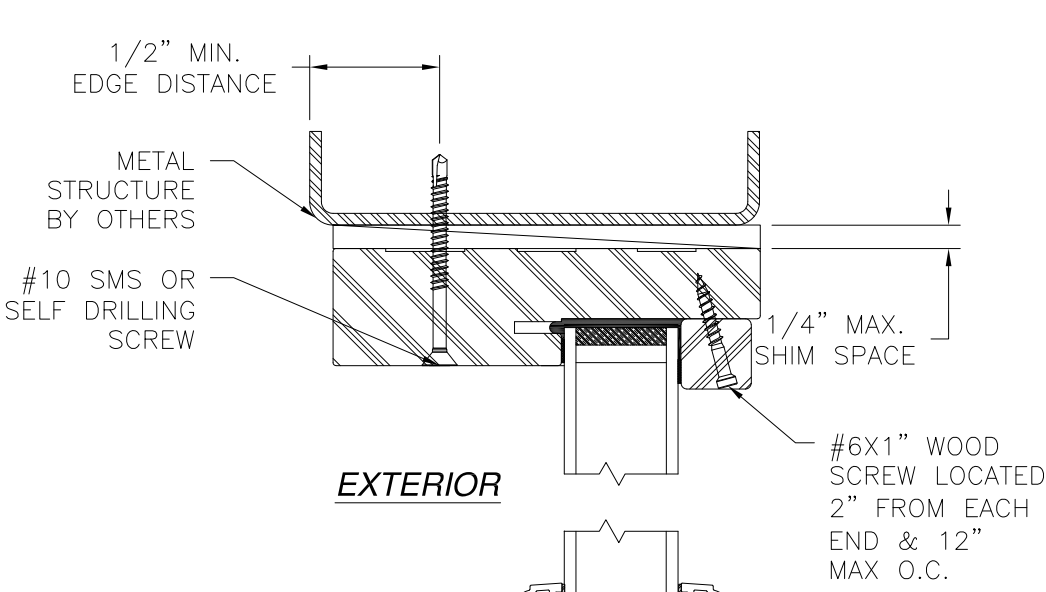


VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION METAL STRUCTURE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

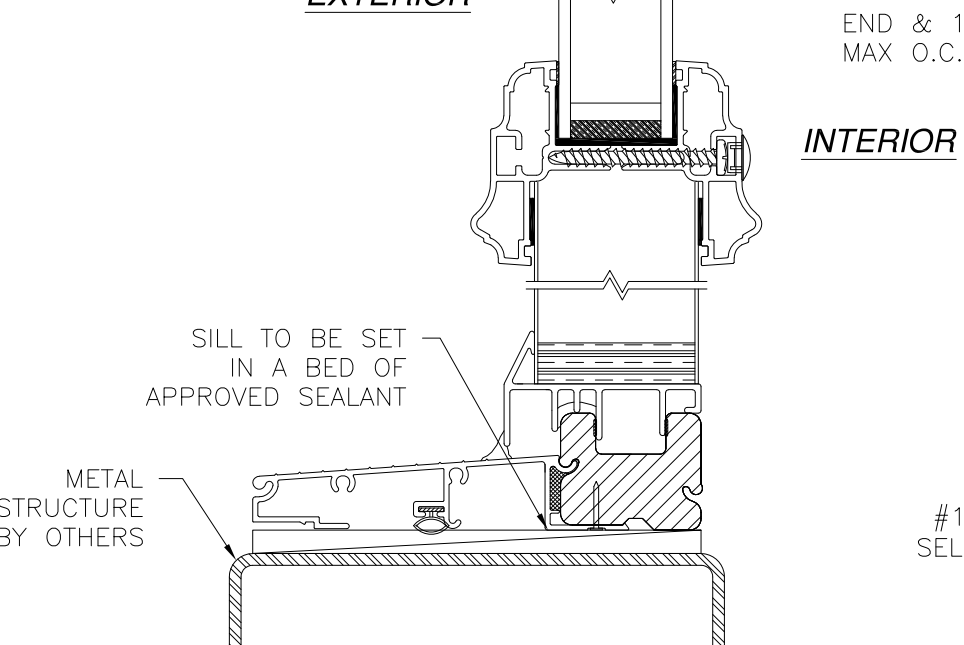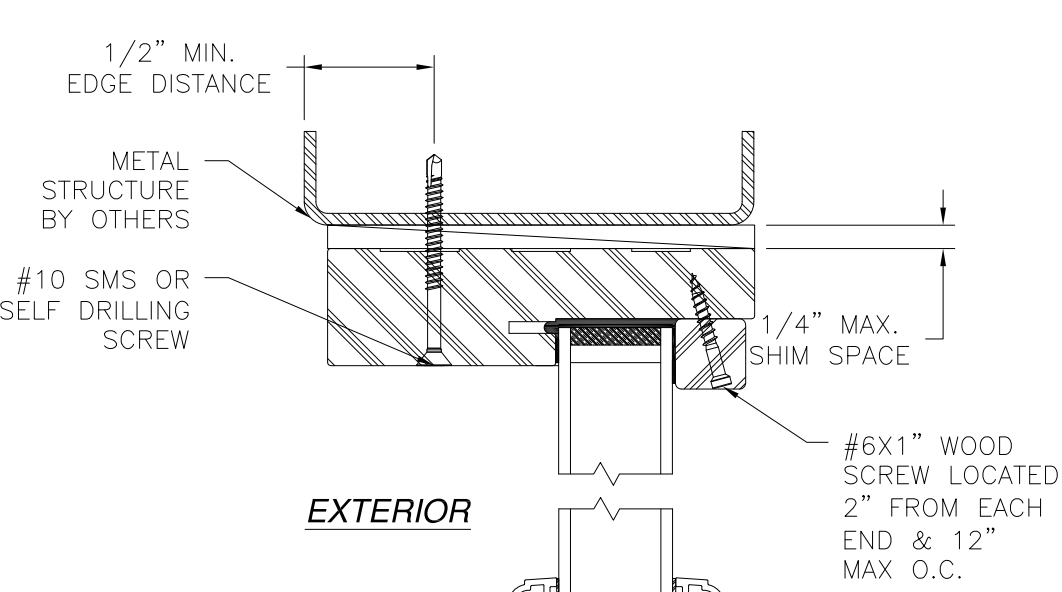


VERTICAL CROSS SECTION
SIDELITE AND TRANSOM INSTALLATION METAL STRUCTURE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

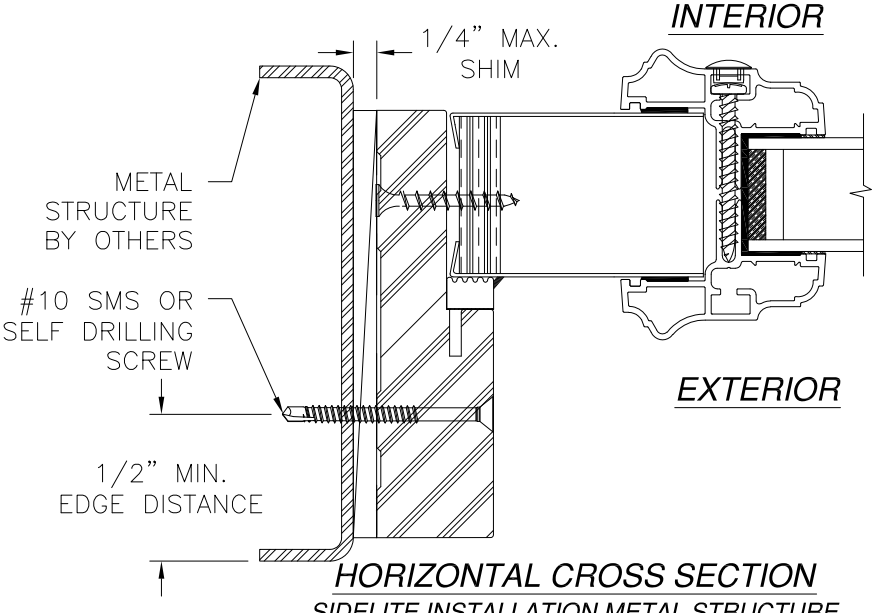

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION METAL STRUCTURE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

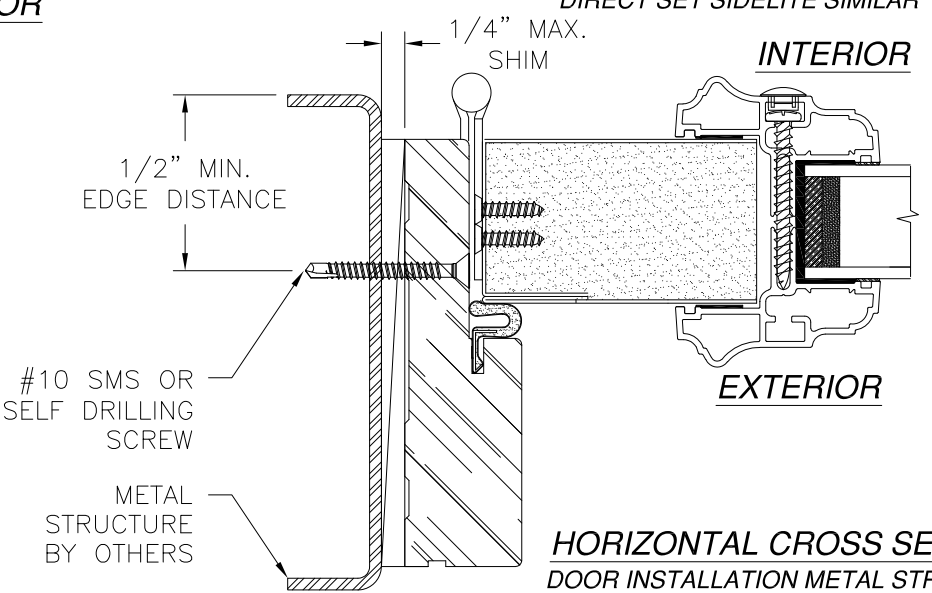

HORIZONTAL CROSS SECTION
DOOR INSTALLATION METAL STRUCTURE


SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
INSTALLATION DETAILS

DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 6 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

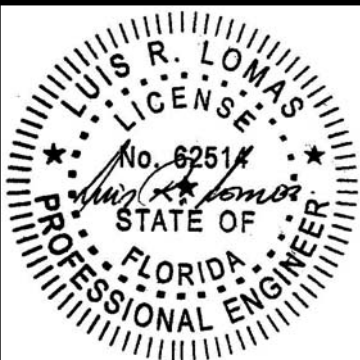

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

2" MIN.
EDGE DISTANCE

CONCRETE/
MASONRY
BY OTHERS

1 3/4" MIN.
EMBEDMENT

1X BUCK
SEE NOTE 4
SHEET 1

3/16" TAPCON

1/4" MAX.
SHIM SPACE

#6X1" WOOD SCREW
LOCATED 2" FROM
EACH END
& 12" MAX O.C.

EXTERIOR

INTERIOR

3/16" TAPCON

SILL TO BE SET
IN A BED OF
APPROVED SEALANT

MASONRY/
CONCRETE
BY OTHERS

1 1/4" MIN
EMBEDMENT

2" MIN
EDGE DISTANCE

VERTICAL CROSS SECTION

DOOR AND TRANSOM INSTALLATION MASONRY/CONCRETE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

2" MIN.
EDGE DISTANCE

CONCRETE/MASONRY
BY OTHERS

1 3/4" MIN.
EMBEDMENT

1X BUCK
SEE NOTE 4
SHEET 1

3/16" TAPCON

1/4" MAX.
SHIM SPACE

#6X1" WOOD SCREW
LOCATED 2" FROM EACH
END & 12" MAX O.C.

EXTERIOR

INTERIOR

3/16" TAPCON

SILL TO BE SET
IN A BED OF
APPROVED SEALANT

MASONRY/
CONCRETE
BY OTHERS

1 1/4" MIN
EMBEDMENT

2" MIN
EDGE DISTANCE

VERTICAL CROSS SECTION

SIDELITE AND TRANSOM INSTALLATION MASONRY/CONCRETE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

1 3/4" MIN.
EMBEDMENT

MASONRY/
CONCRETE
BY OTHERS

3/16" TAPCON

2" MIN.
EDGE DIST.

1 3/4" MIN.
EMBEDMENT

2" MIN.
EDGE DIST.

3/16" TAPCON

MASONRY/
CONCRETE
BY OTHERS

INTERIOR

EXTERIOR

1 3/4" MIN.
EMBEDMENT

MASONRY/
CONCRETE
BY OTHERS

3/16" TAPCON

2" MIN.
EDGE DIST.

1 3/4" MIN.
EMBEDMENT

2" MIN.
EDGE DIST.

3/16" TAPCON

MASONRY/
CONCRETE
BY OTHERS

INTERIOR

EXTERIOR

INTERIOR

EXTERIOR

HORIZONTAL CROSS SECTION

SIDELITE INSTALLATION CONCRETE/MASONRY
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

INTERIOR

EXTERIOR

HORIZONTAL CROSS SECTION

DOOR INSTALLATION CONCRETE/MASONRY

SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
INSTALLATION DETAILS

DRAWN:
J.L.

DWG NO.
08-02069

REV
J

SCALE NTS

DATE 06/19/13

SHEET 7 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS
P.E.
No. 62514
STATE OF
FLORIDA
PROFESSIONAL ENGINEER




Luis R. Lomas P.E.
FL No.: 62514

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS,
NOT SHOWN FOR CLARITY.

2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE
DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

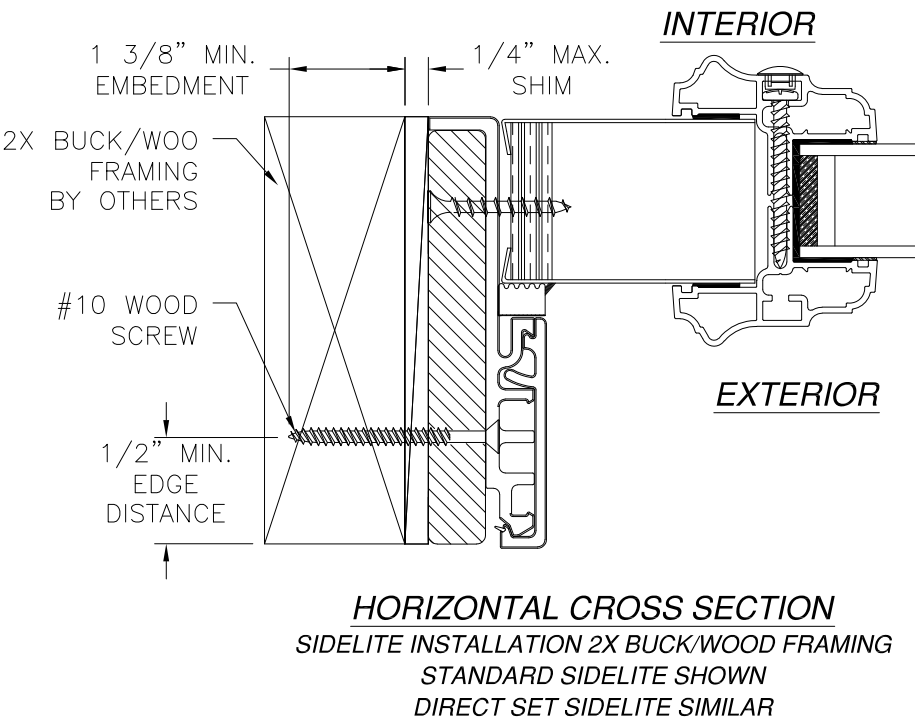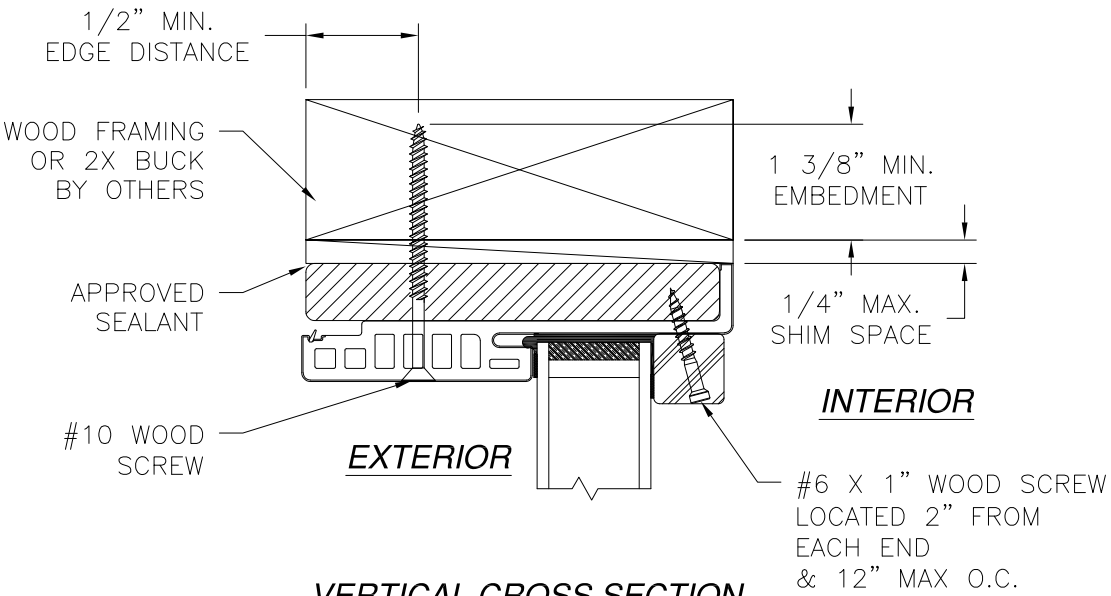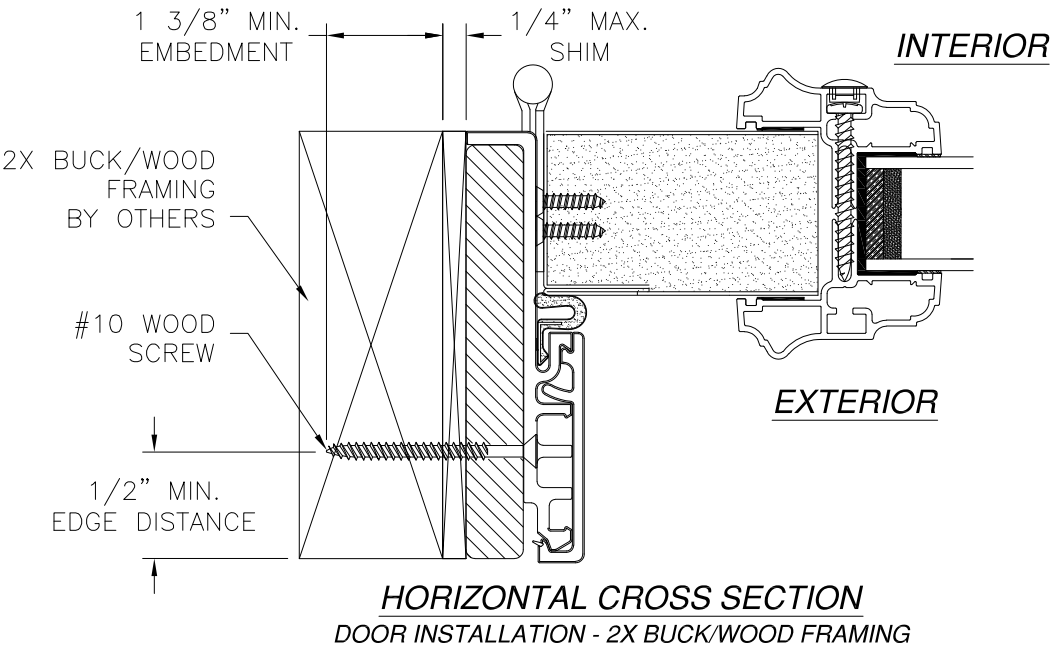

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
INSTALLATION DETAILS W/FUSION FRAME

DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 8 OF 16




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 11/27/2023



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

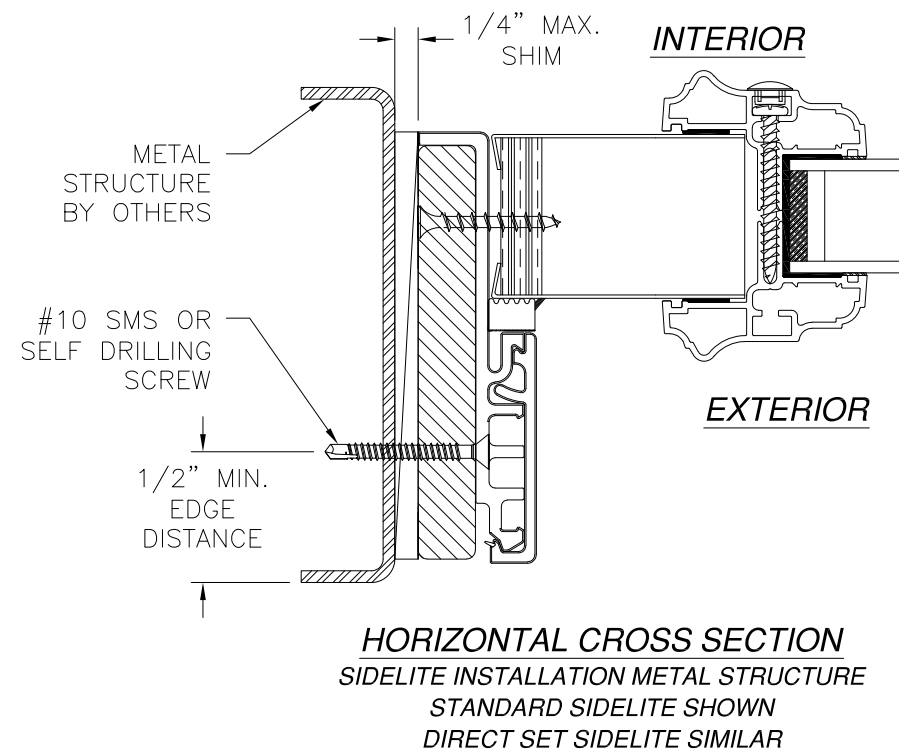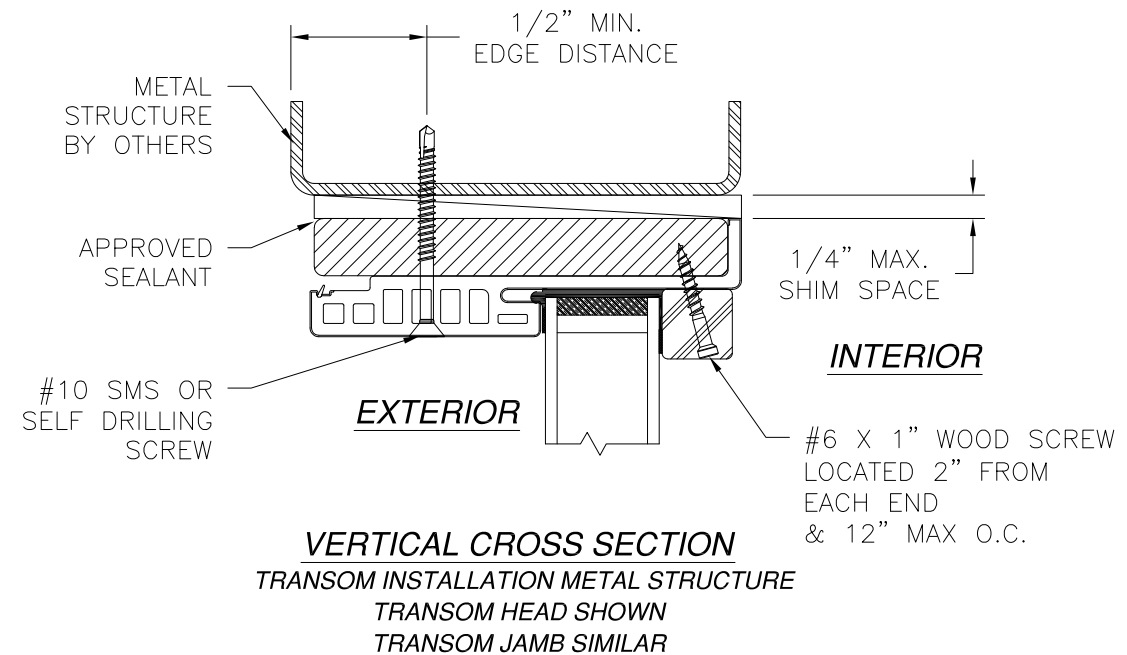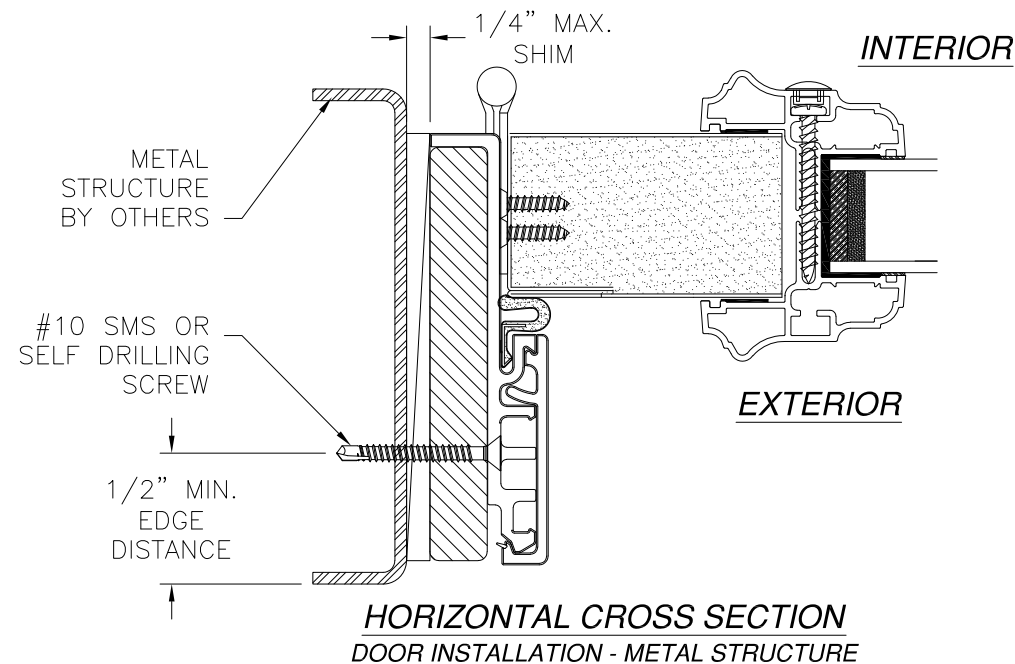


- NOTES:
- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 - PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 11/27/2023


PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS IS GLAZED SINGLE DOOR W/SIDELITES & TRANSOM NON-IMPACT INSTALLATION DETAILS W/FUSION FRAME		
DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 9 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

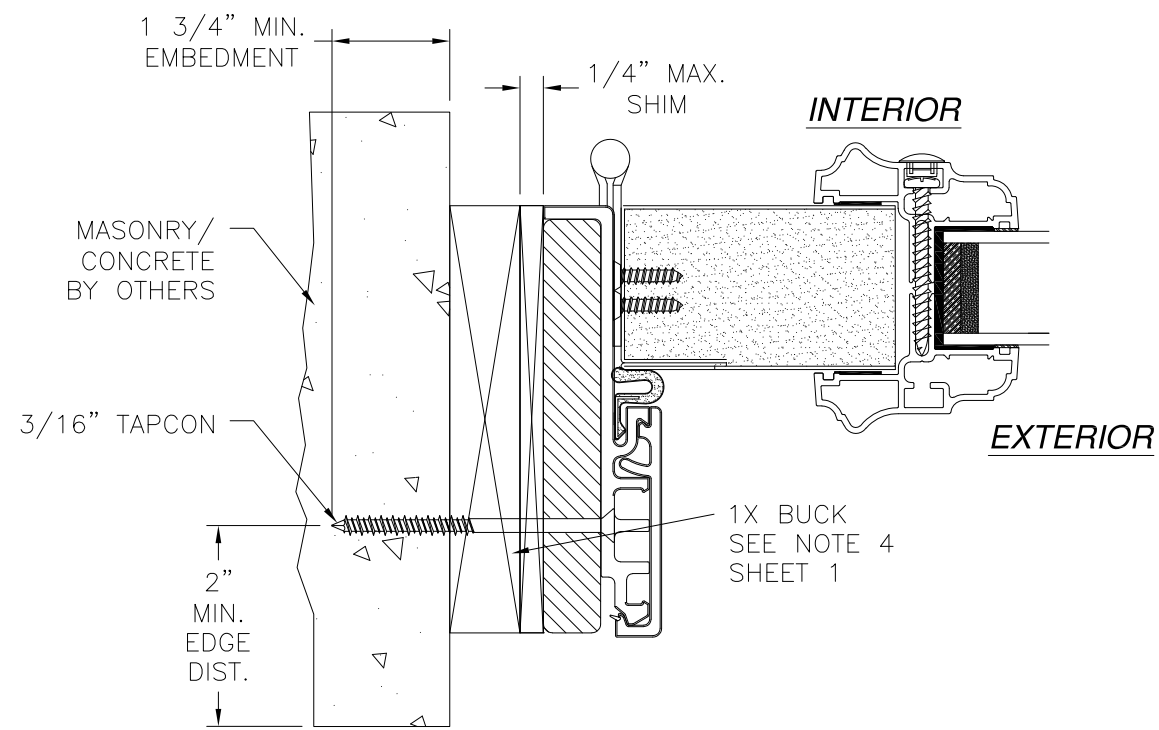

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - MASONRY/CONCRETE

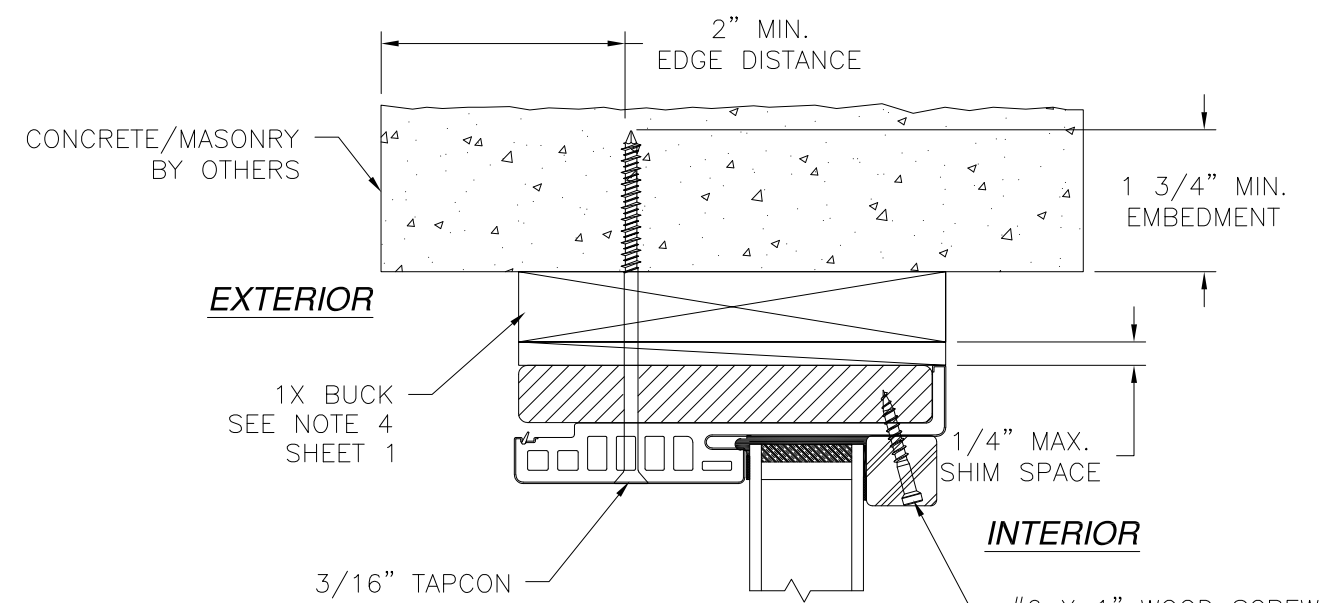

VERTICAL CROSS SECTION
TRANSOM INSTALLATION MASONRY/CONCRETE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

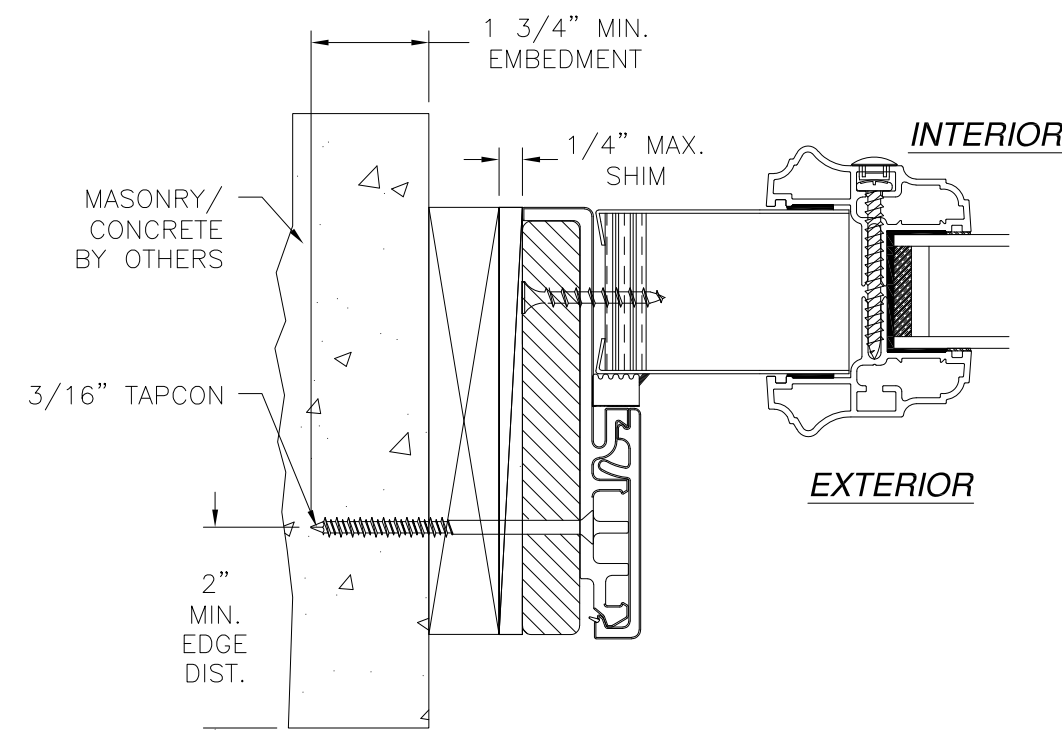

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION MASONRY/CONCRETE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
INSTALLATION DETAILS W/FUSION FRAME




DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 10 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


LUIS R. LOMAS
LICENSED PROFESSIONAL ENGINEER
No. 62514
STATE OF FLORIDA

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

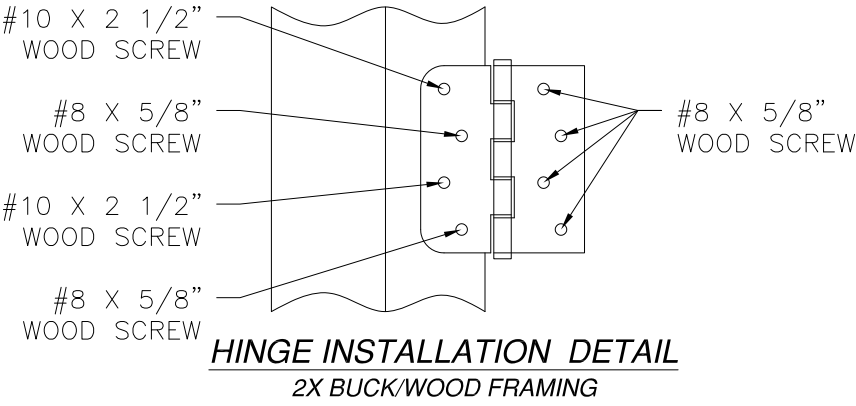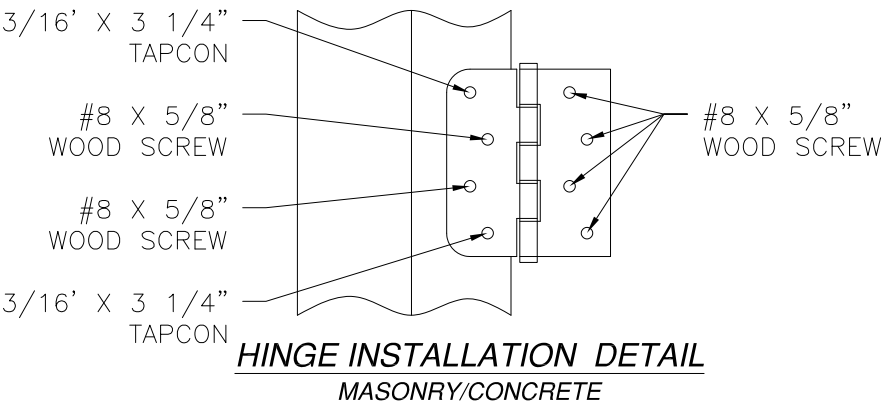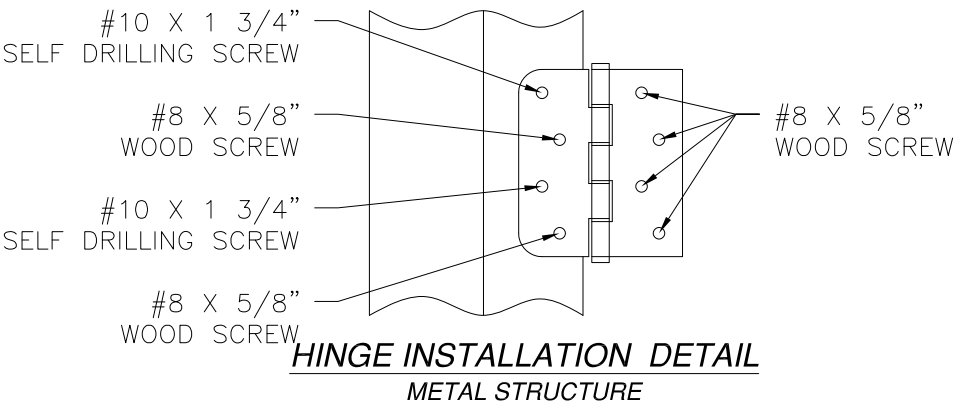

APPROVED LITE CONFIGURATIONS

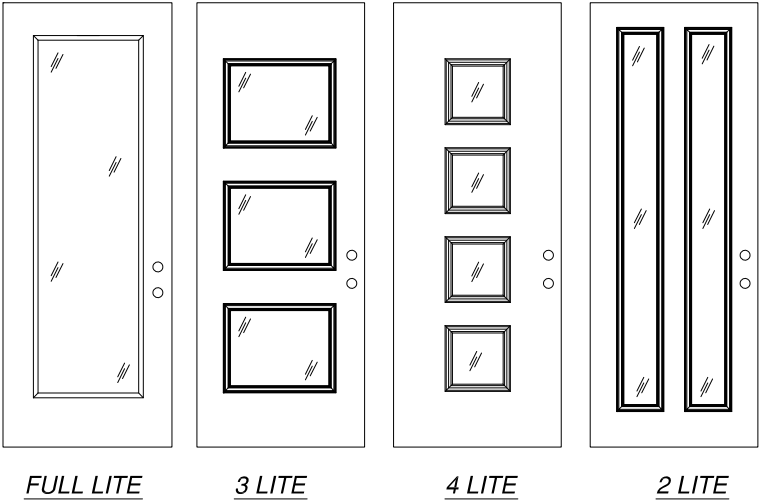

LITE CONFIGURATIONS SHOWN ARE FOR REFERENCE ONLY. MULTIPLE LITE CONFIGURATIONS ARE APPROVED AS LONG AS LITE SIZE DOES NOT EXCEED 11.5 FT²

SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
HINGE DETAILS & APPROVED CONFIGURATIONS

DRAWN:
J.L.

DWG NO.
08-02069

REV
J

SCALE NTS


DATE 06/19/13

SHEET 11 OF 16




L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com



Luis R. Lomas P.E.
FL No.: 62514

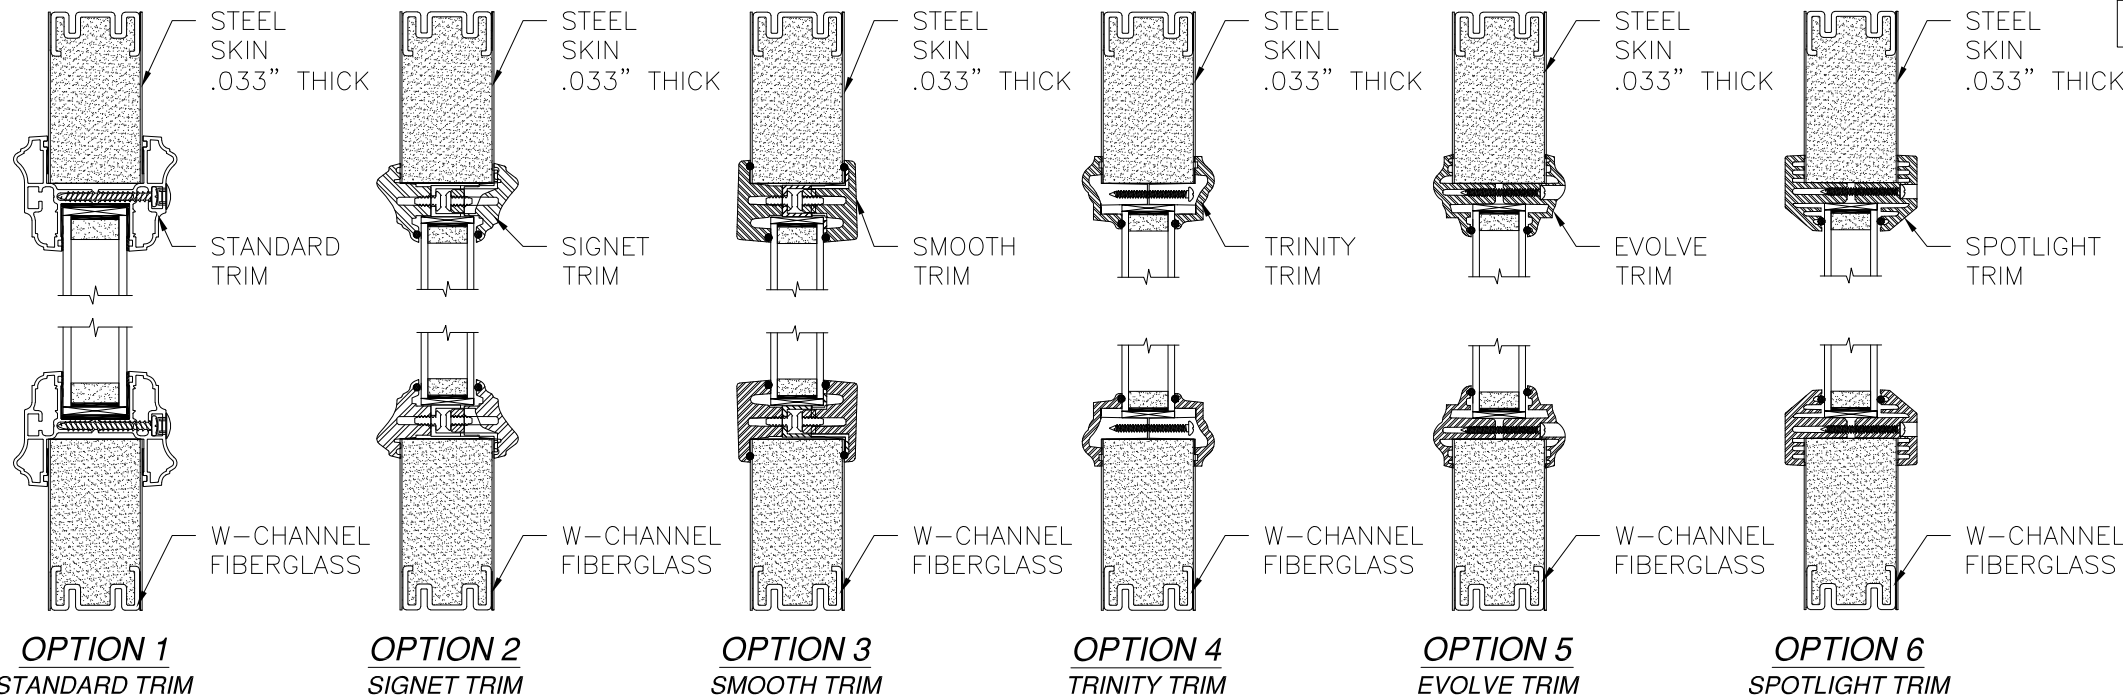

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

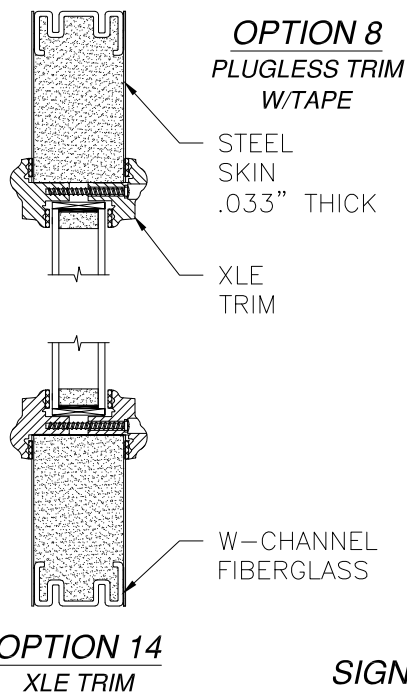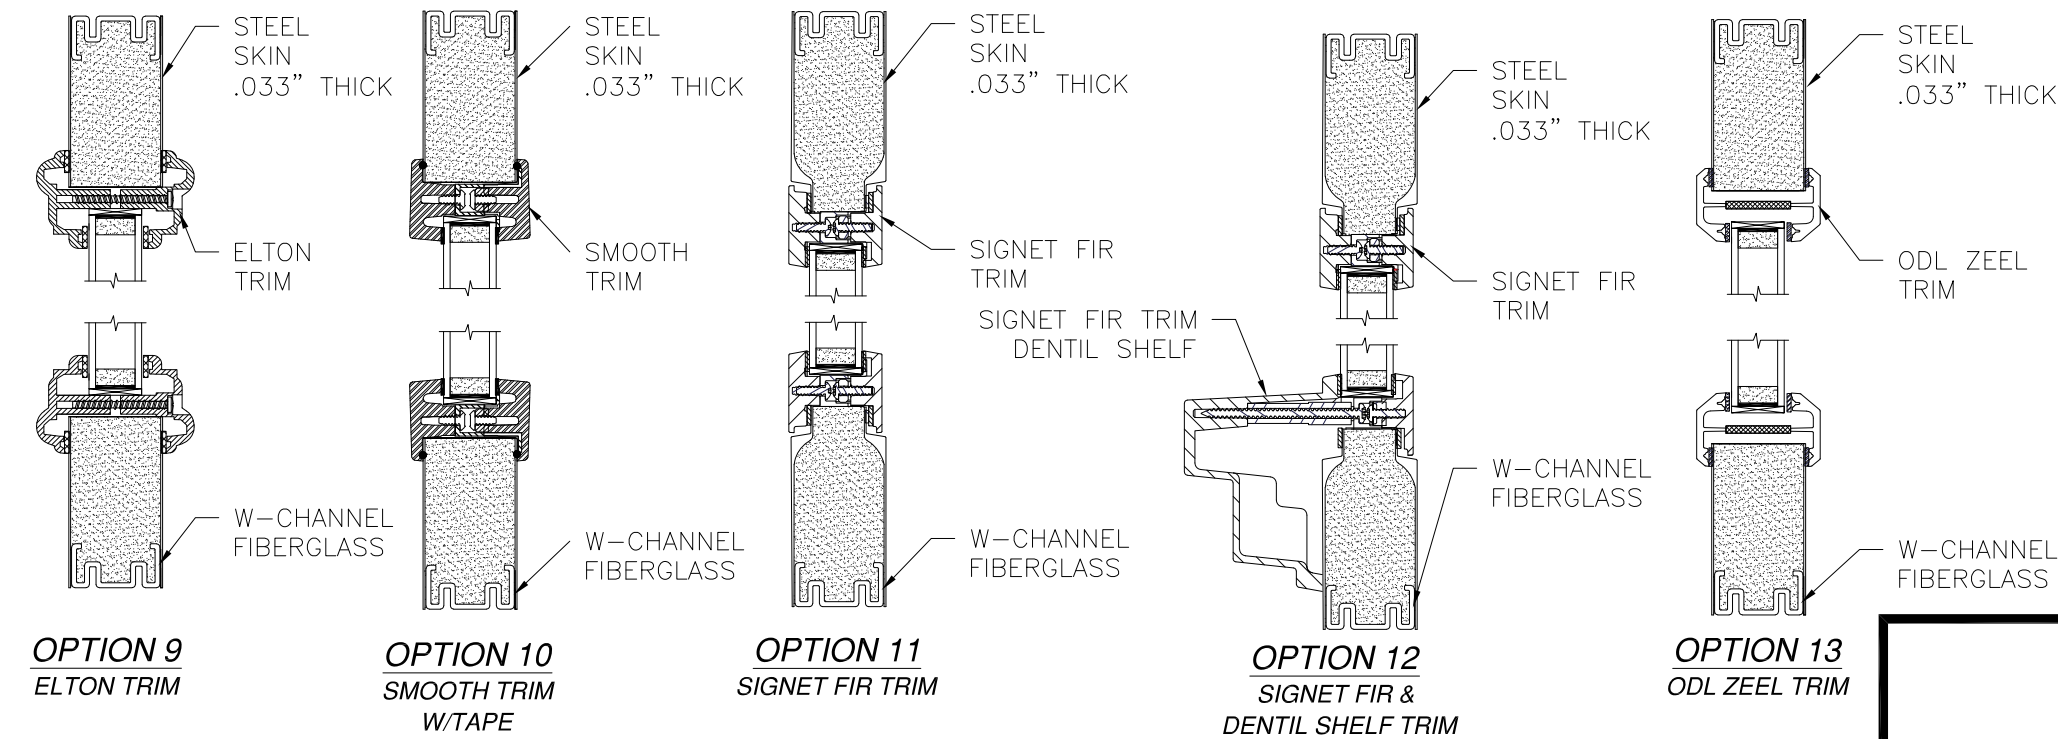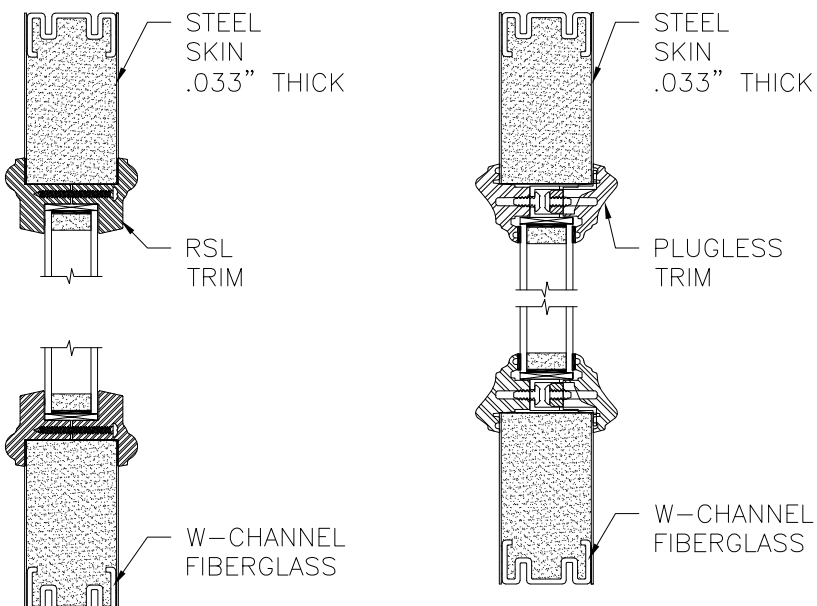

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN:
J.L.

DWG NO.
08-02069

REV
J

SCALE
NTS

DATE
06/19/13


SHEET
12 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com




SIGNED: 11/27/2023



Luis R. Lomas P.E.
FL No.: 62514

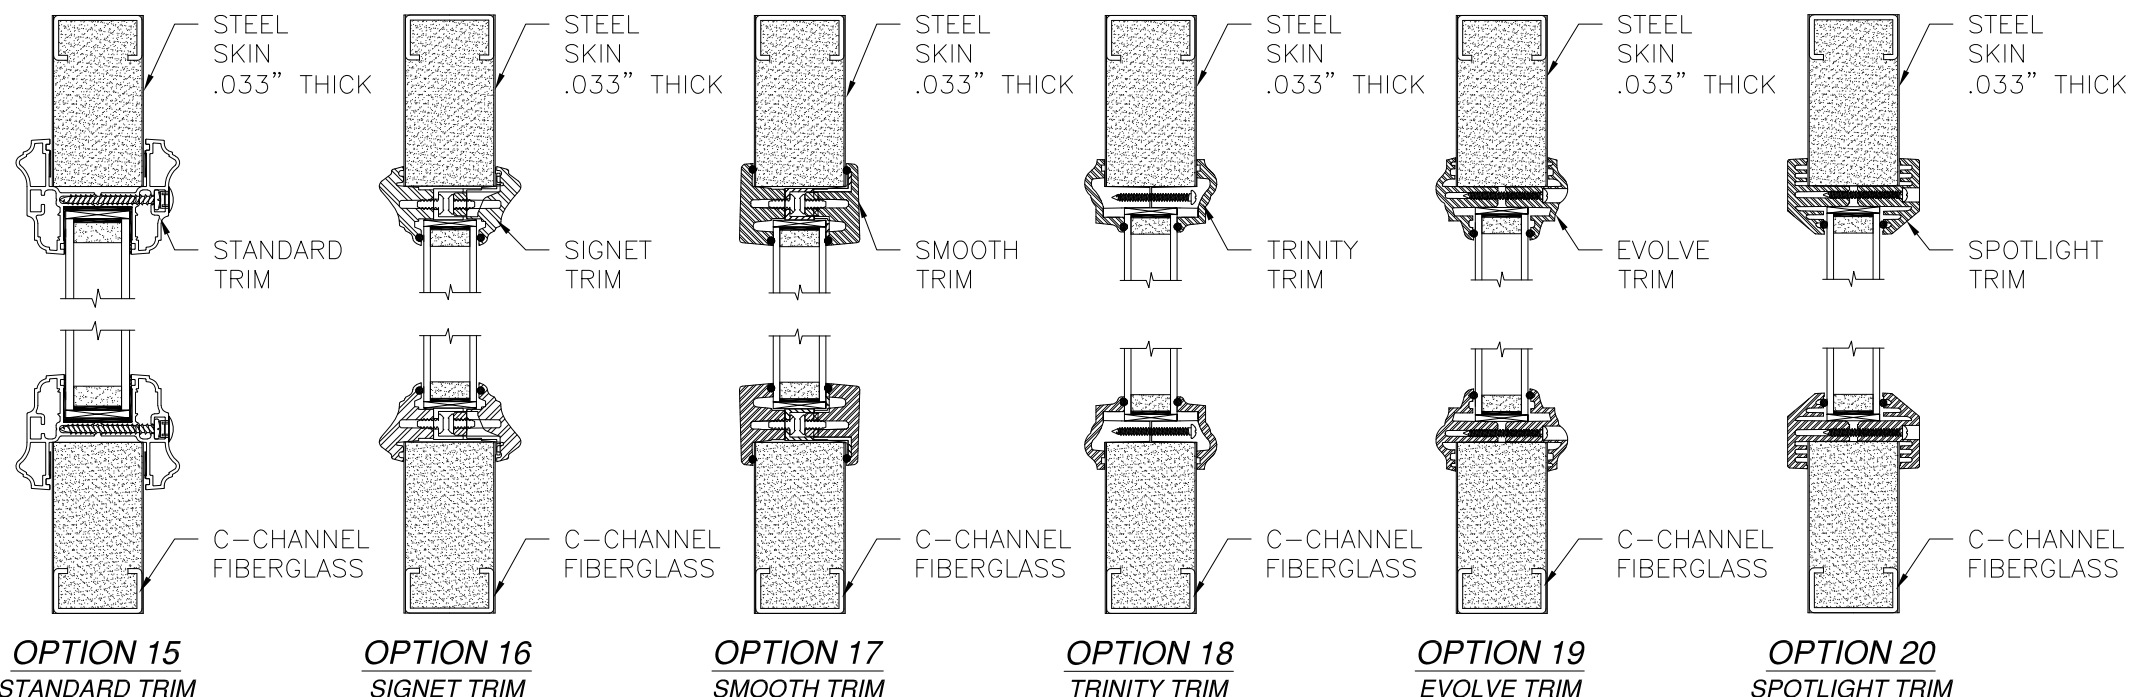

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

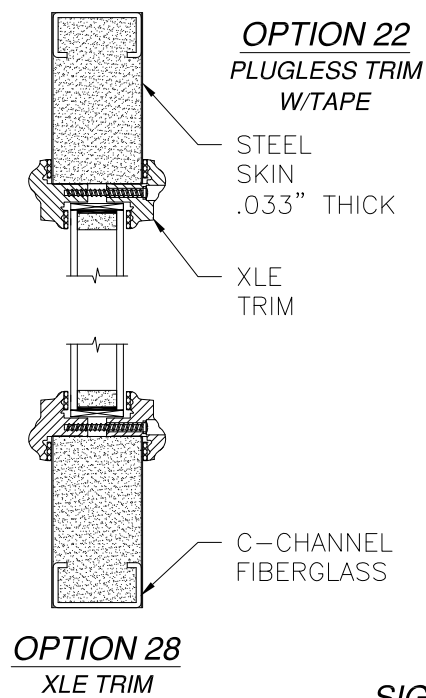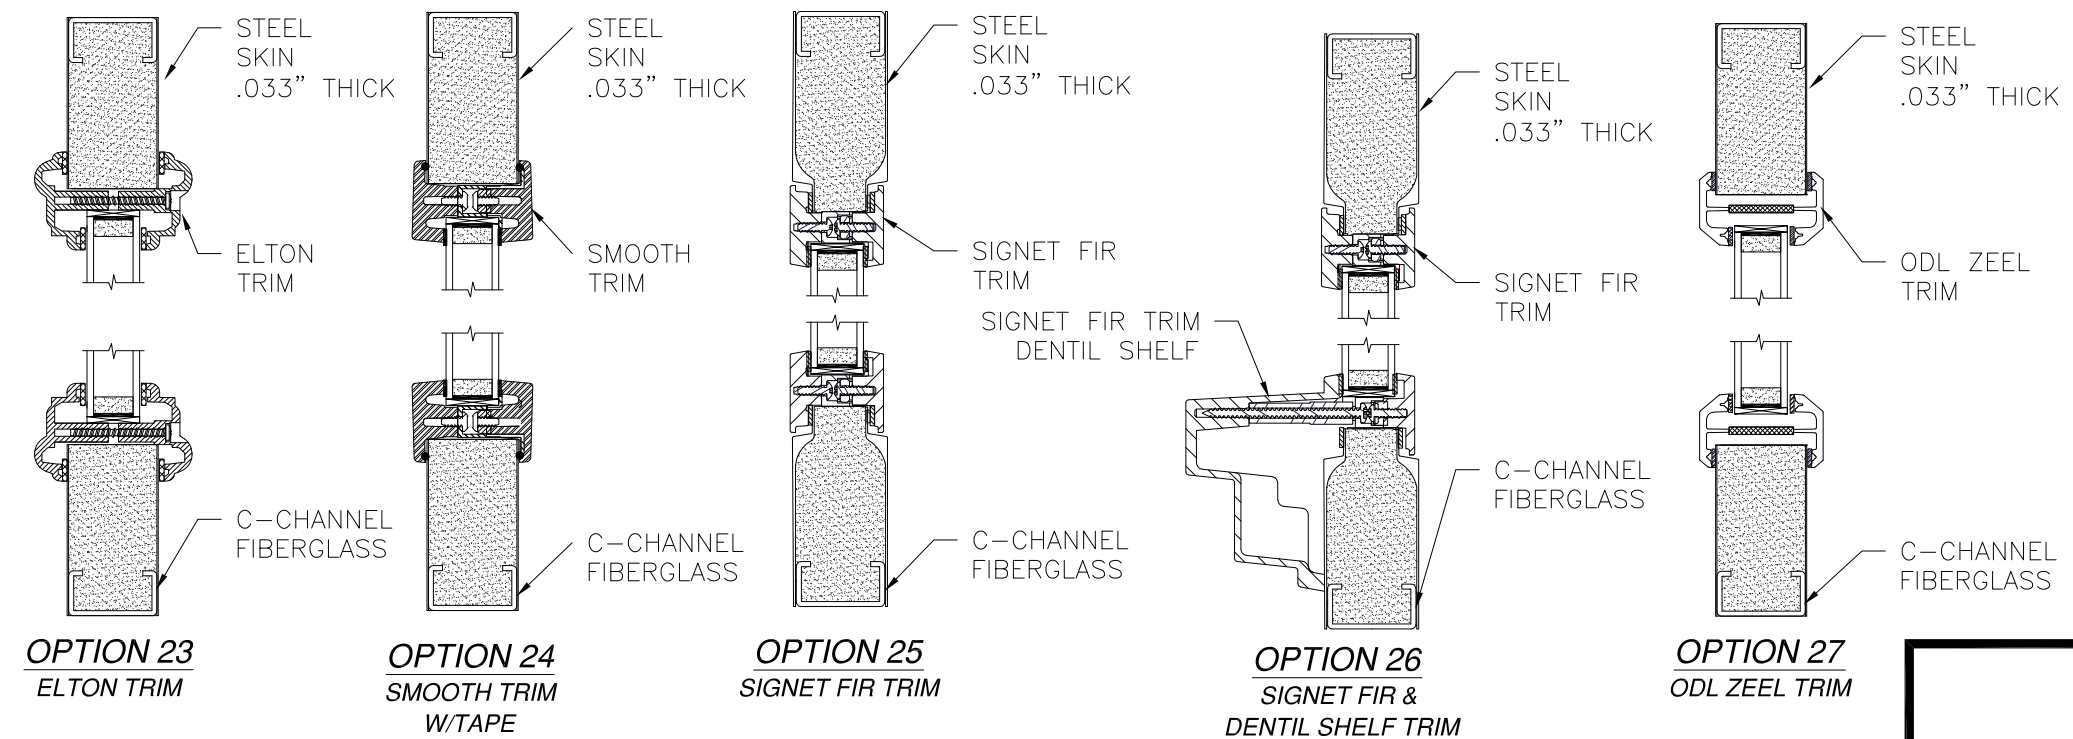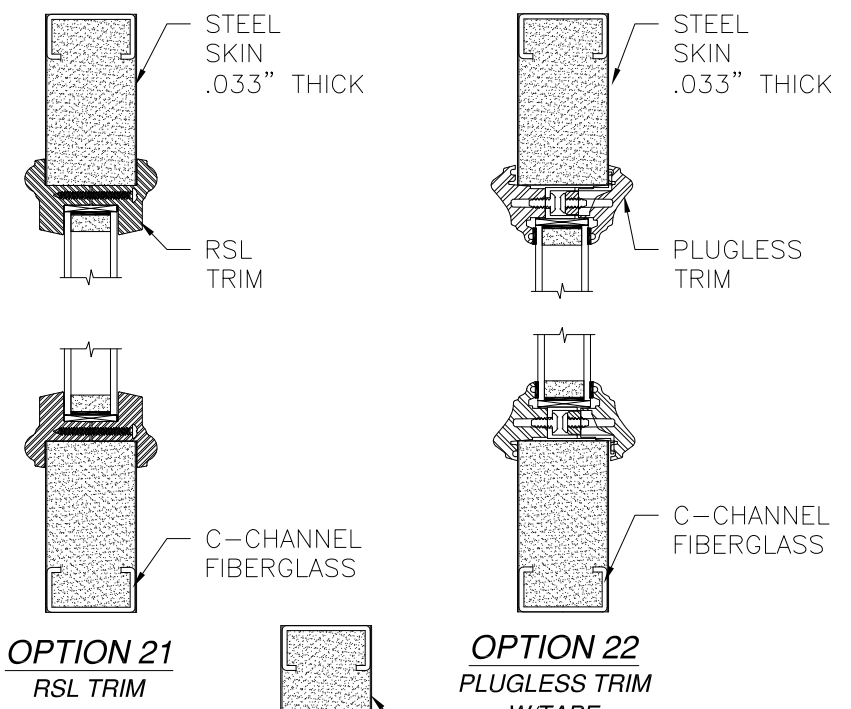

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN:
J.L.

DWG NO.
08-02069

REV
J

SCALE
NTS


DATE
06/19/13

SHEET
13 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 11/27/2023

Luis R. Lomas P.E.
FL No.: 62514

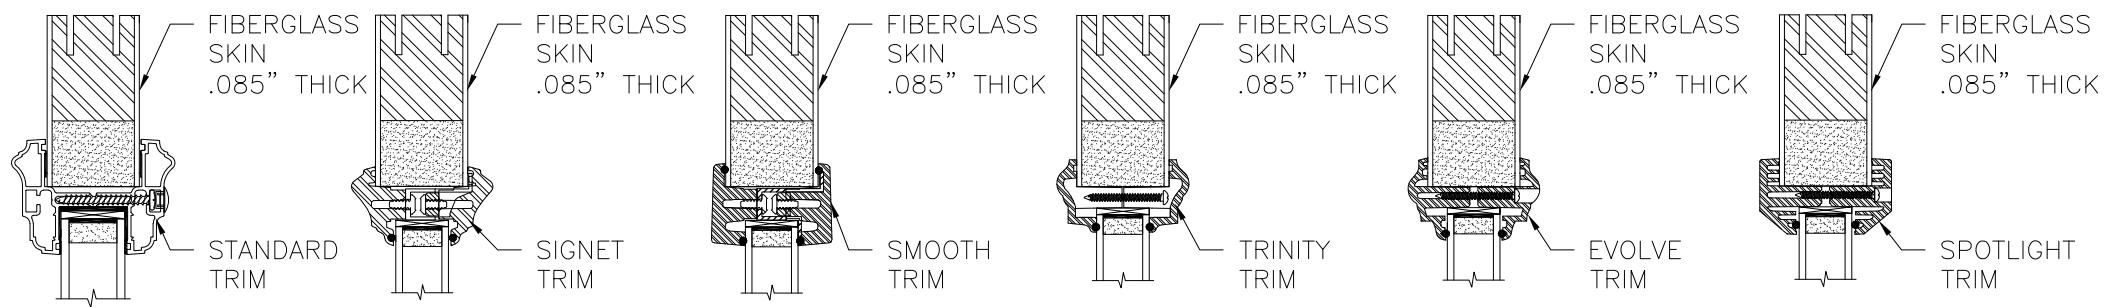

OPTION 29
STANDARD TRIM

OPTION 30
SIGNET TRIM


OPTION 31
SMOOTH TRIM

OPTION 32
TRINITY TRIM

OPTION 33
EVOLVE TRIM


OPTION 34
SPOTLIGHT TRIM

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

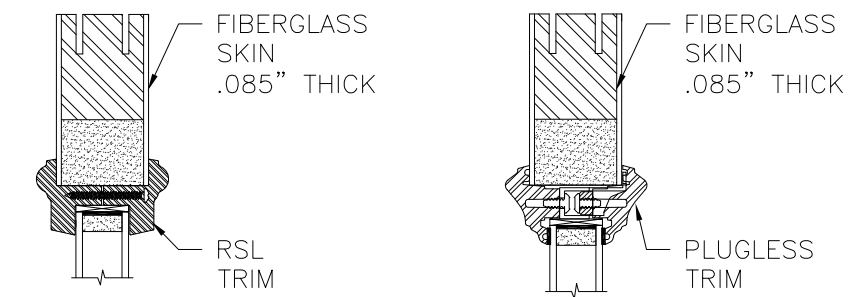

OPTION 35
RSL TRIM

OPTION 36
PLUGLESS TRIM
W/TAPE

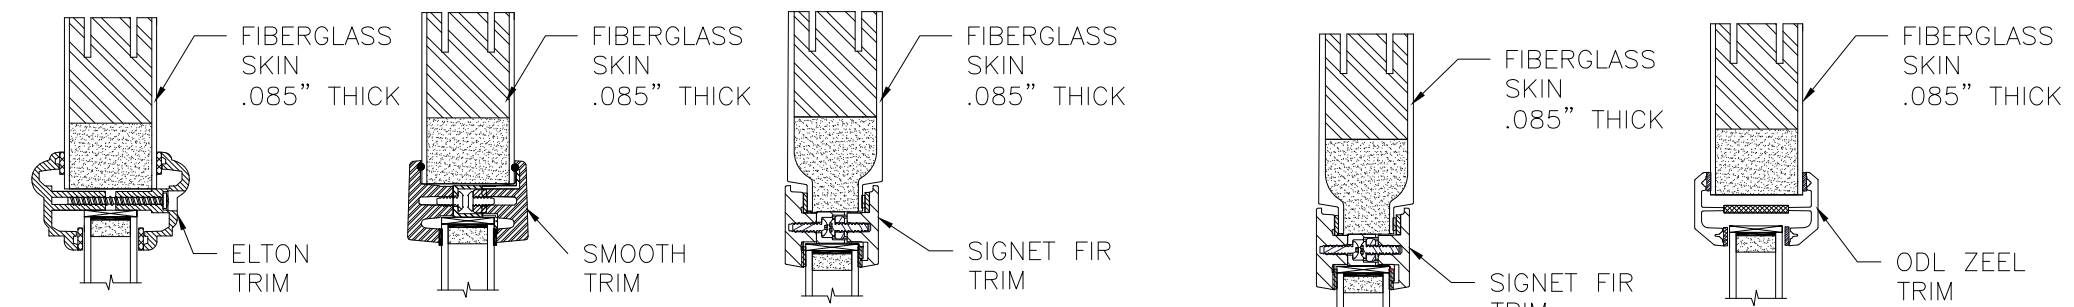


OPTION 37
ELTON TRIM

OPTION 38
SMOOTH TRIM
W/TAPE

OPTION 39
SIGNET FIR TRIM

OPTION 40
SIGNET FIR &
DENTIL SHELF TRIM

OPTION 41
ODL ZEEL TRIM

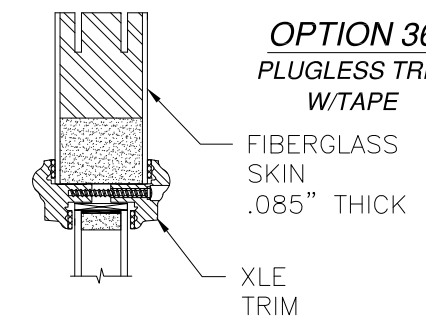

OPTION 42
XLE TRIM

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681






STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 14 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 11/27/2023

Luis R. Lomas P.E.
FL No.: 62514

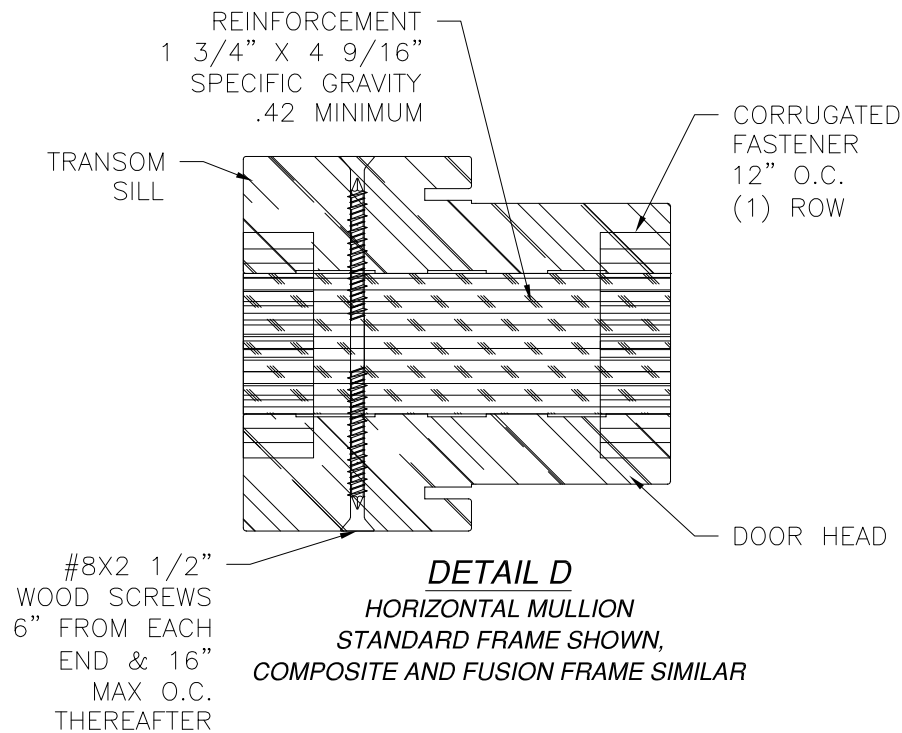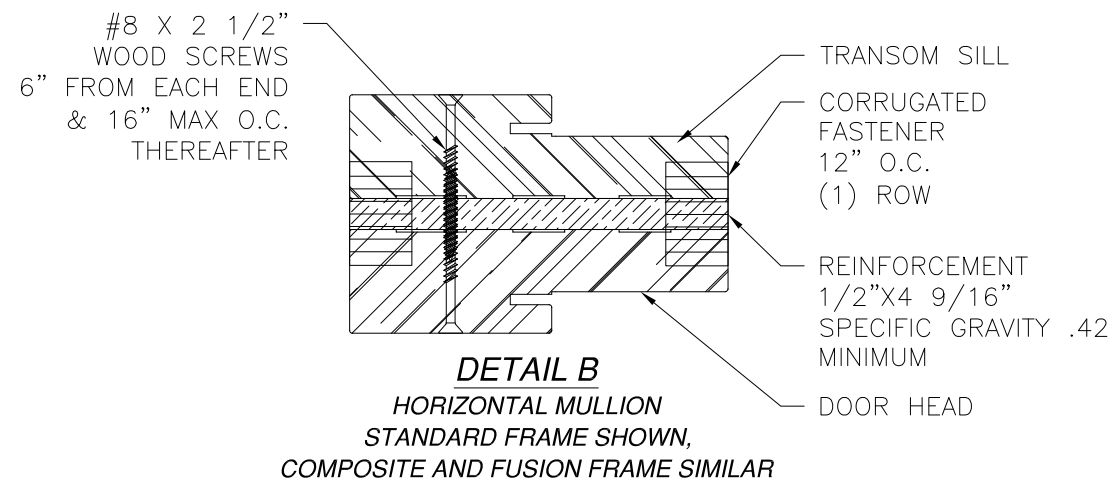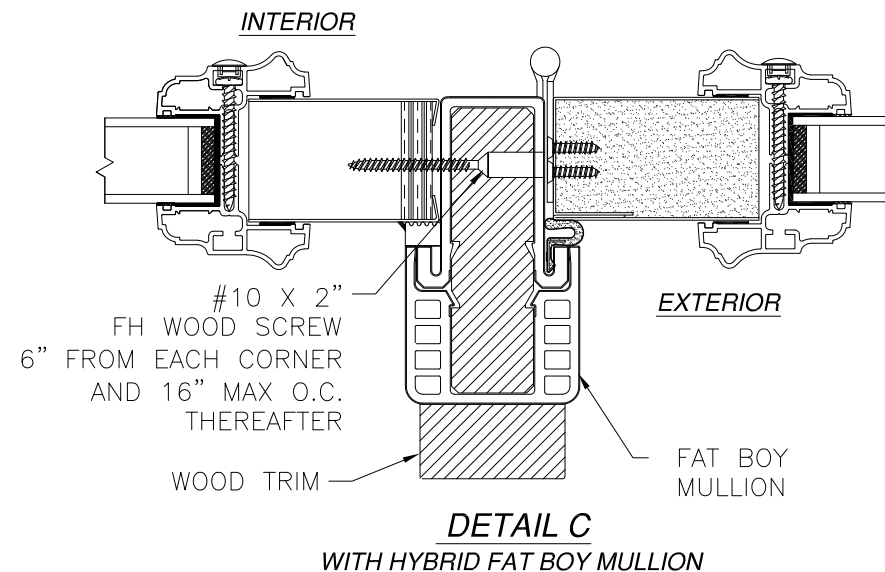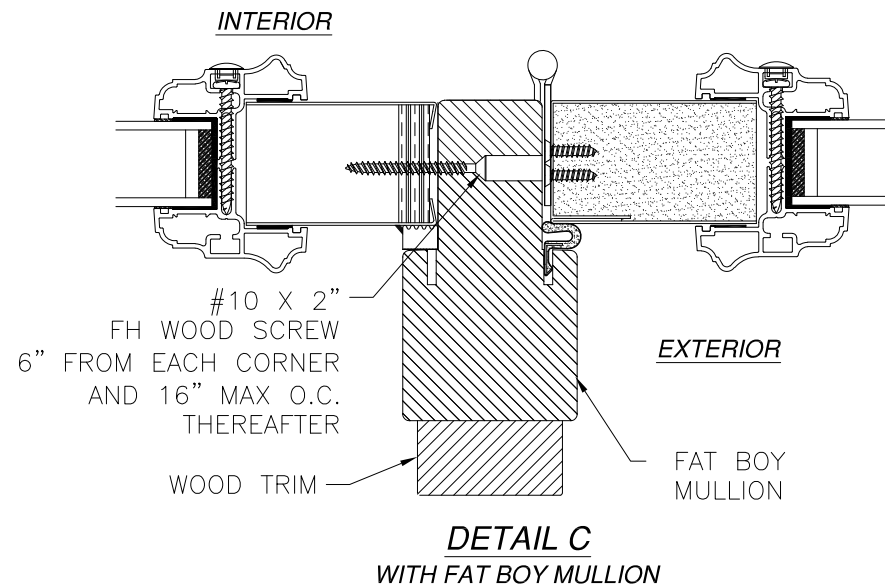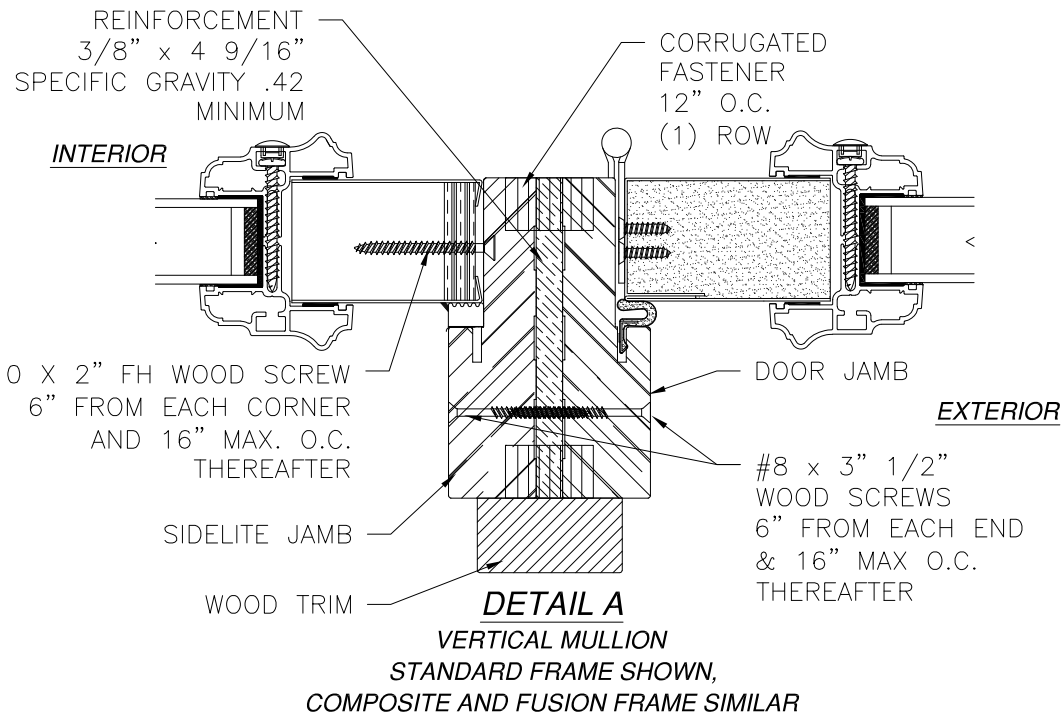


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

SIGNED: 11/27/2023


PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS IS GLAZED SINGLE DOOR W/SIDELITES & TRANSOM NON-IMPACT MULLION DETAILS		
DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 15 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		




Luis R. Lomas P.E.
FL No.: 62514

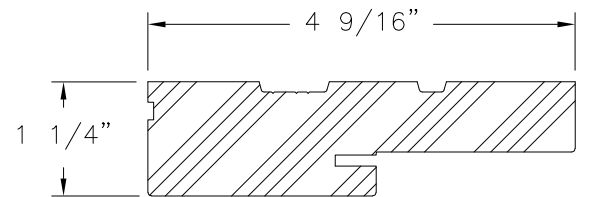


COMPOSITE FRAME PROFILE

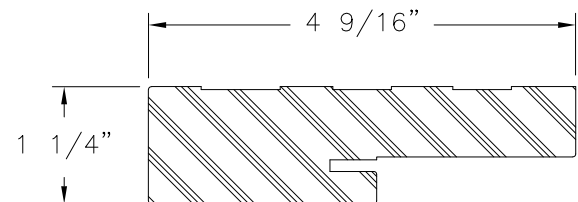


WOOD FRAME PROFILE

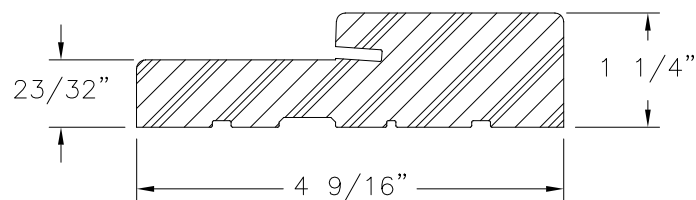


**FRAMESAVER
COMPOSITE**

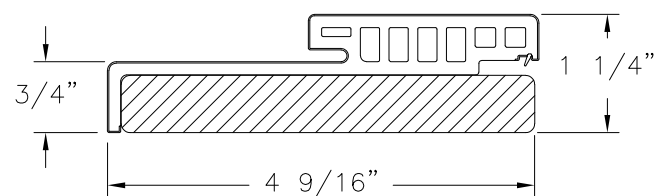


**HYBRID HEAD
WOOD/COMPOSITE**

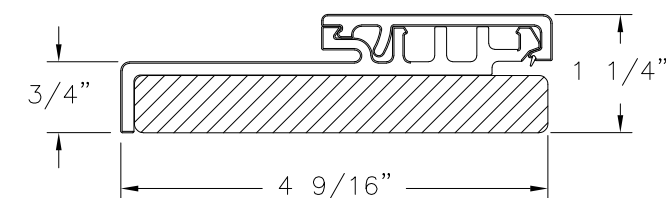


**HYBRID JAMB
WOOD/COMPOSITE**

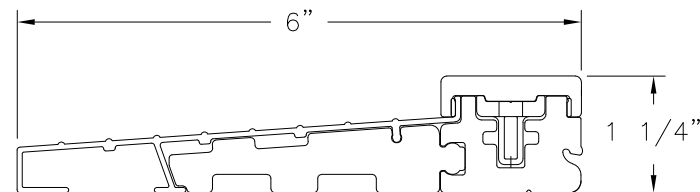


STANDARD INSWING THRESHOLD

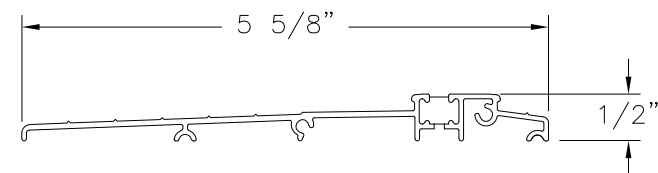


ADA THRESHOLD

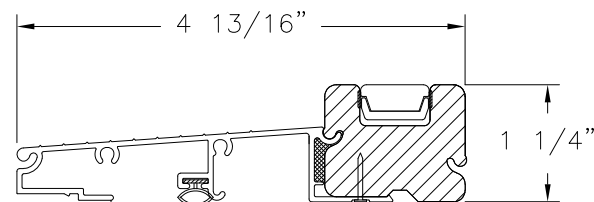


SAHARA INSWING THRESHOLD

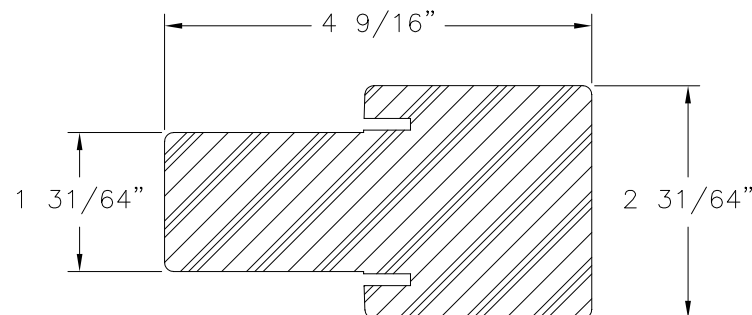


**FAT BOY MULLION
COMPOSITE**

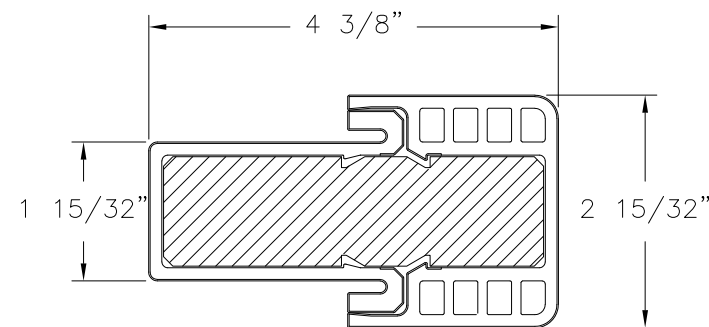


**HYBRID FAT BOY MULLION
COMPOSITE**

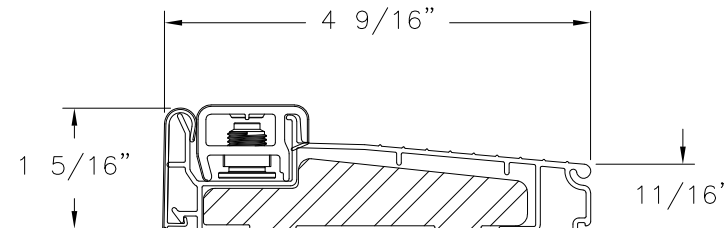


INSWING SILL ZAIL4565

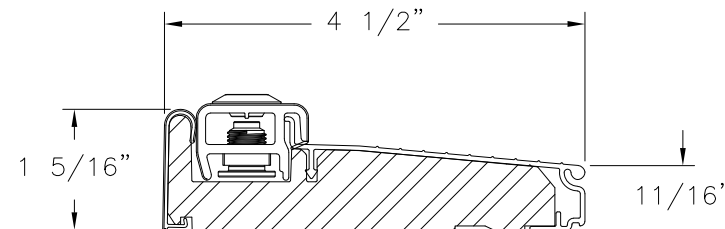


INSWING SILL ZAI4565F

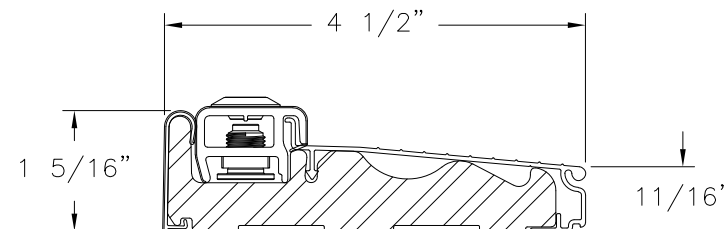


INSWING SILL ZAILH4565

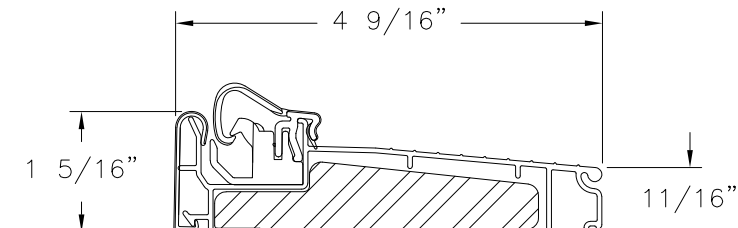

INSWING SILL ZACL4565

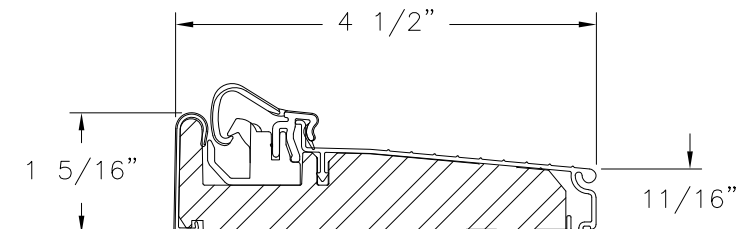

INSWING SILL ZAC4565F

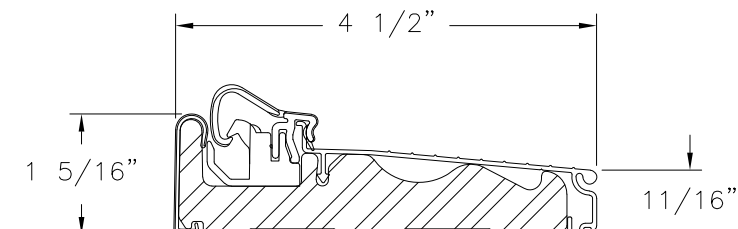

INSWING SILL ZACLH4565

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
J	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

SIGNED: 11/27/2023


PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS IS GLAZED SINGLE DOOR
W/SIDELITES & TRANSOM NON-IMPACT
COMPONENTS

DRAWN: J.L.	DWG NO. 08-02069	REV J
SCALE NTS	DATE 06/19/13	SHEET 16 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

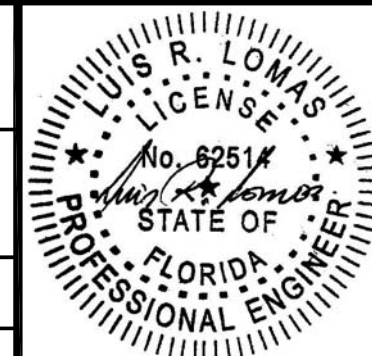

Luis R. Lomas P.E.
FL No.: 62514