

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.

2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.

3. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.

4. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.

5. ALLOWABLE STRESS INCREASE OF 1/3 WAS NOT USED IN THE DESIGN OF THE PRODUCT SHOWN HEREIN. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.

6. FRAME MATERIAL: WOOD WITH G=.46 MINIMUM SPECIFIC GRAVITY, OR COMPOSITE, OR FRAMESAVER, OR FUSION FRAME.
DOOR SKIN MATERIAL: STEEL .033” THICK (MINIMUM) AND FIBERGLASS .085” THICK (MINIMUM).
SIDELITE SKIN MATERIAL: STEEL .022” THICK (MINIMUM)

7. UNITS MUST BE GLAZED PER ASTM E1300, WITH SAFETY GLAZING.

8. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

9. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
10. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

11. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

12. FOR ANCHORING INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

13. ALL FASTENERS TO BE CORROSION RESISTANT.

14. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

14.1. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42

14.2. CONCRETE – MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.

14.3. MASONRY – GROUT FILLED STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).

14.4. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .048” THICK MINIMUM

15. DOOR CONSTRUCTION MAYBE CONTINUOUS HEAD FRAME AND CONTINUOUS THRESHOLD OR BOX CONSTRUCTION.

SIGNED: 11/27/2023

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 – 3	ELEVATIONS AND APPROVED CONFIGURATIONS
4	ANCHORING LAYOUTS
5 – 12	INSTALLATION DETAILS
13 – 15	APPROVED SLABS
16	COMPONENTS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
NOTES

DRAWN:
V.L.

DWG NO.
08-02070


REV
K

SCALE NTS

DATE 06/19/13


SHEET 1 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

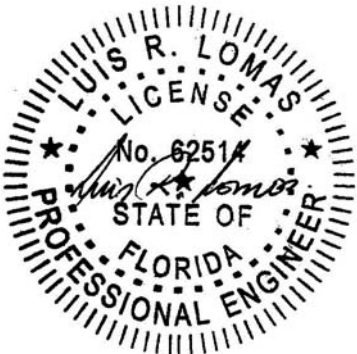


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

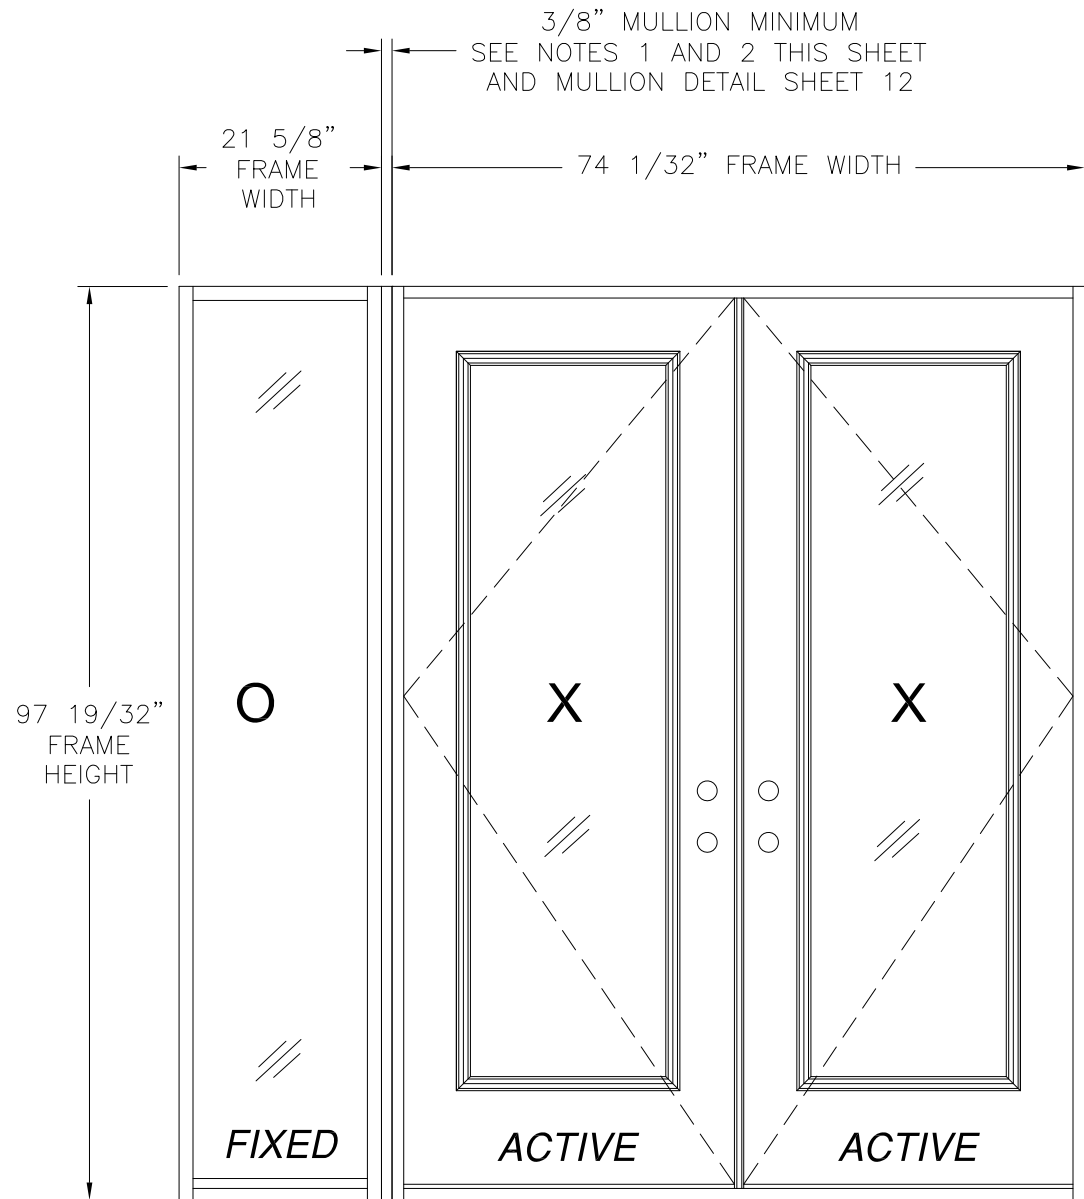

DOUBLE W/ DIRECT SET SIDELITE
EXTERIOR VIEW
OXX SHOWN XXO ALSO APPROVED

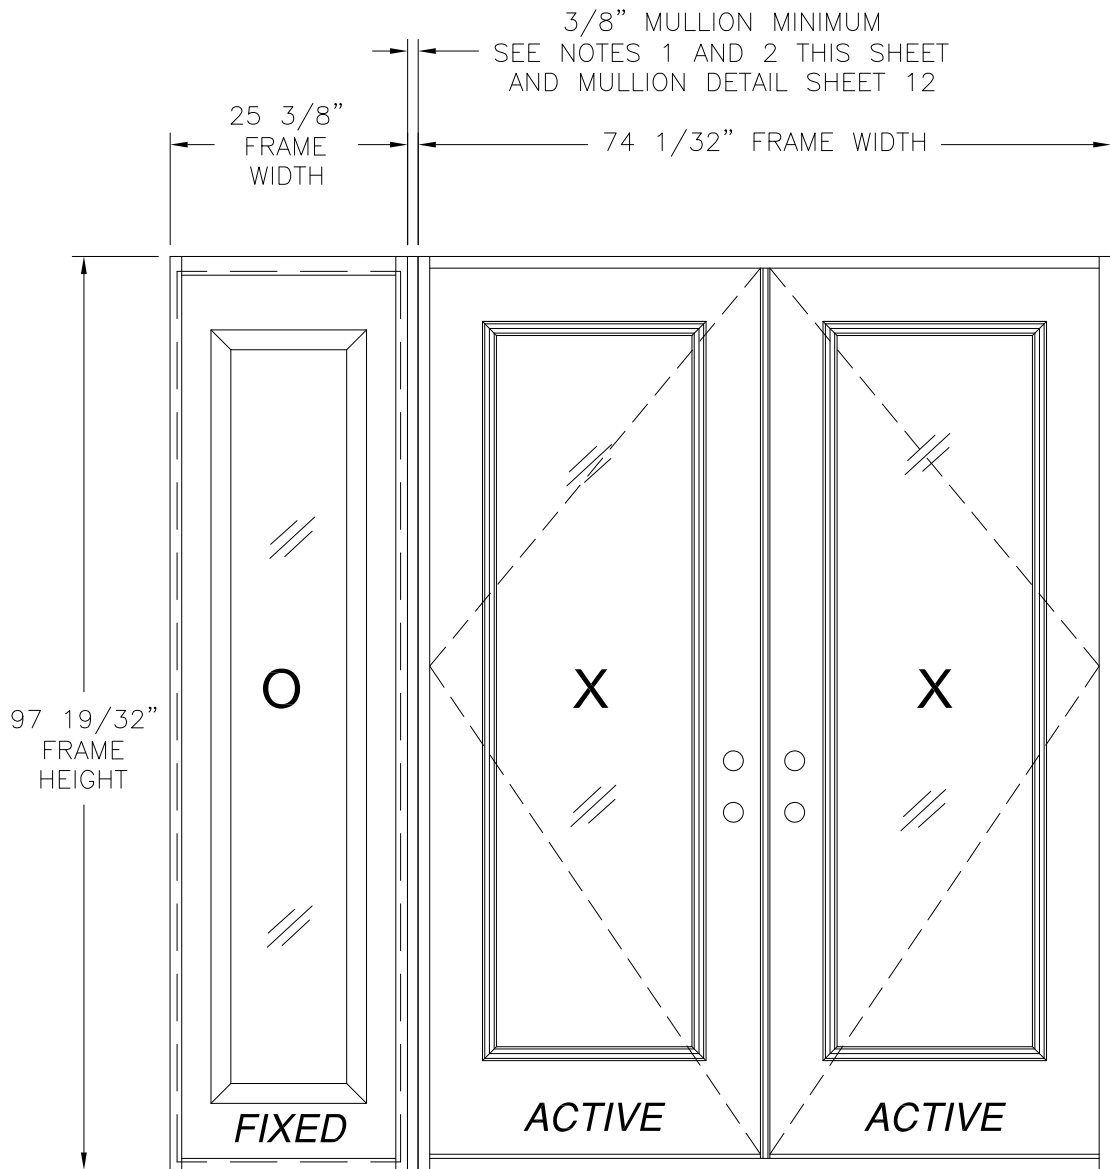

DOUBLE WITH STANDARD SIDELITE
EXTERIOR VIEW
OXX SHOWN XXO ALSO APPROVED

DESIGN PRESSURE RATING	IMPACT RATING
±55.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-52.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB AND PANOLOCK MULTI-POINT

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-50.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB AND PANOLOCK MULTI-POINT

D.L.O. NOTES:

1. MAXIMUM DOOR D.L.O.: 20 3/8" X 78 1/2"
2. MAXIMUM STD. SIDELITE D.L.O.: 12 3/8" X 78 3/8"
3. MAXIMUM DIRECT SET SIDELITE D.L.O.: 18 5/8" X 93 3/4"


NOTES:

1. MAXIMUM ALLOWED BUILD UP TO BE 7" AT EACH VERTICAL MULLION.
2. IF SIDELITE WIDTH IS 16" OR LESS NO VERTICAL MULLION IS REQUIRED.

35 3/4" x 94 15/16" PANEL SIZE SHOWN. OTHER SIZES ARE APPROVED
AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 23.56 FT²


PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR W/SIDELITES NON-IMPACT ELEVATIONS		
DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 2 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 11/27/2023

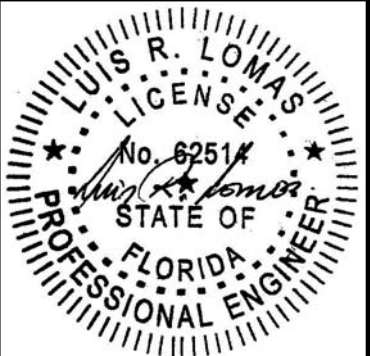

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

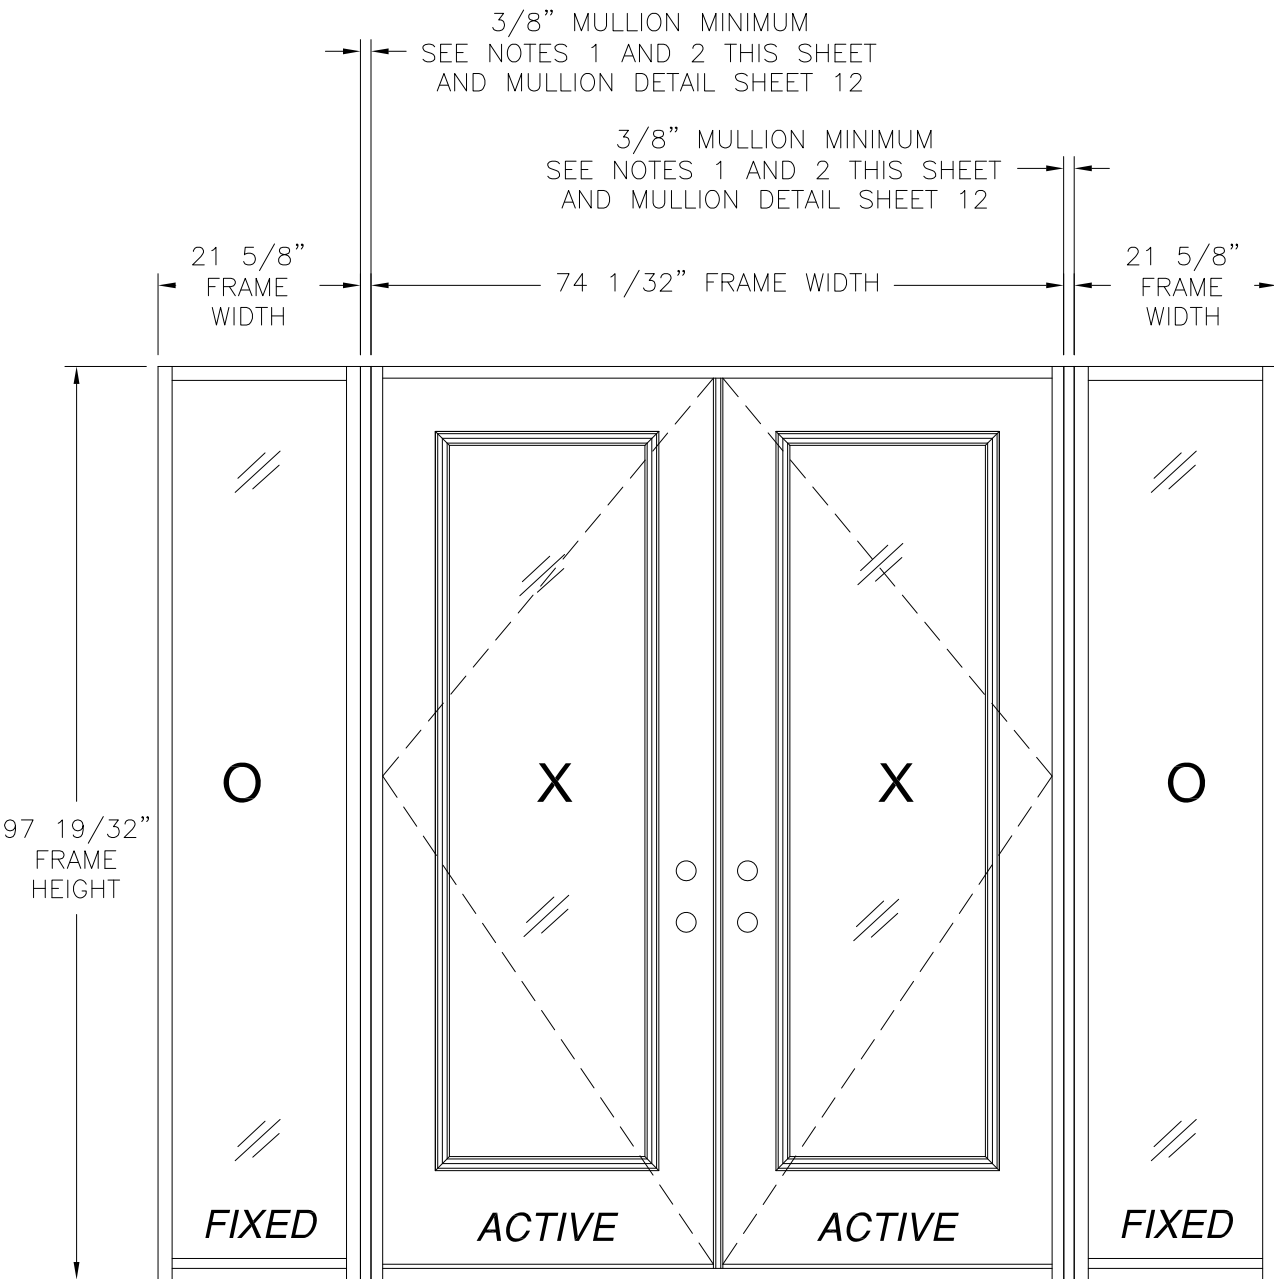

DOUBLE WITH DIRECT SET SIDELITES
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±55.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-52.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB

- NOTES:
1. MAXIMUM ALLOWED BUILD UP TO BE 7" AT EACH VERTICAL MULLION.
 2. IF SIDELITE WIDTH IS 16" OR LESS NO VERTICAL MULLION IS REQUIRED.


DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB AND PANOLOCK MULTI-POINT

DESIGN PRESSURE RATING	IMPACT RATING
+48.0/-50.0	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB AND PANOLOCK MULTI-POINT

35 3/4" x 94 15/16" PANEL SIZE SHOWN. OTHER SIZES ARE APPROVED AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 23.56 FT²

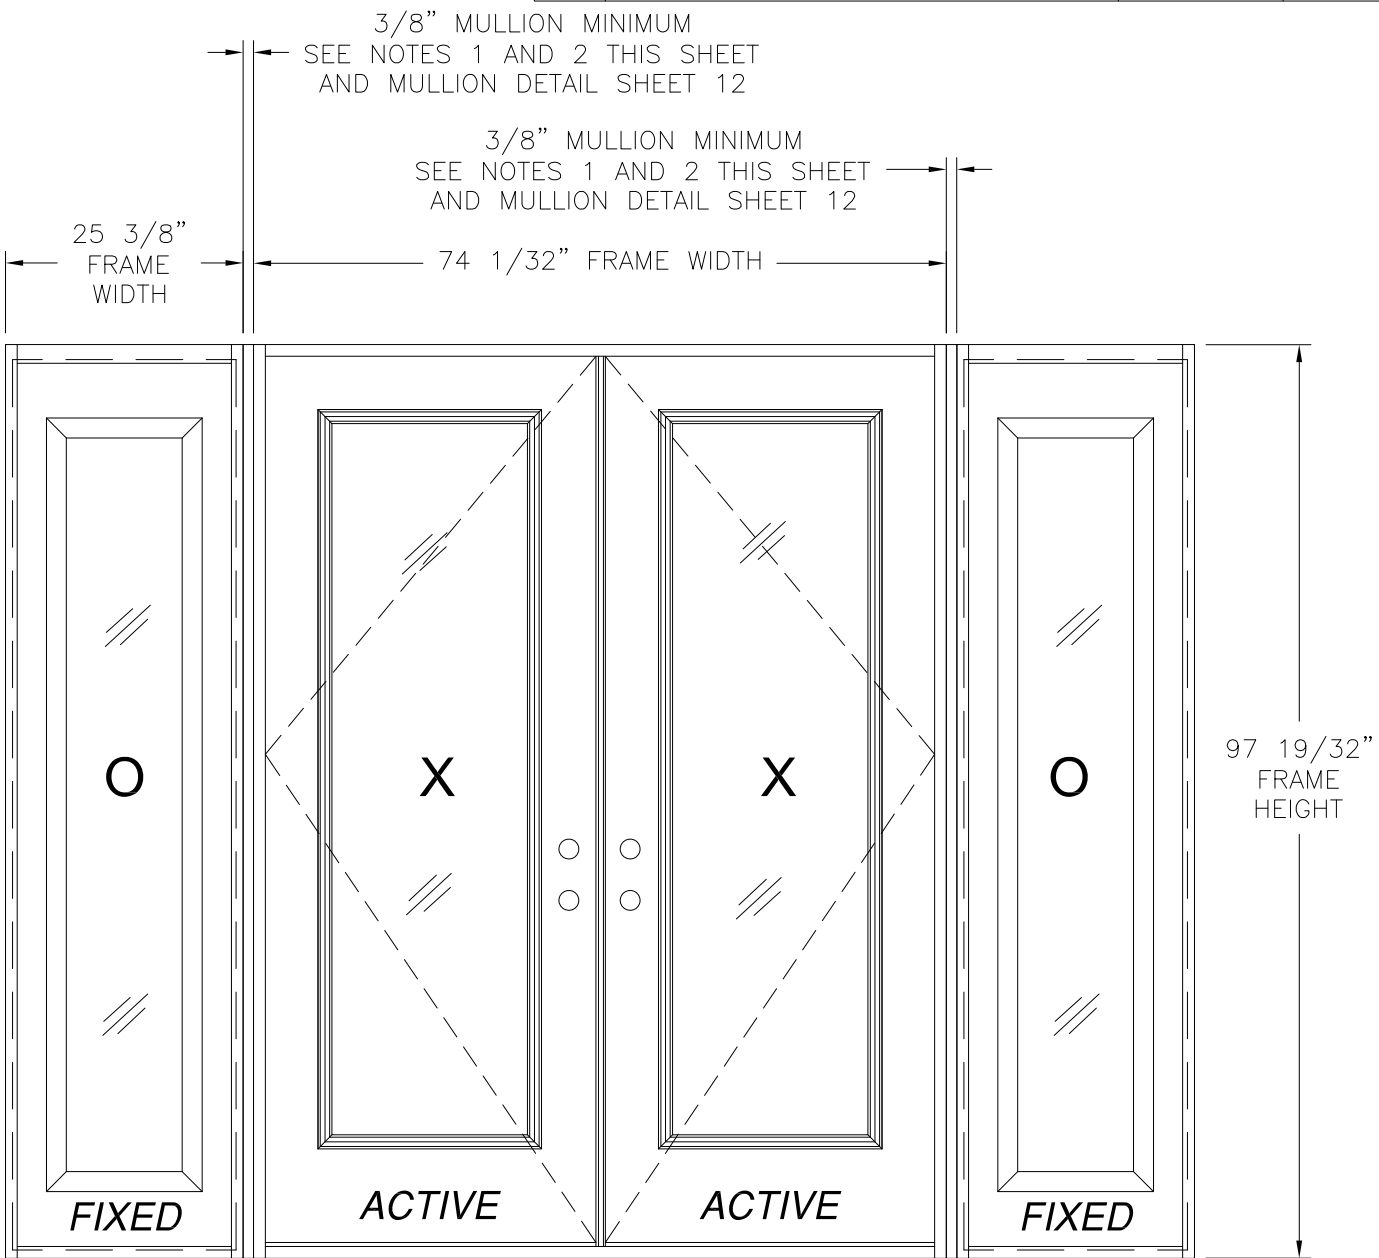

DOUBLE WITH STANDARD SIDELITES
EXTERIOR VIEW


PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR W/SIDELITES NON-IMPACT ELEVATIONS		
DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 3 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 11/27/2023




Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

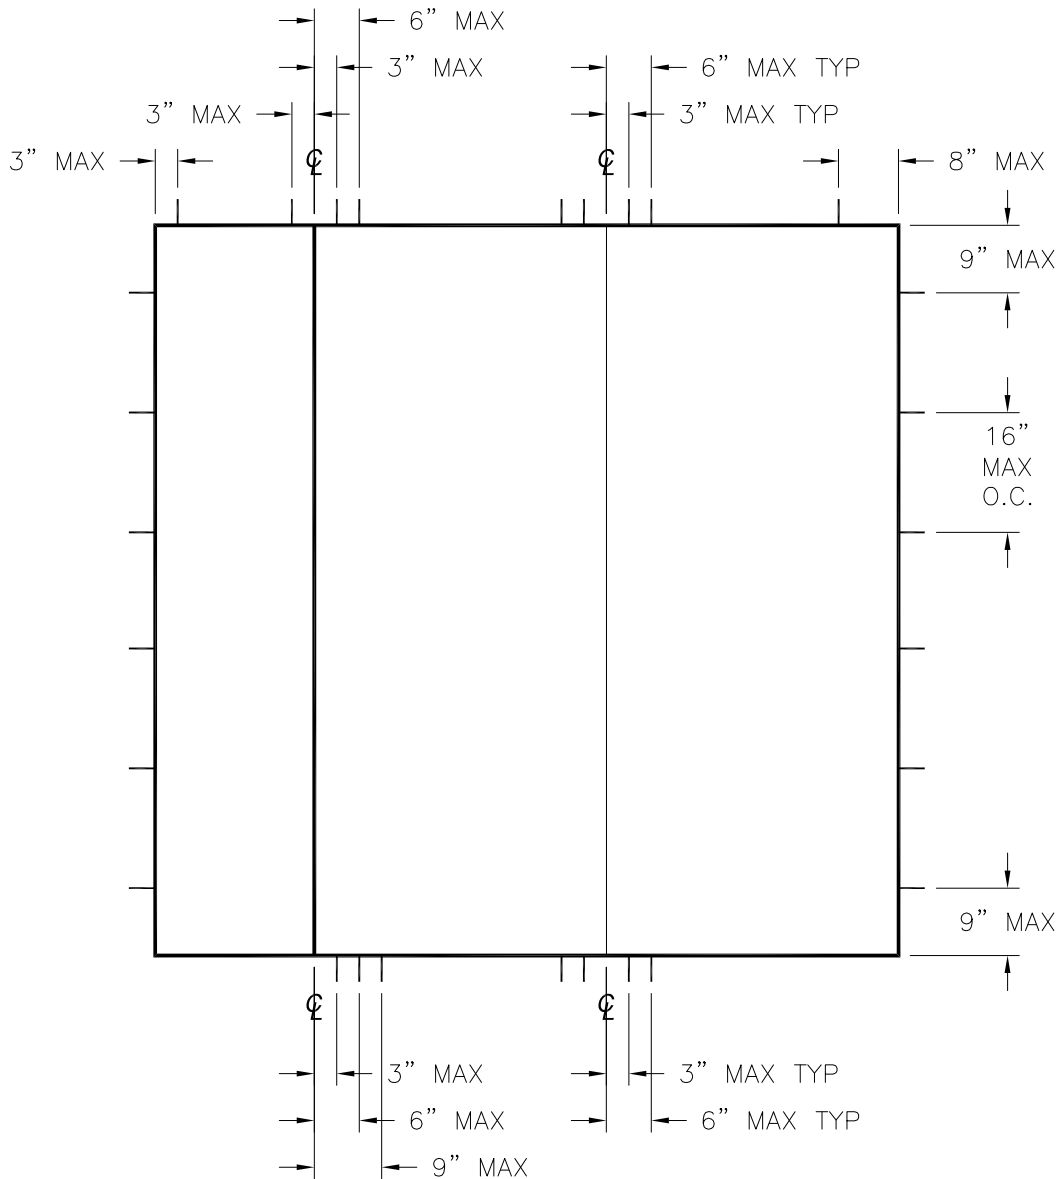

DOUBLE DOOR WITH SIDELITE

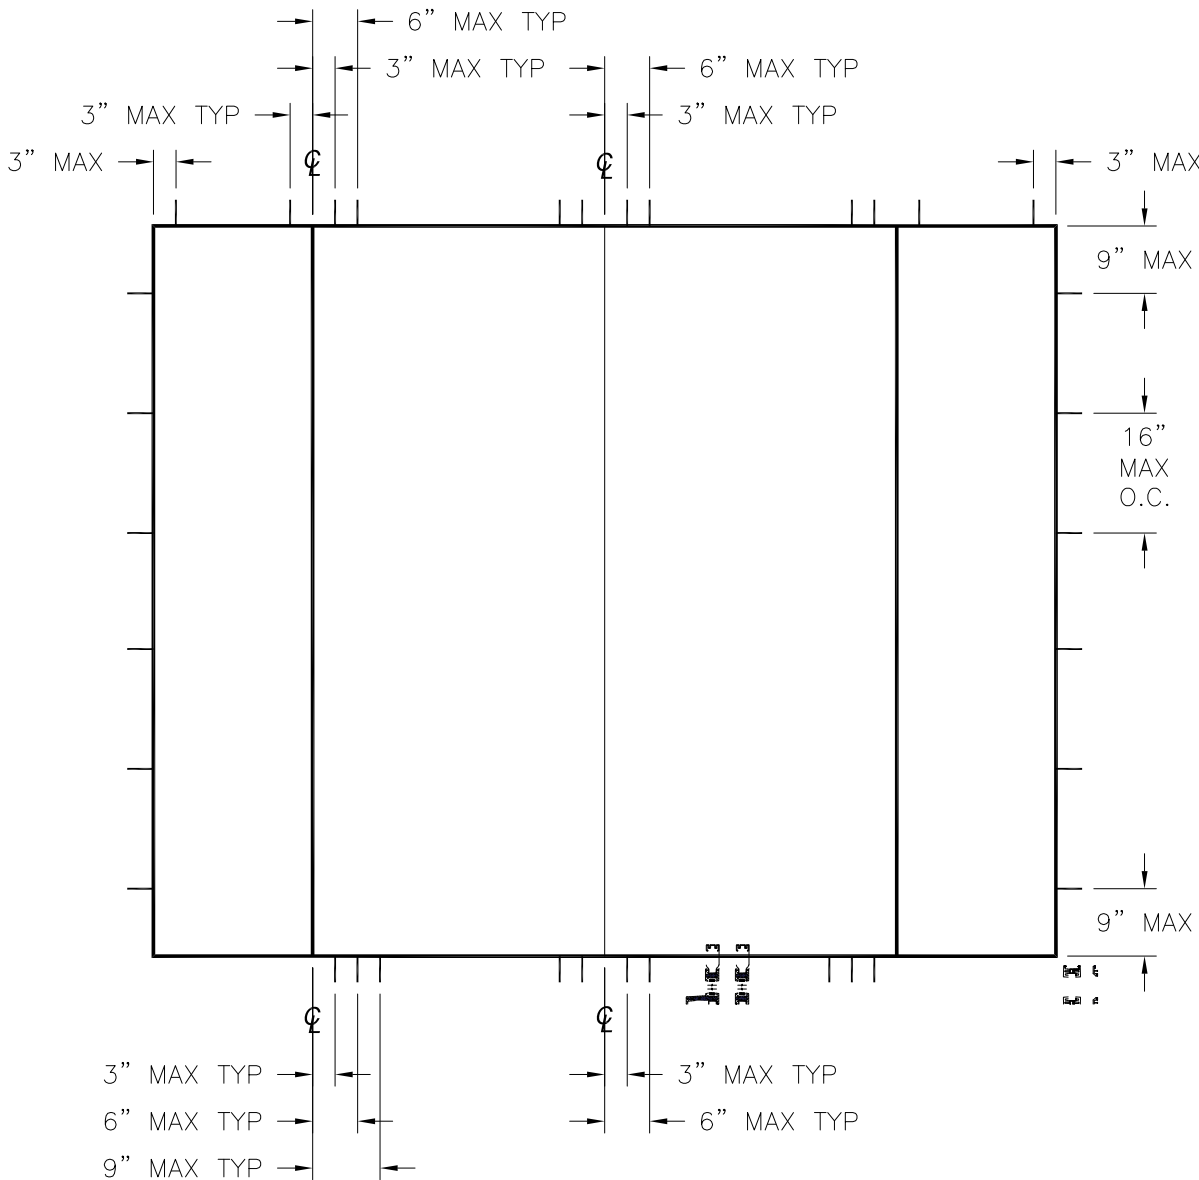


DOUBLE DOOR WITH SIDELITES


SIGNED: 11/27/2023

HARDWARE SCHEDULE	
A.	F-SERIES LOCK ASSEMBLY DOOR KNOB BY SCHLAGE
B.	B-SERIES DEADBOLT ASSEMBLY BY SCHLAGE
C.	F-SERIES DEADBOLT ASSEMBLY BY SCHLAGE
D.	RESIDENTIAL GRADE DOOR HANDLE ASSEMBLY BY EMTEK (ALTERNATE)
E.	MULTI-POINT LOCK HANDLE ASSEMBLY BY TRILENNIUM (ALTERNATE)
F.	PANOLOCK MULTI-POINT LOCK ASSEMBLY (ALTERNATE)
G.	(3) 4" X 4" BALL BEARING HINGES BY PENROD
H.	(3) 4" X 4" SPRING BOMMER HINGES BY PENROD (ALTERNATE)


PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR W/SIDELITES NON-IMPACT ANCHORING LAYOUTS		
DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 4 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

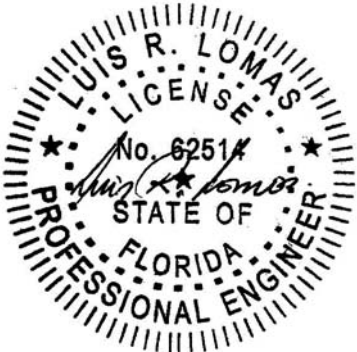


Luis R. Lomas P.E.
FL No.: 62514

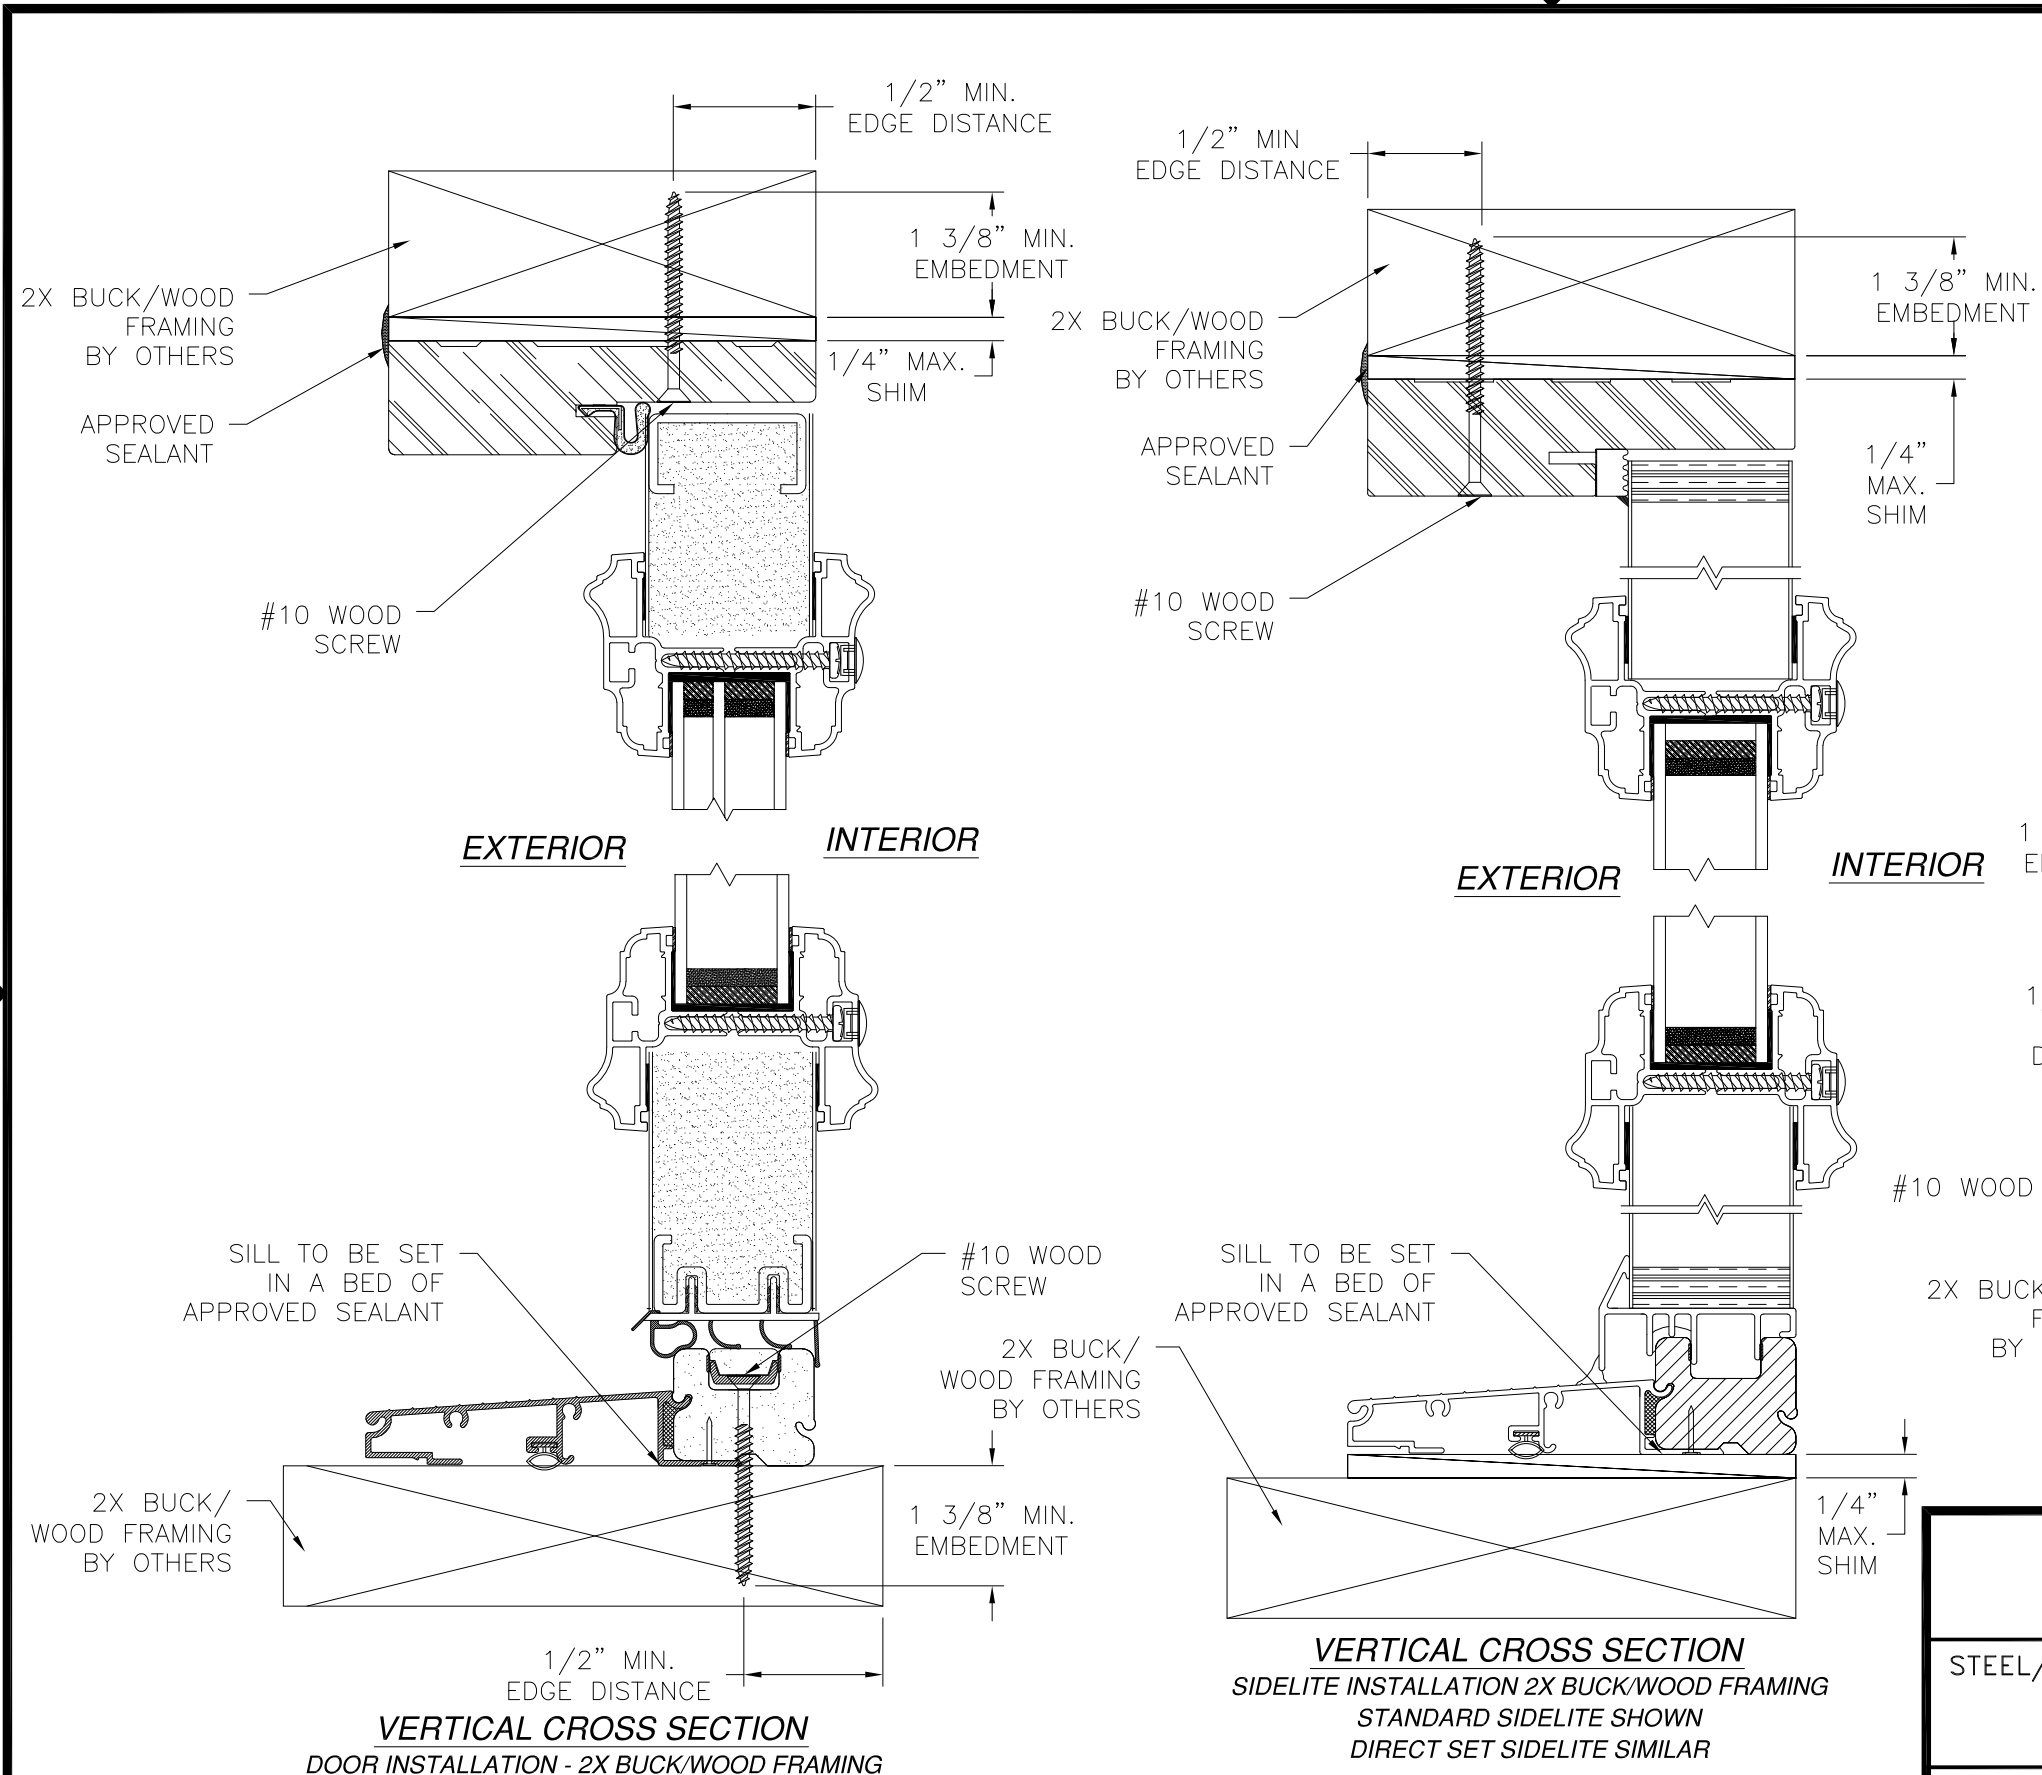

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

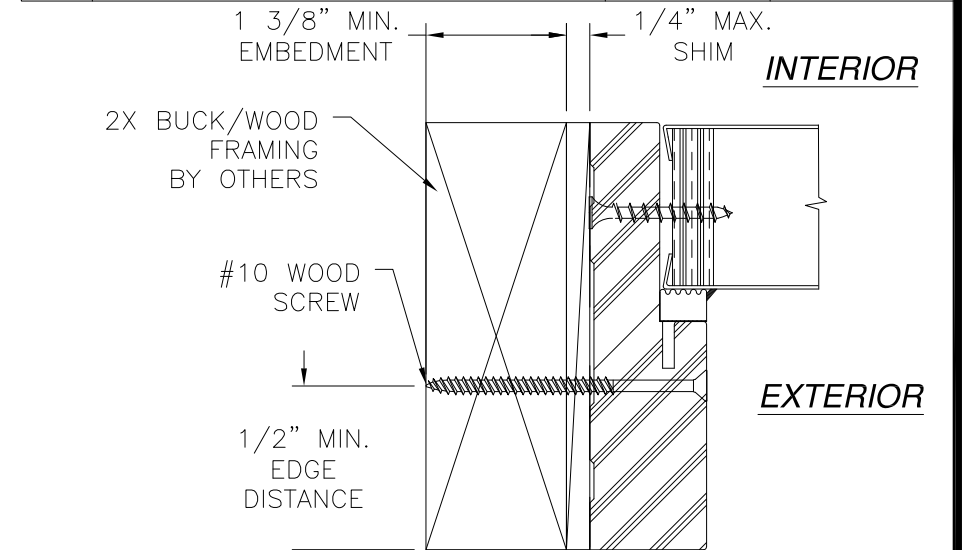

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION 2X BUCK/WOOD FRAMING
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

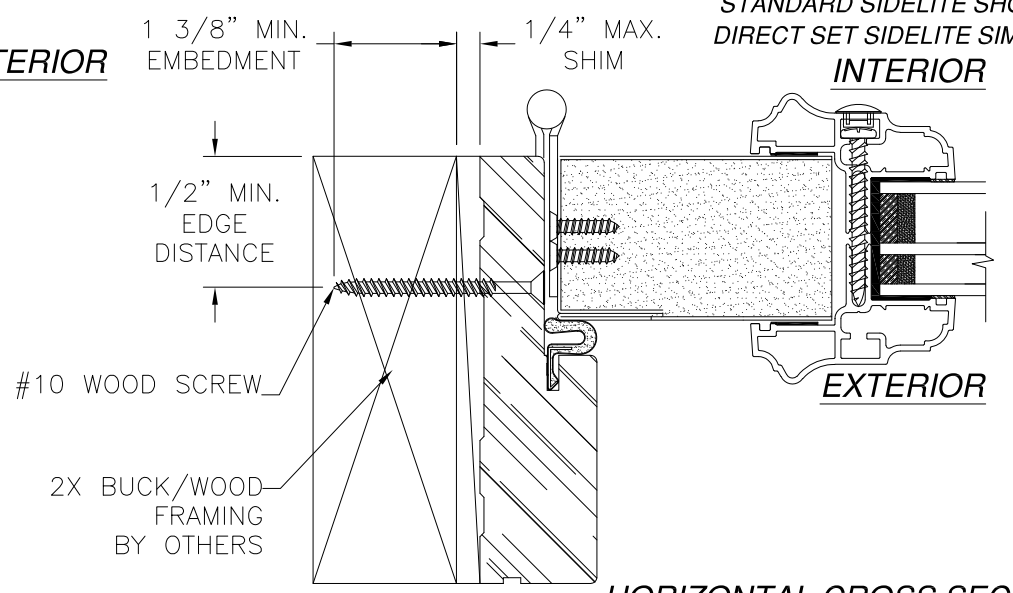

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - 2X BUCK/WOOD FRAMING
SIGNED: 11/27/2023

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS

DRAWN: V.L. DWG NO. 08-02070 REV K







SCALE NTS DATE 06/19/13 SHEET 5 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS
P.E.
No. 62514
STATE OF
FLORIDA
PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

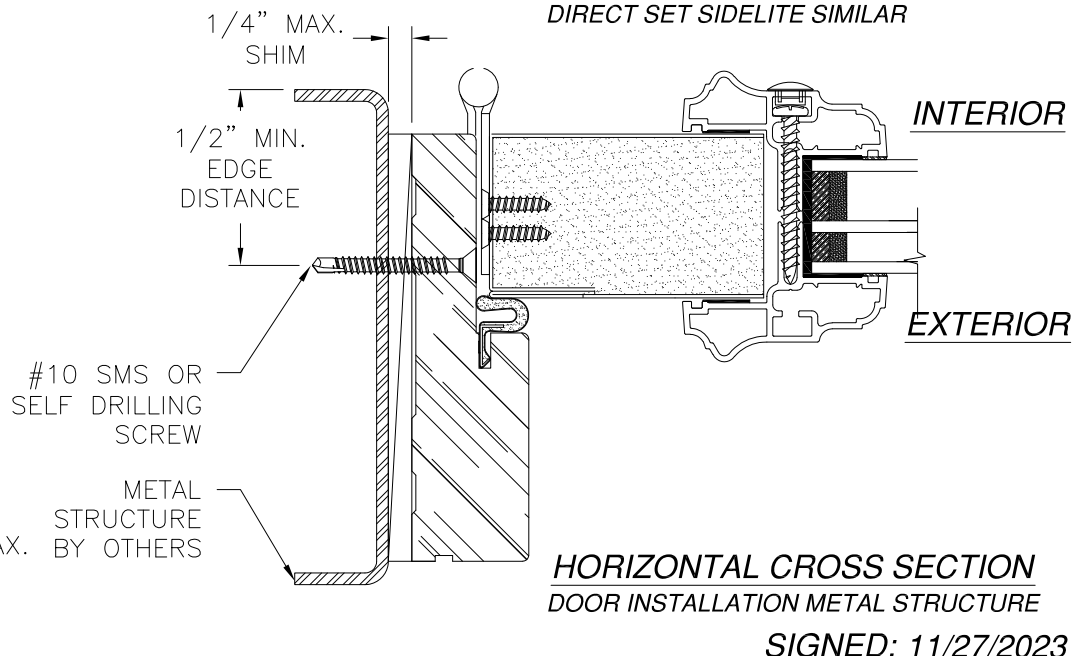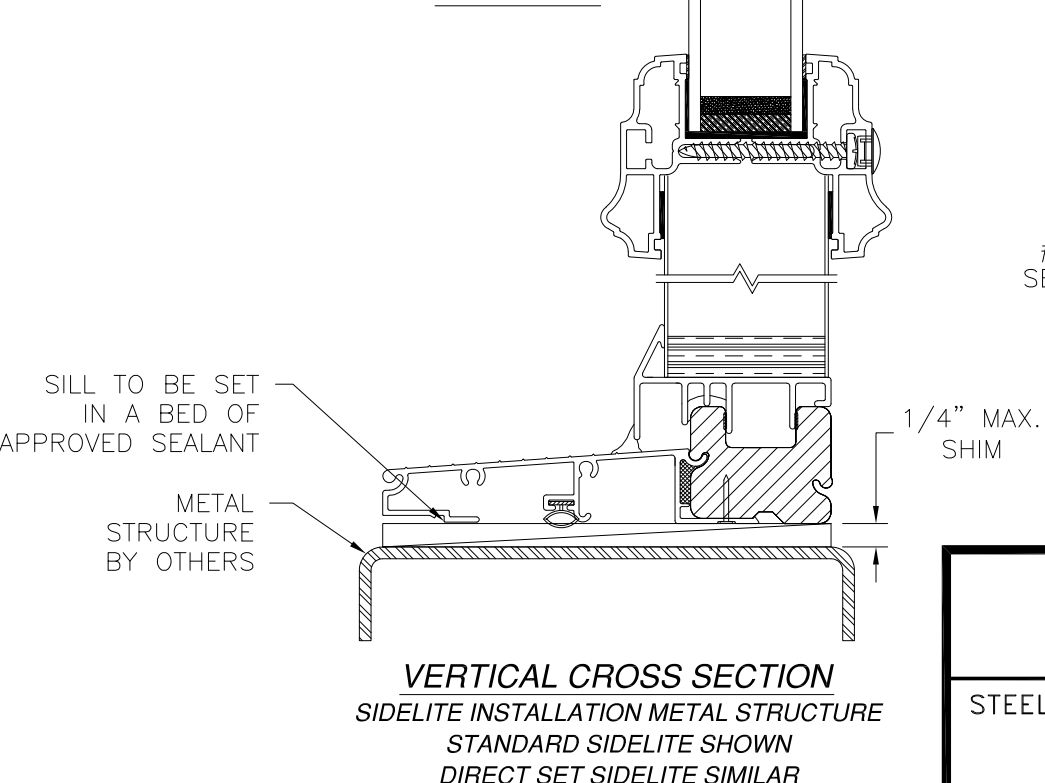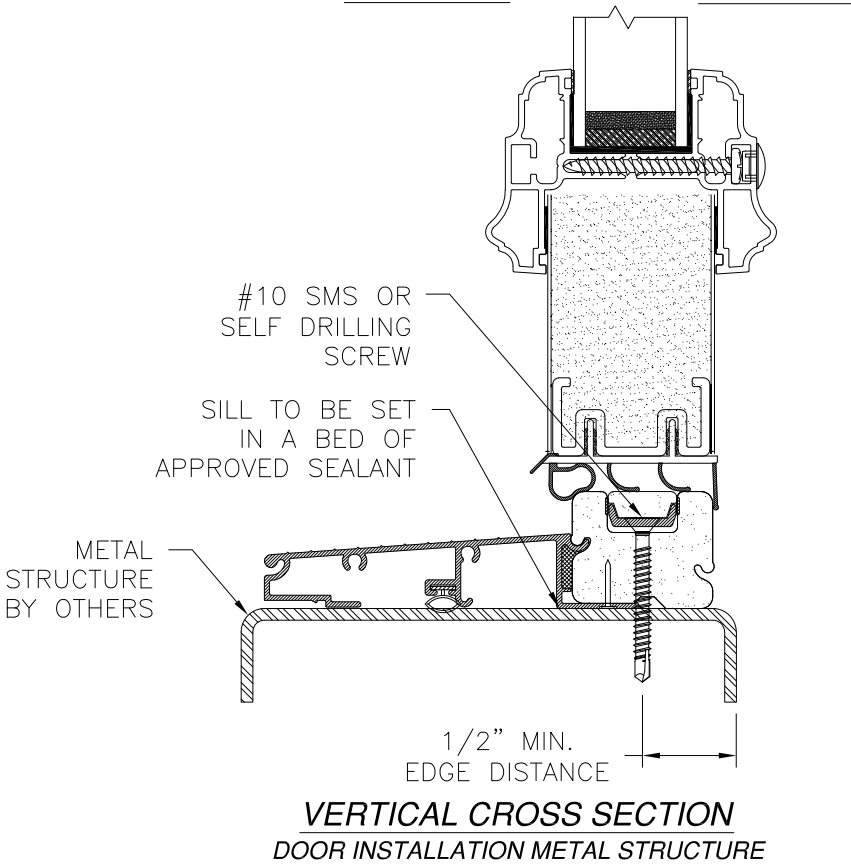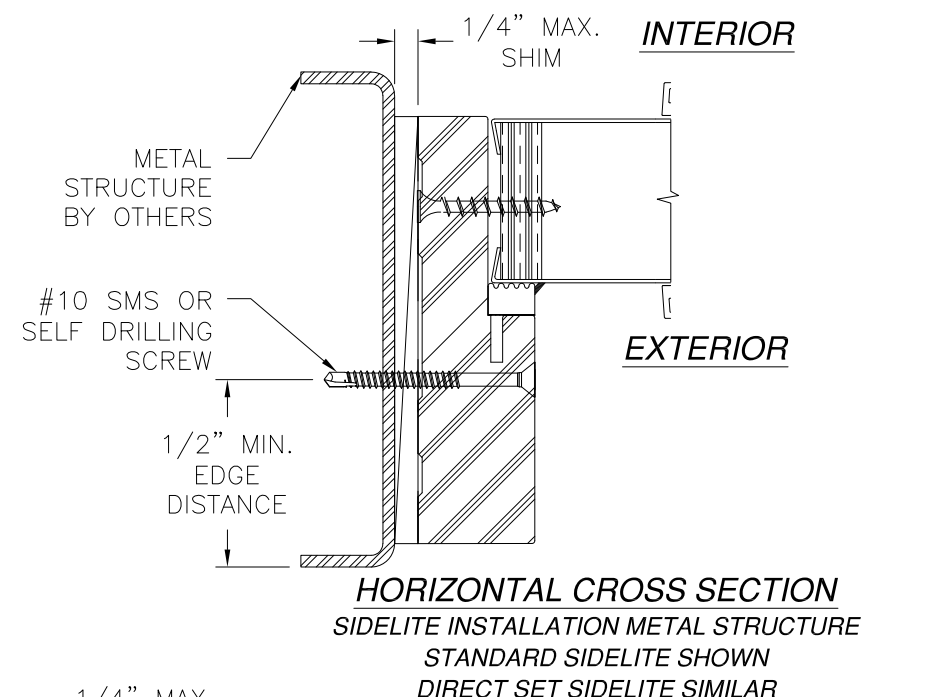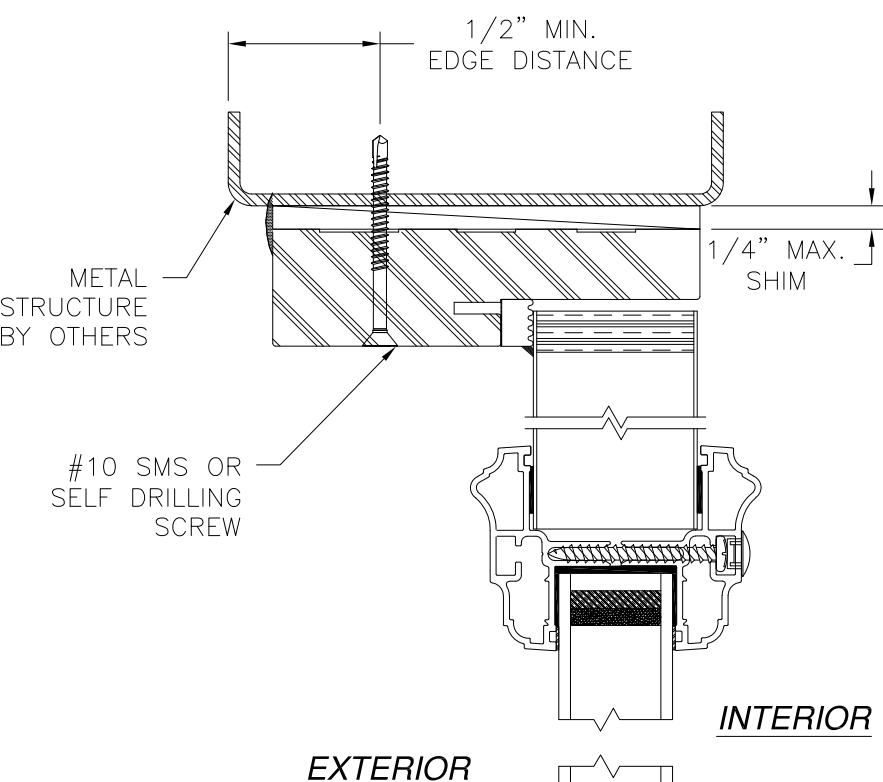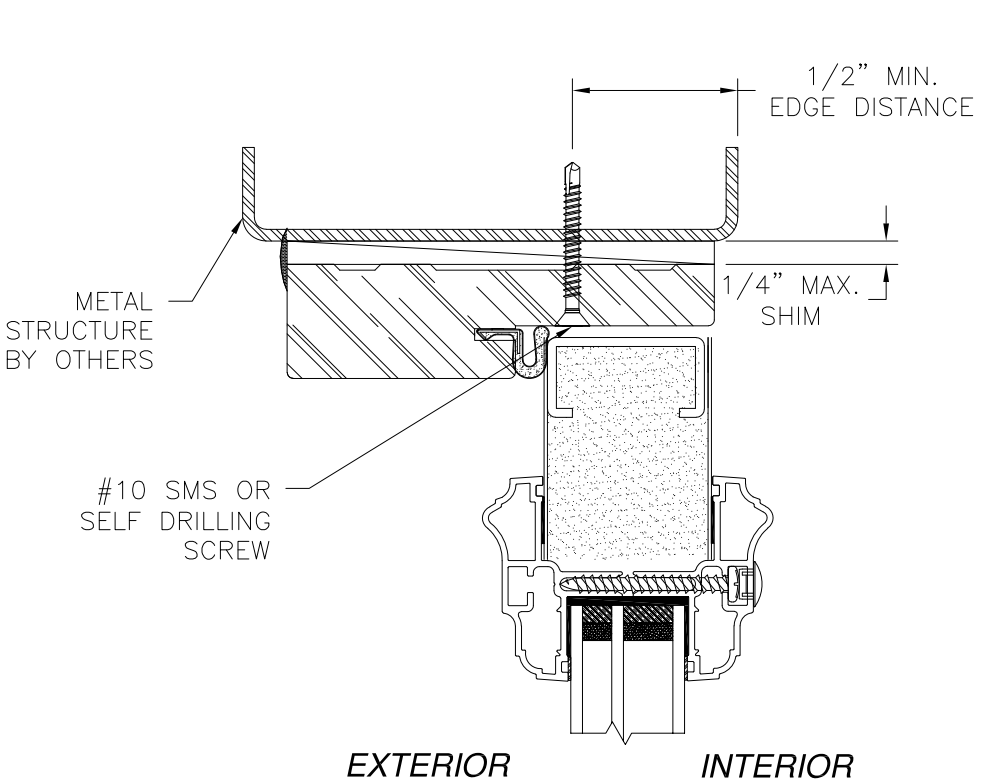

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS


DRAWN: V.L. DWG NO. 08-02070 REV K

SCALE NTS DATE 06/19/13 SHEET 6 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS
P.E.
No. 62514
STATE OF FLORIDA
PROFESSIONAL ENGINEER

Luis R. Lomas P.E.
FL No.: 62514

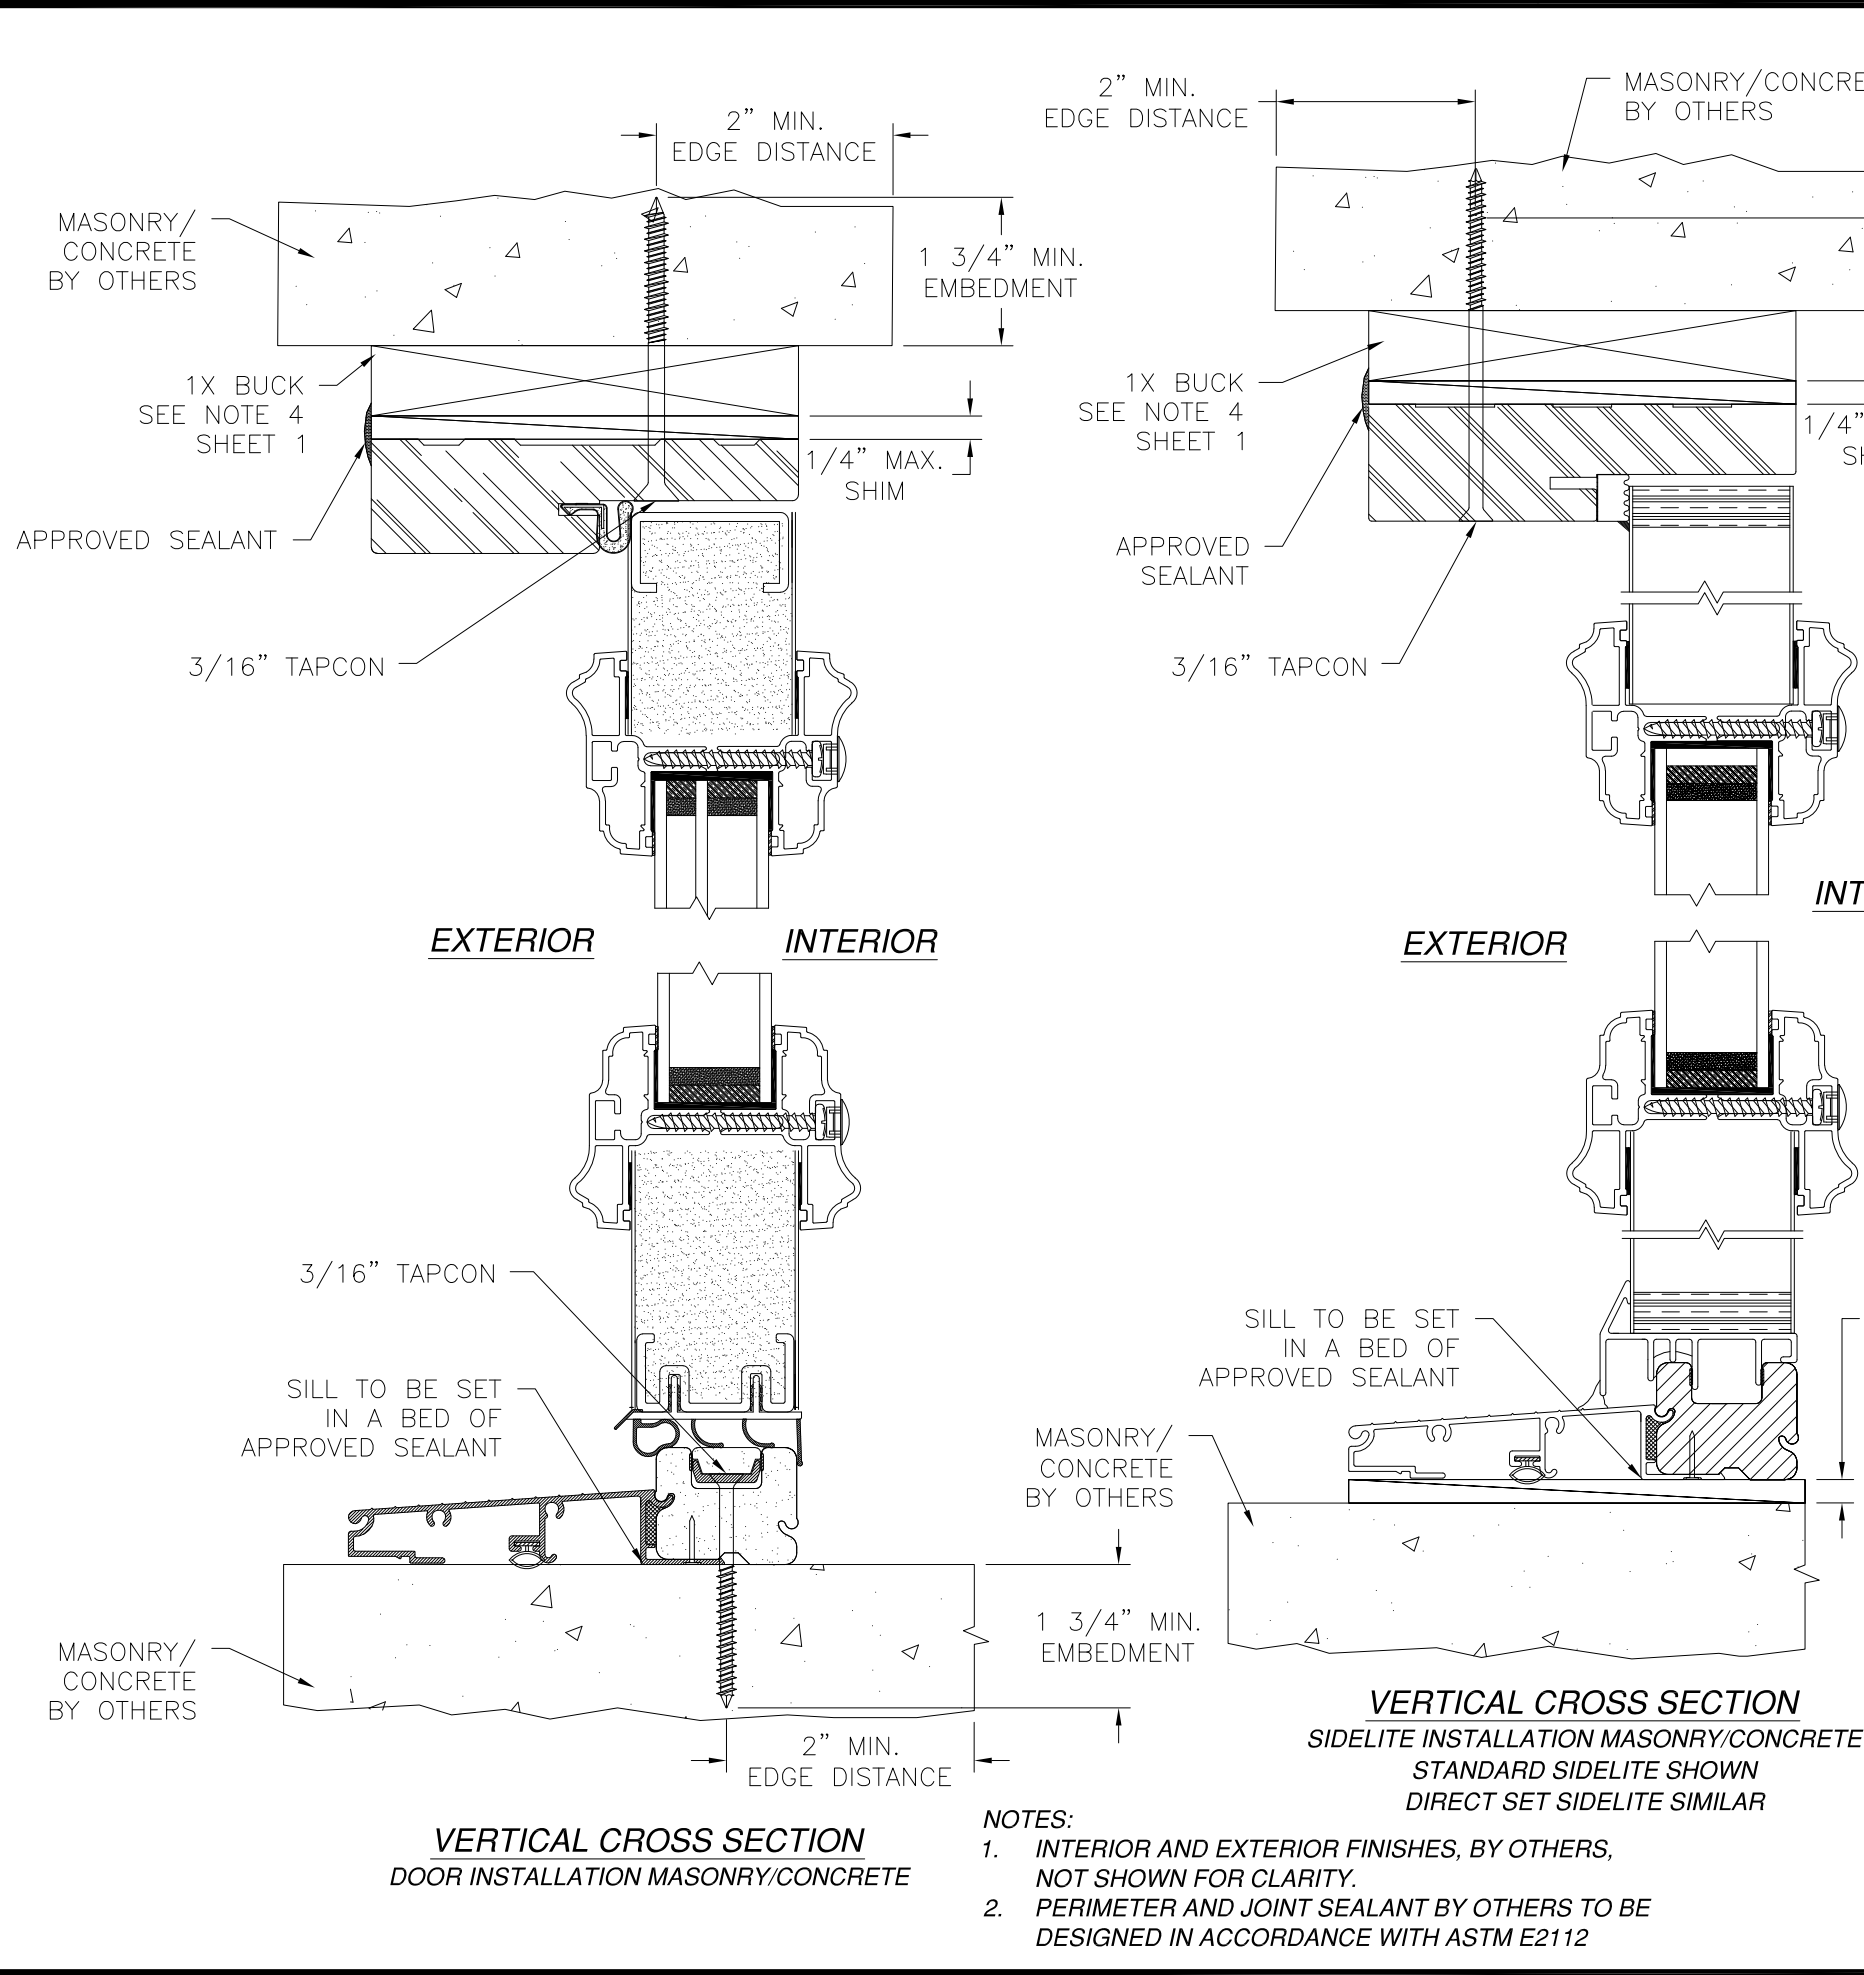

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

INTERIOR

1 3/4" MIN. EMBEDMENT

1/4" MAX. SHIM

MASONRY/CONCRETE BY OTHERS

3/16" TAPCON

2" MIN. EDGE DISTANCE

1X BUCK SEE NOTE 4 SHEET 1

EXTERIOR

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION CONCRETE/MASONRY
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

INTERIOR

1 3/4" MIN. EMBEDMENT

2" MIN. EDGE DISTANCE

3/16" TAPCON

1/4" MAX. SHIM

MASONRY/CONCRETE BY OTHERS

1X BUCK SEE NOTE 4 SHEET 1

EXTERIOR

HORIZONTAL CROSS SECTION
DOOR INSTALLATION CONCRETE/MASONRY
SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681


**STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS**

DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 7 OF 16



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS
LICENSED PROFESSIONAL ENGINEER
No. 62514
STATE OF FLORIDA

Luis R. Lomas P.E.
FL No.: 62514

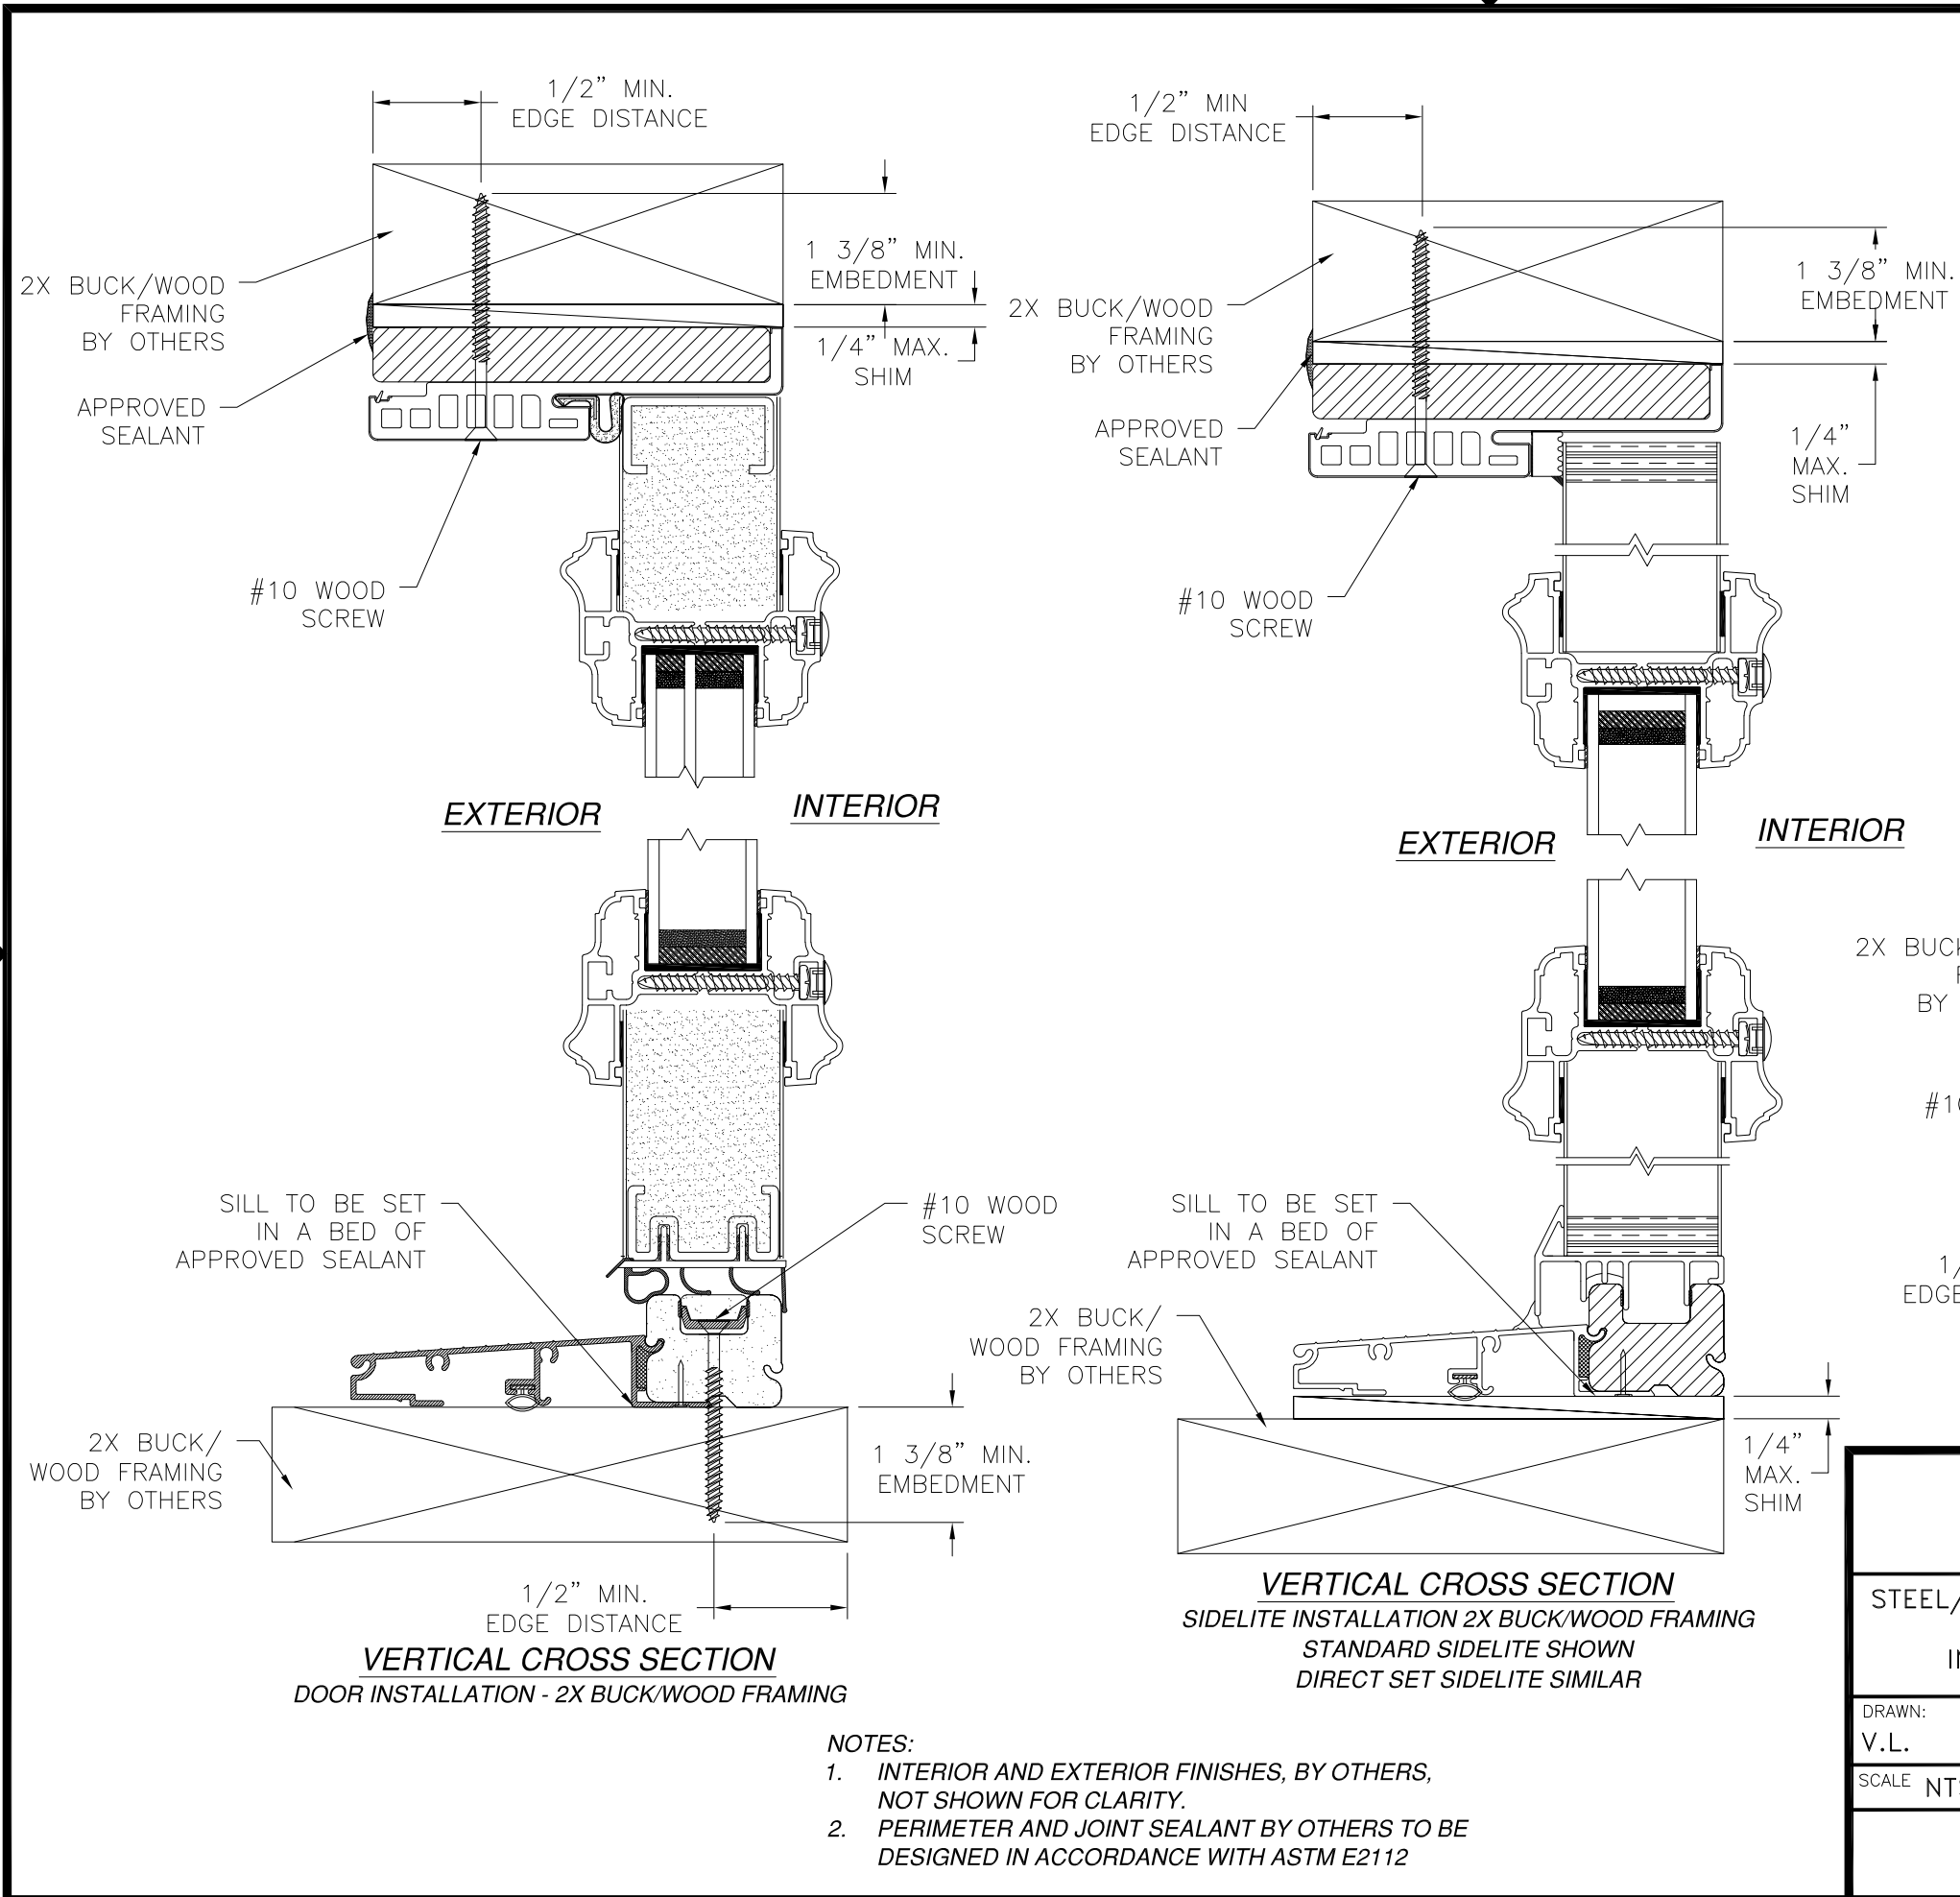

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

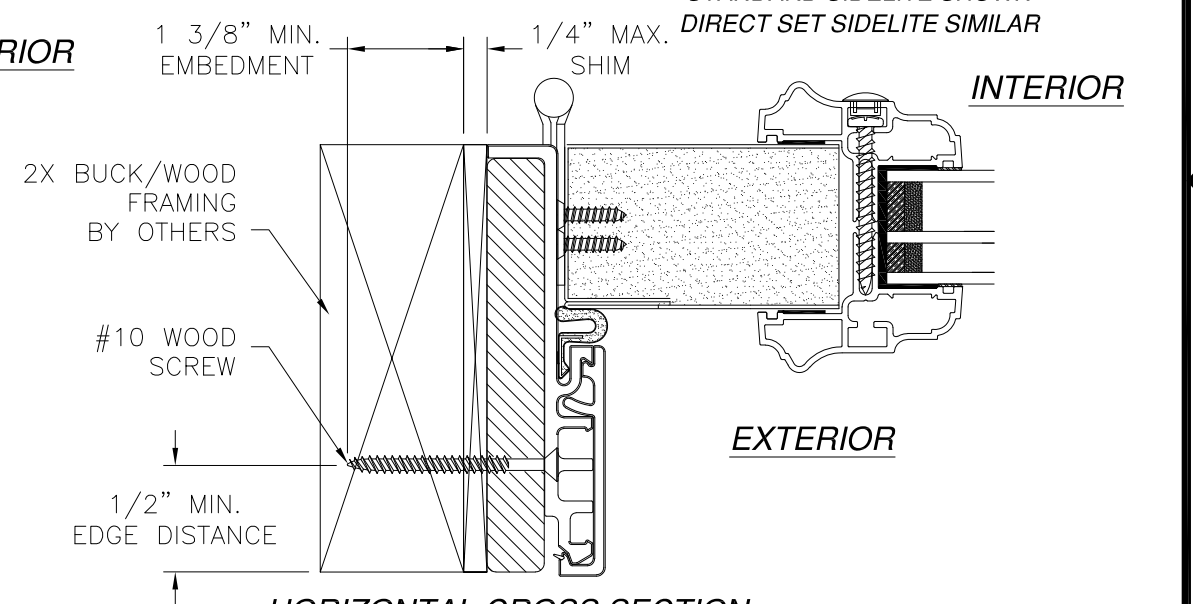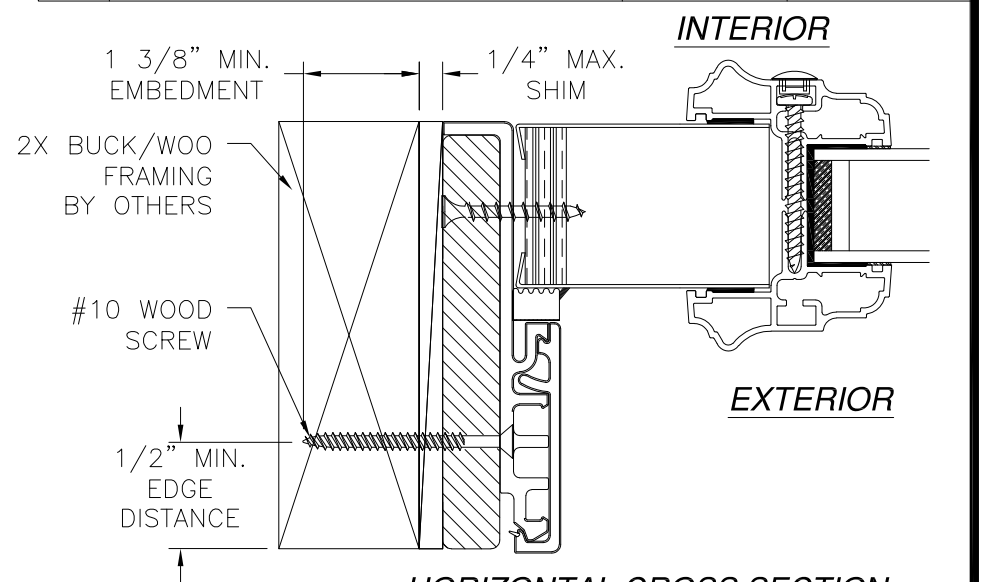

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS W/FUSION FRAME

DRAWN: V.L. DWG NO. 08-02070 REV K


SCALE NTS DATE 06/19/13 SHEET 8 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 11/27/2023

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

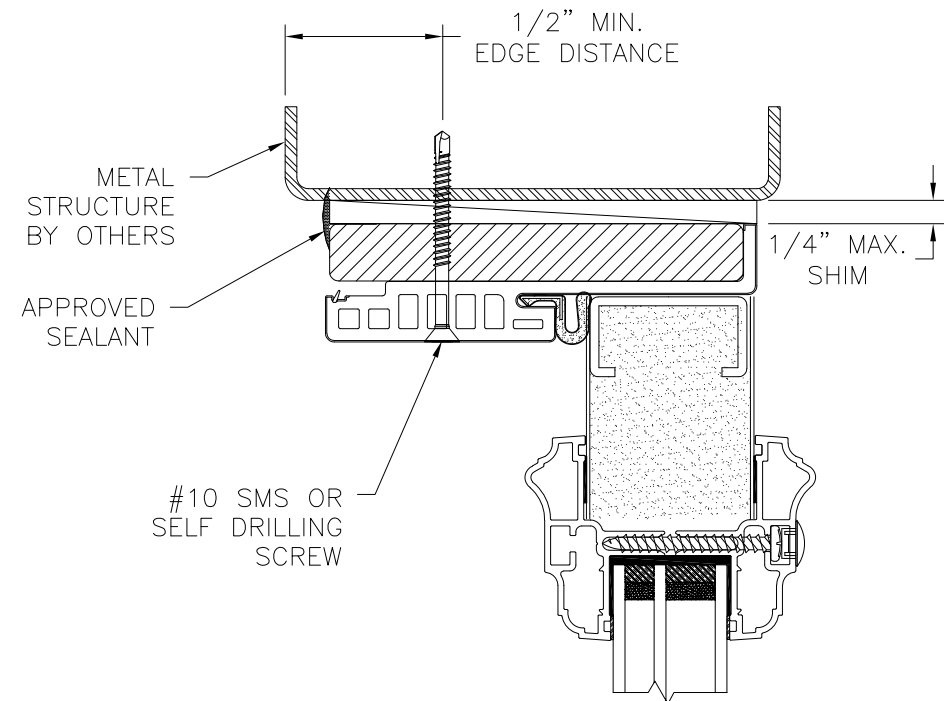


EXTERIOR INTERIOR

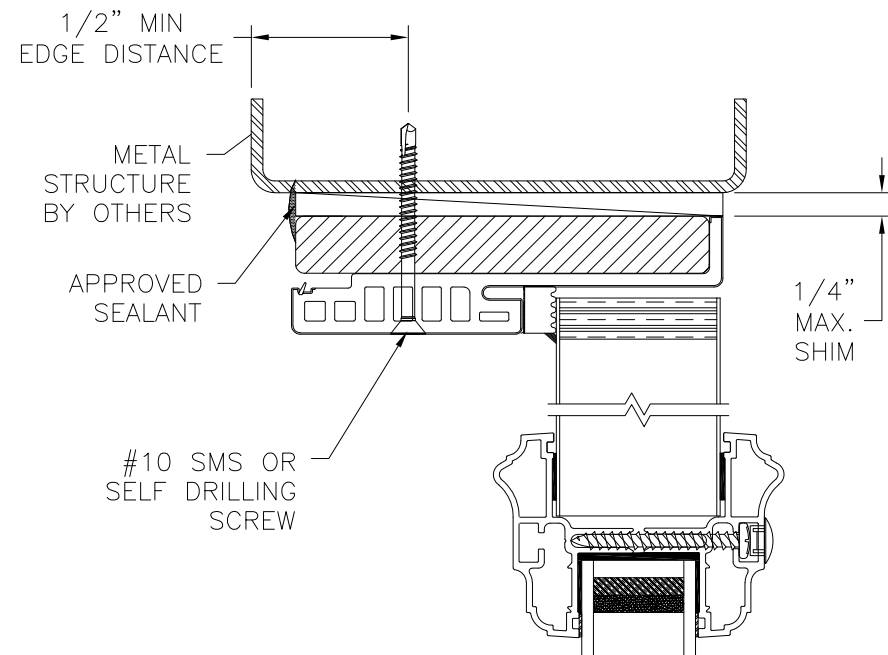


EXTERIOR INTERIOR

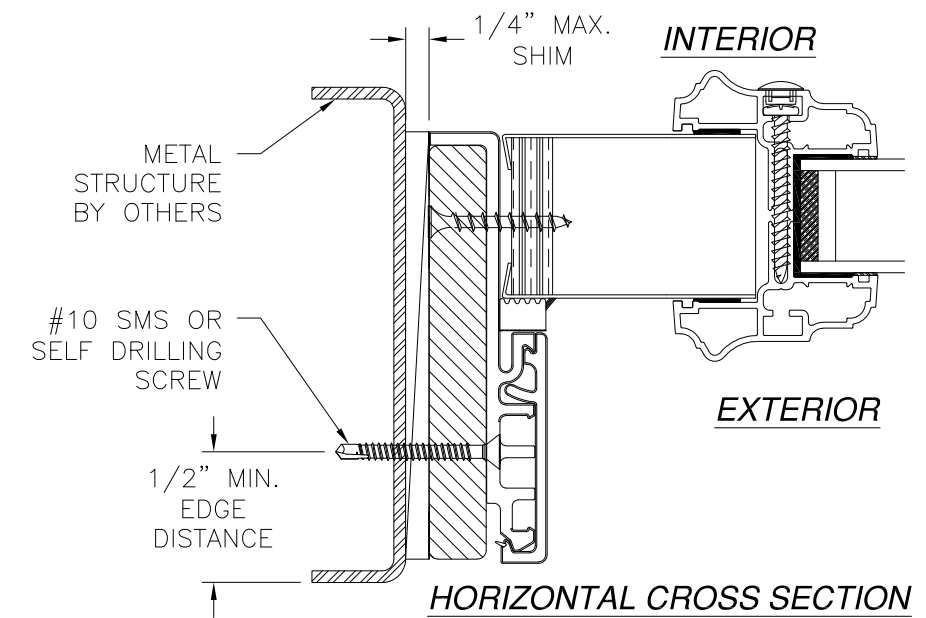


HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION METAL STRUCTURE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

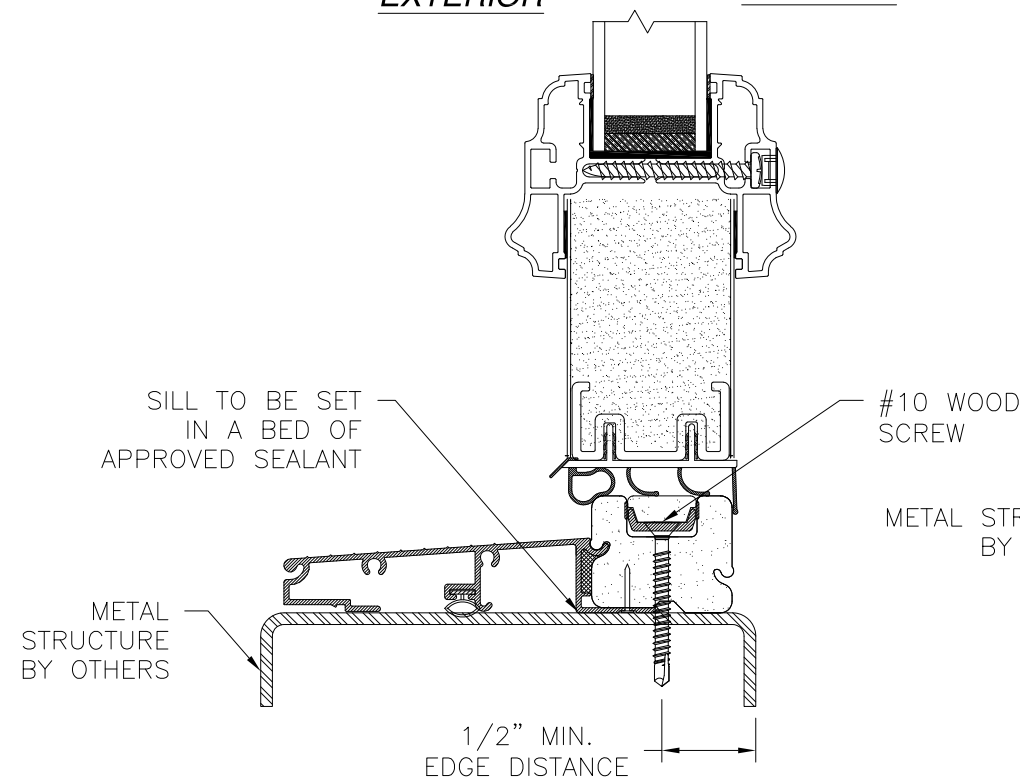

VERTICAL CROSS SECTION
DOOR INSTALLATION - METAL STRUCTURE

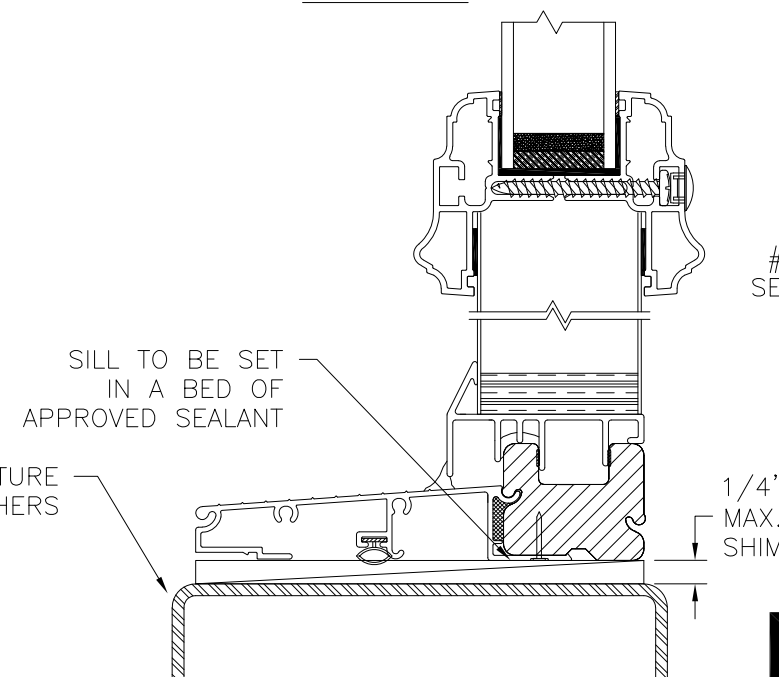

VERTICAL CROSS SECTION
SIDELITE INSTALLATION METAL STRUCTURE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

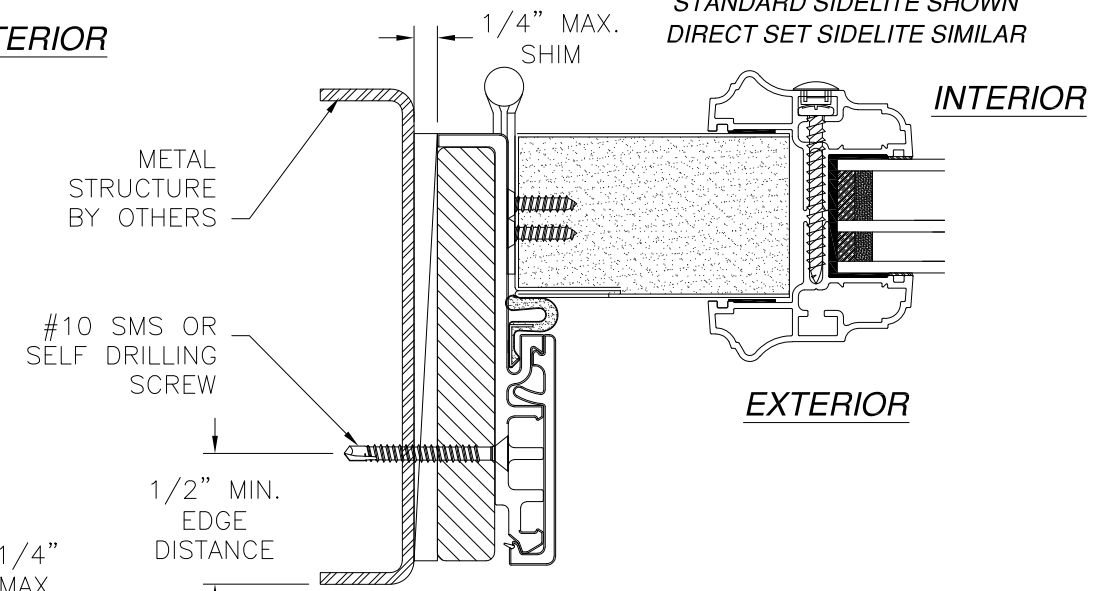

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - METAL STRUCTURE

SIGNED: 11/27/2023

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS W/FUSION FRAME




DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 9 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com



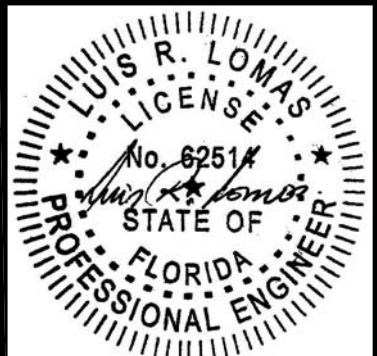


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

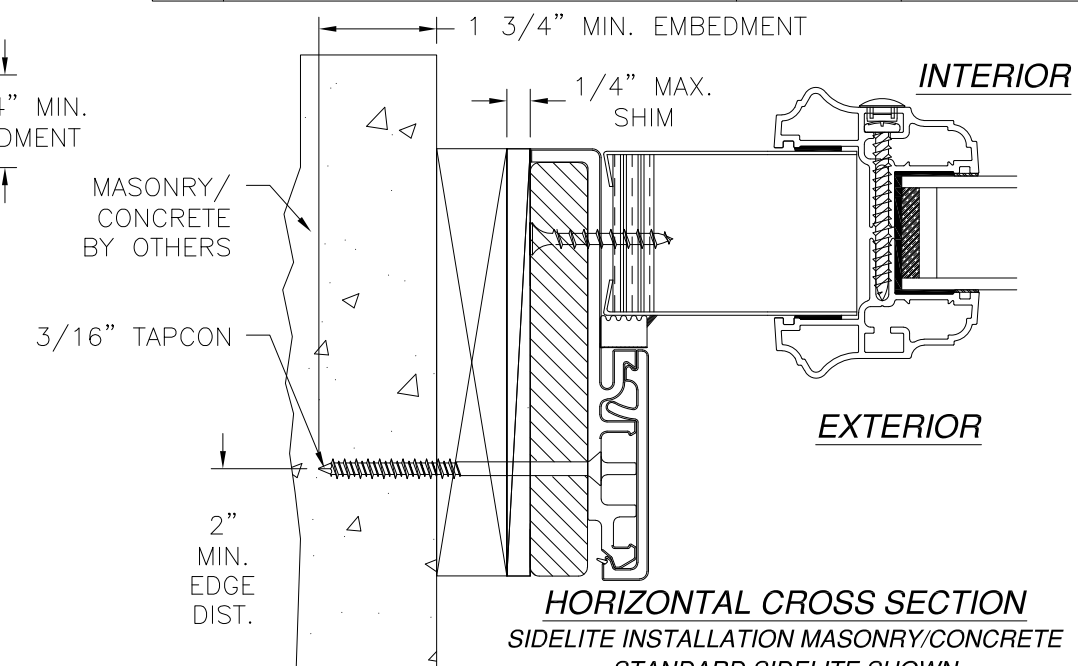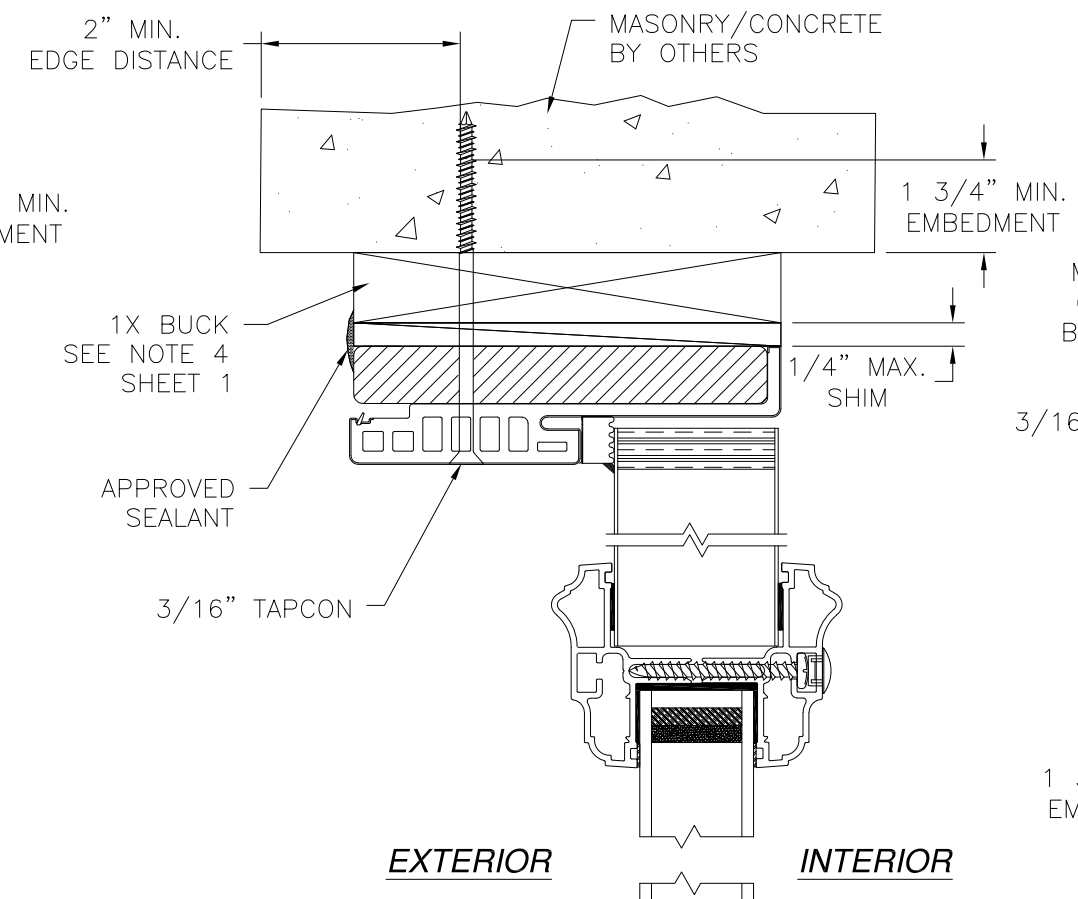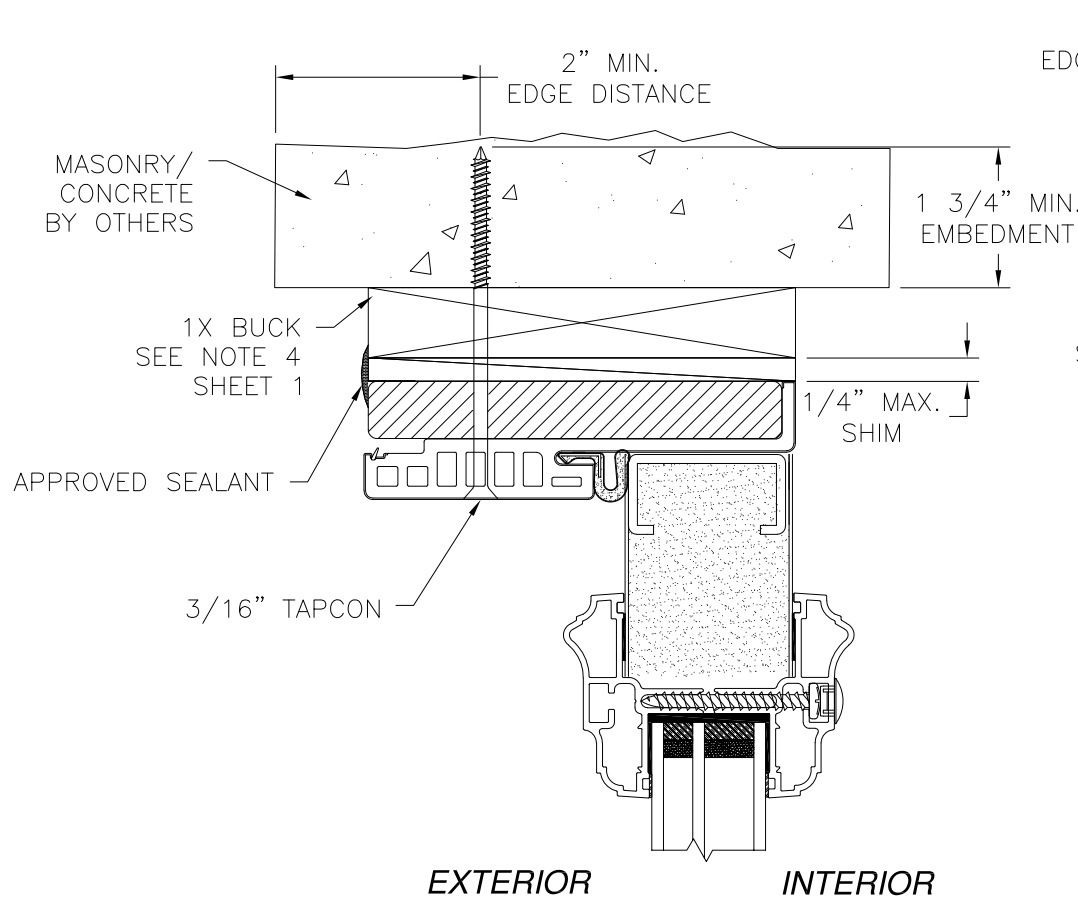

HORIZONTAL CROSS SECTION
SIDELITE INSTALLATION MASONRY/CONCRETE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

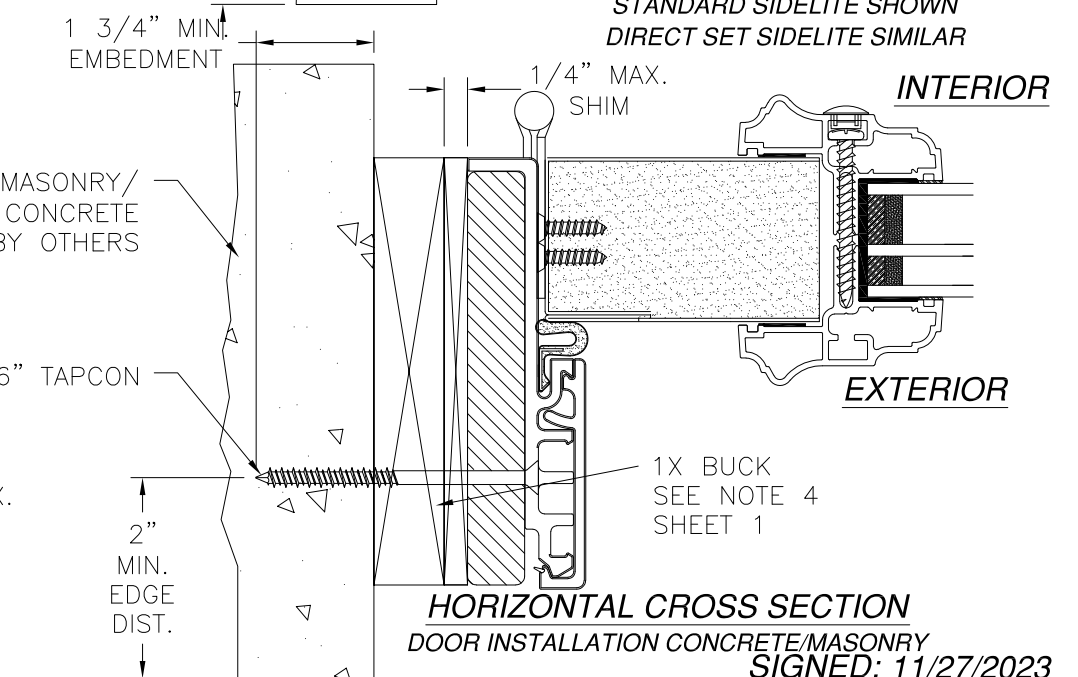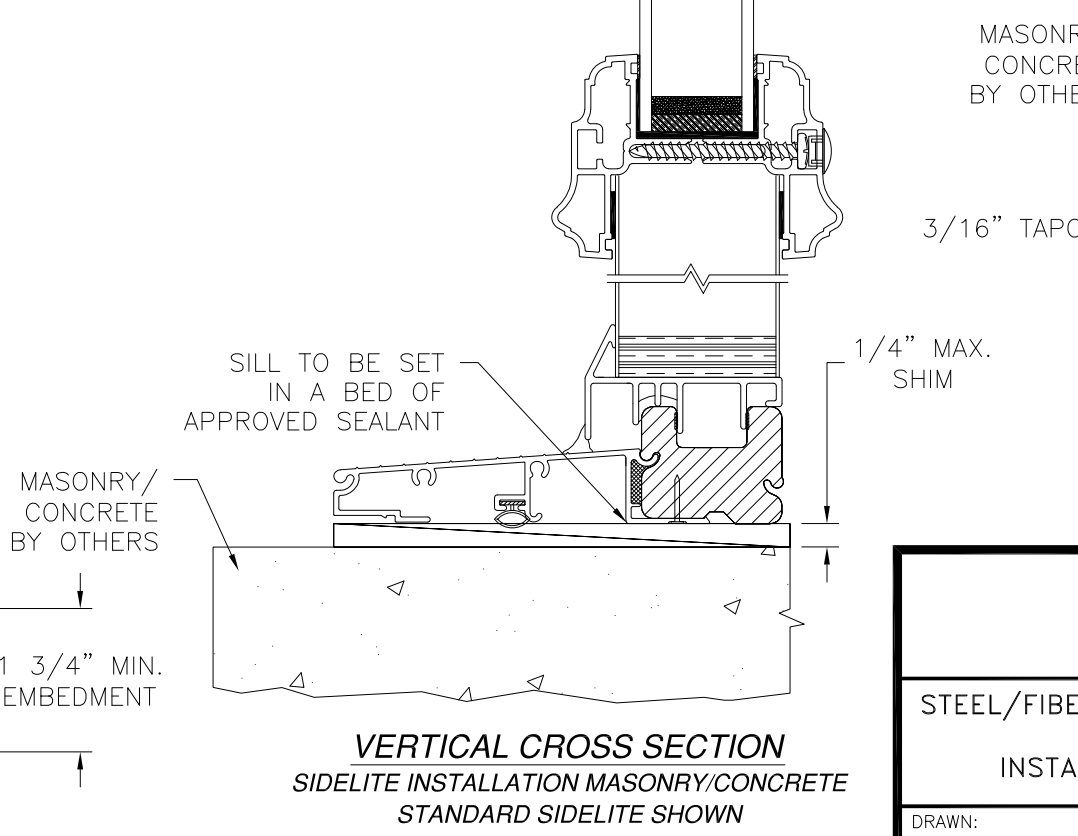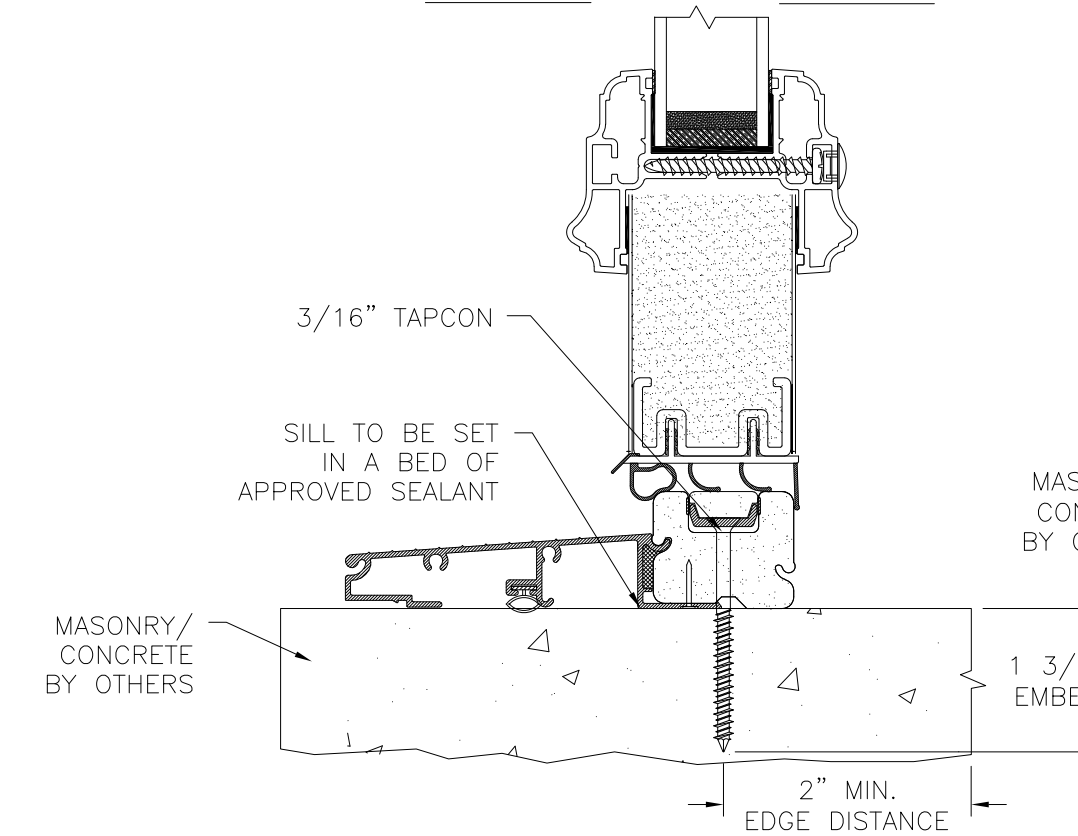

HORIZONTAL CROSS SECTION
DOOR INSTALLATION CONCRETE/MASONRY
SIGNED: 11/27/2023

VERTICAL CROSS SECTION
DOOR INSTALLATION MASONRY/CONCRETE

VERTICAL CROSS SECTION
SIDELITE INSTALLATION MASONRY/CONCRETE
STANDARD SIDELITE SHOWN
DIRECT SET SIDELITE SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS W/FUSION FRAME

DRAWN: V.L.

DWG NO. 08-02070

REV K

SCALE NTS

DATE 06/19/13

SHEET 10 OF 16

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS

LICENS. M. S.

No. 62514


STATE OF FLORIDA

PROFESSIONAL ENGINEER


Luis R. Lomas P.E.

FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

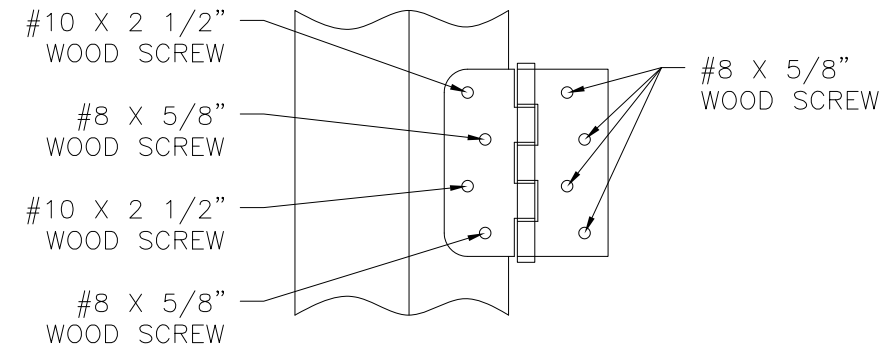


HINGE INSTALLATION DETAIL
2X BUCK/WOOD FRAMING

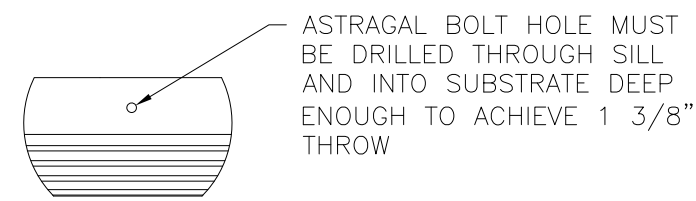


ASTRAGAL SILL DETAIL

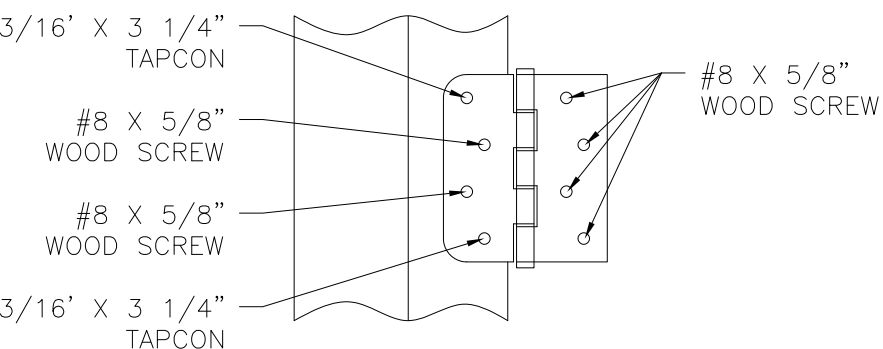


HINGE INSTALLATION DETAIL
MASONRY/CONCRETE

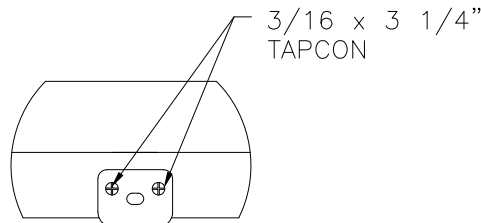

ASTRAGAL HEAD STRIKE DETAIL
MASONRY/CONCRETE

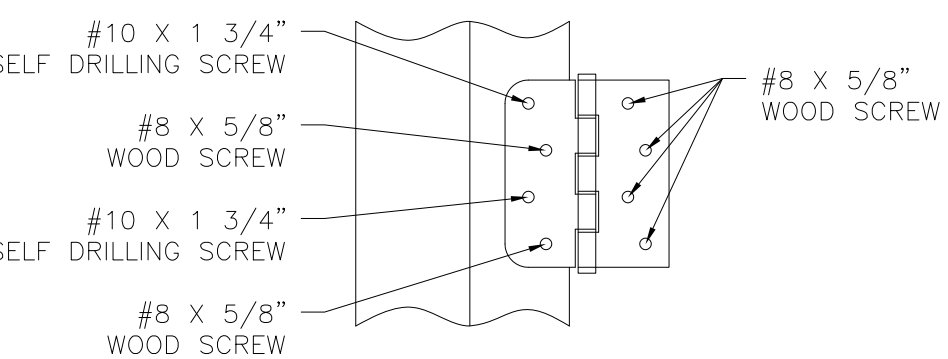


HINGE INSTALLATION DETAIL
METAL STRUCTURE

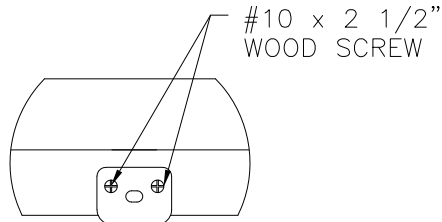

ASTRAGAL HEAD STRIKE DETAIL
2X BUCK/WOOD FRAMING

APPROVED LITE CONFIGURATIONS

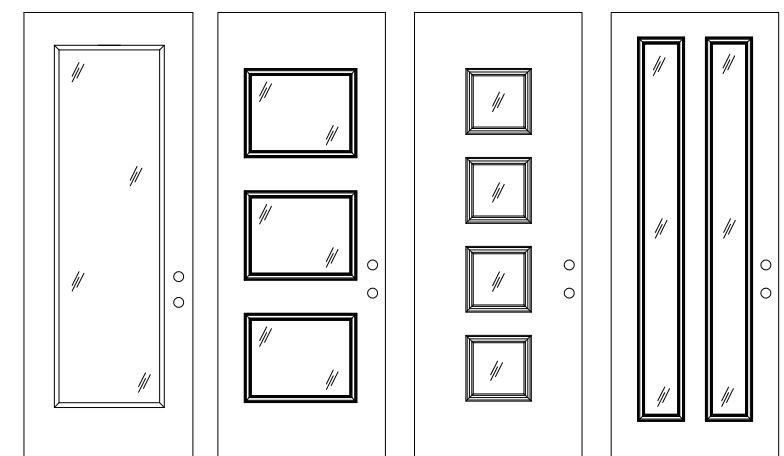

FULL LITE 3 LITE 4 LITE 2 LITE

LITE CONFIGURATIONS SHOWN ARE FOR REFERENCE ONLY. MULTIPLE LITE CONFIGURATIONS ARE APPROVED AS LONG AS LITE SIZE DOES NOT EXCEED 11.5 FT²

SIGNED: 11/27/2023

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
INSTALLATION DETAILS & APPROVED CONFIGURATIONS

DRAWN:
V.L.

DWG NO.
08-02070

REV
K




SCALE
NTS

DATE
06/19/13

SHEET
11 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

Luis R. Lomas P.E.
FL No.: 62514

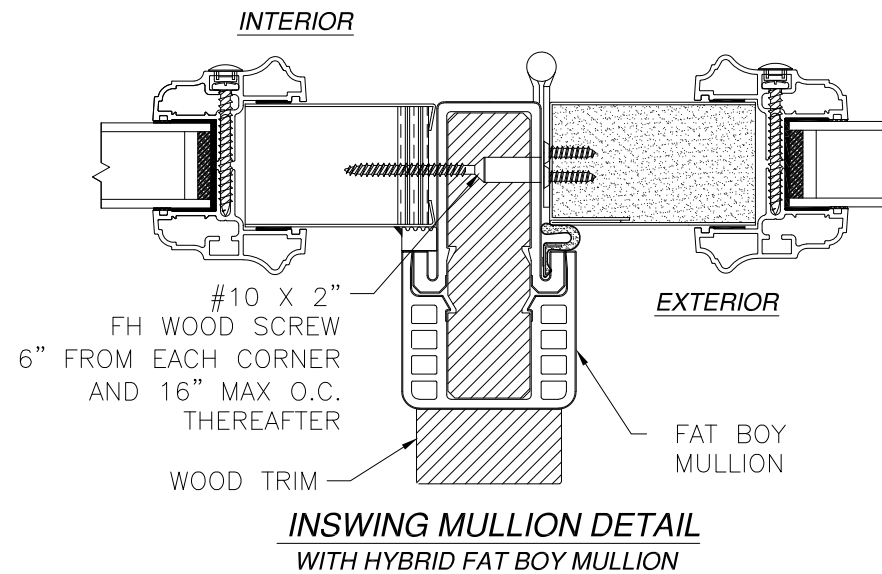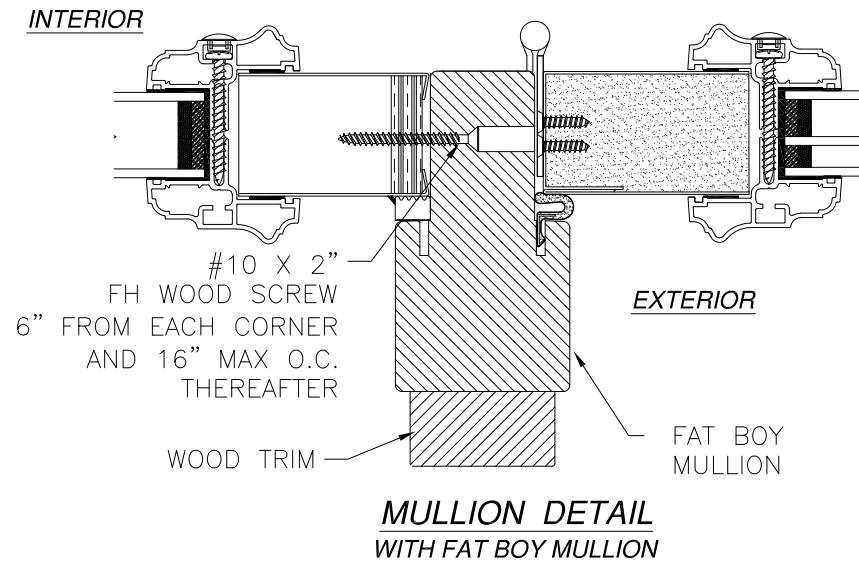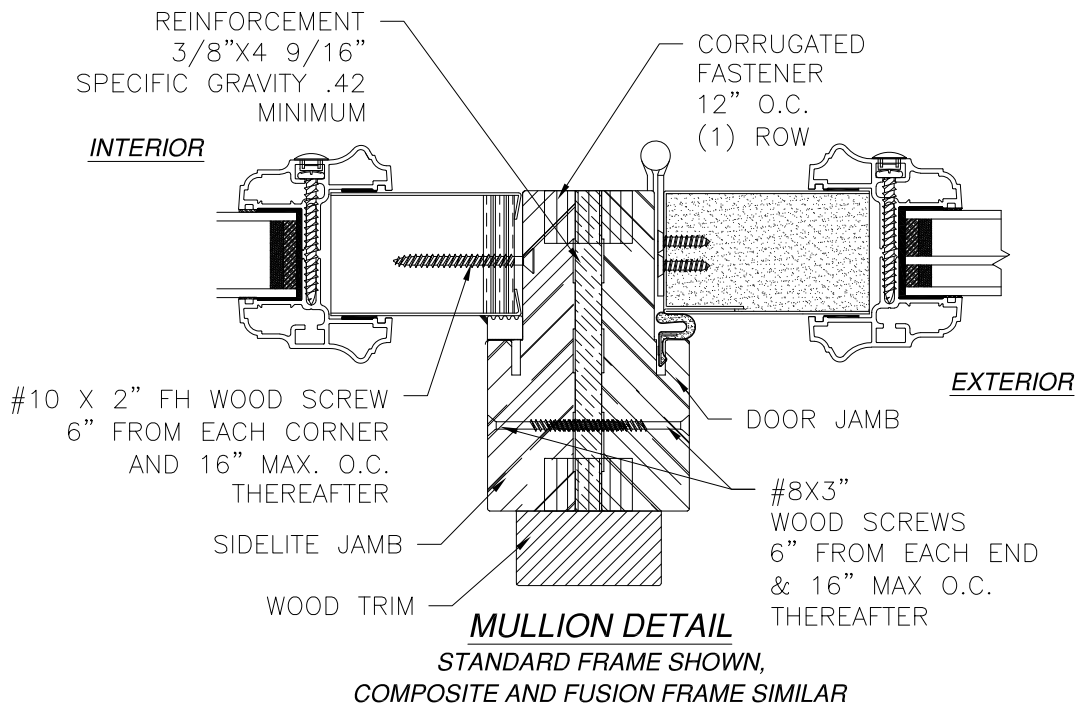


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR W/SIDELITES NON-IMPACT MULLION DETAILS		
DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 12 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		




SIGNED: 11/27/2023



Luis R. Lomas P.E.
FL No.: 62514

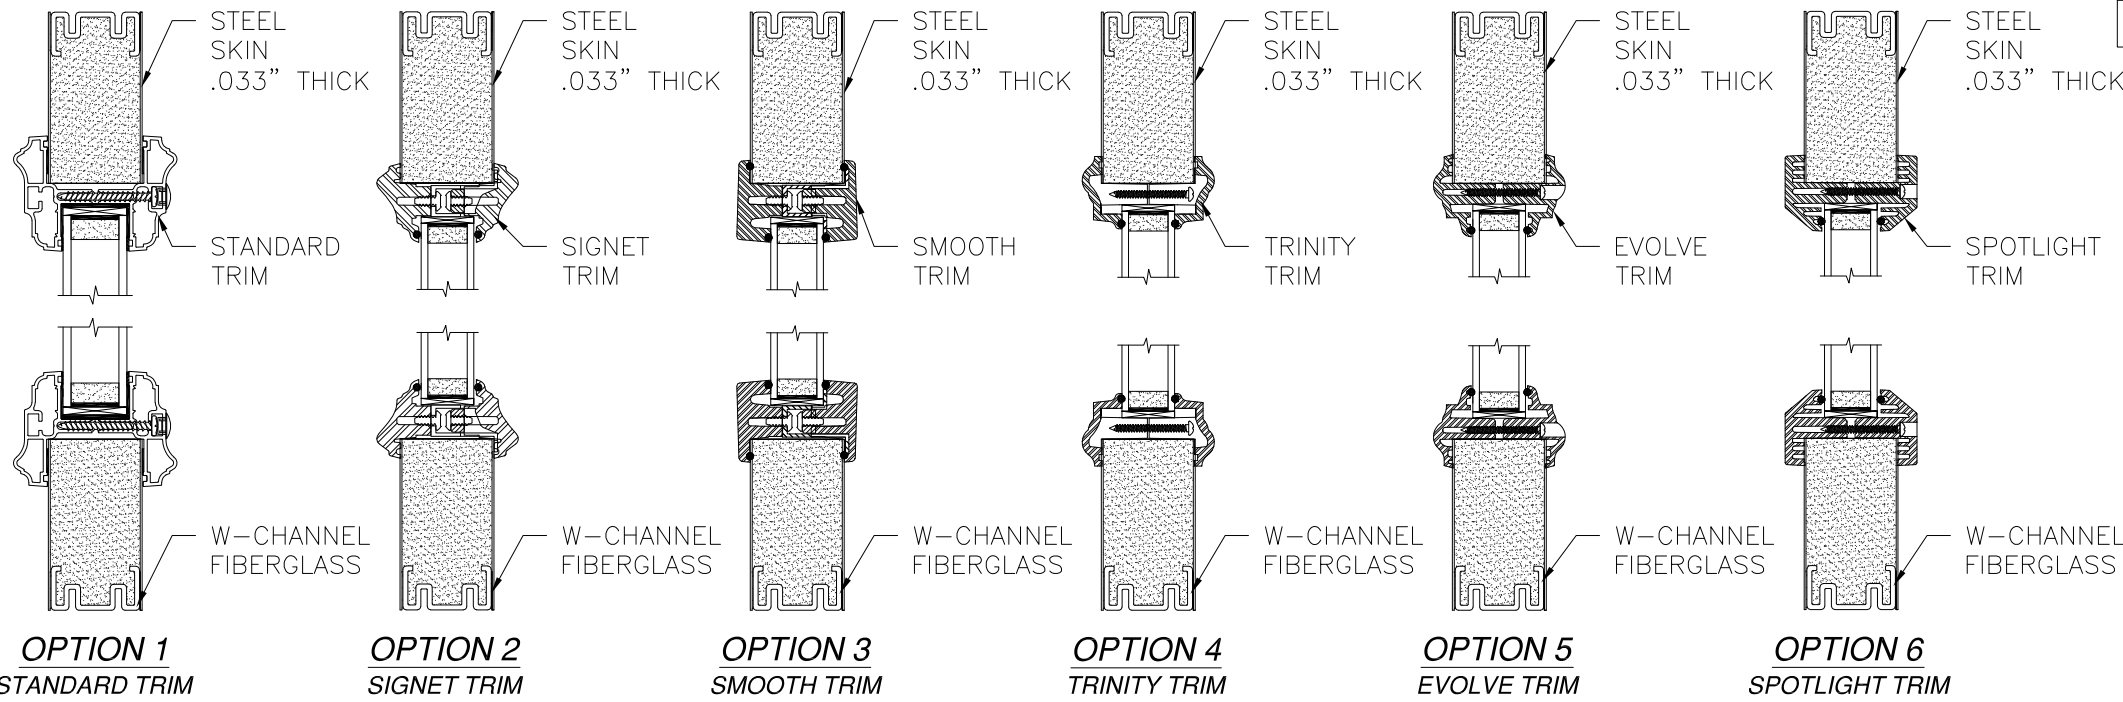

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

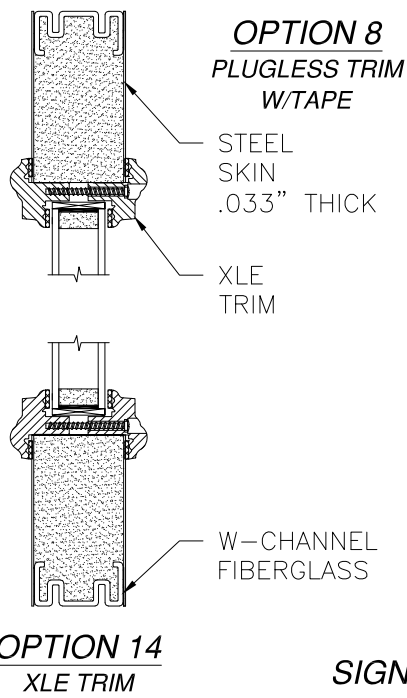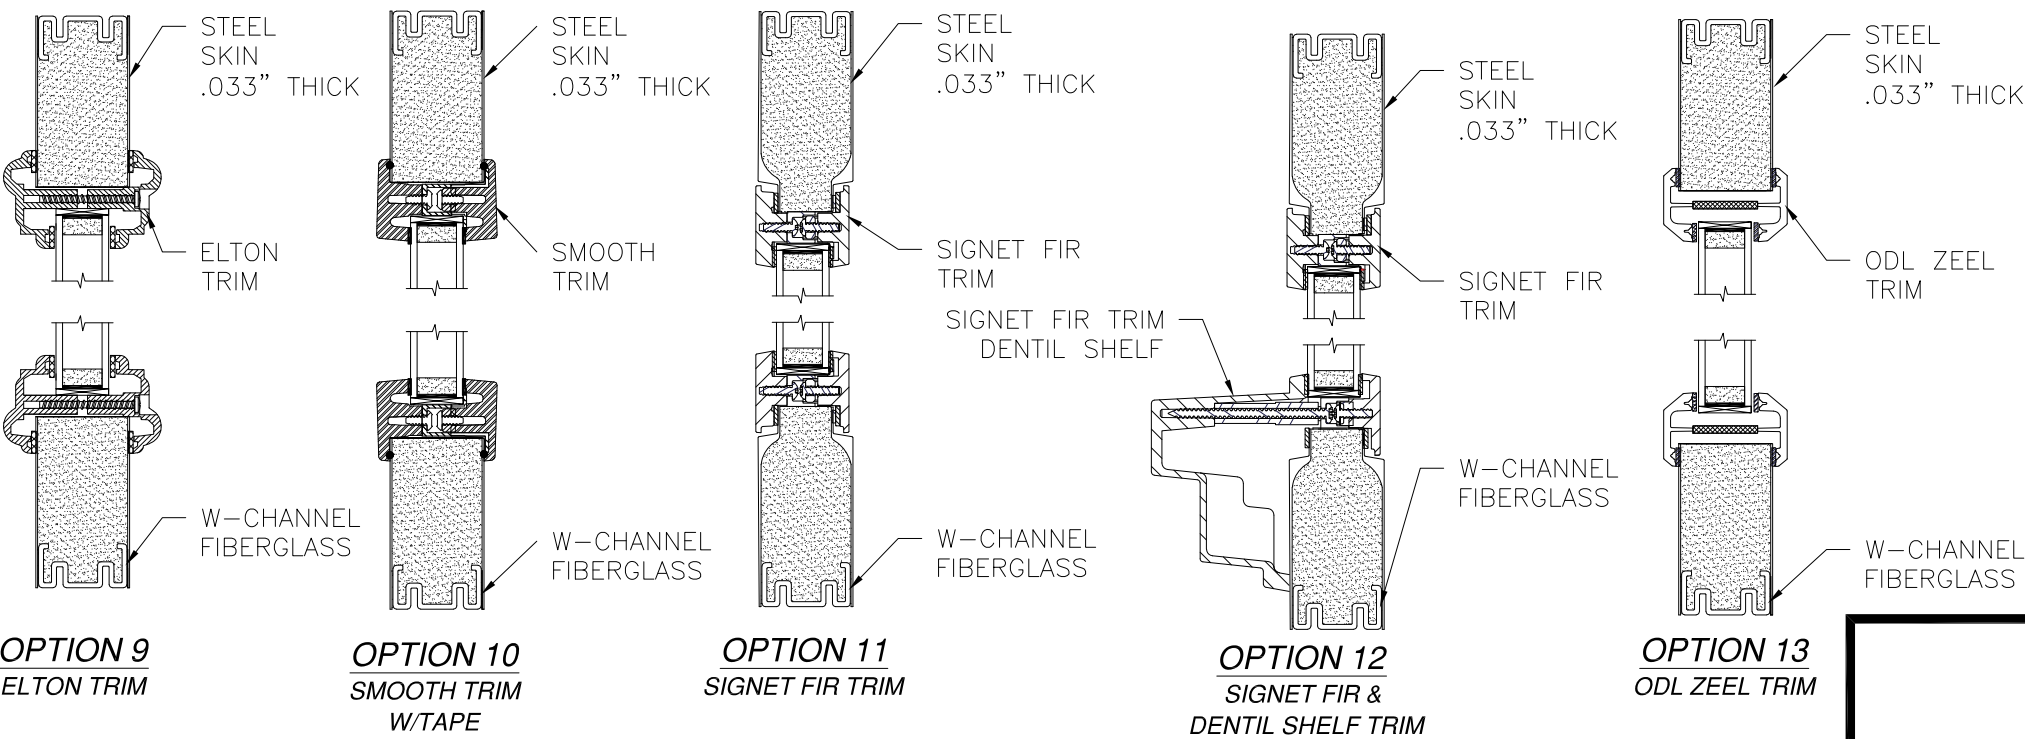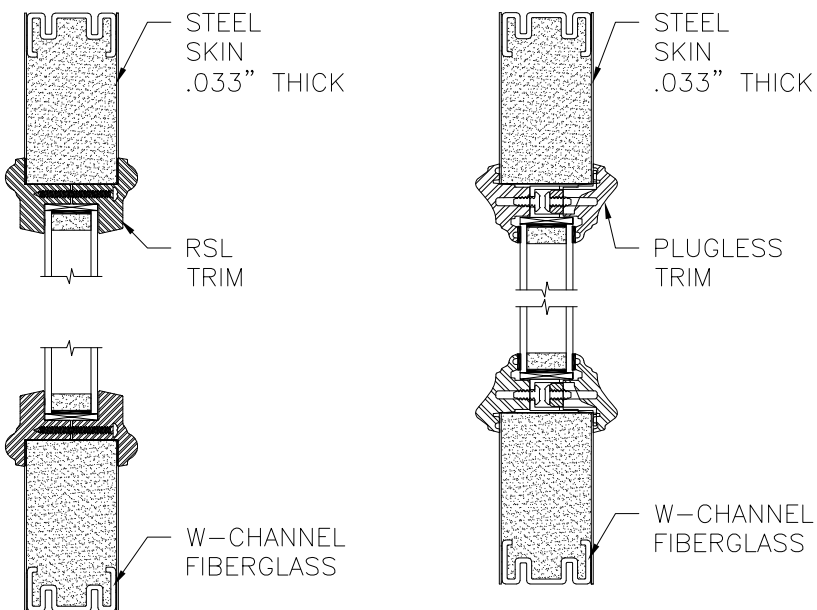

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN:
V.L.

DWG NO.
08-02070

REV
K

SCALE
NTS

DATE
06/19/13


SHEET
13 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com




SIGNED: 11/27/2023



Luis R. Lomas P.E.
FL No.: 62514

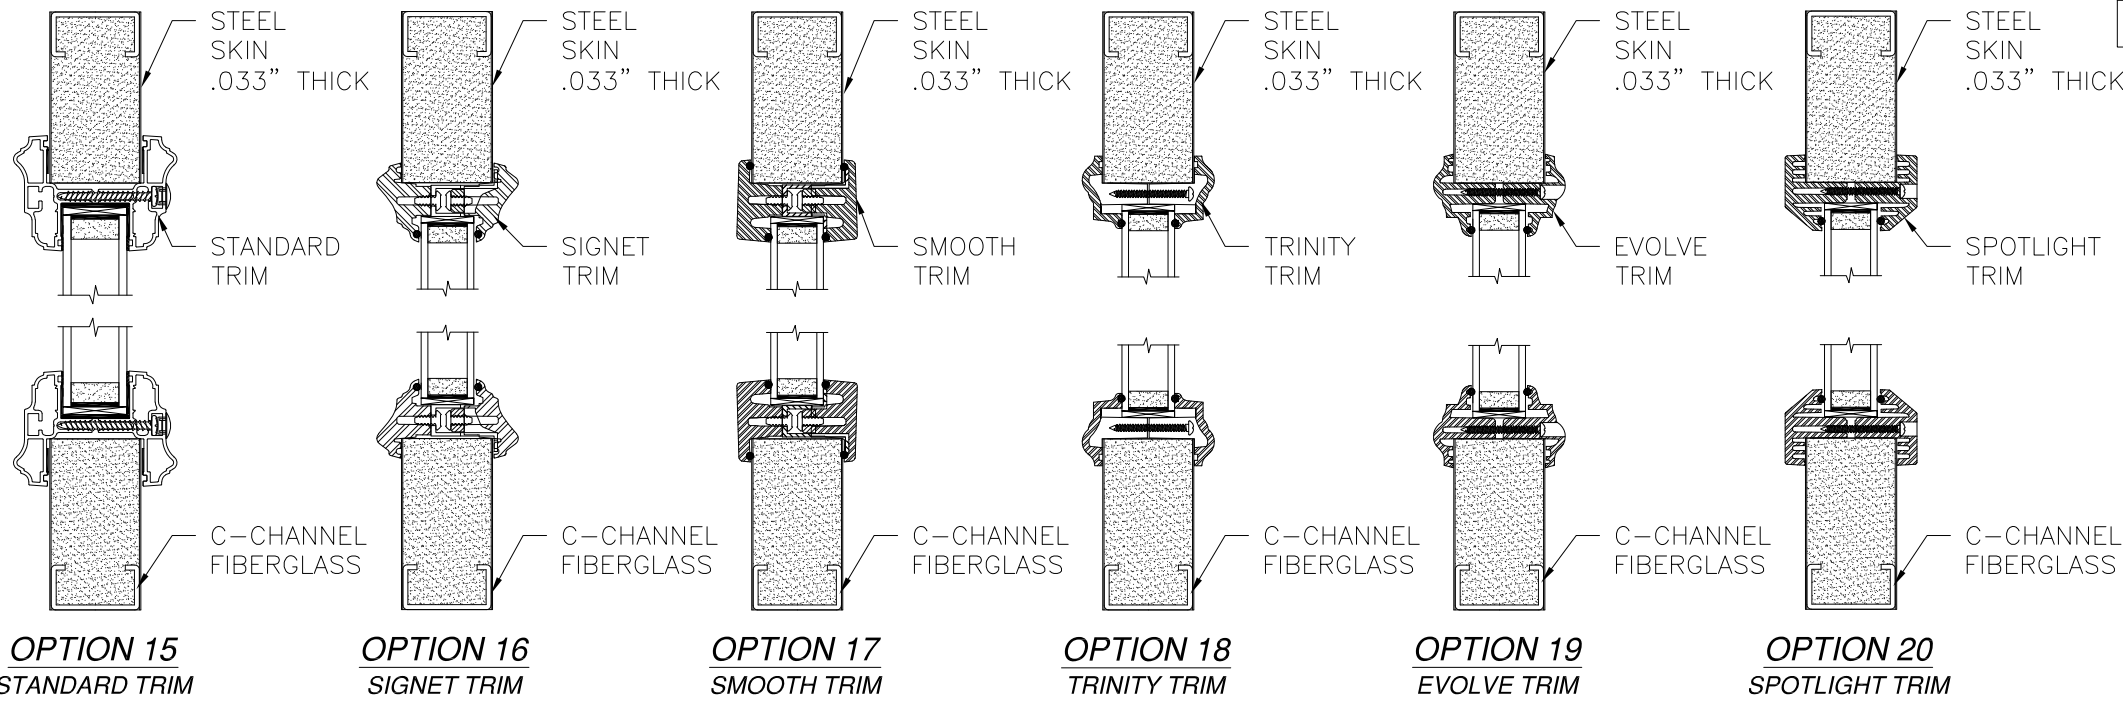

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

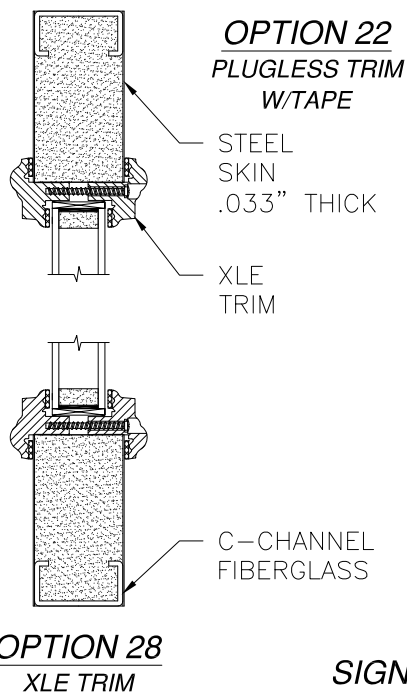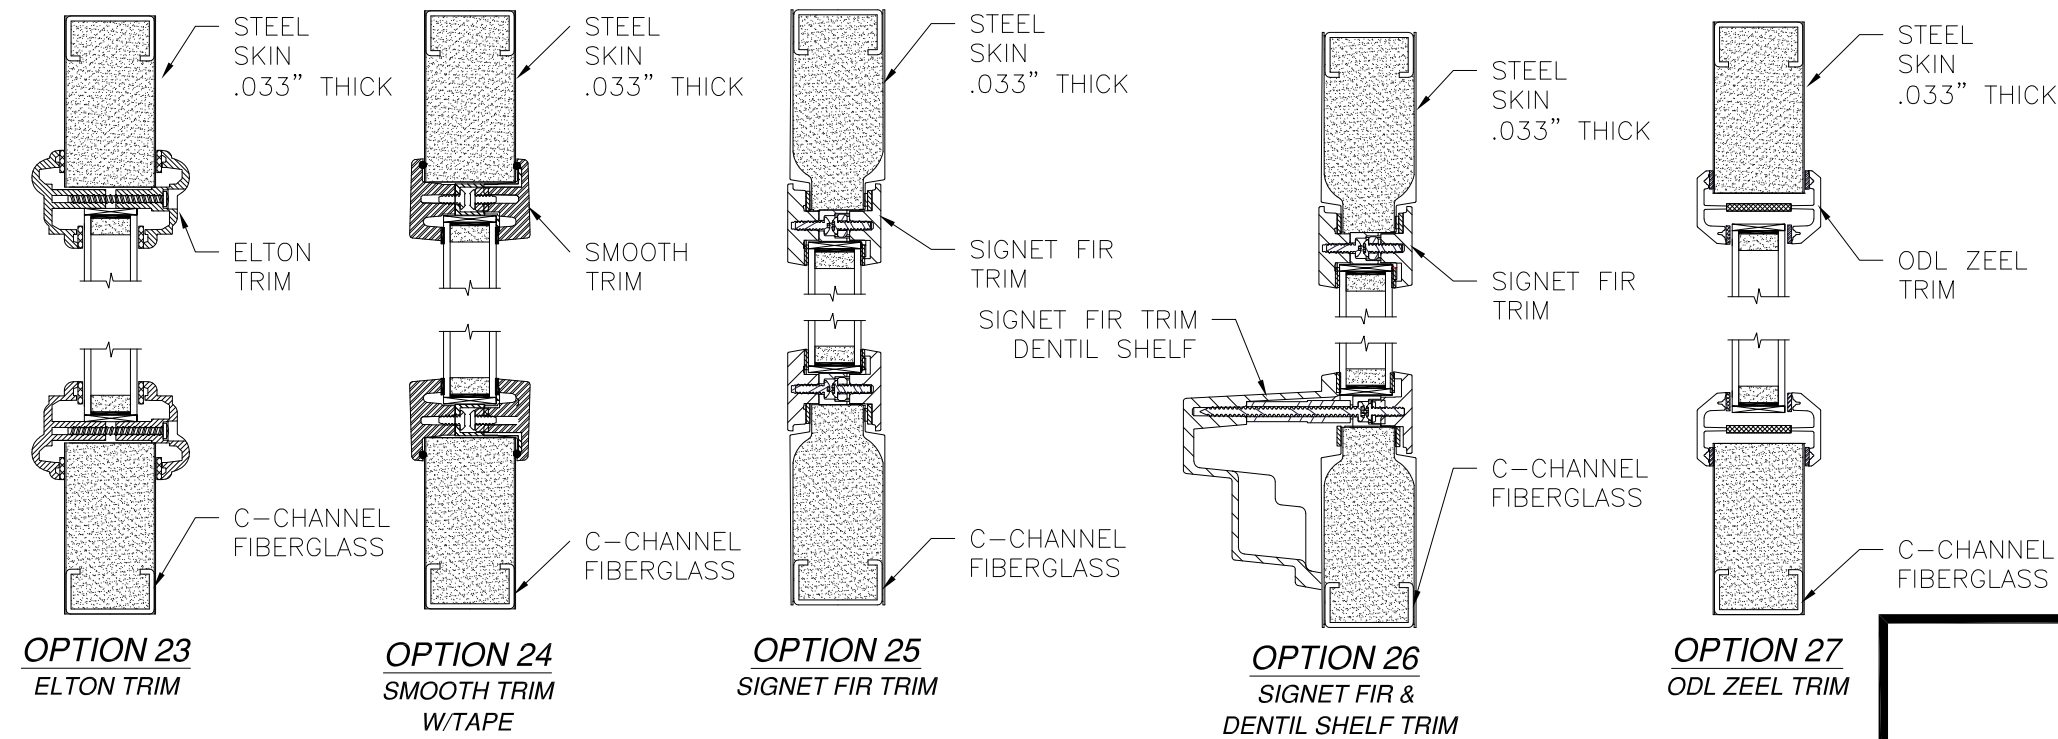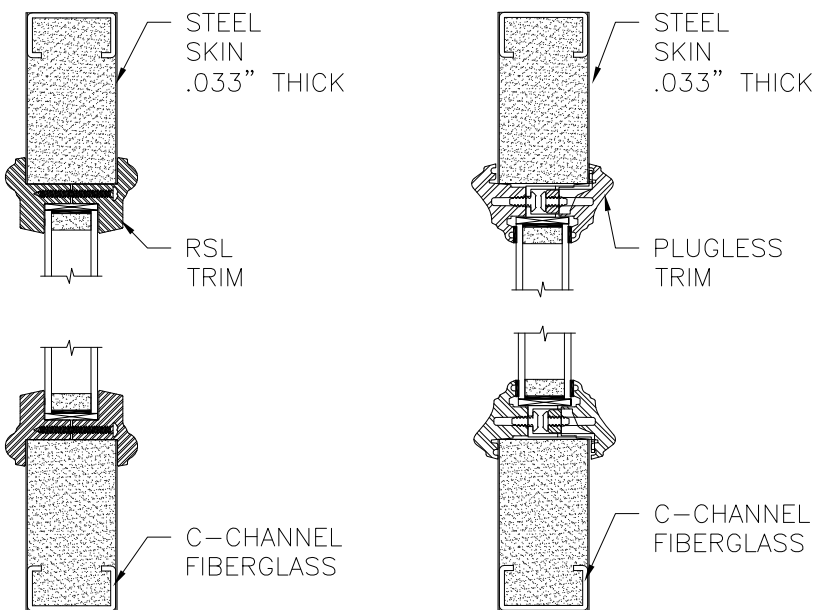

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN: V.L. DWG NO. 08-02070 REV K

SCALE NTS DATE 06/19/13 SHEET 14 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 11/27/2023



Luis R. Lomas P.E.
FL No.: 62514



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

FIBERGLASS SKIN .085" THICK

STANDARD TRIM

COMPOSITE RAIL

OPTION 29
STANDARD TRIM

FIBERGLASS SKIN .085" THICK

SIGNET TRIM

COMPOSITE RAIL

OPTION 30
SIGNET TRIM

FIBERGLASS SKIN .085" THICK

SMOOTH TRIM

COMPOSITE RAIL

OPTION 31
SMOOTH TRIM

FIBERGLASS SKIN .085" THICK

TRINITY TRIM

COMPOSITE RAIL

OPTION 32
TRINITY TRIM

FIBERGLASS SKIN .085" THICK

EVOLVE TRIM

COMPOSITE RAIL

OPTION 33
EVOLVE TRIM

FIBERGLASS SKIN .085" THICK

SPOTLIGHT TRIM

COMPOSITE RAIL

OPTION 34
SPOTLIGHT TRIM

FIBERGLASS SKIN .085" THICK

RSL TRIM

COMPOSITE RAIL

OPTION 35
RSL TRIM

FIBERGLASS SKIN .085" THICK

PLUGLESS TRIM

COMPOSITE RAIL

OPTION 36
PLUGLESS TRIM
W/TAPE

FIBERGLASS SKIN .085" THICK

ELTON TRIM

COMPOSITE RAIL

OPTION 37
ELTON TRIM

FIBERGLASS SKIN .085" THICK

SMOOTH TRIM

COMPOSITE RAIL

OPTION 38
SMOOTH TRIM
W/TAPE

FIBERGLASS SKIN .085" THICK

SIGNET FIR TRIM

COMPOSITE RAIL

OPTION 39
SIGNET FIR TRIM

FIBERGLASS SKIN .085" THICK

SIGNET FIR TRIM

SIGNET FIR TRIM DENTIL SHELF

COMPOSITE RAIL

OPTION 40
SIGNET FIR &
DENTIL SHELF TRIM

FIBERGLASS SKIN .085" THICK

ODL ZEEL TRIM

COMPOSITE RAIL

OPTION 41
ODL ZEEL TRIM

FIBERGLASS SKIN .085" THICK

XLE TRIM

COMPOSITE RAIL

OPTION 42
XLE TRIM

APPROVED SLABS AND TRIMS

PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR
W/SIDELITES NON-IMPACT
APPROVED SLABS AND TRIMS

DRAWN:
V.L.

DWG NO.
08-02070

REV
K

SCALE
NTS

DATE
06/19/13

















SHEET
15 OF 16

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 11/27/2023


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
K	REVISE TRIMS AND HARDWARE SCHEDULE	11/06/2023	R.L.

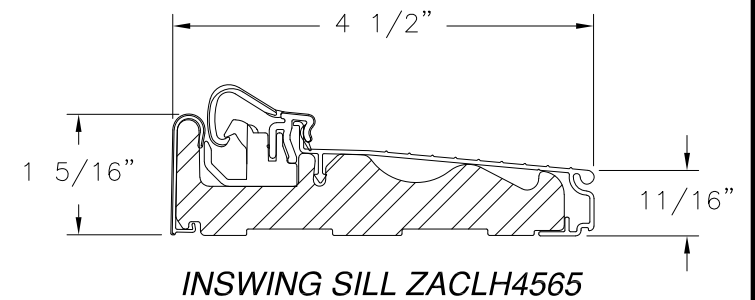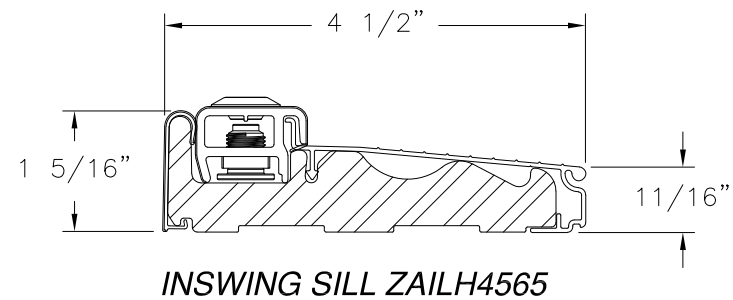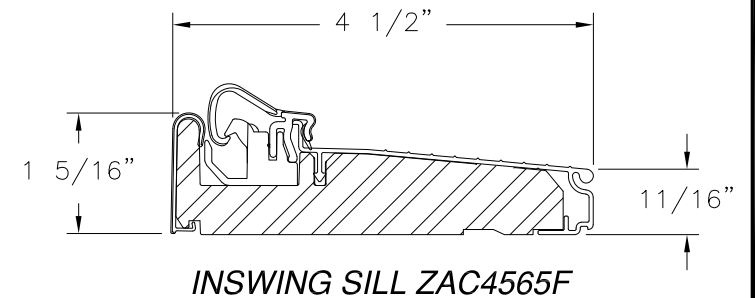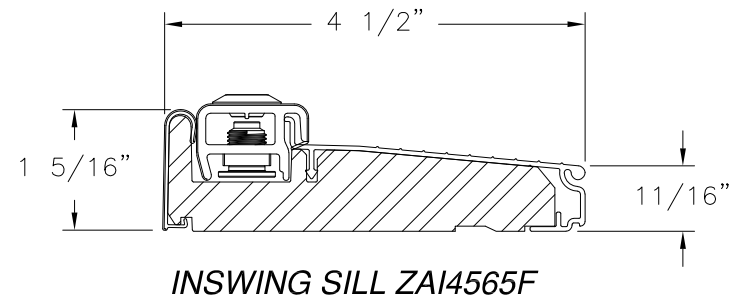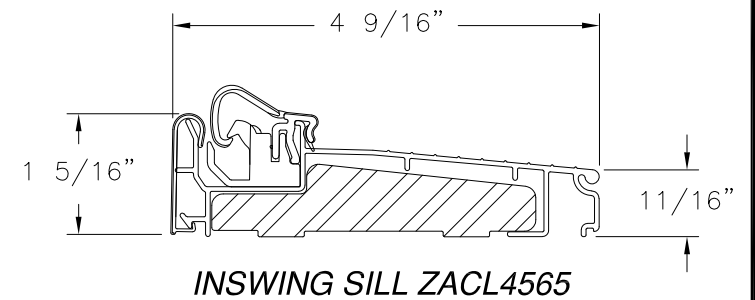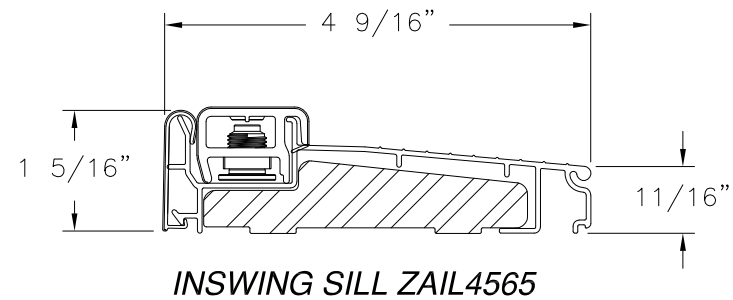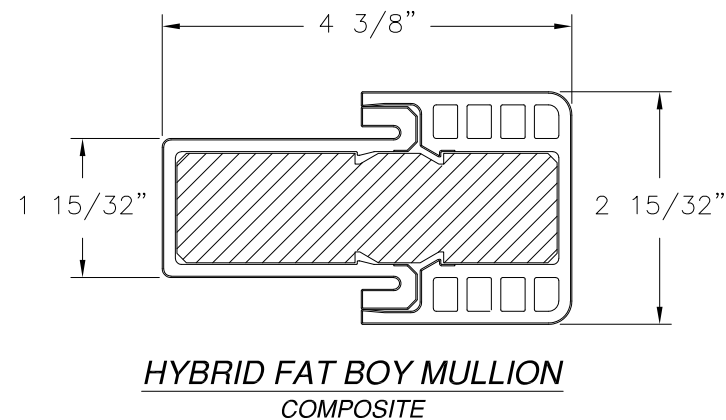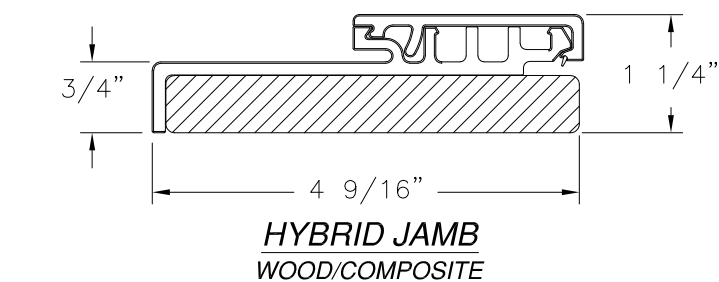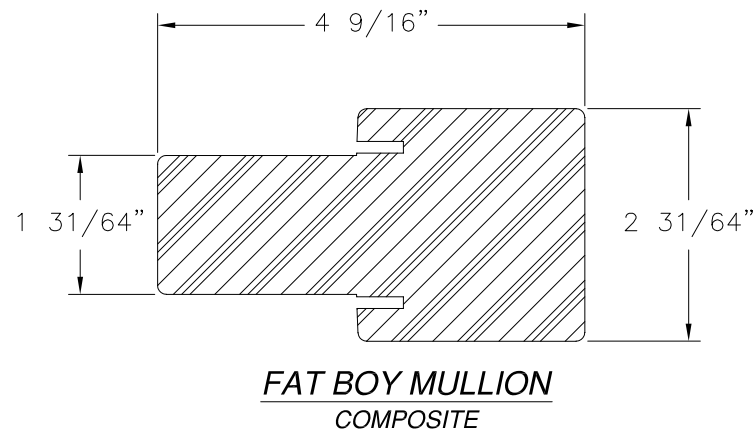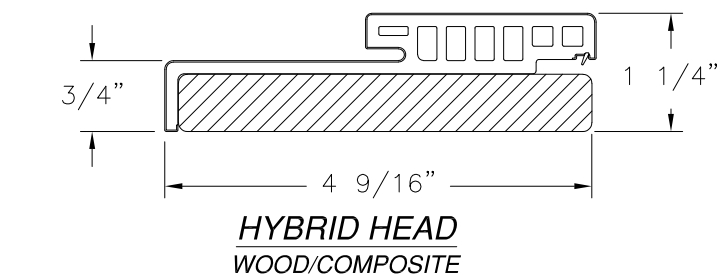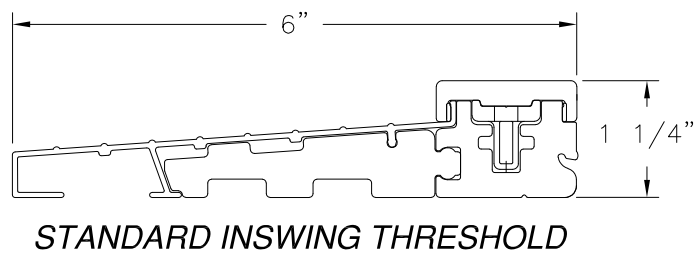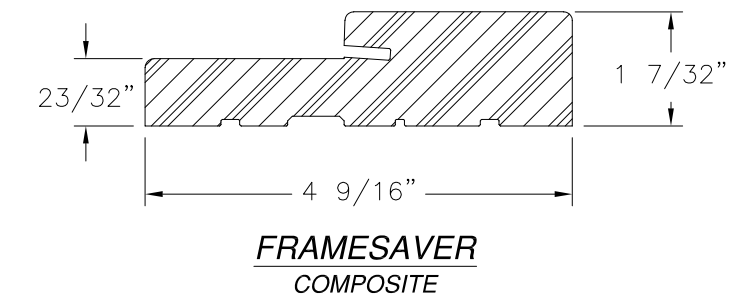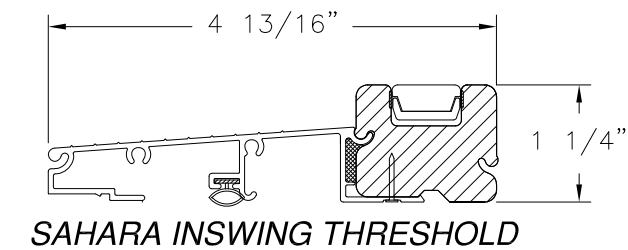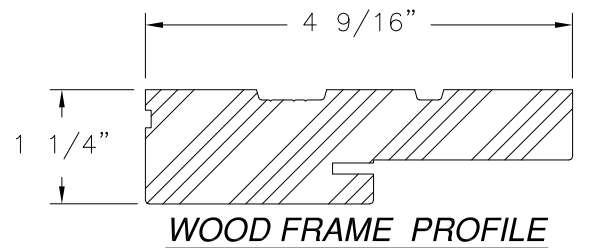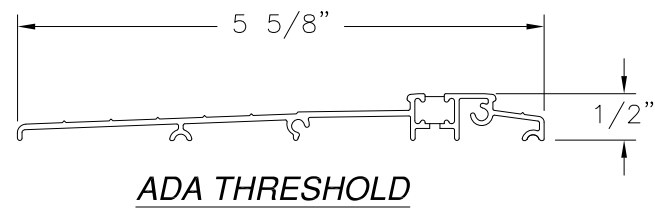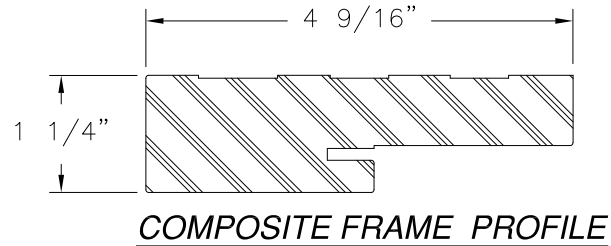

SIGNED: 11/27/2023

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS INSWING GLAZED DOUBLE DOOR W/SIDELITES NON-IMPACT COMPONENTS		
DRAWN: V.L.	DWG NO. 08-02070	REV K
SCALE NTS	DATE 06/19/13	SHEET 16 OF 16
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

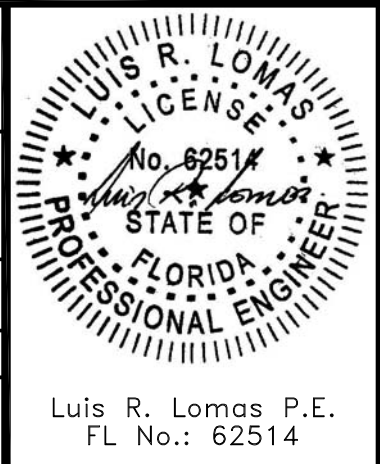

Luis R. Lomas P.E.
FL No.: 62514