

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
5. ALLOWABLE STRESS INCREASE OF 1/3 WAS NOT USED IN THE DESIGN OF THE PRODUCT SHOWN HEREIN. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
6. FRAME MATERIAL: WOOD WITH G=.46 MINIMUM SPECIFIC GRAVITY, OR COMPOSITE, OR FRAMESAVER, OR FUSION FRAME.
DOOR SKIN MATERIAL: STEEL .033" THICK (MINIMUM) AND FIBERGLASS .085" THICK (MINIMUM)
7. UNITS MUST BE GLAZED PER ASTM E1300, WITH SAFETY GLAZING.
8. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
9. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".

10. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #10 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/8" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
11. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 3/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
12. FOR ANCHORING INTO METAL STRUCTURE USE #10 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
13. ALL FASTENERS TO BE CORROSION RESISTANT.
14. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 14.1. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42C
 - 14.2. CONCRETE – MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.
 - 14.3. MASONRY – GROUT FILLED STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).
 - 14.4. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .048" THICK MINIMUM

SIGNED: 09/09/2026

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3	ANCHORING LAYOUT AND APPROVED CONFIGURATIONS
4 – 11	INSTALLATION DETAILS
12 – 15	APPROVED SLABS, MULLION DETAILS AND COMPONENTS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
NOTES

DRAWN:
N.G.

DWG NO.
08-02078


REV
L

SCALE NTS

DATE 06/19/13


SHEET 1 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

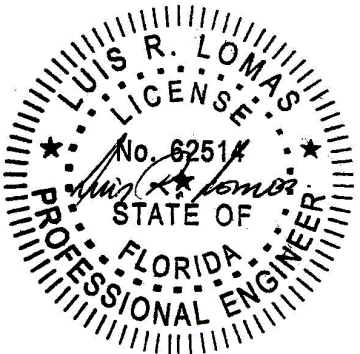

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

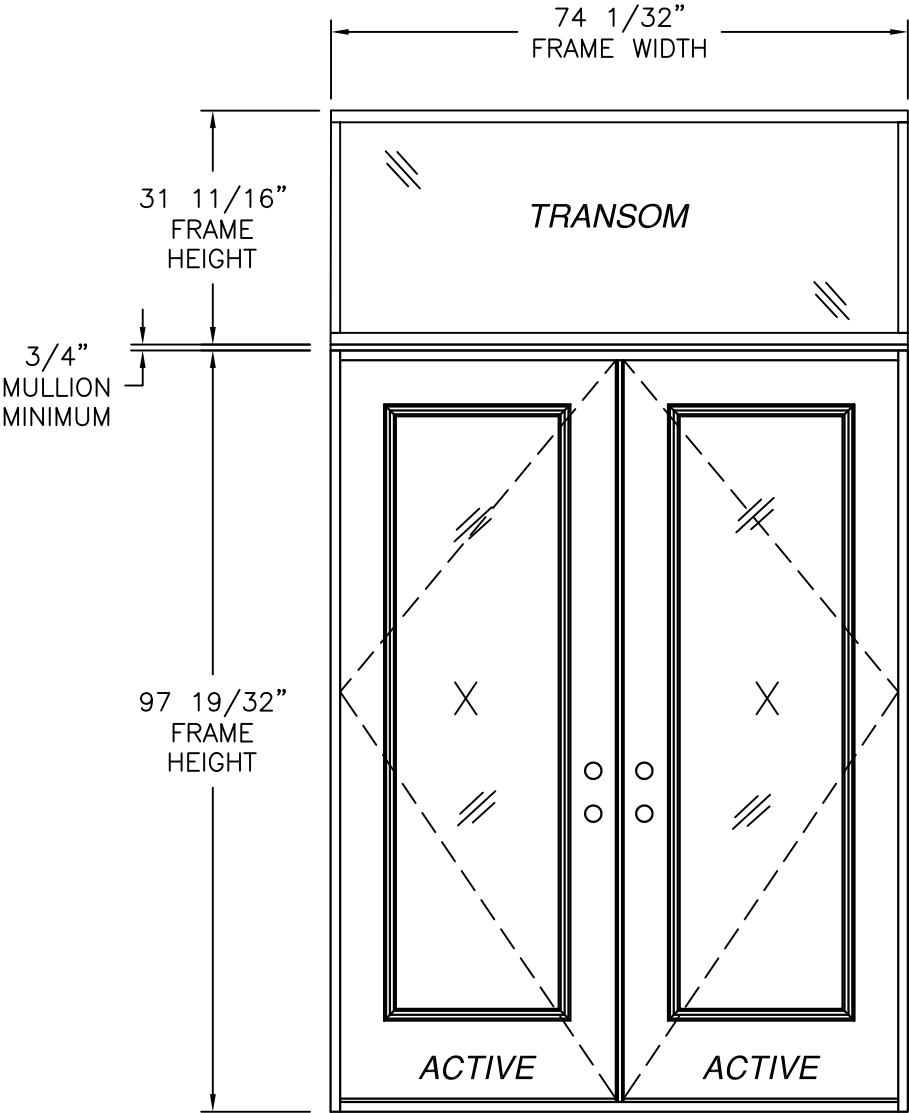

DESIGN PRESSURE RATING	IMPACT RATING
± 55.0 PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB

DESIGN PRESSURE RATING	IMPACT RATING
$+48.0/-52.0$	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB

DESIGN PRESSURE RATING	IMPACT RATING
± 50.0 PSF	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH STEEL SLAB AND PANOLOCK MULTI-POINT

DESIGN PRESSURE RATING	IMPACT RATING
$+48.0/-50.0$	NONE
THIS SYSTEM WAS NOT TESTED FOR WATER INFILTRATION AND IS TO BE INSTALLED ONLY WHERE WATER RESISTANCE IS NOT REQUIRED	

WITH FIBERGLASS SLAB AND PANOLOCK MULTI-POINT

DOUBLE DOOR W/ TRANSOM
EXTERIOR VIEW

35 3/4" x 94 15/16" PANEL SIZE SHOWN. OTHER SIZES ARE APPROVED
AS LONG AS INDIVIDUAL PANEL AREA DOES NOT EXCEED 23.56 FT²

- D.L.O. NOTES:
- DOOR D.L.O.: 20 3/8" x 78 1/2"
 - TRANSOM D.L.O.: 71 1/32" x 28 11/16"


HARDWARE SCHEDULE	
A.	F-SERIES & FC-SERIES LOCK ASSEMBLY DOOR KNOB BY SCHLAGE
B.	B-SERIES DEADBOLT ASSEMBLY BY SCHLAGE
C.	F-SERIES & FC-SERIES DEADBOLT ASSEMBLY BY SCHAGE
D.	RESIDENTIAL GRADE DOOR HANDLE ASSEMBLY BY EMTEK (ALTERNATE)
E.	MULTI-POINT HANDLE ASSEMBLY BY TRILENNIUM (ALTERNATE)
F.	PANOLOCK MULTI-POINT LOCK ASSEMBLY (ALTERNATE)
G.	(3) 4" X 4" BALL BEARING HINGES BY PENROD
H.	(3) 4" X 4" SPRING BOMMER HINGES BY PENROD (ALTERNATE)

SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT ELEVATION		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 2 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

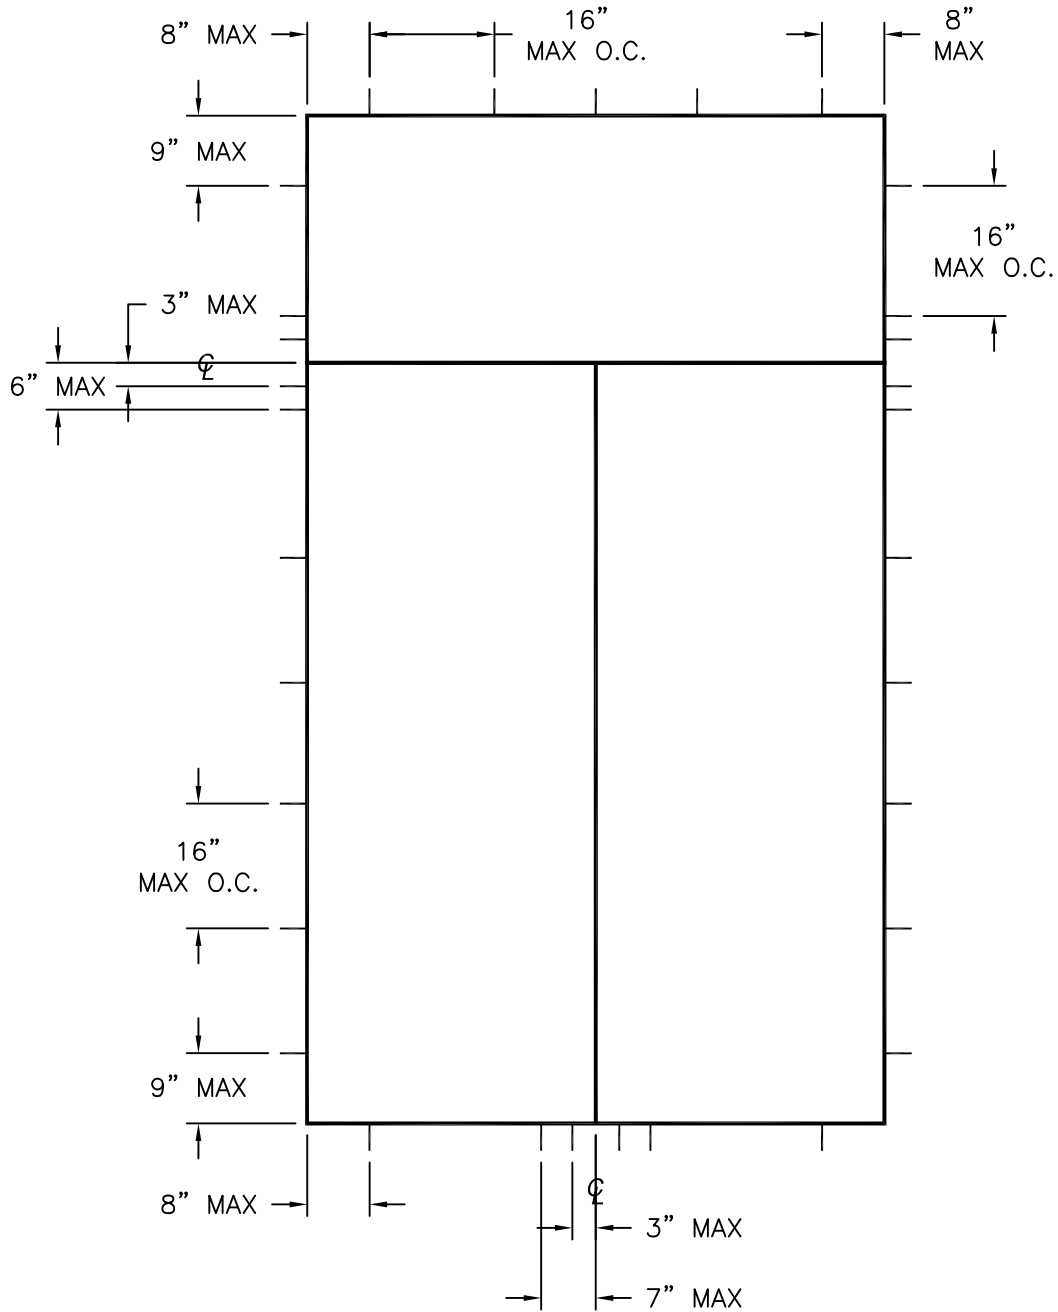

ANCHOR LAYOUT

Anchors and anchor connectors corrosion resistance chart		
Exposure	Distance from coastal shoreline	
	0' up to 300'	>300' up to 3000'
Exterior - partially sheltered	304 or A305 or 306 Stainless steel per ASTM A240	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Exterior - open exposed	304 or A305 or 306 Stainless steel per ASTM A240	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Unconditioned interior-vented enclosed	Galvanized per ASTM A153 class D or ASTM A641 class 3S	Galvanized per ASTM A153 class D or ASTM A641 class 3S
Unconditioned interior-unvented enclosed	Galvanized per ASTM A153 class D or ASTM A641 class 3S	Galvanized per ASTM A153 class D or ASTM A641 class 3S

APPROVED LITE CONFIGURATIONS

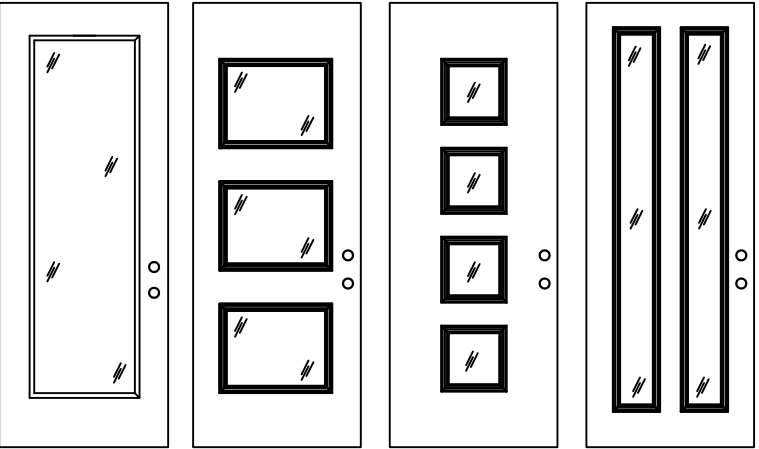

FULL LITE 3 LITE 4 LITE 2 LITE

LITE CONFIGURATIONS SHOWN ARE FOR REFERENCE ONLY. MULTIPLE LITE CONFIGURATIONS ARE APPROVED AS LONG AS LITE SIZE DOES NOT EXCEED 11.5 FT²

SIGNED: 09/09/2026

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
ANCHORING & APPROVED CONFIGURATION

DRAWN:
N.G.

DWG NO.
08-02078


REV
L

SCALE
NTS

DATE
06/19/13



SHEET
3 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

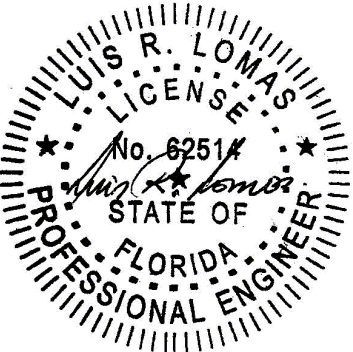


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

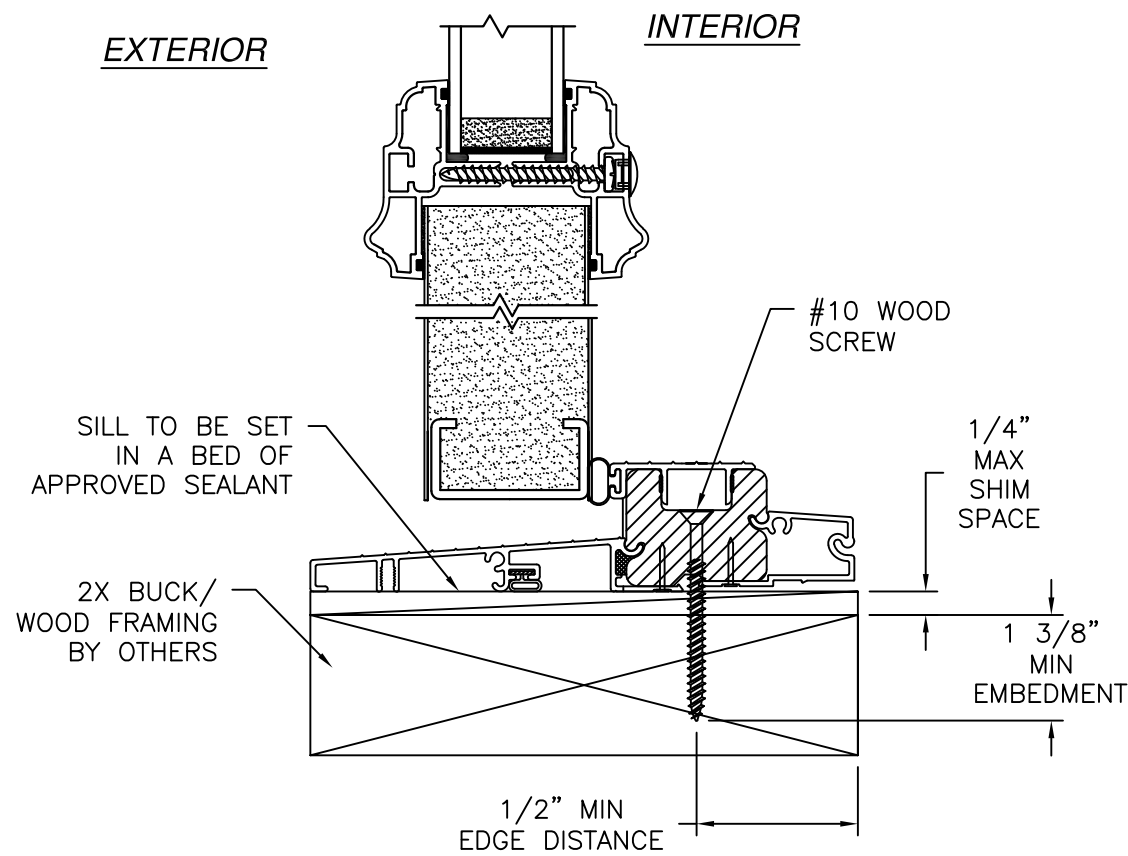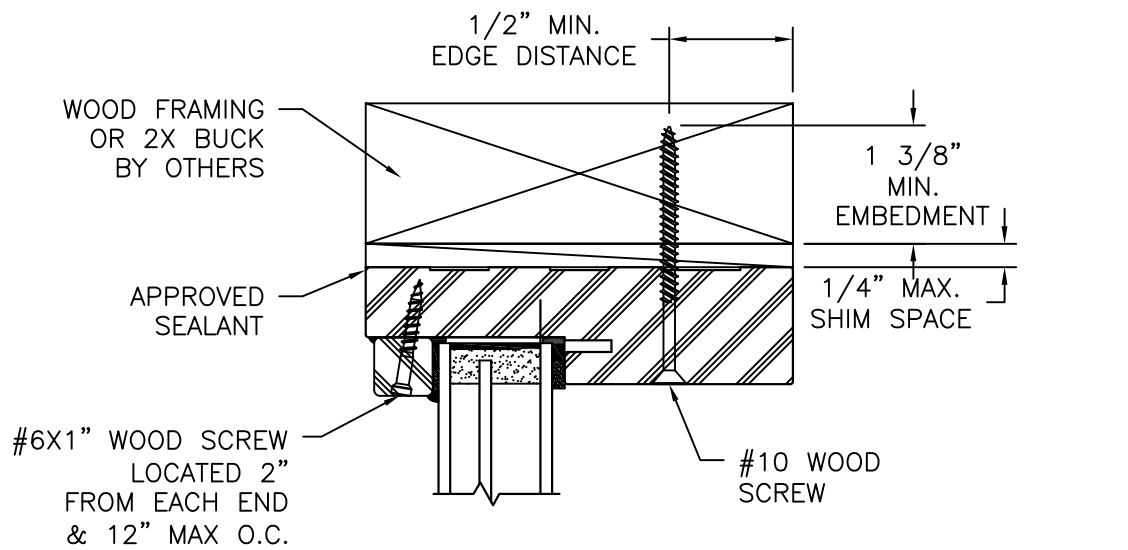

VERTICAL CROSS SECTION
 DOOR AND TRANSOM INSTALLATION - 2X BUCK/WOOD FRAMING
 TRANSOM HEAD SHOWN
 TRANSOM JAMB SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

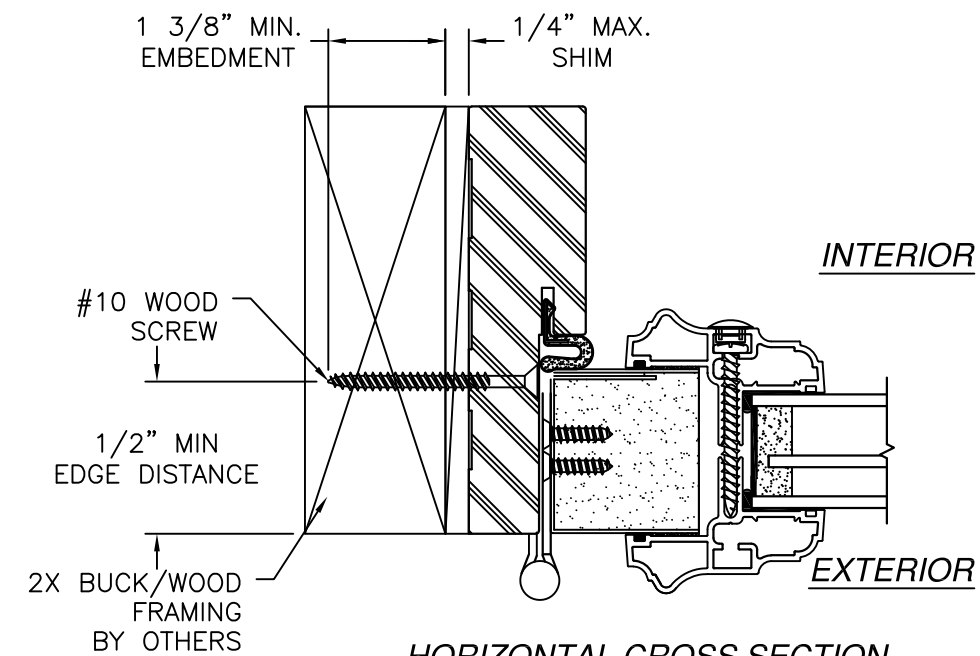

HORIZONTAL CROSS SECTION
 DOOR INSTALLATION - 2X BUCK/WOOD FRAMING

PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
INSTALLATION DETAILS

DRAWN: N.G.

DWG NO. 08-02078

REV L

SCALE NTS

DATE 06/19/13

SHEET 4 OF 15

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903


434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/09/2026

Luis R. Lomas P.E.


FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

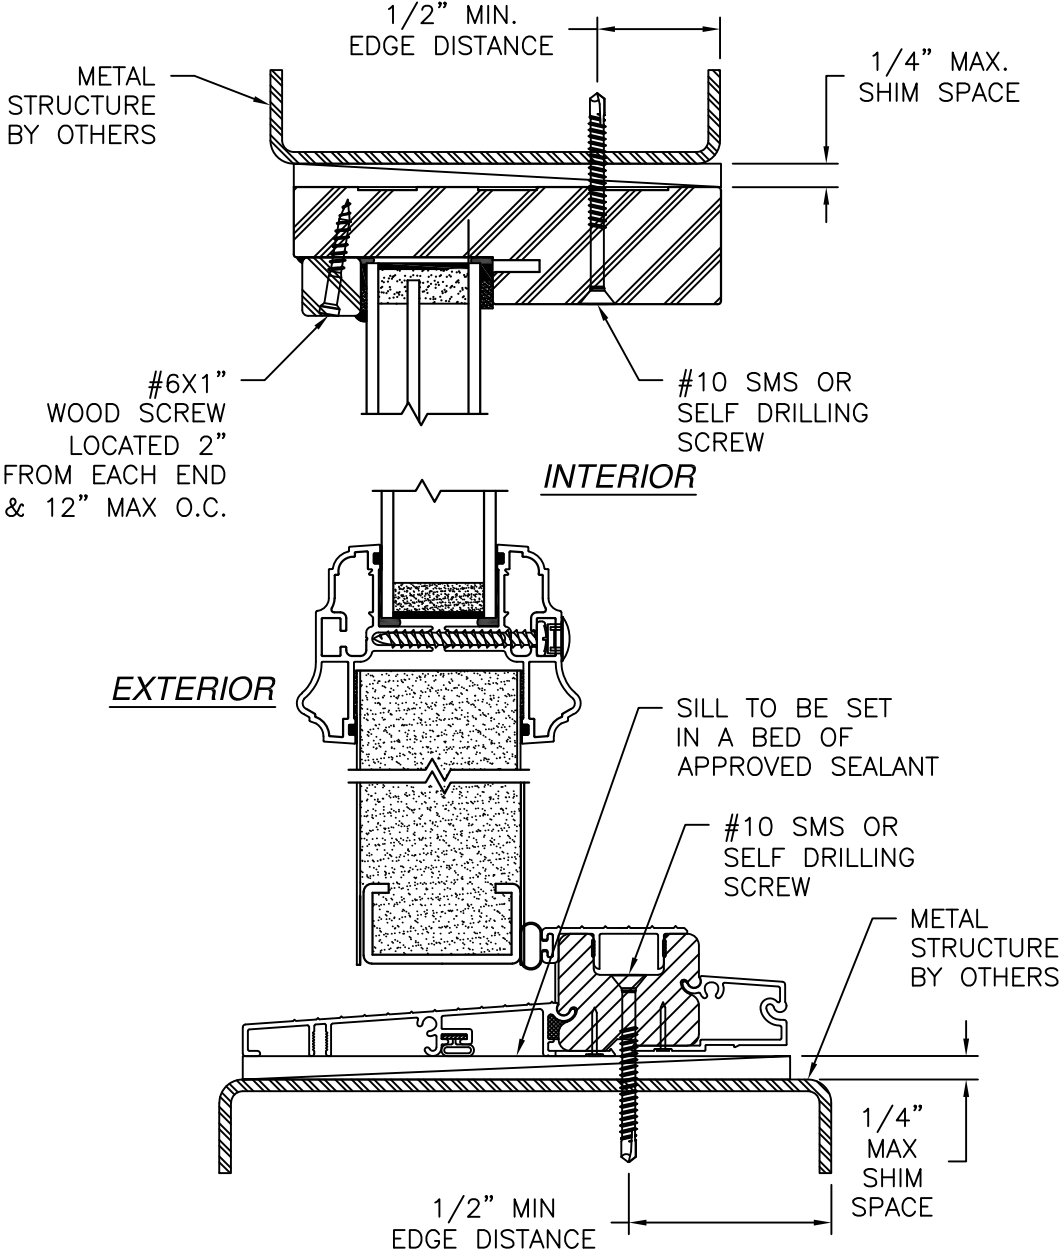

VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION METAL STRUCTURE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

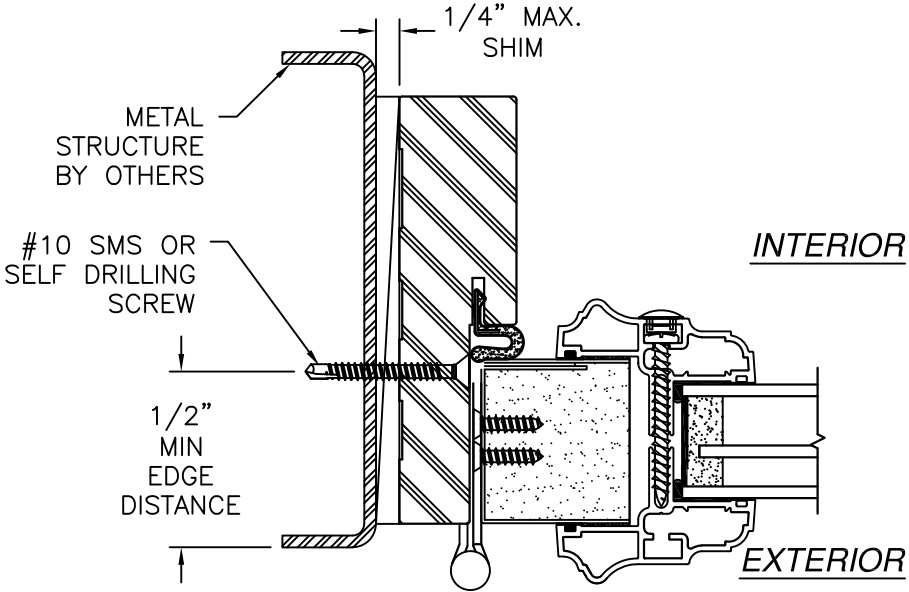

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - METAL STRUCTURE

PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
INSTALLATION DETAILS

DRAWN: N.G.

DWG NO. 08-02078

REV L

SCALE NTS

DATE 06/19/13


SHEET 5 OF 15

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903


434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/09/2026

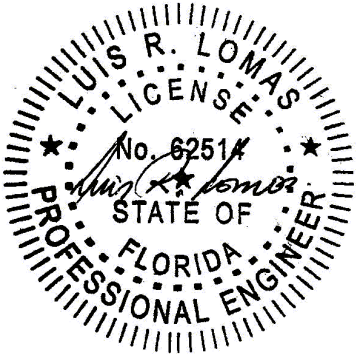


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

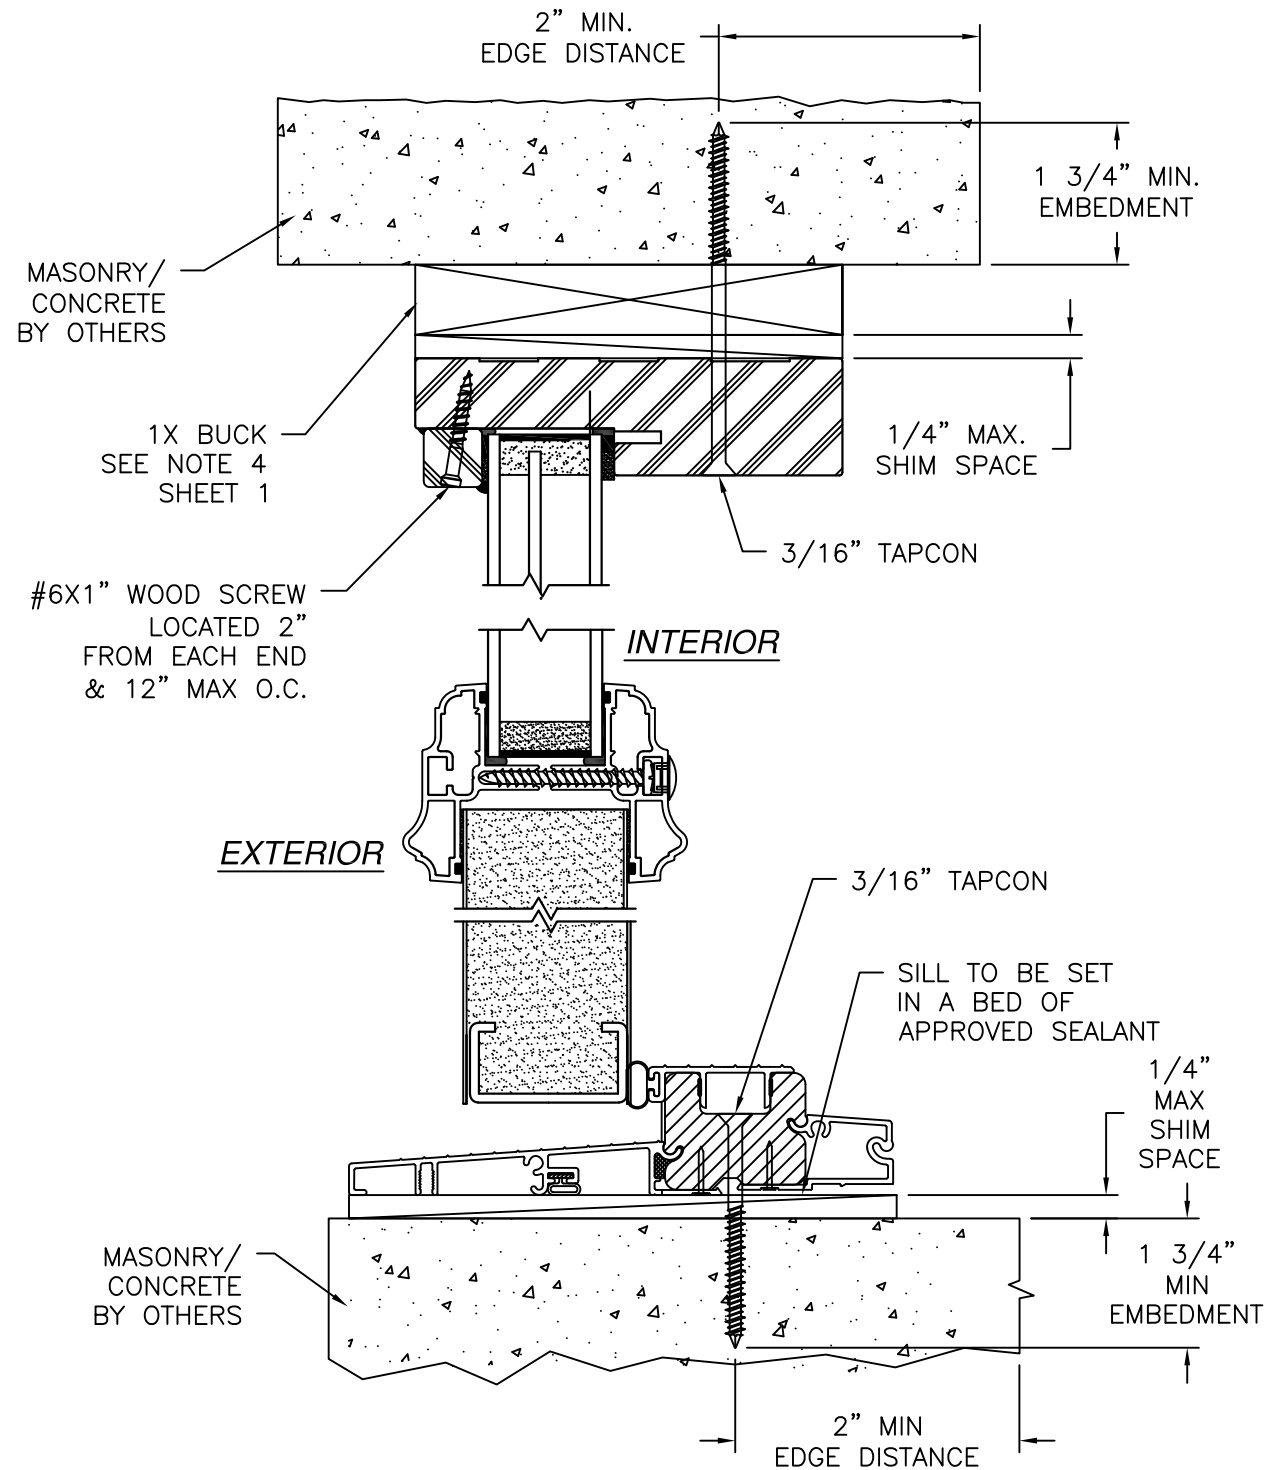

VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION MASONRY/CONCRETE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

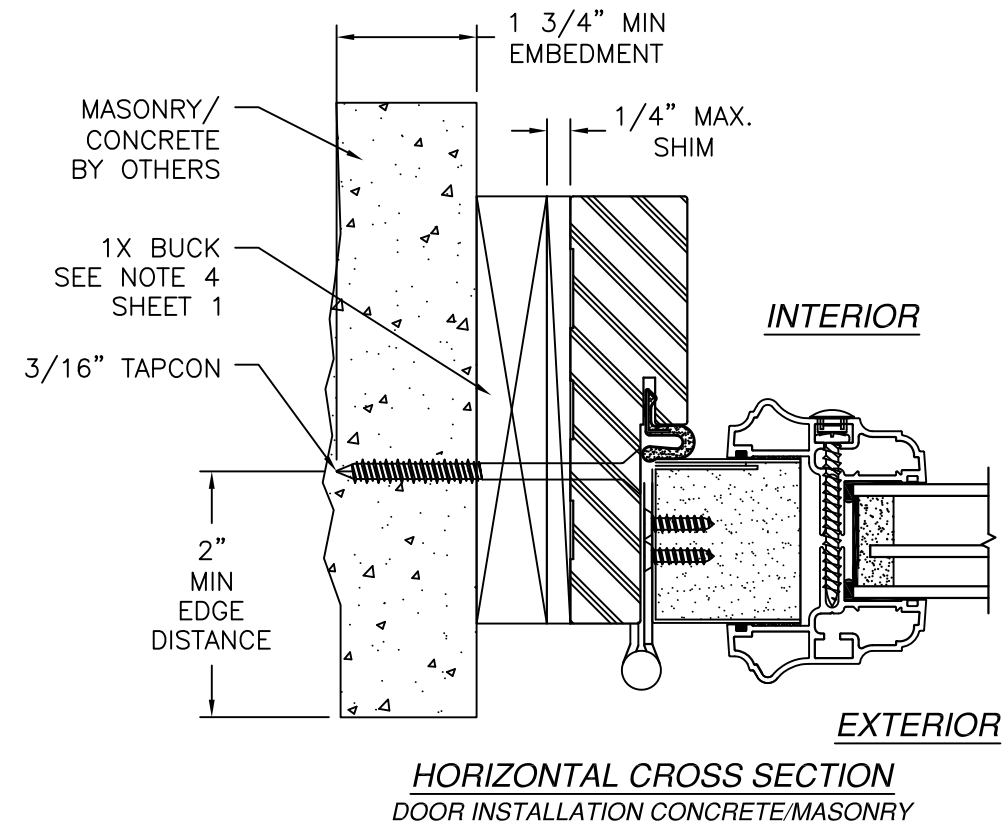

HORIZONTAL CROSS SECTION
DOOR INSTALLATION CONCRETE/MASONRY


SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 6 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

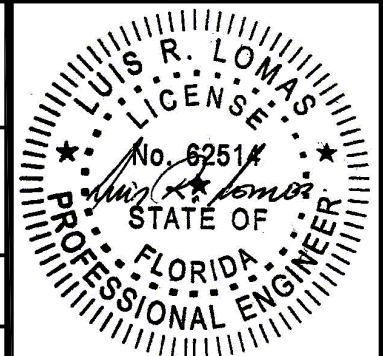


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

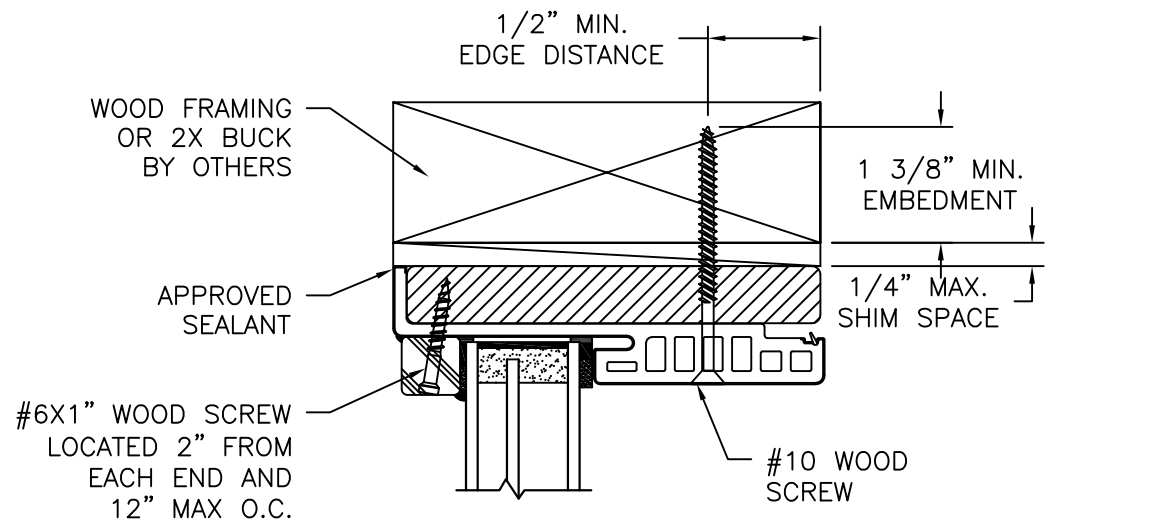

EXTERIOR

INTERIOR

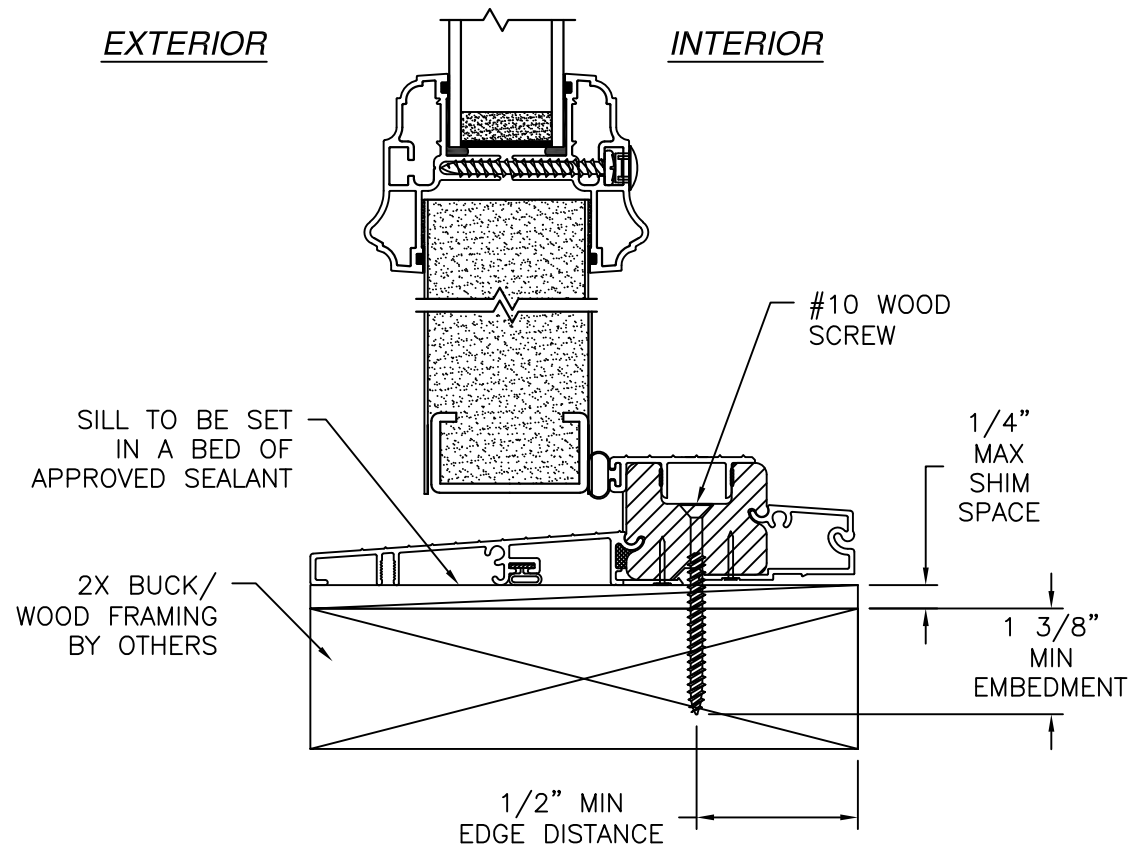


VERTICAL CROSS SECTION

DOOR AND TRANSOM INSTALLATION - 2X BUCK/WOOD FRAMING
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR

NOTES:


- INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
- PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

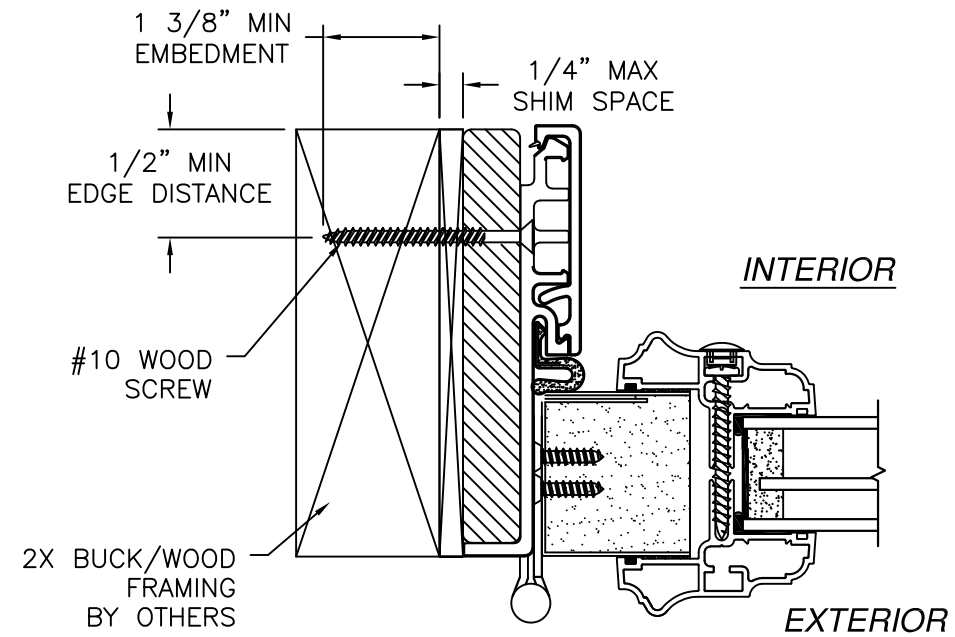

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - 2X BUCK/WOOD FRAMING


SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT INSTALLATION DETAILS W/FUSION FRAME		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 7 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

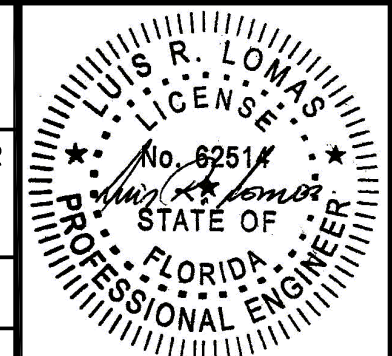


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

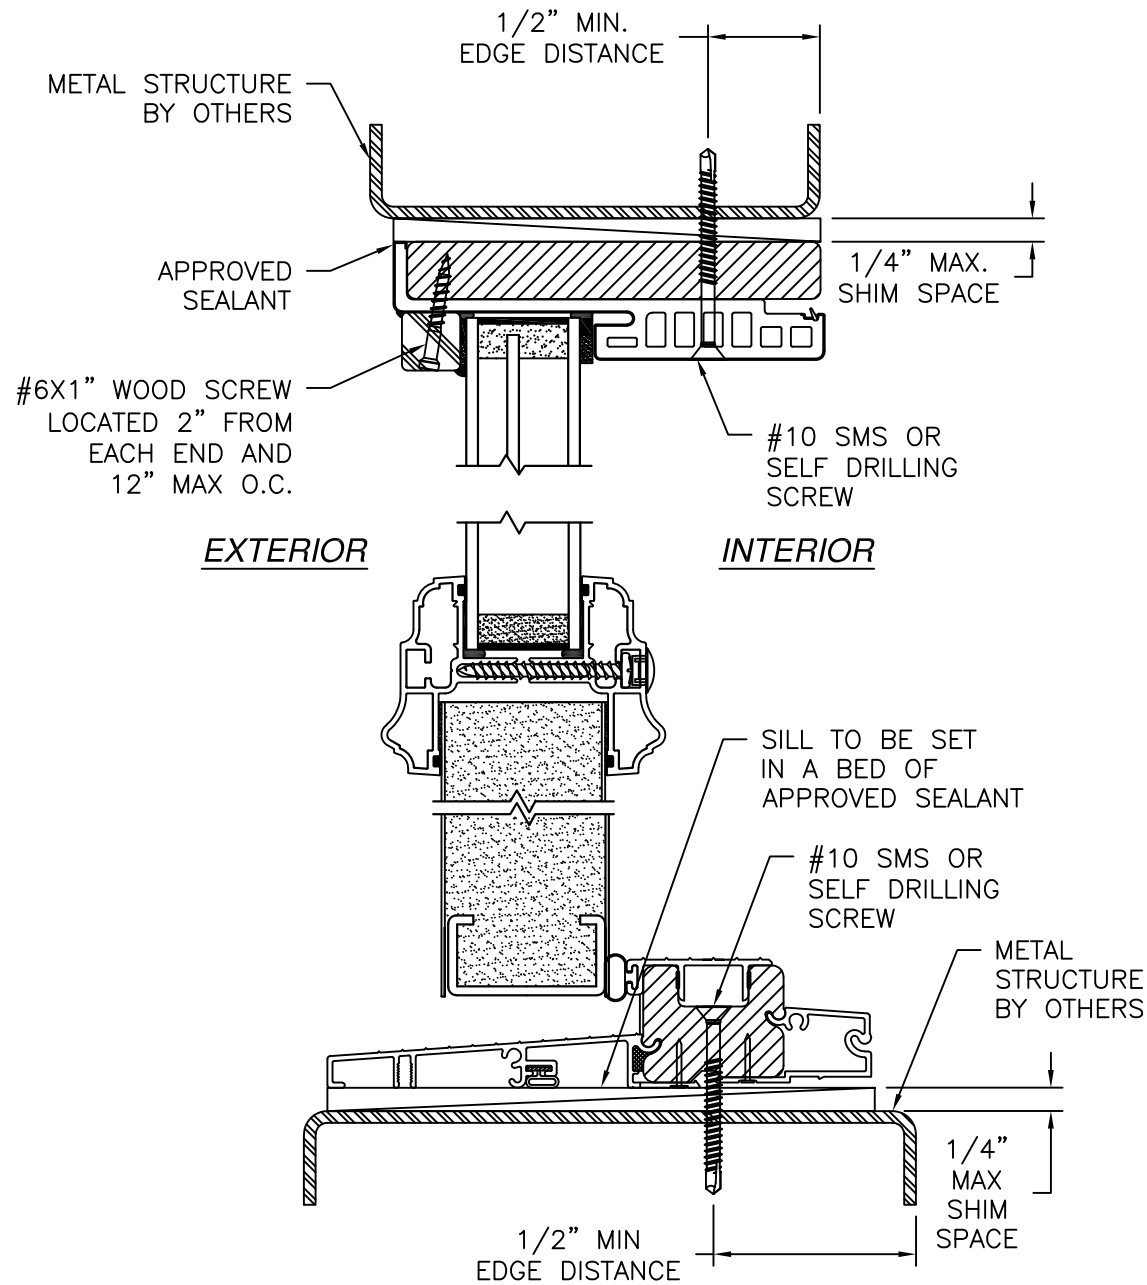

VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION METAL STRUCTURE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

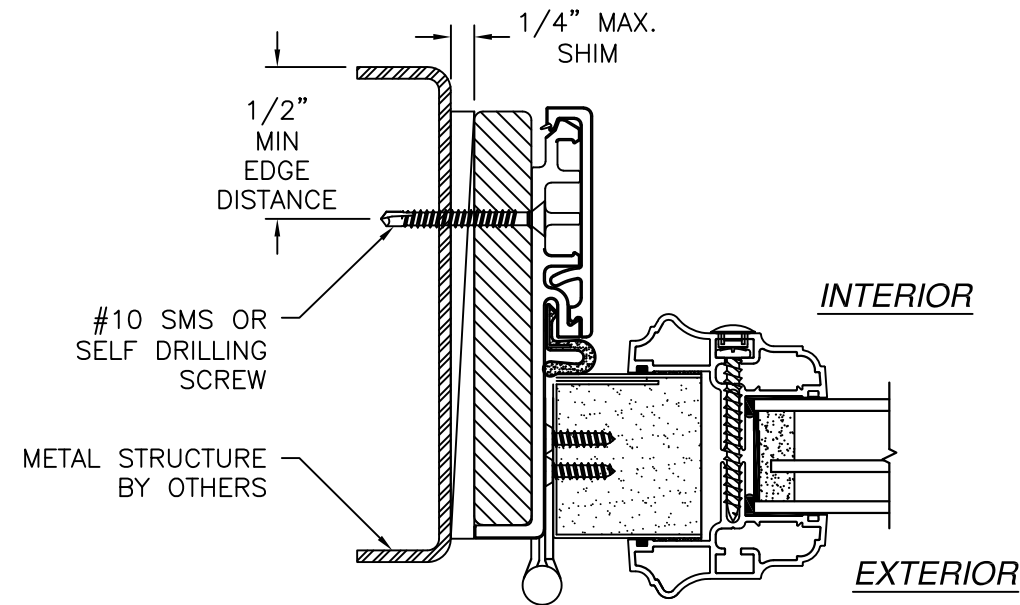

HORIZONTAL CROSS SECTION
DOOR INSTALLATION - METAL STRUCTURE


SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT INSTALLATION DETAILS W/FUSION FRAME		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 8 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

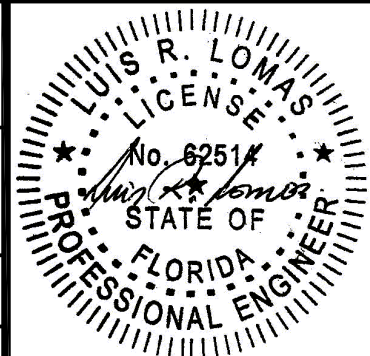


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

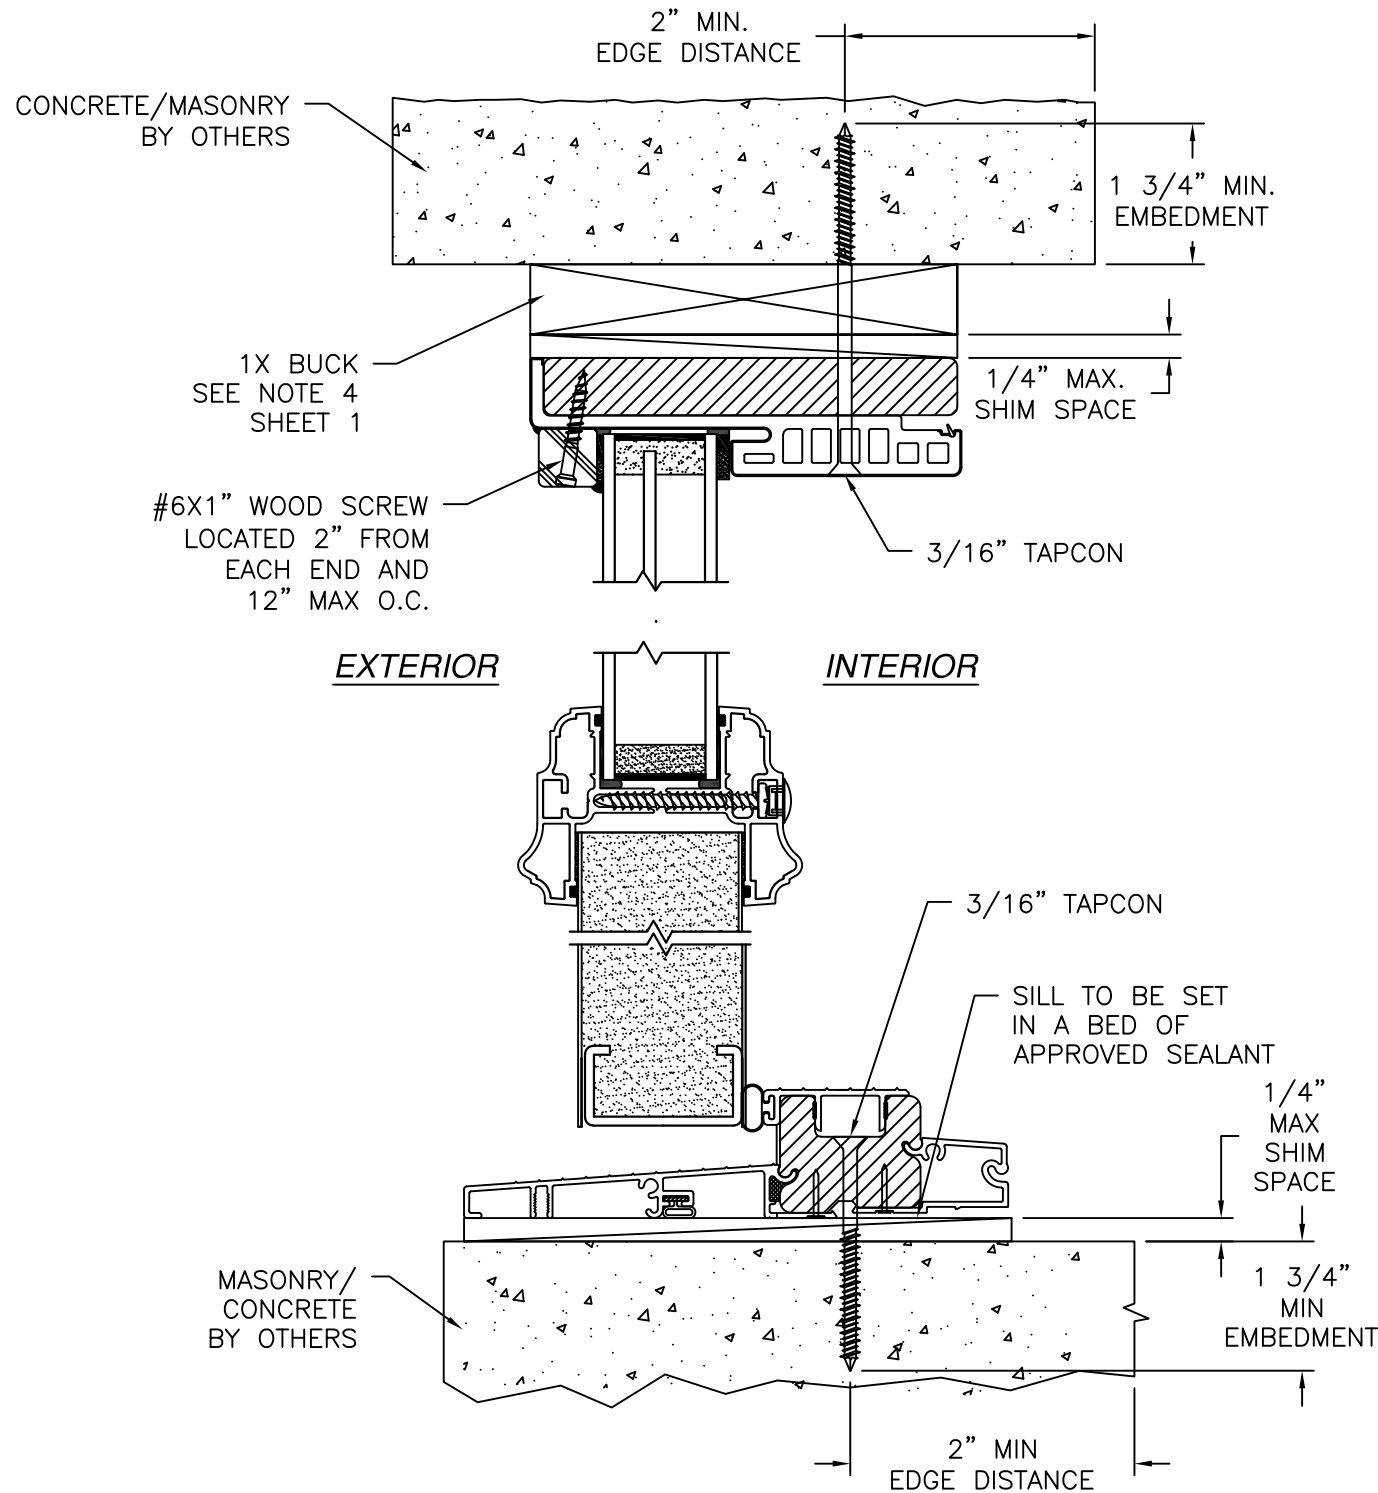

VERTICAL CROSS SECTION
DOOR AND TRANSOM INSTALLATION MASONRY/CONCRETE
TRANSOM HEAD SHOWN
TRANSOM JAMB SIMILAR


- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

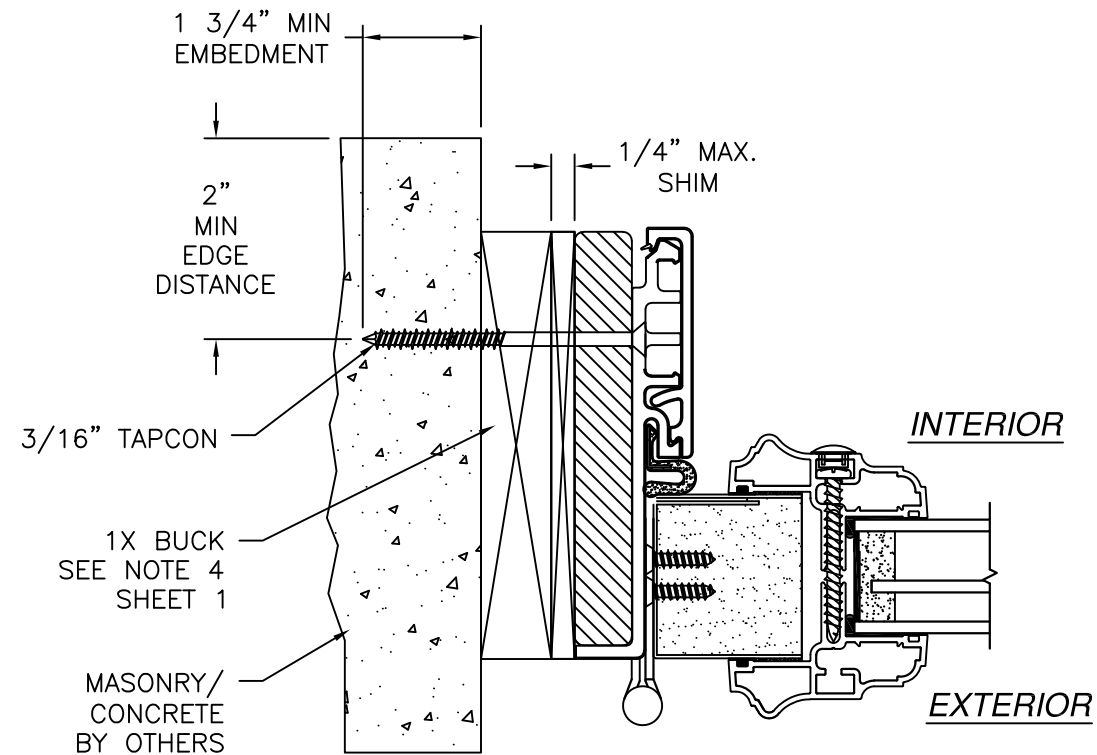

HORIZONTAL CROSS SECTION
DOOR INSTALLATION CONCRETE/MASONRY







SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT INSTALLATION DETAILS W/FUSION FRAME		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 9 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

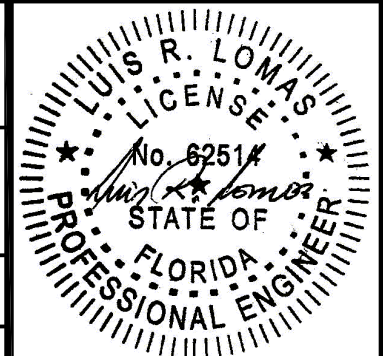

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

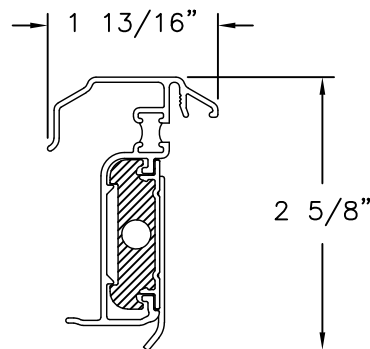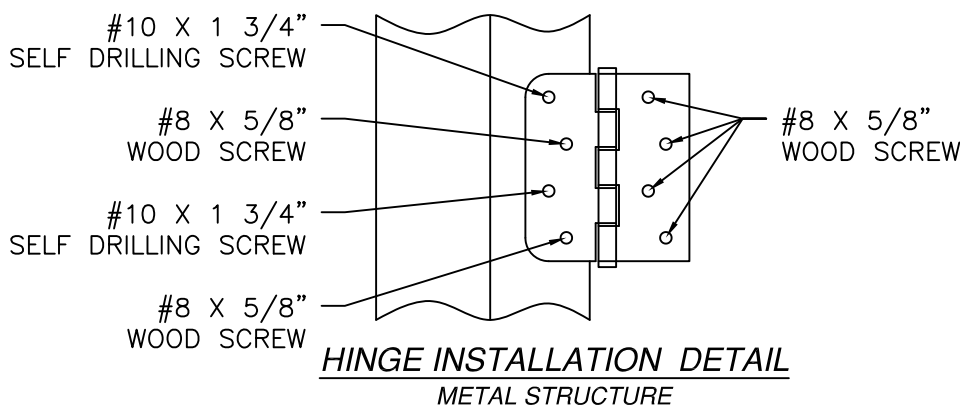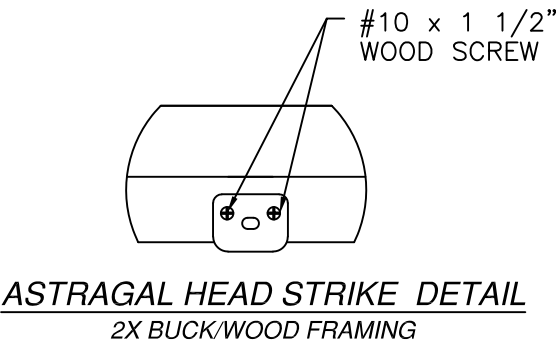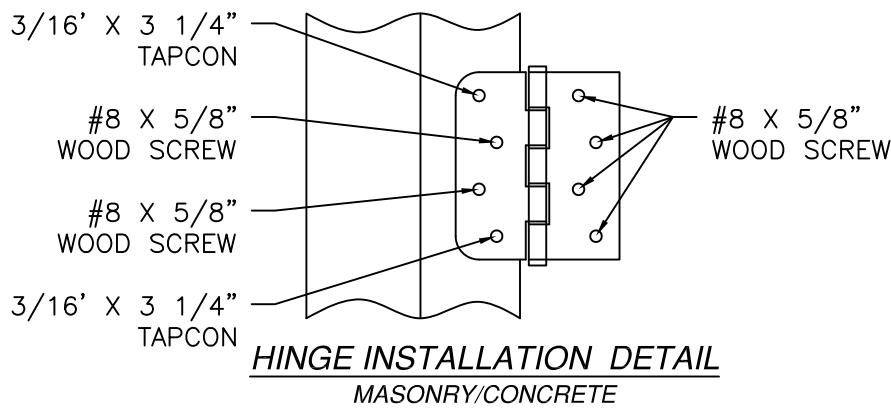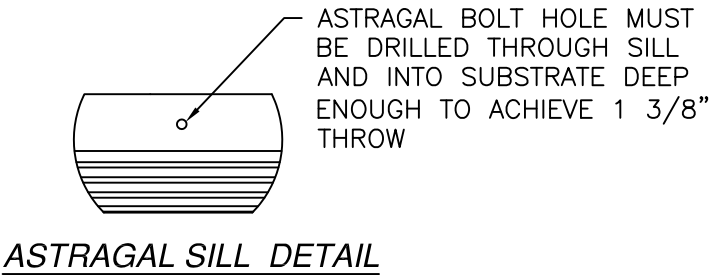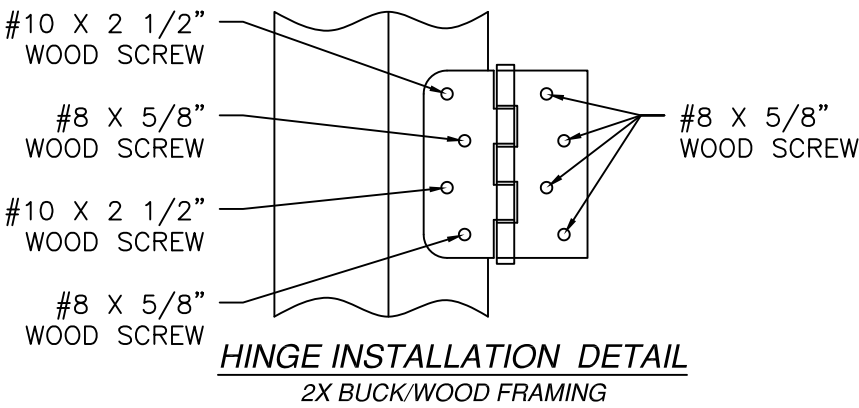


SIGNED: 09/09/2026

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
COMPONENTS


DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 10 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

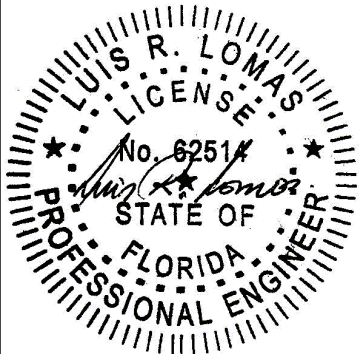


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

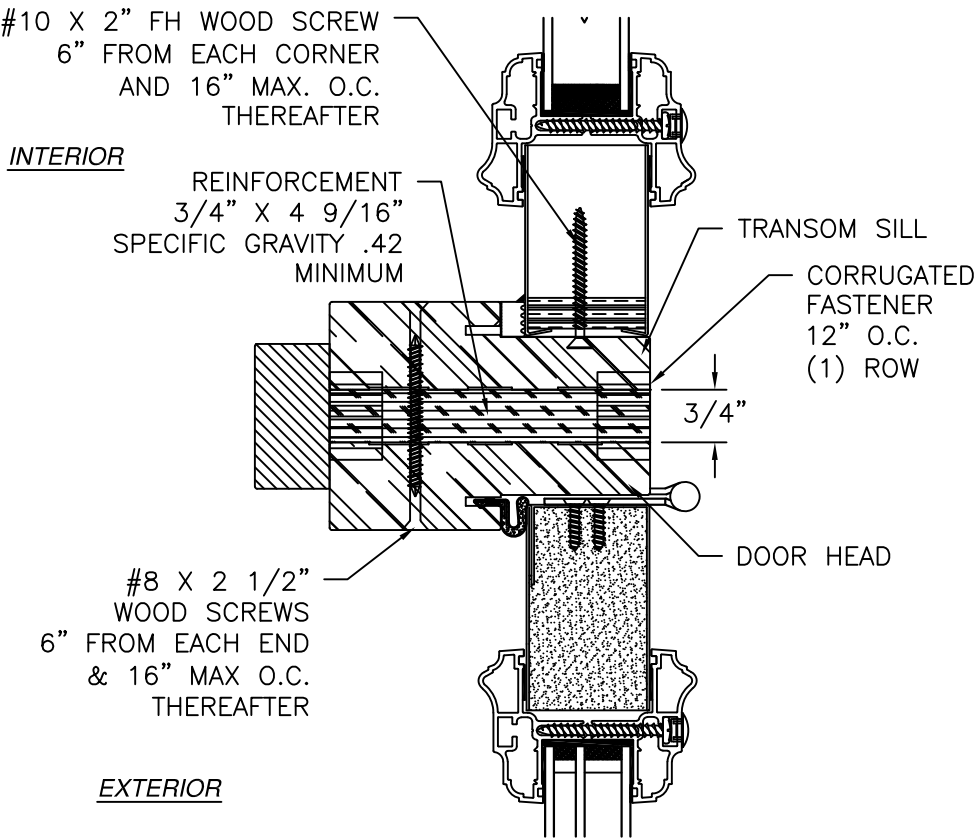

MULLION DETAIL
STANDARD FRAME SHOWN,
COMPOSITE AND FUSION FRAME SIMILAR

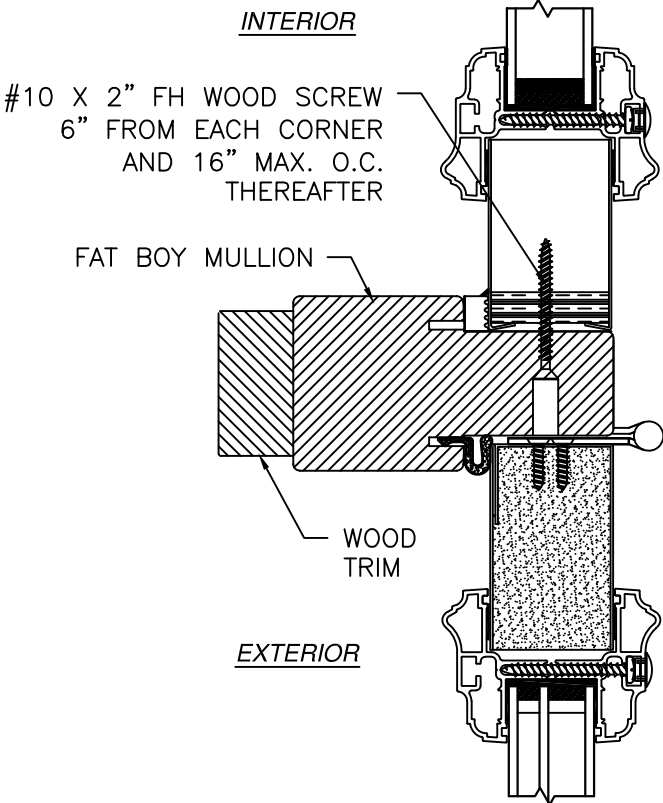

MULLION DETAIL
WITH FAT BOY MULLION

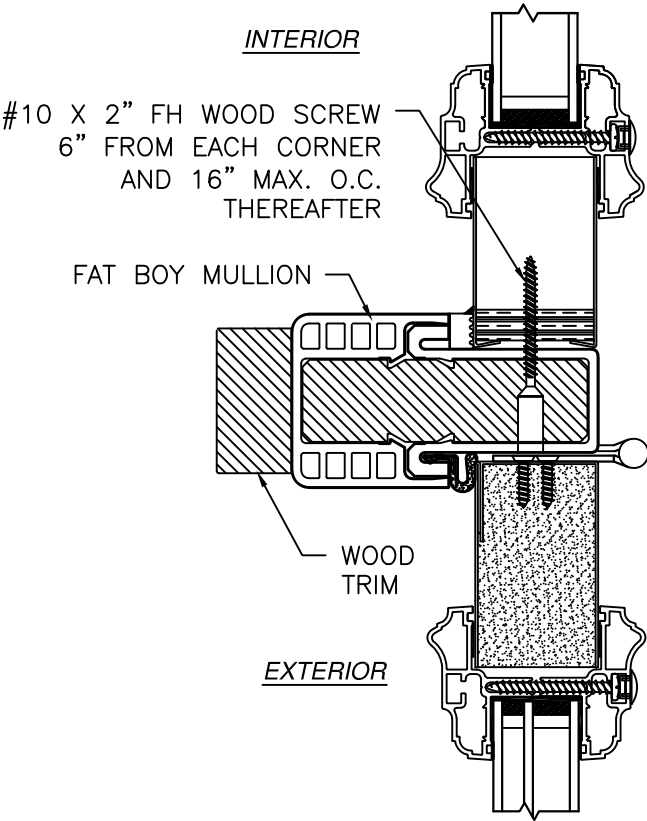

MULLION DETAIL
WITH HYBRID FAT BOY MULLION

SIGNED: 09/09/2026

PROVIA, LLC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
MULLION DETAILS

DRAWN:
N.G.

DWG NO.
08-02078

REV
L

SCALE
NTS


DATE
06/19/13

SHEET
11 OF 15


L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903


434-688-0609 rllomas@lrlomaspe.com

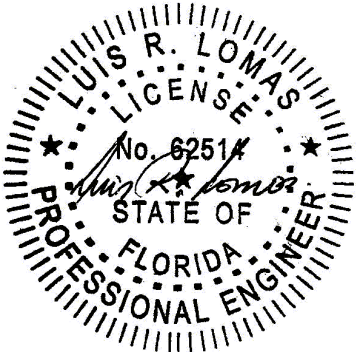


Luis R. Lomas P.E.
FL No.: 62514

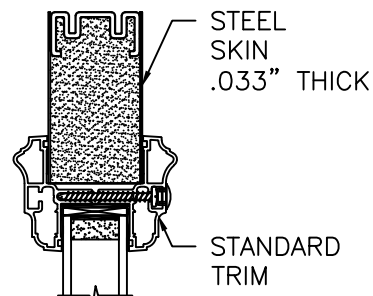


OPTION 1
STANDARD TRIM

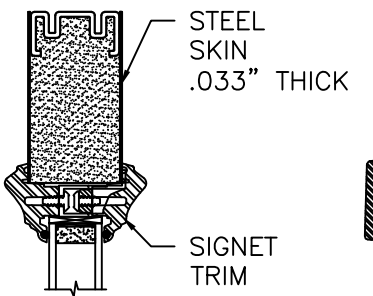


OPTION 2
SIGNET TRIM

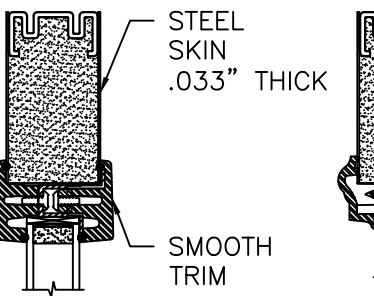


OPTION 3
SMOOTH TRIM

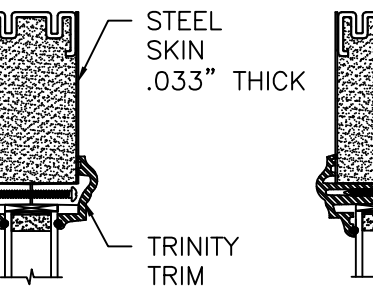


OPTION 4
TRINITY TRIM

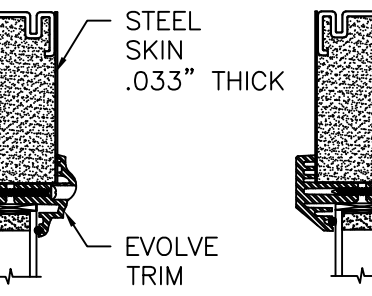


OPTION 5
EVOLVE TRIM

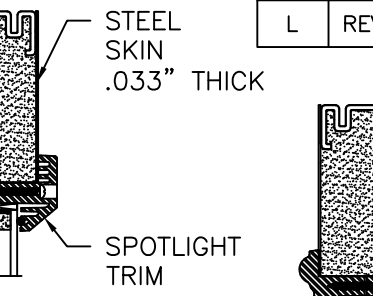


OPTION 6
SPOTLIGHT TRIM

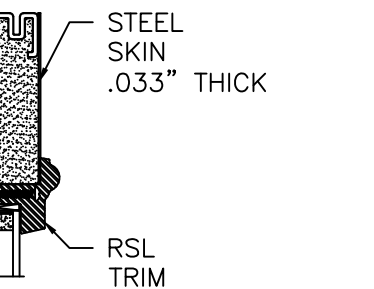


OPTION 7
RSL TRIM

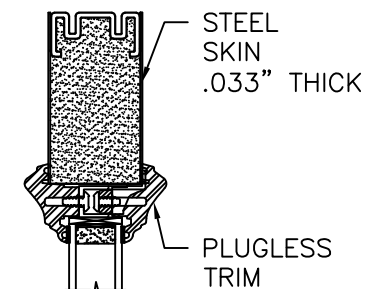


OPTION 8
PLUGLESS TRIM
W/TAPE

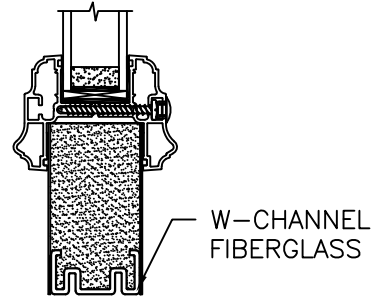


OPTION 9
ELTON TRIM

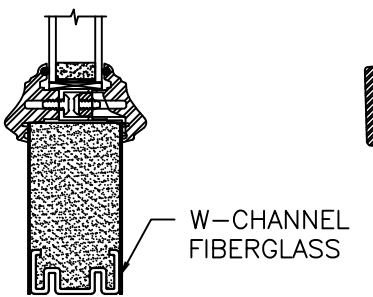


OPTION 10
SMOOTH TRIM
W/TAPE

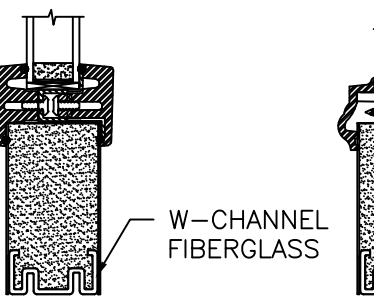


OPTION 11
SIGNET FIR TRIM

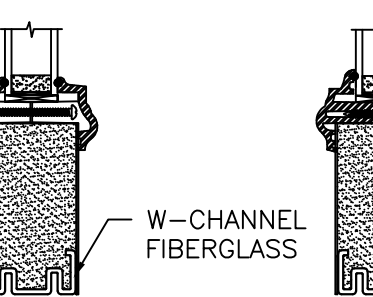


OPTION 12
SIGNET FIR &
DENTIL SHELF TRIM

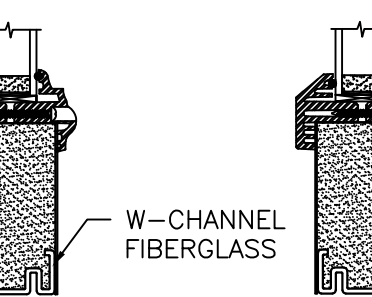


OPTION 13
ODL ZEEL TRIM

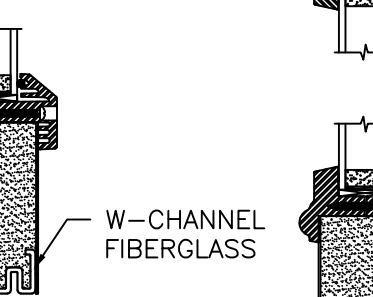

OPTION 14
XLE TRIM

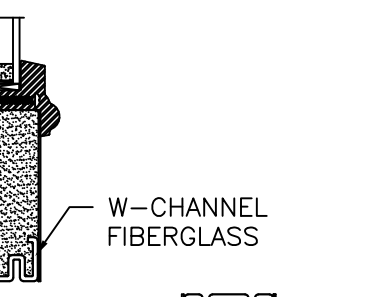

OPTION 14
XLE TRIM

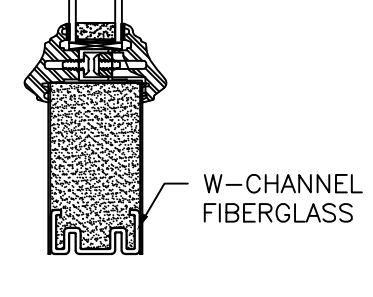

OPTION 14
XLE TRIM

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

APPROVED SLABS AND TRIMS

PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

**STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
APPROVED SLABS AND TRIMS**


DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 12 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com




SIGNED: 09/09/2026

Luis R. Lomas P.E.
FL No.: 62514

PROFESSIONAL ENGINEER
STATE OF FLORIDA
No. 62514

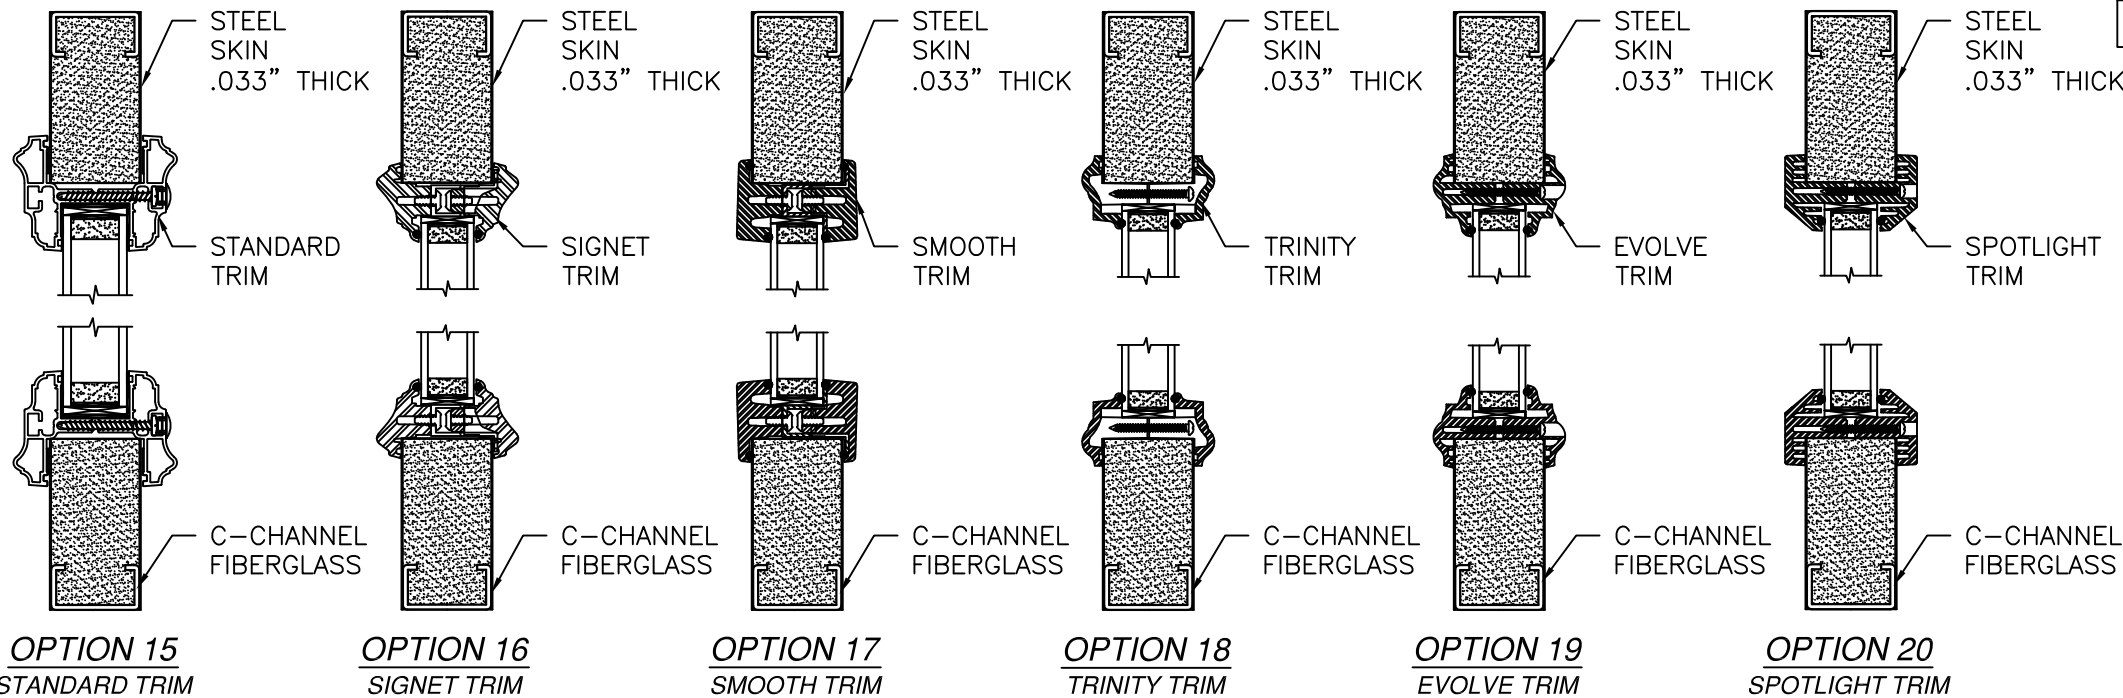

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

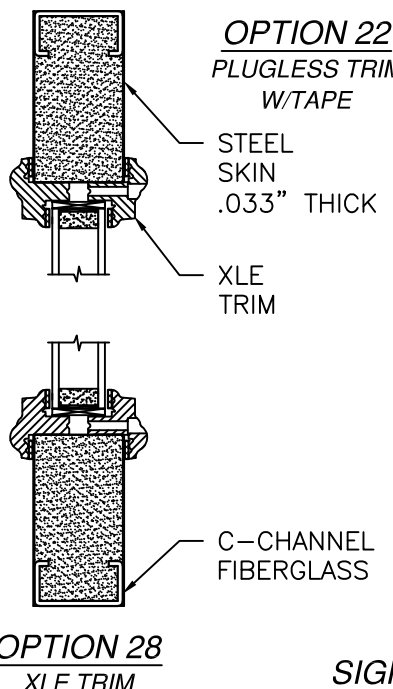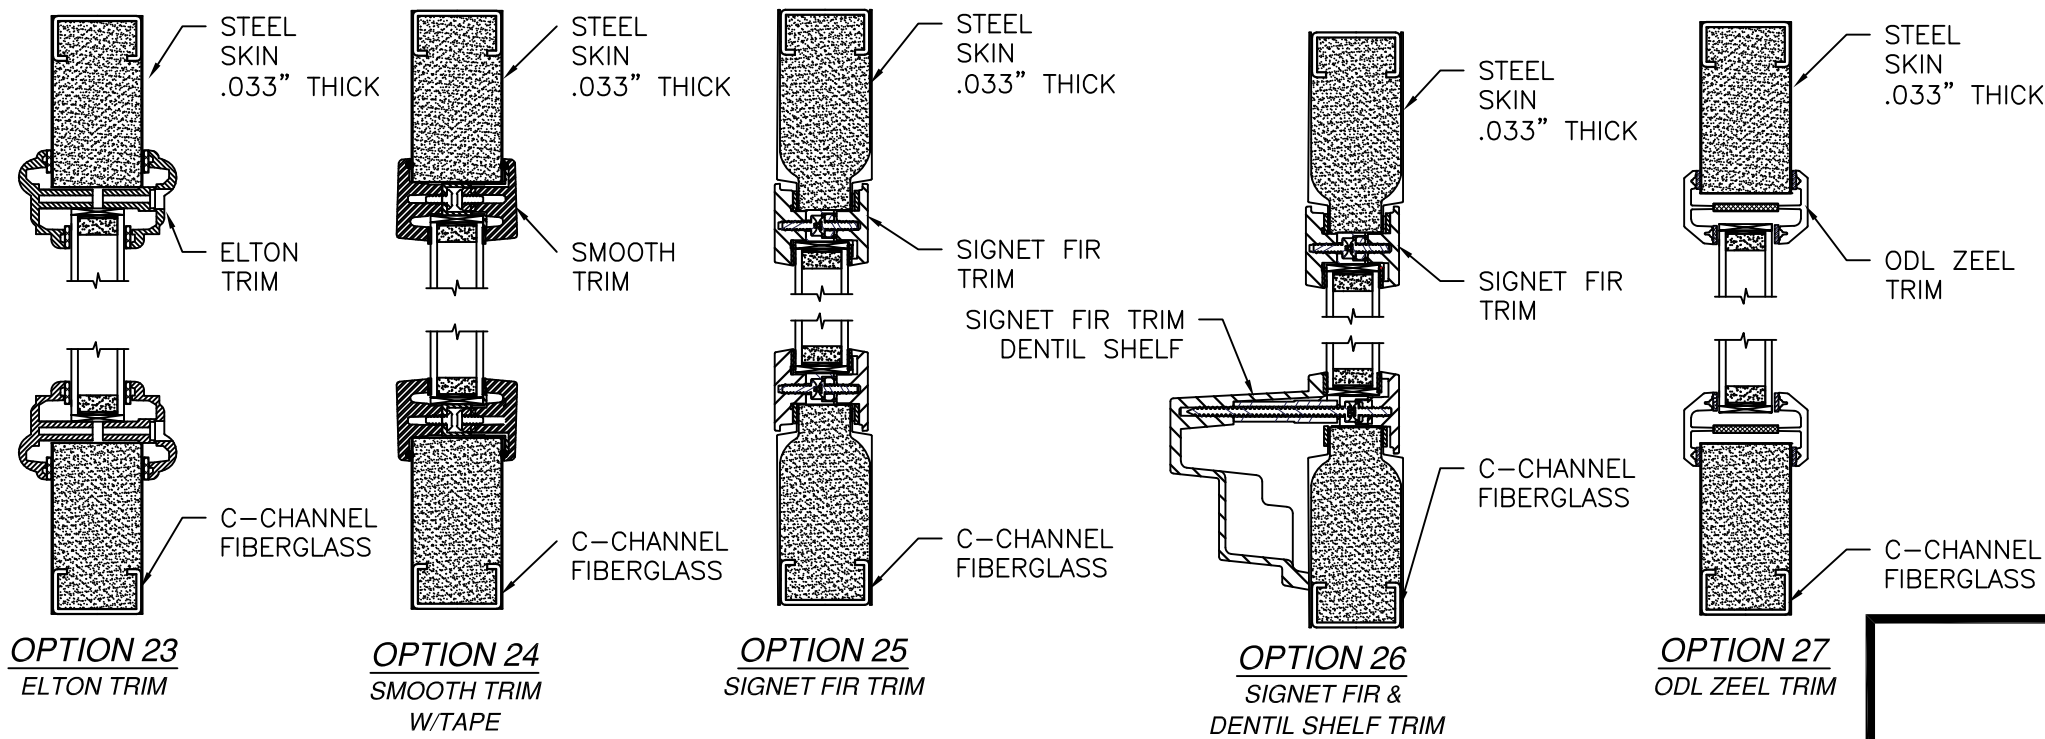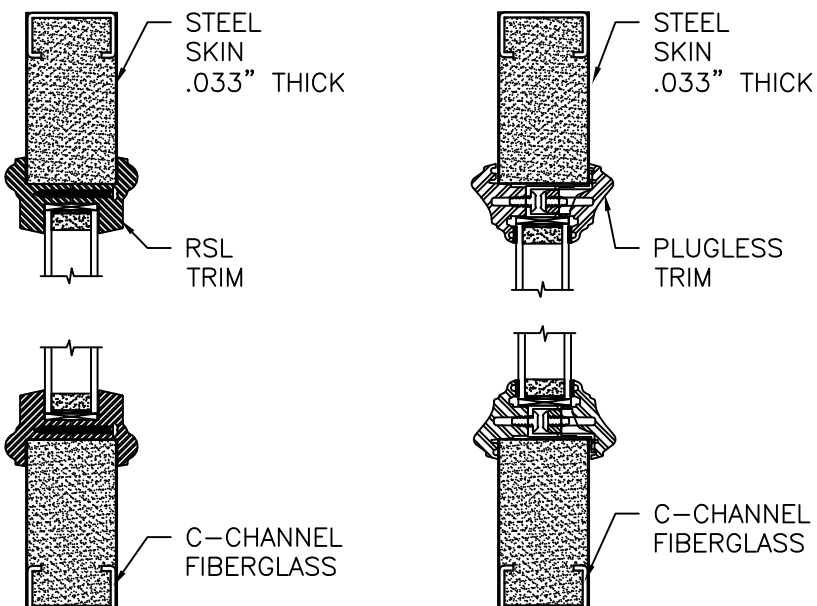

APPROVED SLABS AND TRIMS


PROVIA, LLC.
2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR
W/TRANSOM NON-IMPACT
APPROVED SLABS AND TRIMS


DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 13 OF 15

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 09/09/2026

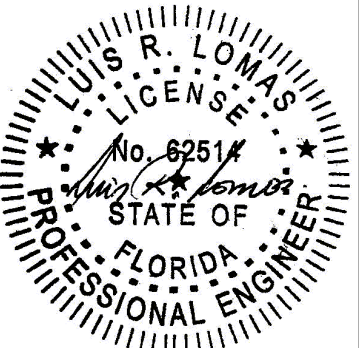

Luis R. Lomas P.E.
FL No.: 62514

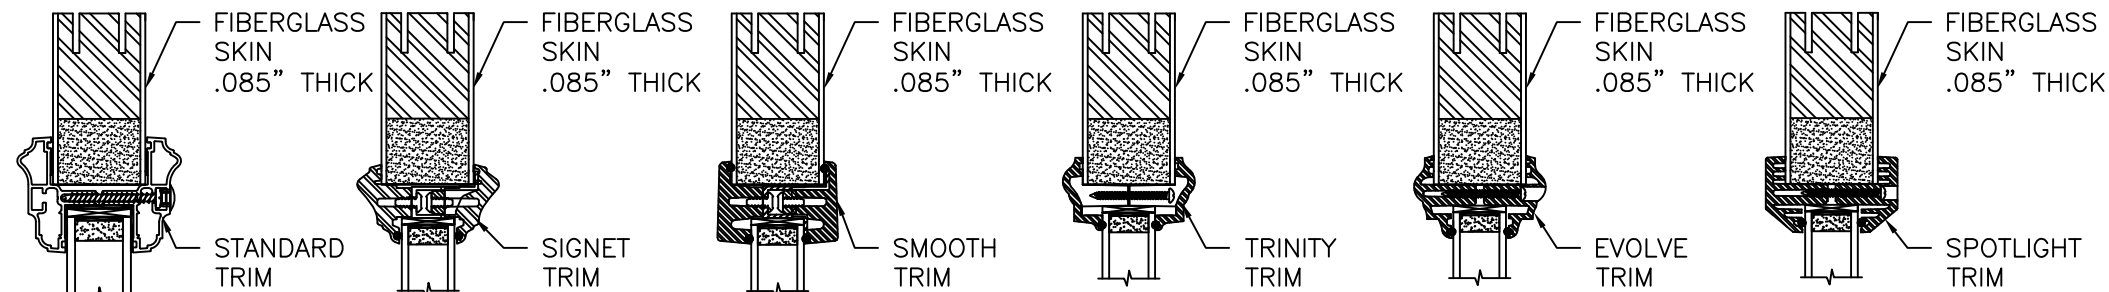

OPTION 29
STANDARD TRIM


OPTION 30
SIGNET TRIM

OPTION 31
SMOOTH TRIM


OPTION 32
TRINITY TRIM

OPTION 33
EVOLVE TRIM










OPTION 34
SPOTLIGHT TRIM

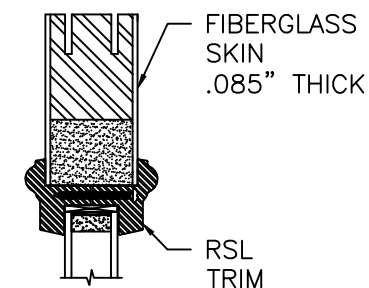


OPTION 35
RSL TRIM

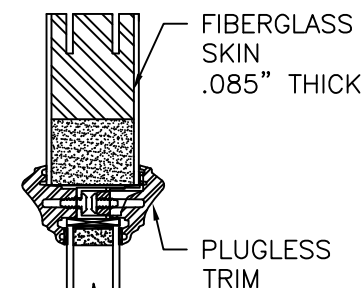


OPTION 36
PLUGLESS TRIM
W/TAPE

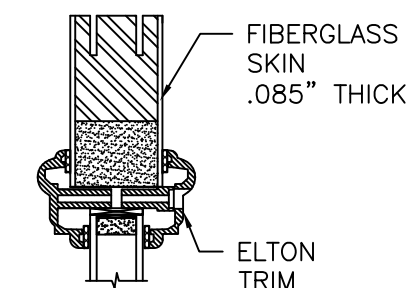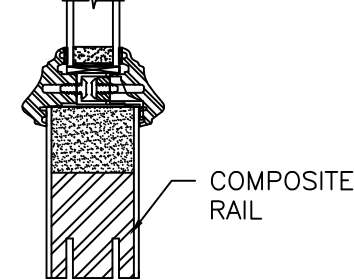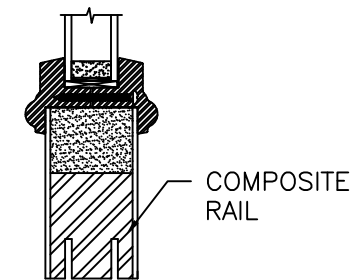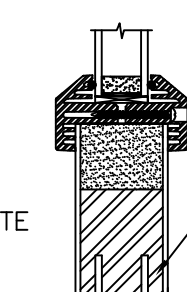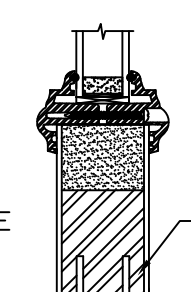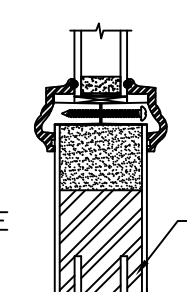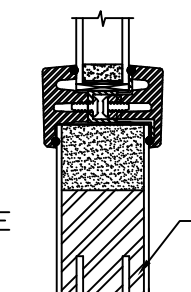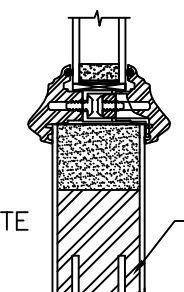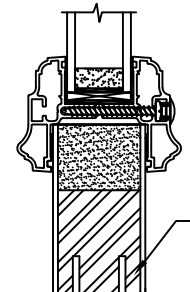


OPTION 37
ELTON TRIM

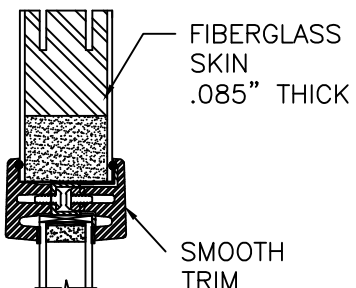


OPTION 38
SMOOTH TRIM
W/TAPE

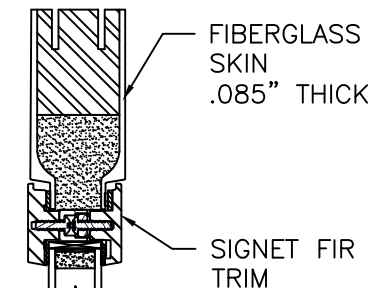


OPTION 39
SIGNET FIR TRIM

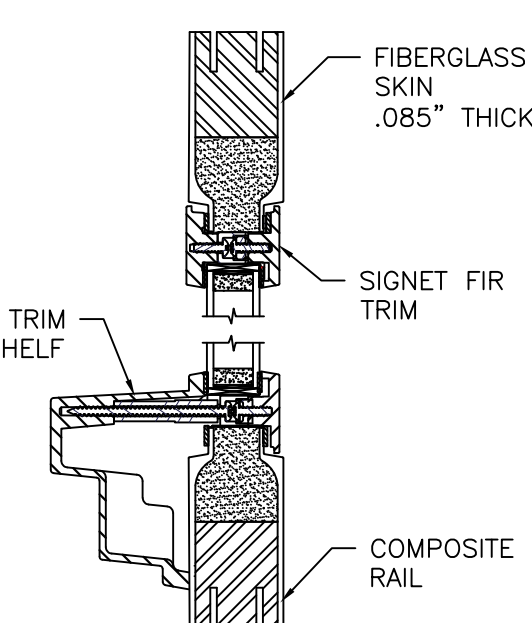

OPTION 40
SIGNET FIR &
DENTIL SHELF TRIM

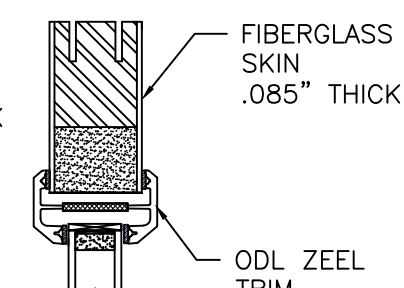

OPTION 41
ODL ZEEL TRIM

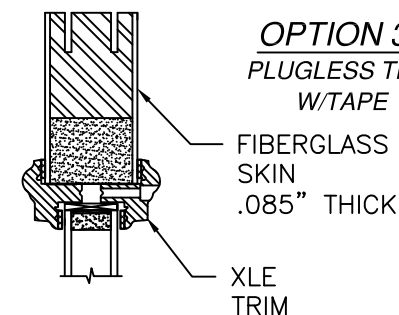


OPTION 42
XLE TRIM

APPROVED SLABS AND TRIMS


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT APPROVED SLABS AND TRIMS		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 14 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

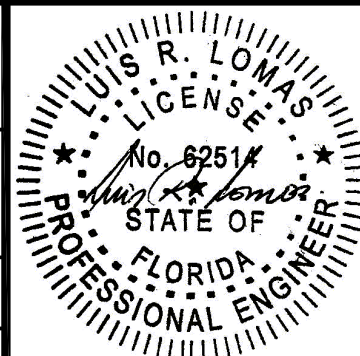


Luis R. Lomas P.E.
FL No.: 62514


SIGNED: 09/09/2026

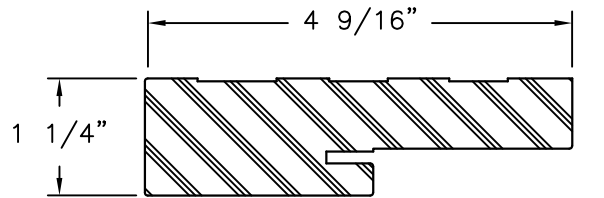


COMPOSITE FRAME PROFILE

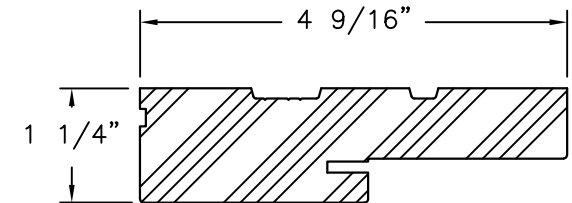


WOOD FRAME PROFILE

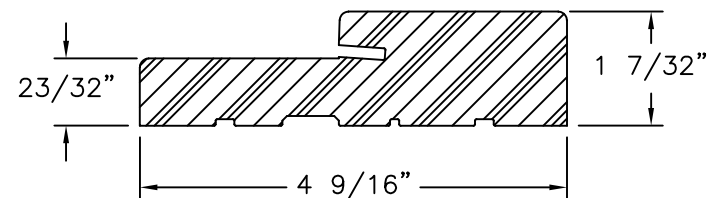


FRAMESAVER
COMPOSITE

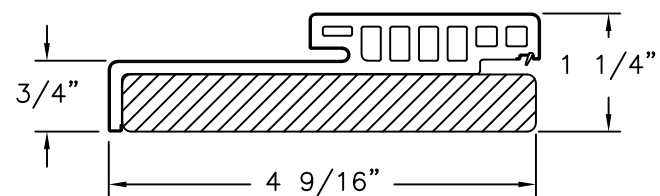


HYBRID HEAD
WOOD/COMPOSITE

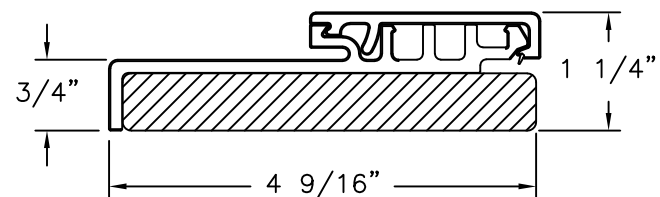


HYBRID JAMB
WOOD/COMPOSITE

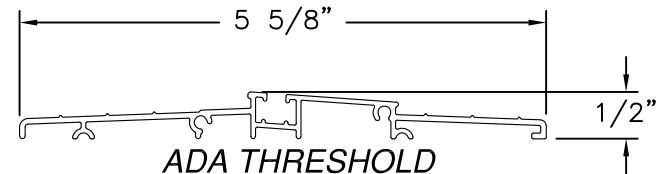


ADA THRESHOLD

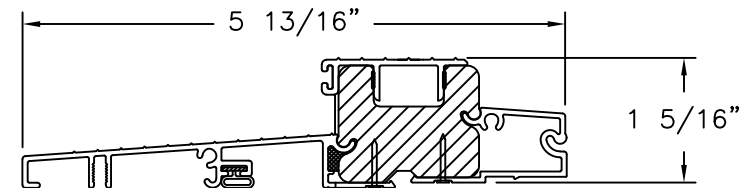


SAHARA OUTSWING THRESHOLD

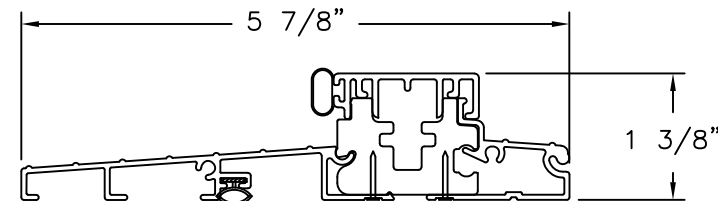


STANDARD OUTSWING THRESHOLD

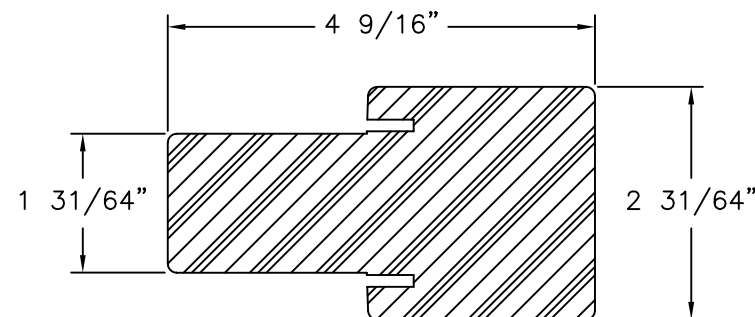


FAT BOY MULLION
COMPOSITE

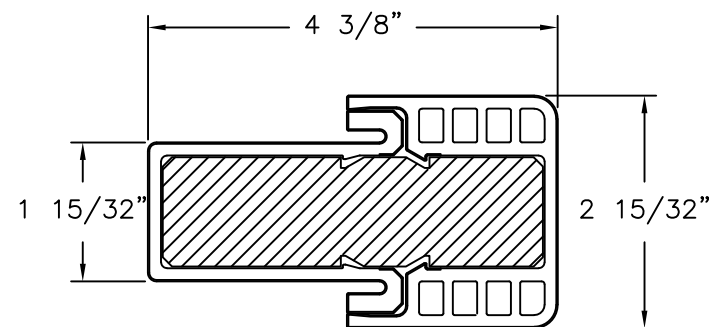


HYBRID FAT BOY MULLION
COMPOSITE

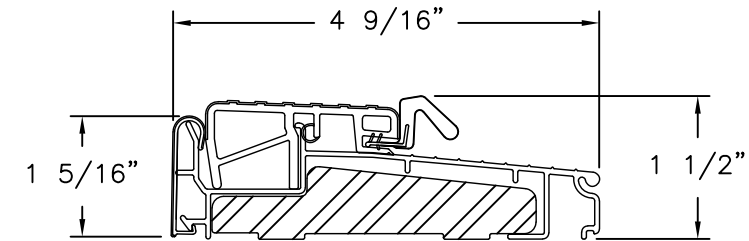

OUTSWING SILL ZOBL4565

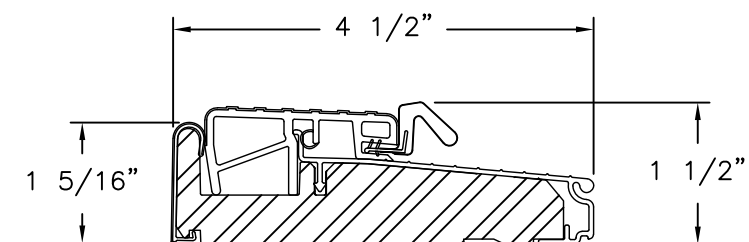

OUTSWING SILL ZOB4565F

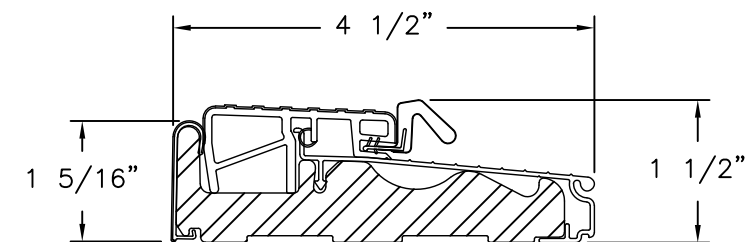


OUTSWING SILL ZOBLH4565

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
L	REVISED HARDWARE SCHEDULE	09/09/26	R.L.

SIGNED: 09/09/2026

PROVIA, LLC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL/FIBERGLASS OUTSWING GLAZED DOUBLE DOOR W/TRANSOM NON-IMPACT COMPONENTS		
DRAWN: N.G.	DWG NO. 08-02078	REV L
SCALE NTS	DATE 06/19/13	SHEET 15 OF 15
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

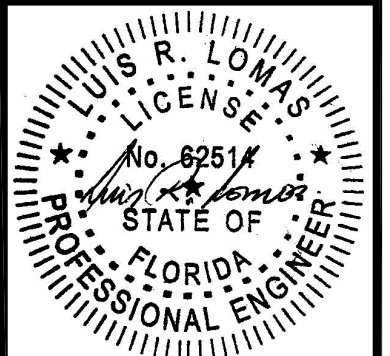

Luis R. Lomas P.E.
FL No.: 62514