

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

- NOTES:
- 1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
 - 2. WOOD FRAMING AND METAL STRUCTURE TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 - 3. SHIM AS NEEDED. AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
 - 4. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
 - 5. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
 - 6. FRAME MATERIAL: EXTRUDED RIGID PVC.
 - 7. UNITS MUST BE GLAZED PER ASTM E1300.
 - 8. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
 - 9. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
 - 10. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
 - 11. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 11.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 11.2. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3	DESIGN PRESSURE CHART AND COMPONENTS
4 – 5	INSTALLATION DETAILS

KRESTMARK INDUSTRIES, L.P.
3950 BASTILLE RD., SUITE 100
DALLAS, TX 75212

400/475 VINYL PICTURE WINDOW
NON-IMPACT 72” X 72”
NOTES

DRAWN:
A.R.

DWG NO.
08-03918

REV
-


SCALE NTS

DATE 06/07/2023

SHEET 1 OF 5


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 10/19/2023

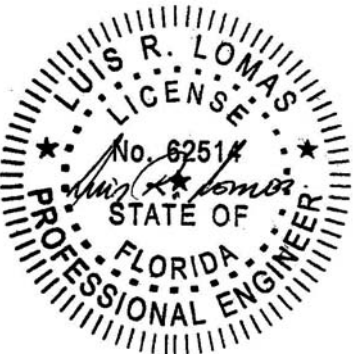

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

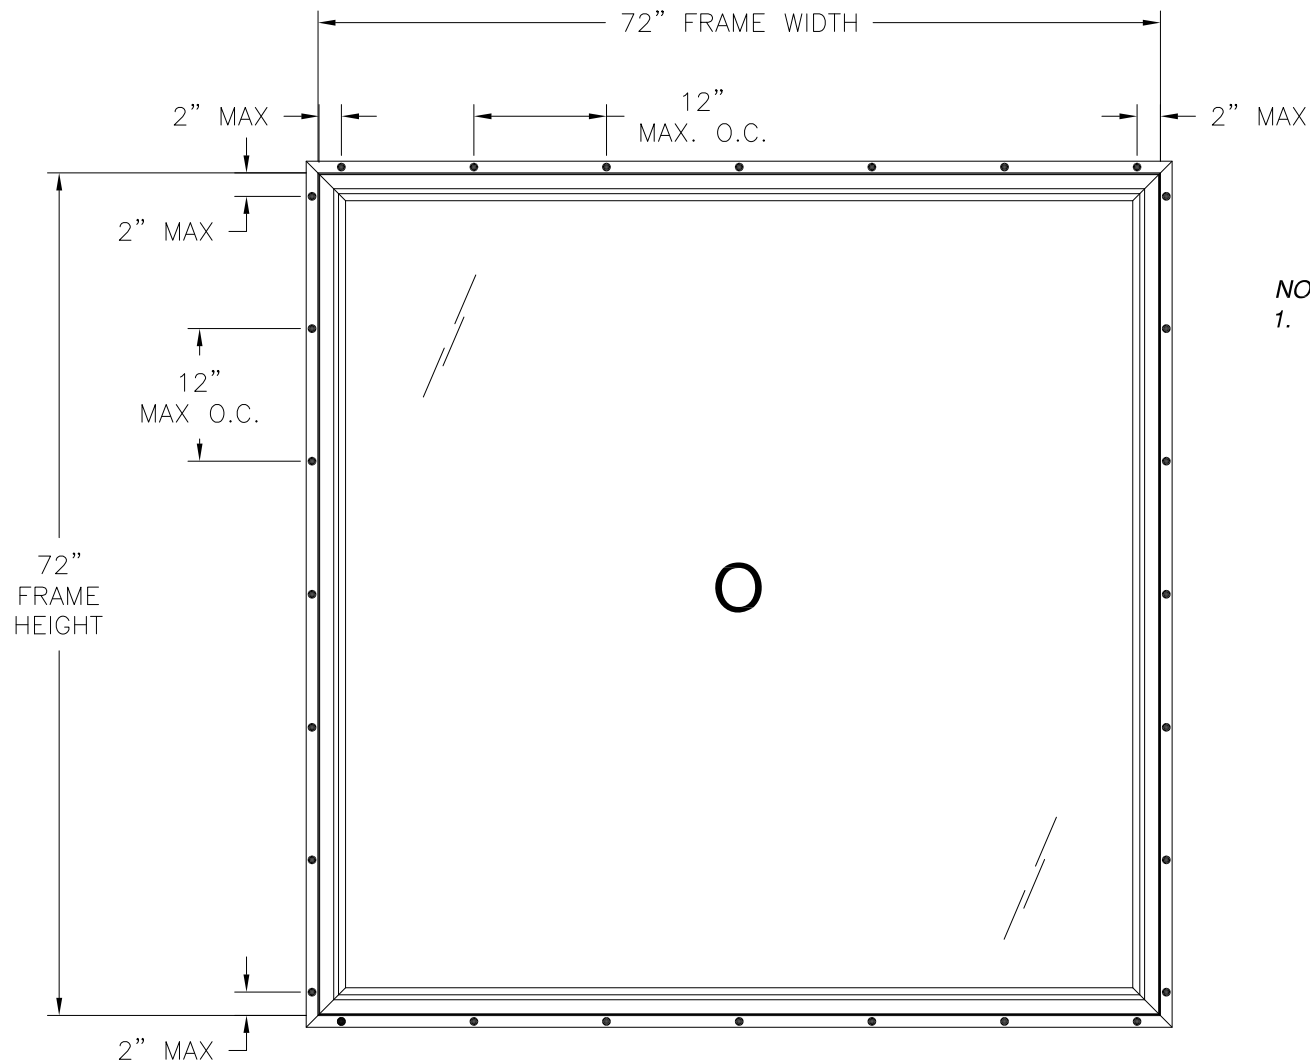

NOTES:
1. D.L.O. SIZE: 69 1/16" X 69 1/16"

400/475 VINYL PICTURE WINDOW
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
± 60.0 PSF	NONE

FOR OTHER SIZES APPROVED. SEE CHART #1, SHEET 2

KRESTMARK INDUSTRIES, L.P.
3950 BASTILLE RD., SUITE 100
DALLAS, TX 75212

400/475 VINYL PICTURE WINDOW
NON-IMPACT 72" X 72"
ELEVATIONS

DRAWN:
A.R.

DWG NO.
08-03918

REV
-

SCALE NTS

DATE 06/07/2023

SHEET 2 OF 5

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com


SIGNED: 10/19/2023

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

Chart #1
Maximum design pressure capacity chart (psf)

Frame Height (in)	Frame width (in)																																	
	24.0		30.0		36.0		42.0		48.0		54.0		60.0		66.0		72.0		78.0		84.0		90.0		96.0		102.0		108.0		114.0		120.0	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
24.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0
30.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	86.4
36.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	87.7	70.0	85.7	70.0	84.0	70.0	82.5	70.0	81.2	70.0	80.0	70.0	75.8	70.0	72.0
42.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	87.4	70.0	84.2	70.0	81.4	70.0	79.1	70.0	77.1	70.0	75.4	70.0	73.9	70.0	72.6	68.6	68.6	65.0	65.0	61.7	61.7
48.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	85.0	70.0	81.0	70.0	77.7	70.0	75.0	70.0	72.7	70.0	70.7	69.0	69.0	67.5	67.5	63.5	63.5	60.0	60.0	-	-	-	-
54.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	85.0	70.0	80.0	70.0	76.0	70.0	72.7	70.0	70.0	67.7	67.7	65.7	65.7	64.0	64.0	60.0	60.0	-	-	-	-	-	-	-	-
60.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	87.4	70.0	81.0	70.0	76.0	70.0	72.0	68.7	68.7	66.0	63.7	63.7	61.7	61.7	-	-	-	-	-	-	-	-	-	-	-	-	-
66.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	84.2	70.0	77.7	70.0	72.7	68.7	68.7	65.5	65.5	62.7	62.7	60.4	60.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-
72.0	70.0	90.0	70.0	90.0	70.0	90.0	70.0	81.4	70.0	75.0	70.0	70.0	66.0	66.0	62.7	62.7	60.0	60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
78.0	70.0	90.0	70.0	90.0	70.0	87.7	70.0	79.1	70.0	72.7	67.7	67.7	63.7	63.7	60.4	60.4	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
84.0	70.0	90.0	70.0	90.0	70.0	85.7	70.0	77.1	70.0	70.7	65.7	65.7	61.7	61.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
90.0	70.0	90.0	70.0	90.0	70.0	84.0	70.0	75.4	69.0	69.0	64.0	64.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
96.0	70.0	90.0	70.0	90.0	70.0	82.5	70.0	73.9	67.5	67.5	60.0	60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
102.0	70.0	90.0	70.0	90.0	70.0	81.2	70.0	72.6	63.5	63.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
108.0	70.0	90.0	70.0	90.0	70.0	80.0	68.6	68.6	60.0	60.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
114.0	70.0	90.0	70.0	90.0	70.0	75.8	65.0	65.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-
120.0	70.0	90.0	70.0	86.4	70.0	72.0	61.7	61.7	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-

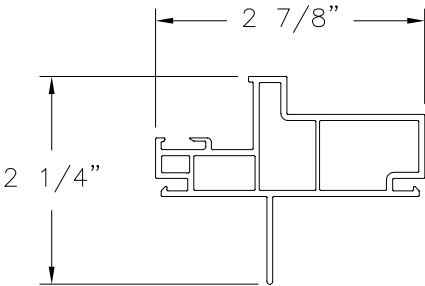

MAIN FRAME (4003)
EXTRUDED RIGID PVC

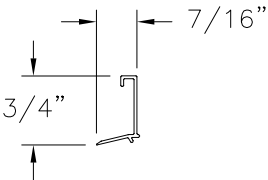

GLAZING BEAD
EXTRUDED RIGID PVC

SIGNED: 10/19/2023

KRESTMARK INDUSTRIES, L.P.
3950 BASTILLE RD., SUITE 100
DALLAS, TX 75212

400/475 VINYL PICTURE WINDOW
NON-IMPACT 72" X 72"
DESIGN PRESSURE CHART AND COMPONENTS

DRAWN:
A.R.

DWG NO.
08-03918

REV
-

SCALE
NTS

DATE
06/07/2023




SHEET
3 OF 5

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com



Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

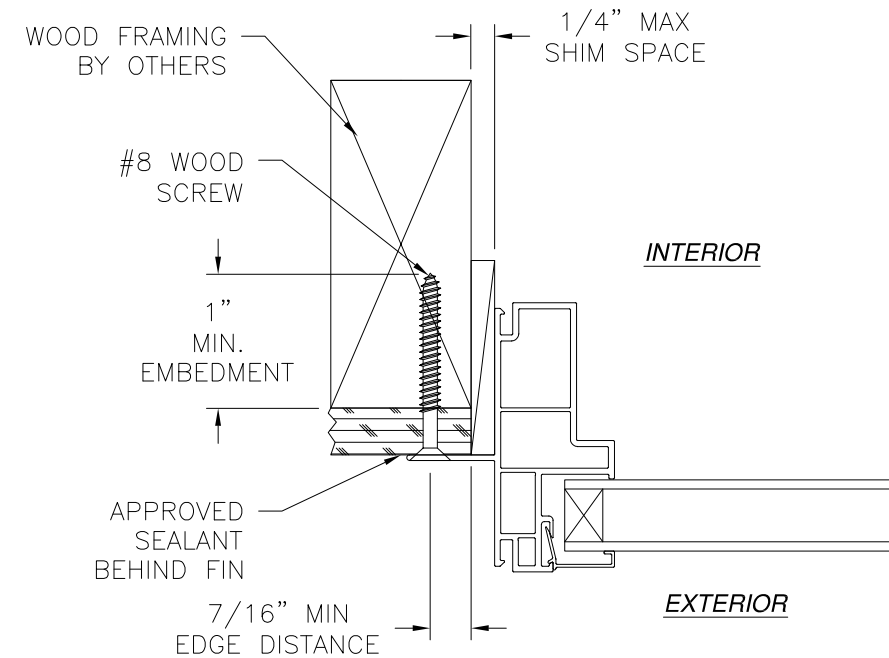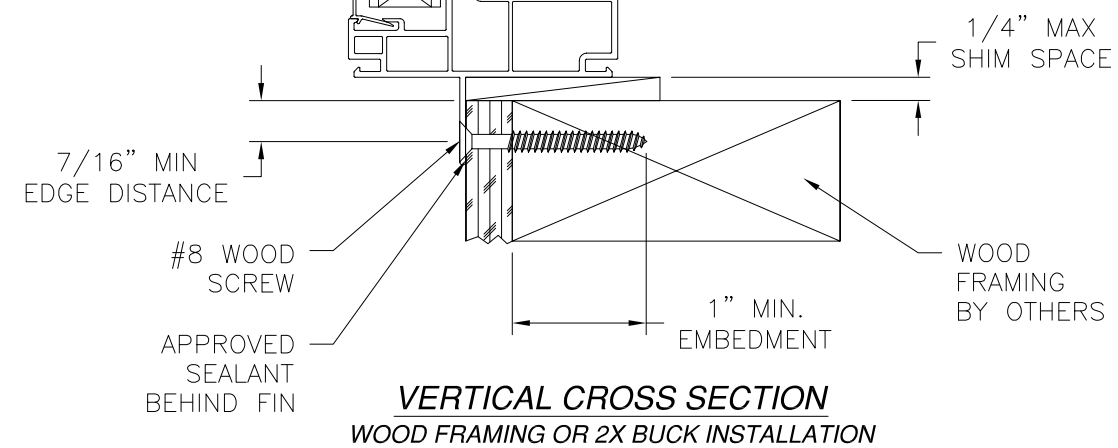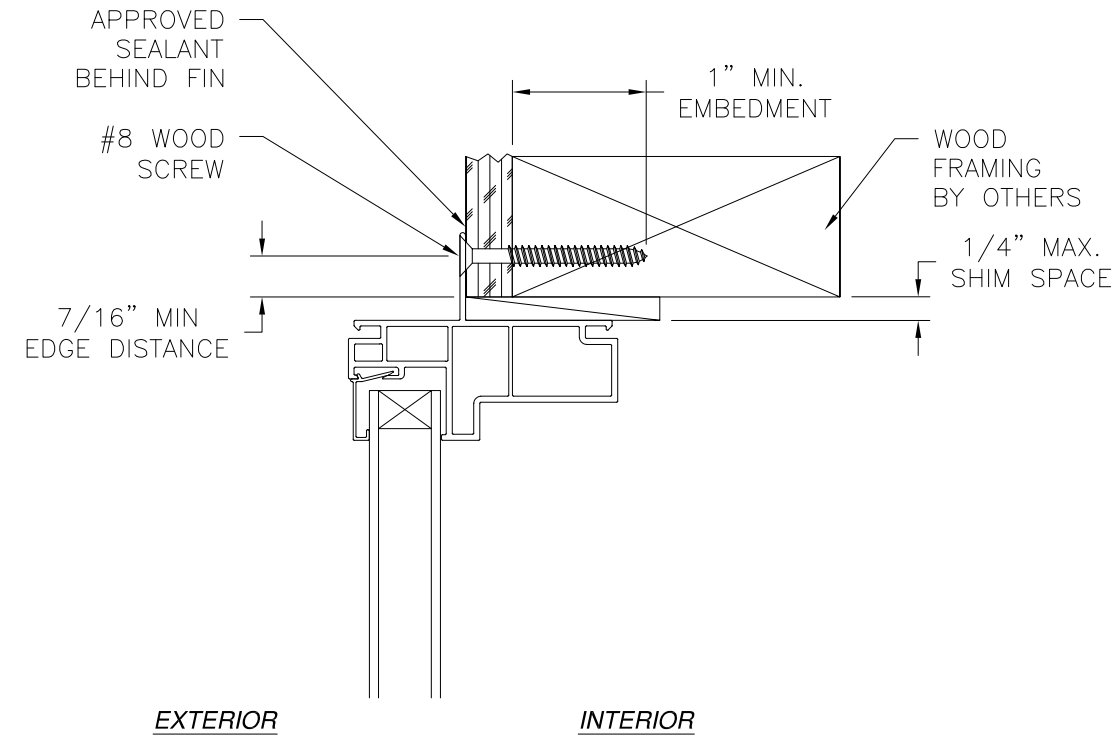


JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112



SIGNED: 10/19/2023

KRESTMARK INDUSTRIES, L.P. 3950 BASTILLE RD., SUITE 100 DALLAS, TX 75212		
400/475 VINYL PICTURE WINDOW NON-IMPACT 72" X 72" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03918	REV -
SCALE NTS	DATE 06/07/2023	SHEET 4 OF 5
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

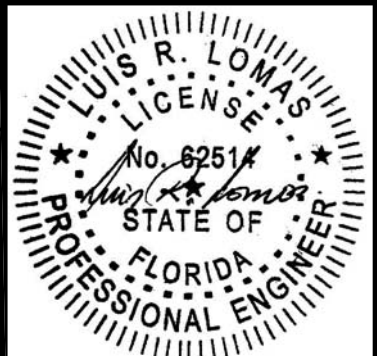

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

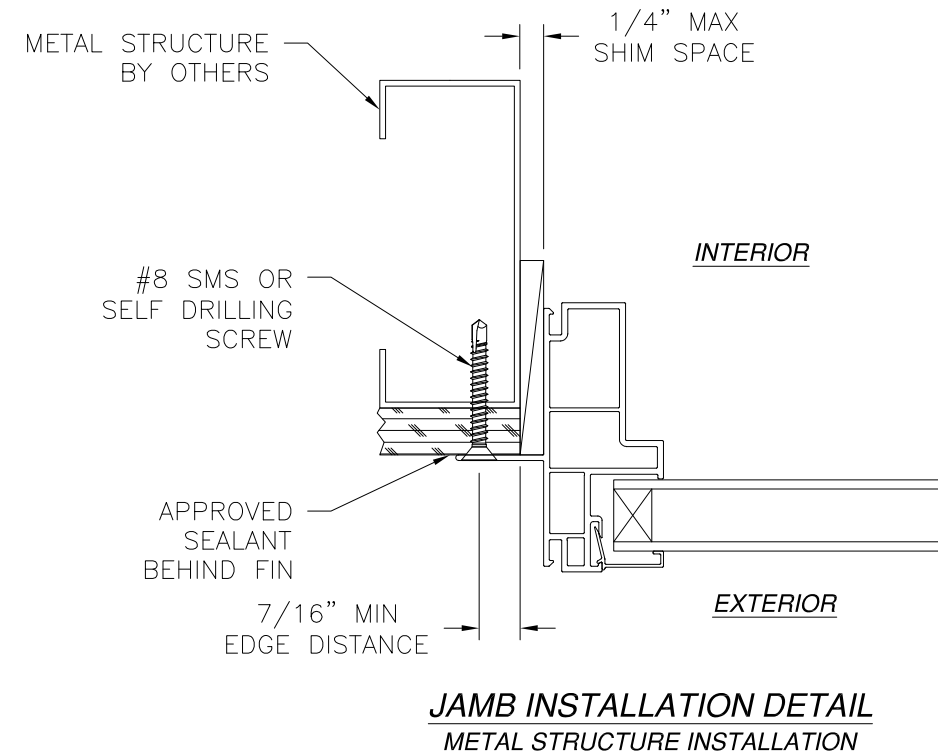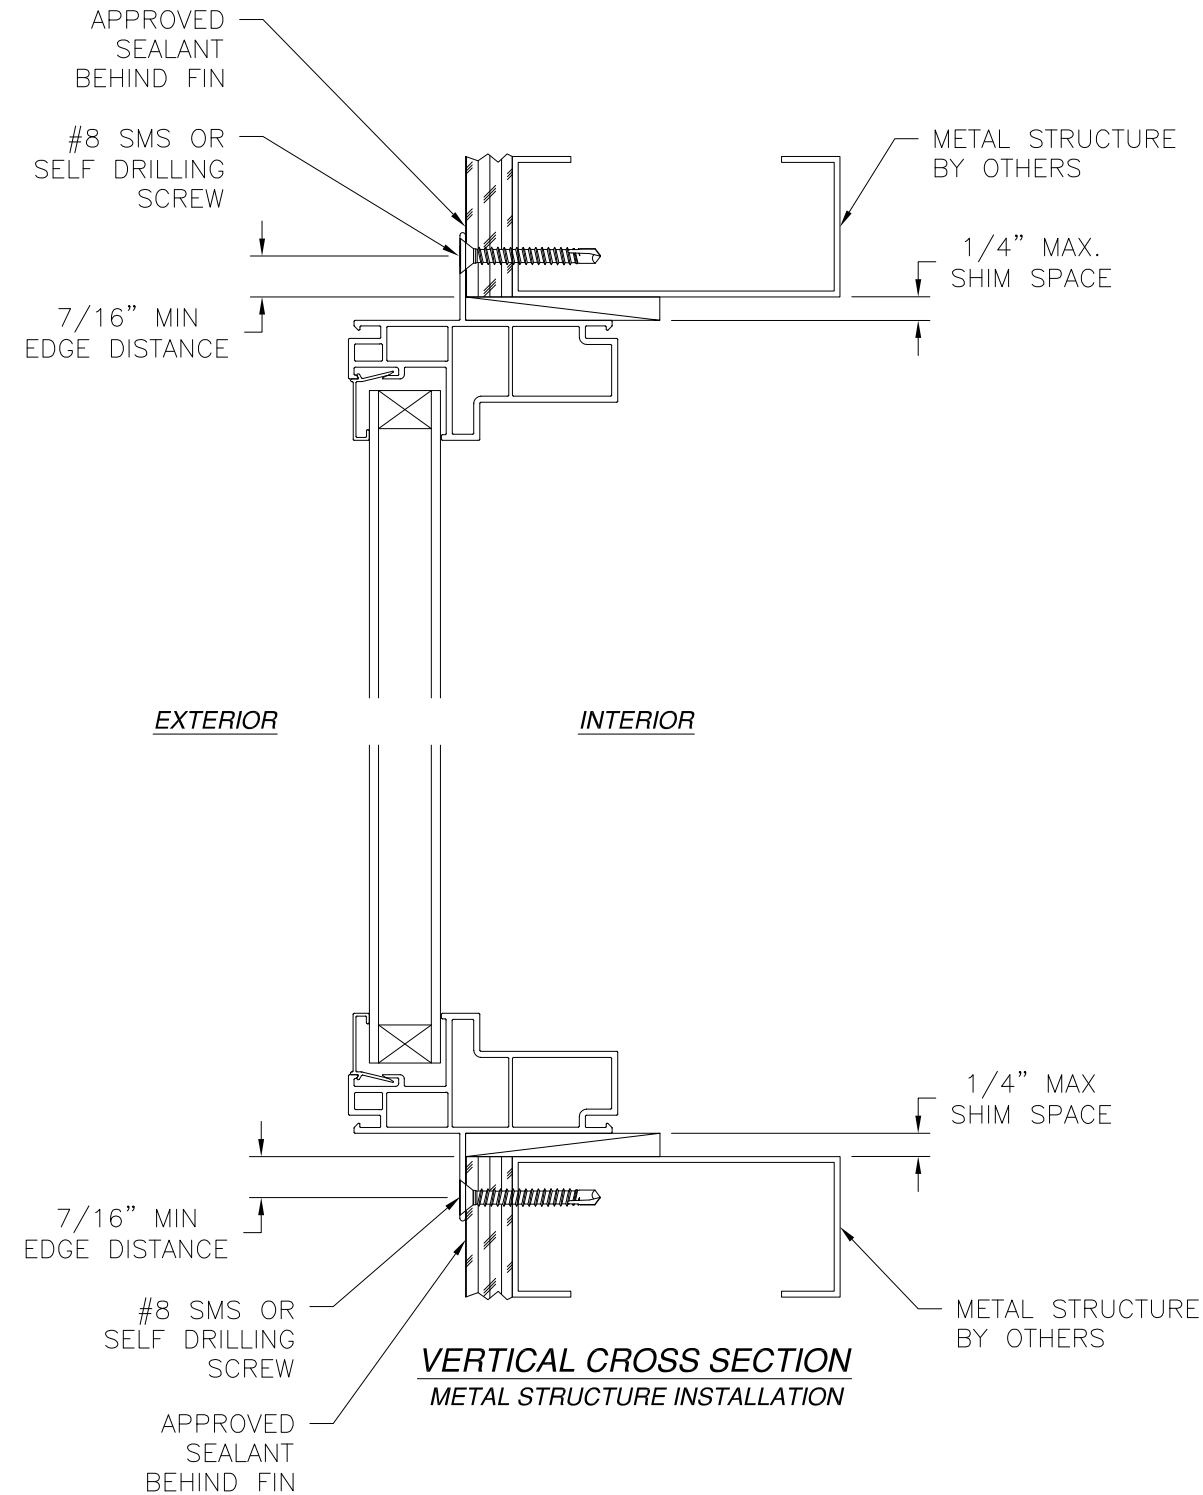


NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 10/19/2023

KRESTMARK INDUSTRIES, L.P. 3950 BASTILLE RD., SUITE 100 DALLAS, TX 75212		
400/475 VINYL PICTURE WINDOW NON-IMPACT 72" X 72" INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03918	REV -
SCALE NTS	DATE 06/07/2023	SHEET 5 OF 5
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

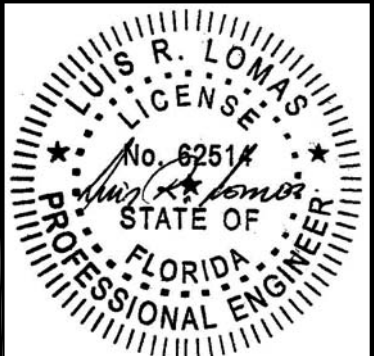

Luis R. Lomas P.E.
FL No.: 62514