



© 2009 R.W. BUILDING CONSULTANTS INC.


Z:\2023 FBC Drawings\MasterGrain\FL-13320 R7\FL-13320.1.dwg

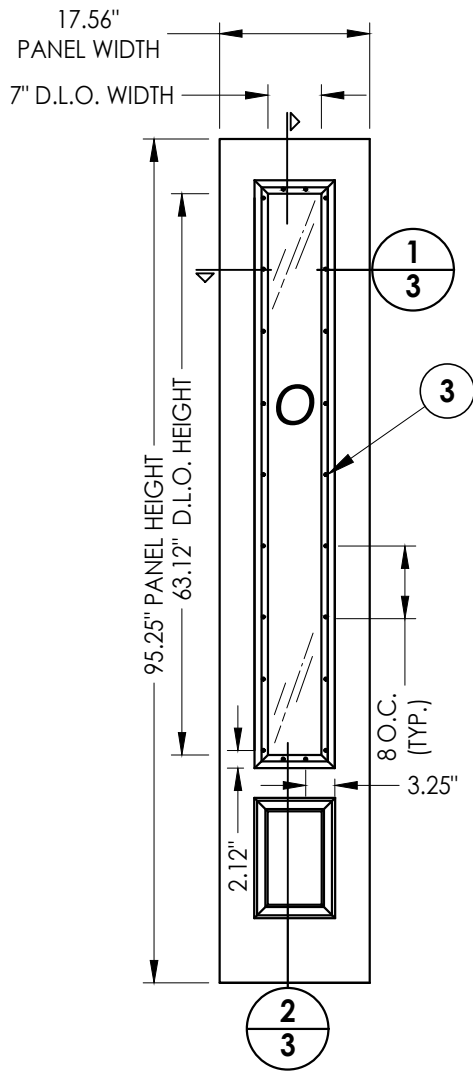


50 SIDELITE PANEL
Fiberglass




52 SIDELITE STILE
Wood




53 SIDELITE BOTTOM RAIL
Wood




54 SIDELITE TOP RAIL
Wood

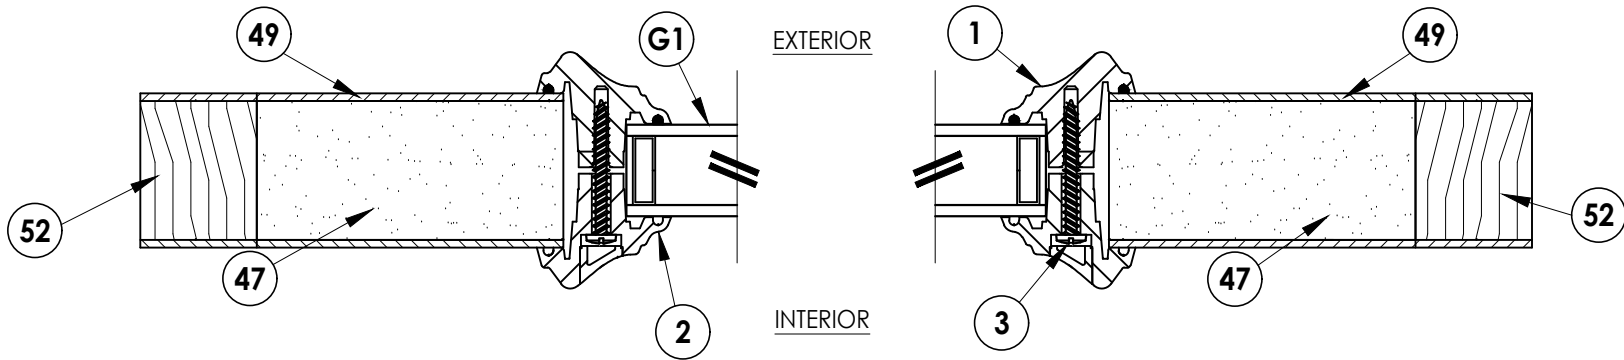

1/3 HORIZONTAL CROSS SECTION



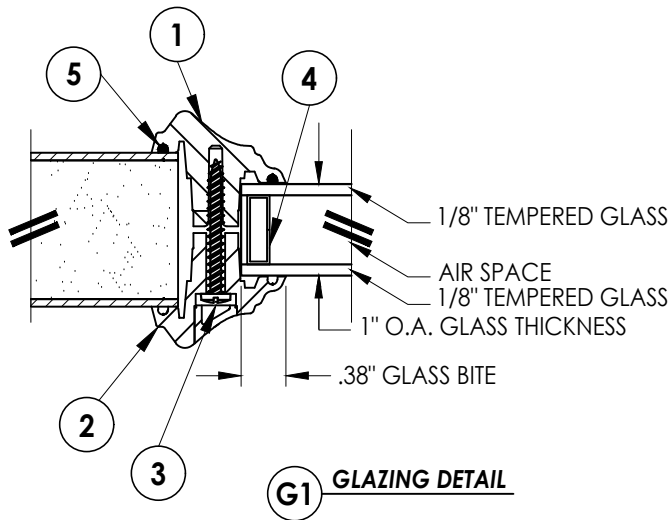


G1 GLAZING DETAIL

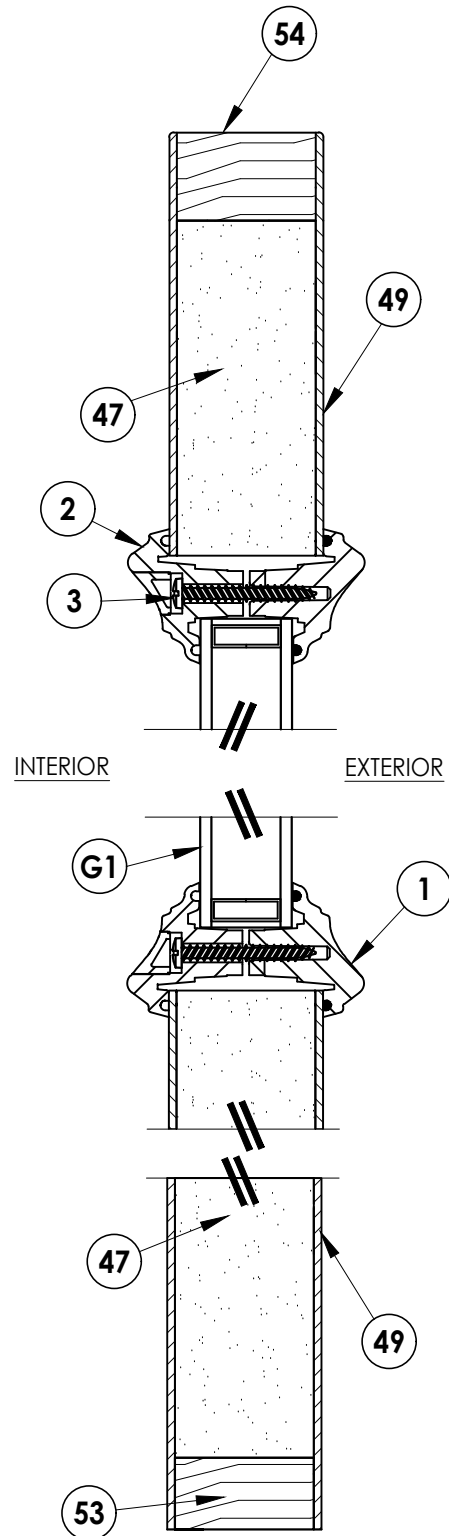

2/3 VERTICAL CROSS SECTION

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: MASTERGRAIN FIBERGLASS DOOR		PART OR ASSEMBLY: SIDELITE PANEL DETAILS AND GLAZING DETAIL	
		LFS	BY
	6	7/01/26	UPDATE TO 9TH ED. (2026) FBC
	5	7/01/23	UPDATE TO 8TH ED. (2023) FBC
	4	7/08/20	UPDATE TO 7TH ED. (2020) FBC
	NO	DATE	
REVISIONS			
DATE: 11/30/09			
SCALE: N.T.S.			
DWG. BY: AP			
CHK. BY: LFS			
DRAWING NO.: FL-13320.1			
SHEET 3 OF 12			

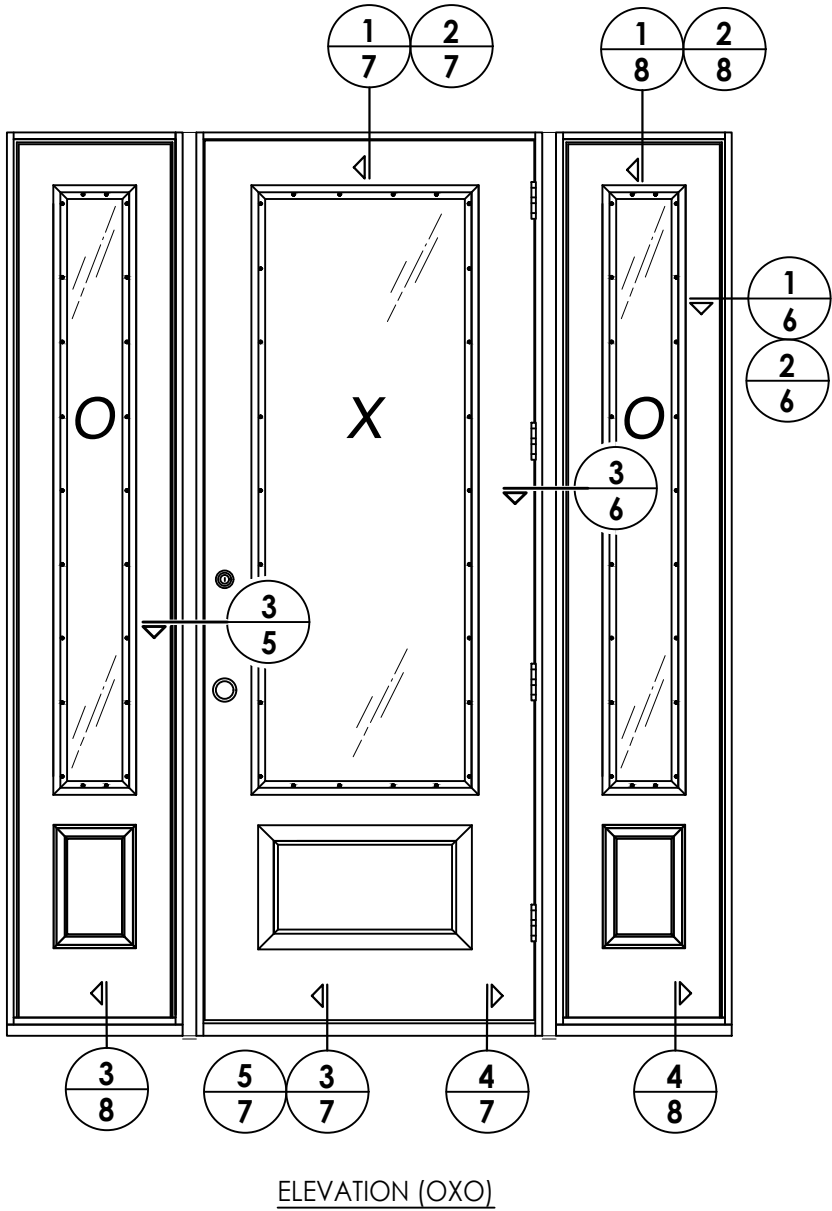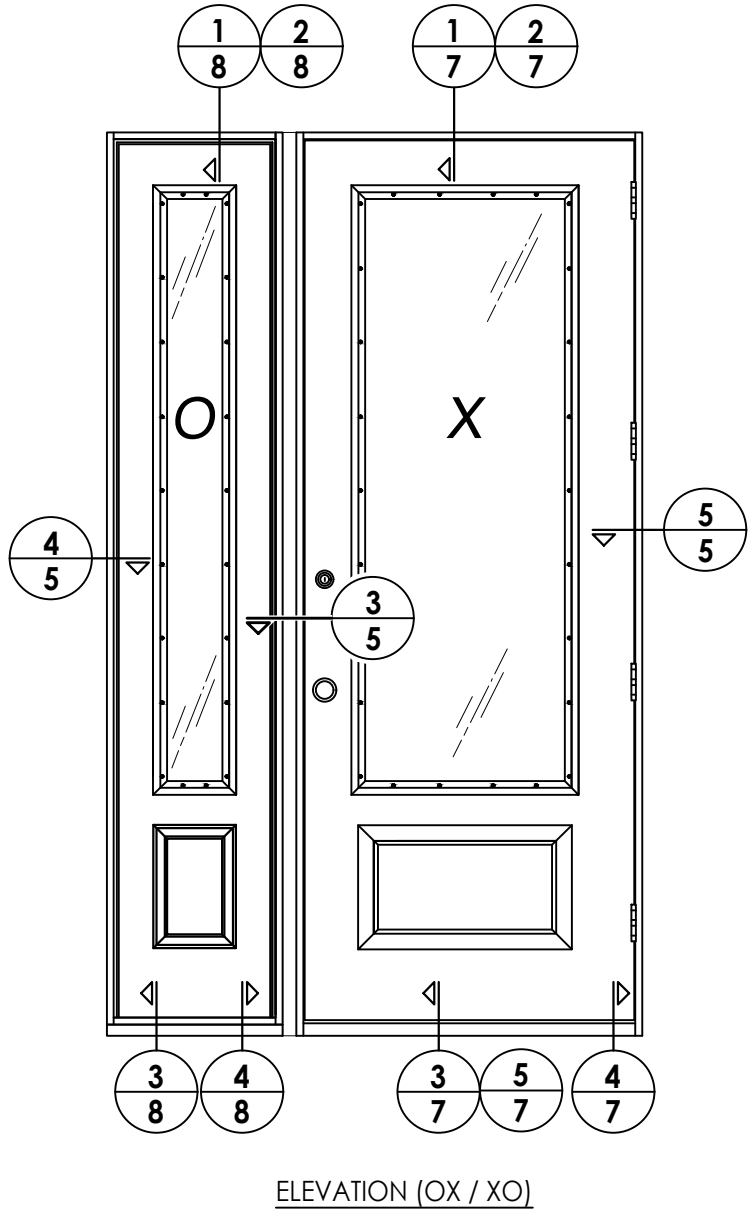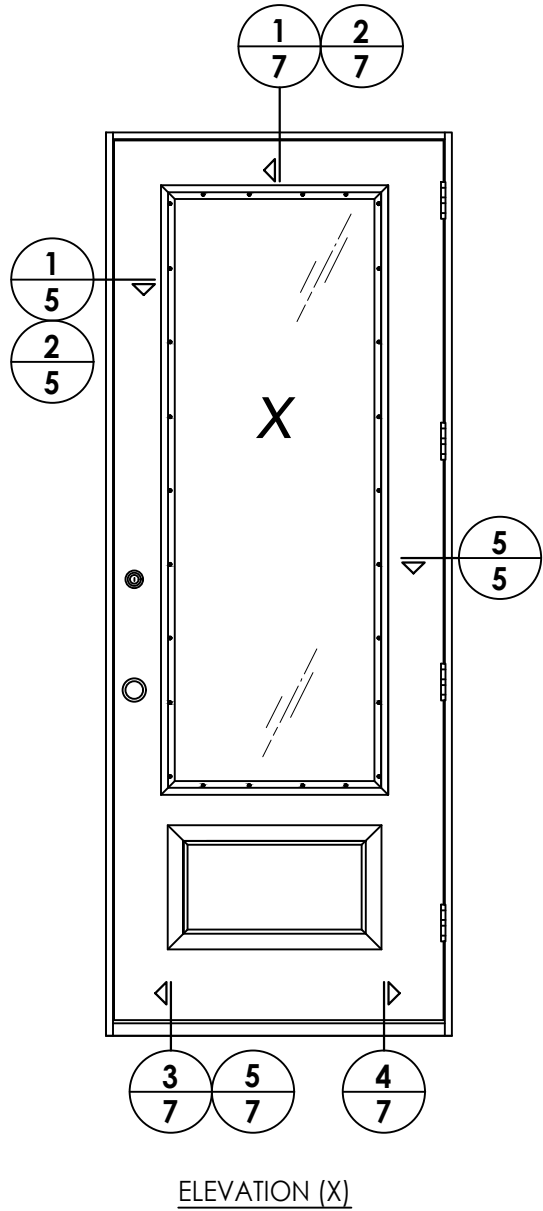

DATE: 11/30/09
SCALE: N.T.S.
DWG. BY: AP
CHK. BY: LFS
DRAWING NO.: FL-13320.1
SHEET 4 OF 12

REVISIONS			
NO.	DATE	BY	
6	7/01/26	UPDATE TO 9TH ED. (2026)	FBC LFS
5	7/01/23	UPDATE TO 8TH ED. (2023)	FBC LFS
4	7/08/20	UPDATE TO 7TH ED. (2020)	FBC LFS

PRODUCT: MASTERGRAIN FIBERGLASS DOOR
PART OR ASSEMBLY: ELEVATIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409
RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\MasterGrain\FL-13320 R7\FL-13320.1.dwg

NOTE:

1. Sidelite ass'y fastener; 6" from each end and 6 more screws equally spaced between. (8 screws total per jamb.)
2. Trim secured with 1" Brad Nail @ 6" O.C. (TYP).

EXTERIOR


INTERIOR

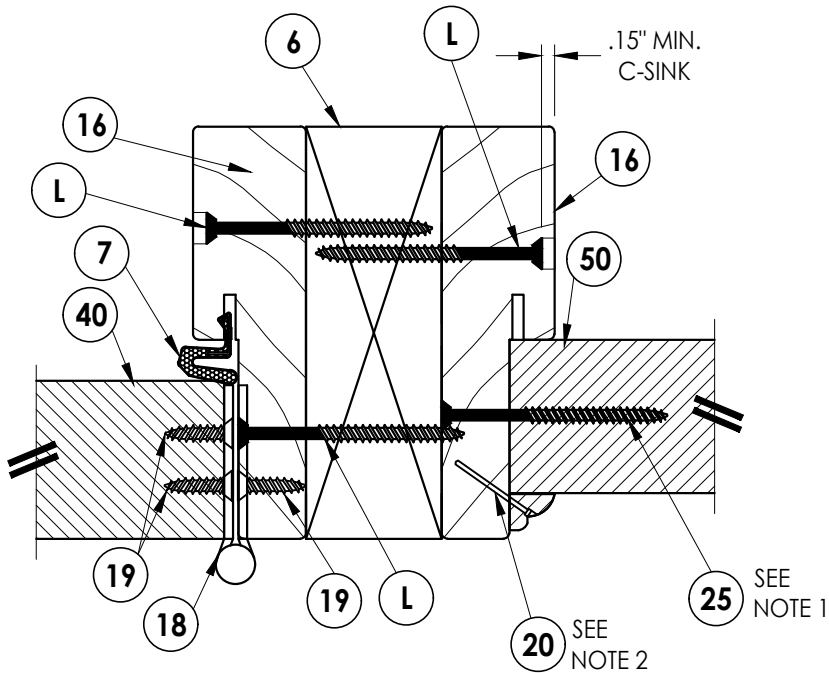

3
6 **HORIZONTAL CROSS SECTION**
Inswing shown - outswing
also approved

EXTERIOR


INTERIOR

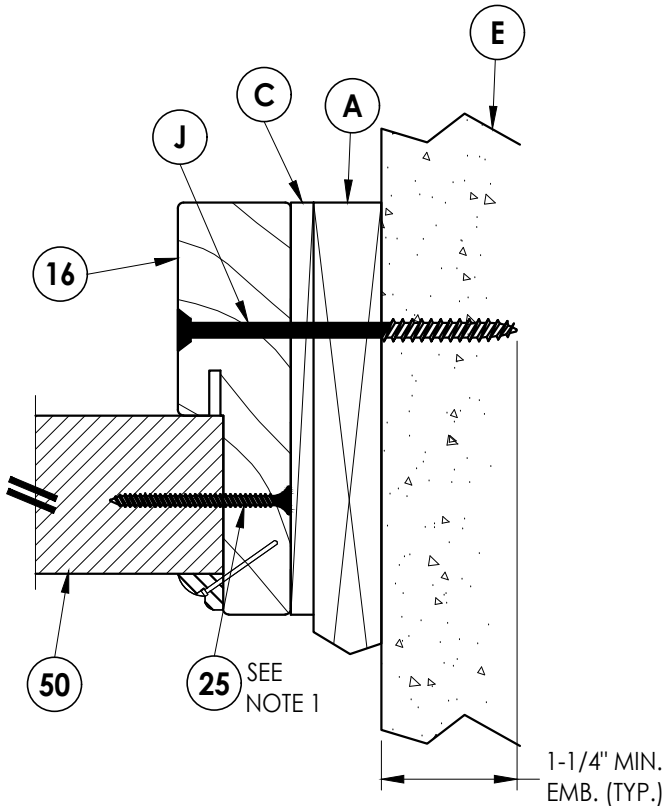

1
6 **HORIZONTAL CROSS SECTION**
Shown w/1X sub-buck

EXTERIOR

INTERIOR

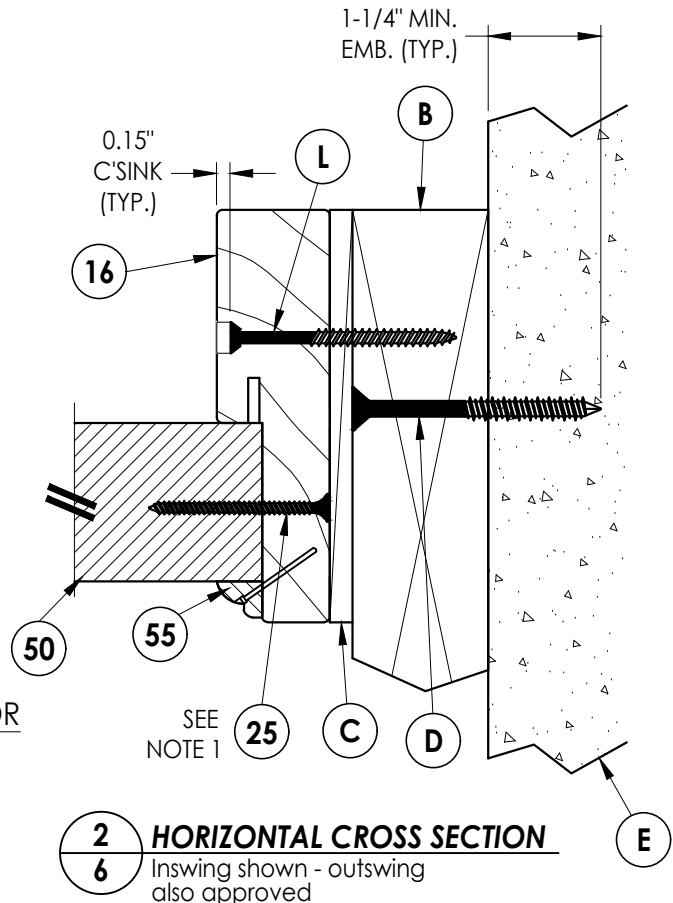

2
6 **HORIZONTAL CROSS SECTION**
Inswing shown - outswing
also approved

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MASTERGRAIN
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL CROSS SECTIONS

NO.	DATE	REVISIONS	BY
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
5	7/01/23	UPDATE TO 8TH ED. (2023) FBC	LFS
4	7/08/20	UPDATE TO 7TH ED. (2020) FBC	LFS

DATE: 11/30/09

SCALE: N.T.S.

DWG. BY: AP


CHK. BY: LFS

DRAWING NO.:


FL-13320.1

SHEET 6 OF 12


INTERIOR EXTERIOR

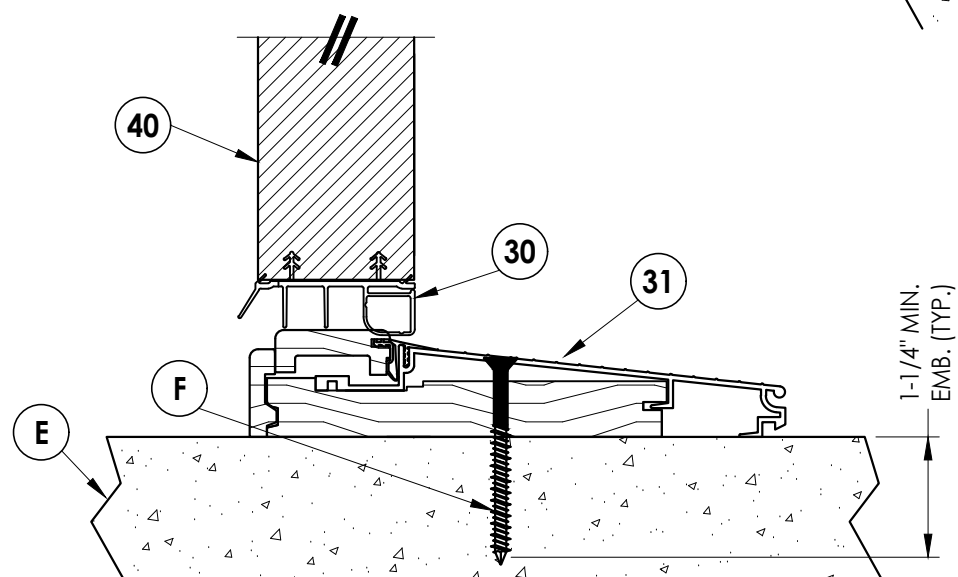


3 **VERTICAL CROSS SECTION**
7 Inswing configuration

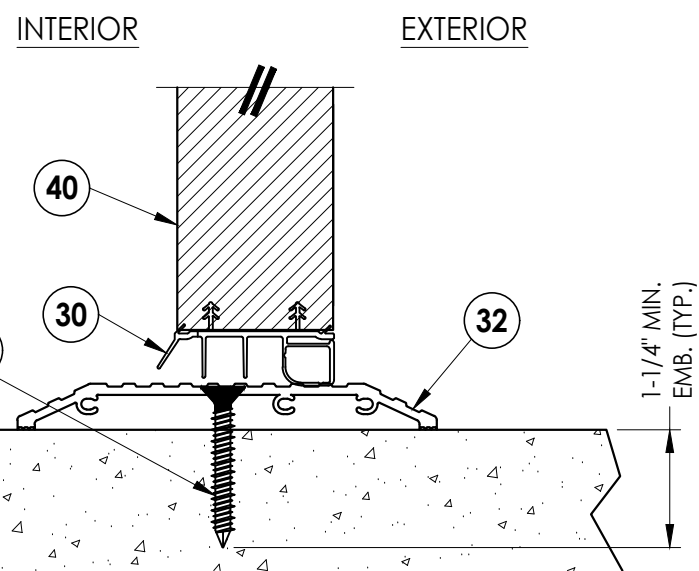

5 VERTICAL CROSS SECTION
7 Shown w/ ADA threshold

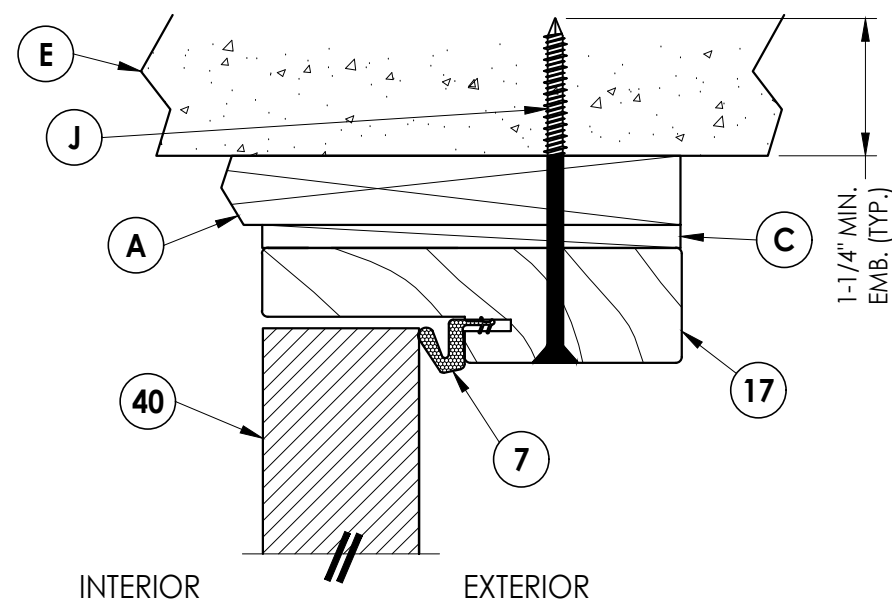

2 **VERTICAL CROSS SECTION**
7 Shown w/1X sub-buck

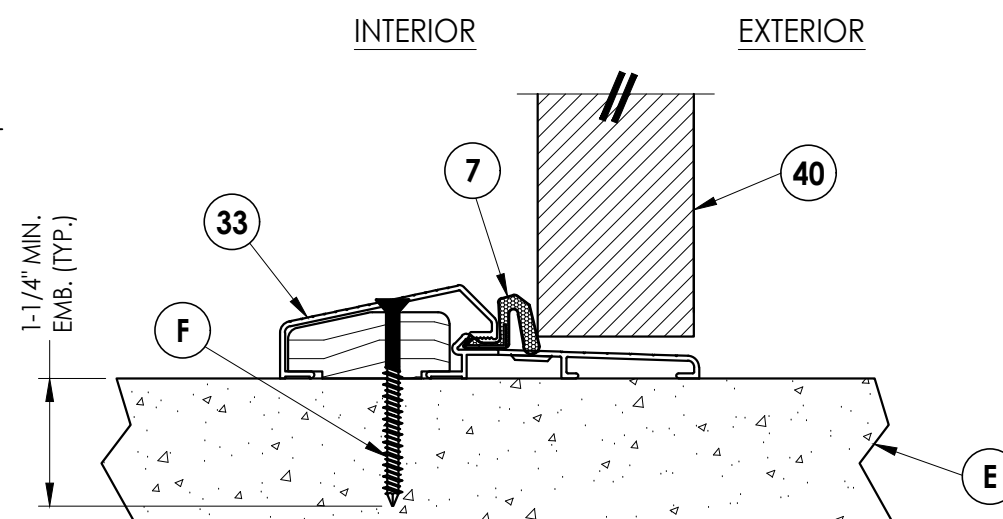

4 7 **VERTICAL CROSS SECTION** Outswing configuration


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT: MASTERGRAIN
FIBERGLASS DOOR

R^{qW} BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


[illegible]

Z:\2023 FBC Drawings\MasterGrain\FL-13320 R7\FL-13320.1.dwg

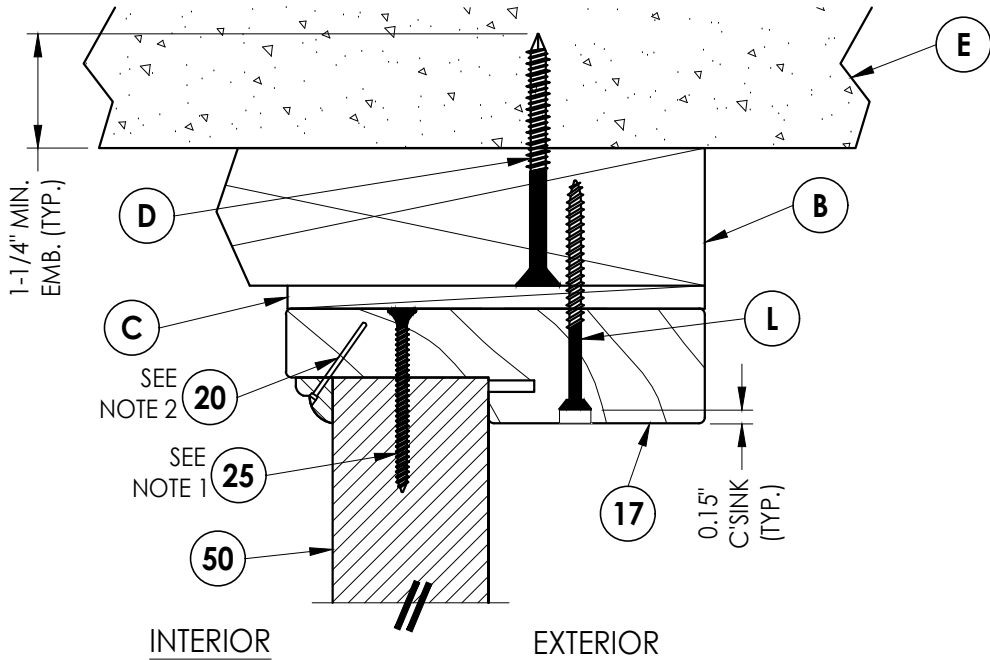

1
8 **VERTICAL CROSS SECTION**
Inswing shown - outswing
also approved


INTERIOR EXTERIOR

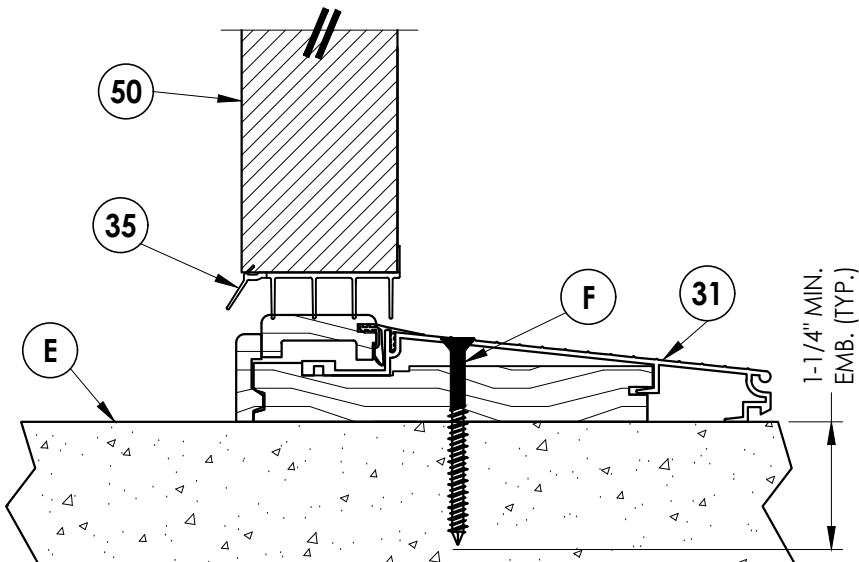

3
8 **VERTICAL CROSS SECTION**
Inswing configuration


NOTE:

1. Screws thru head and sill jamb located 3" from each end.
2. Trim secured with 1" Brad Nail @ 6" O.C. (TYP).

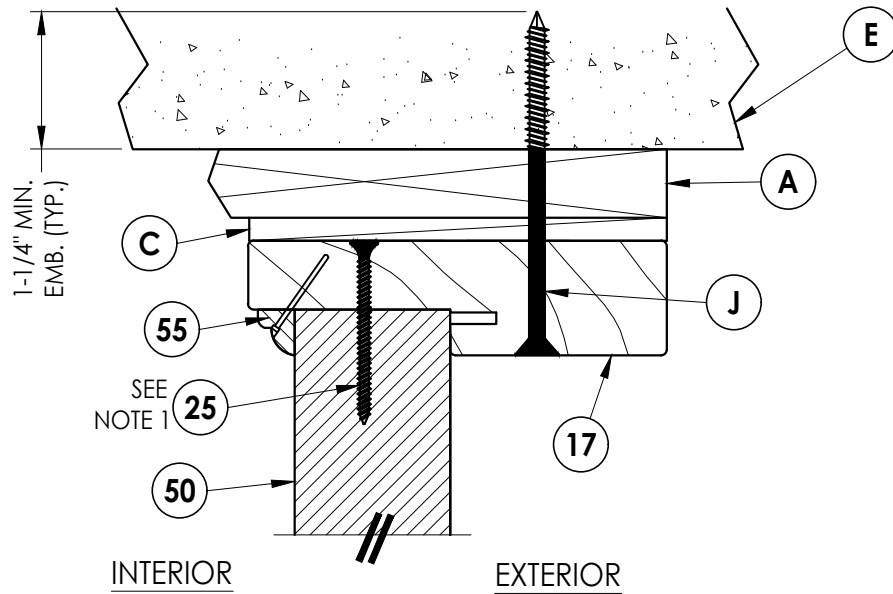

2
8 **VERTICAL CROSS SECTION**
Shown w/1X sub-buck

INTERIOR EXTERIOR

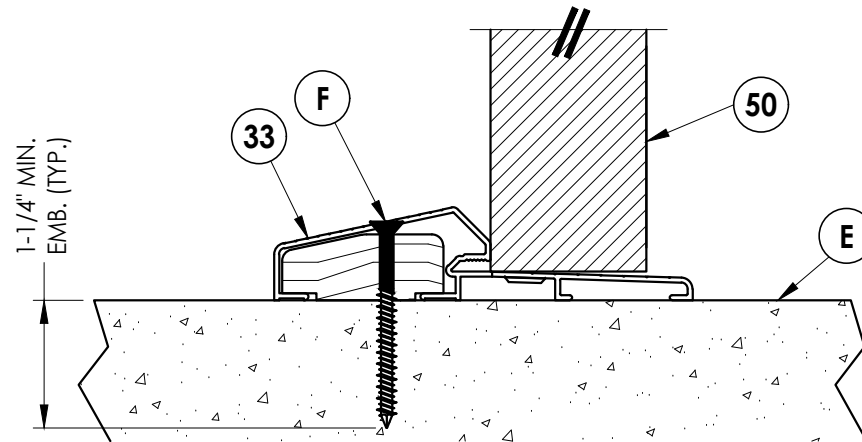

4
8 **VERTICAL CROSS SECTION**
Outswing configuration

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MASTERGRAIN
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/08/20	UPDATE TO 7TH ED. (2020) FBC LFS

DATE: 11/30/09

SCALE: N.T.S.


DWG. BY: AP

CHK. BY: LFS


DRAWING NO.:

FL-13320.1


SHEET 8 OF 12

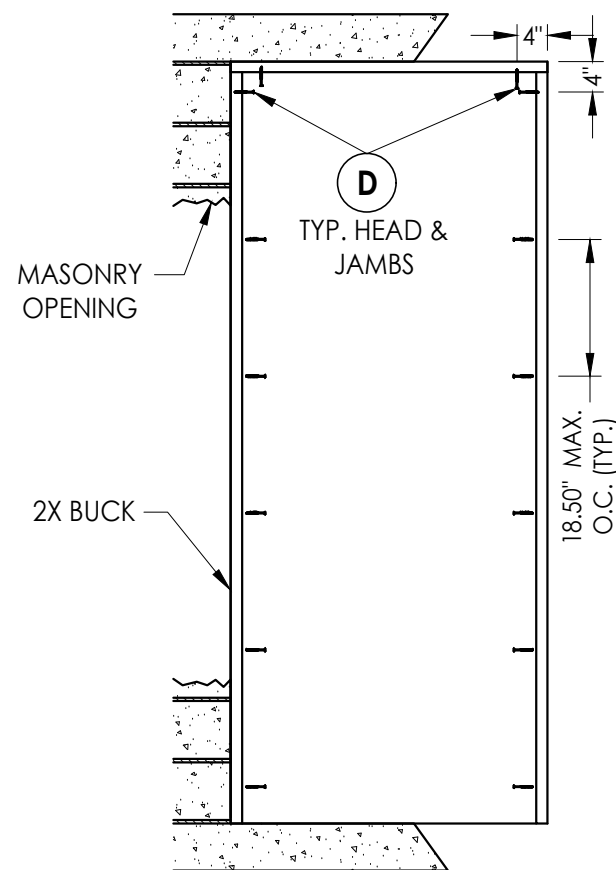


BUCK ANCHORING

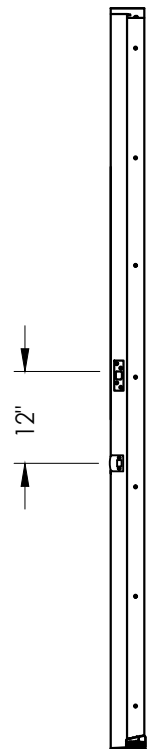

STRIKE JAMB

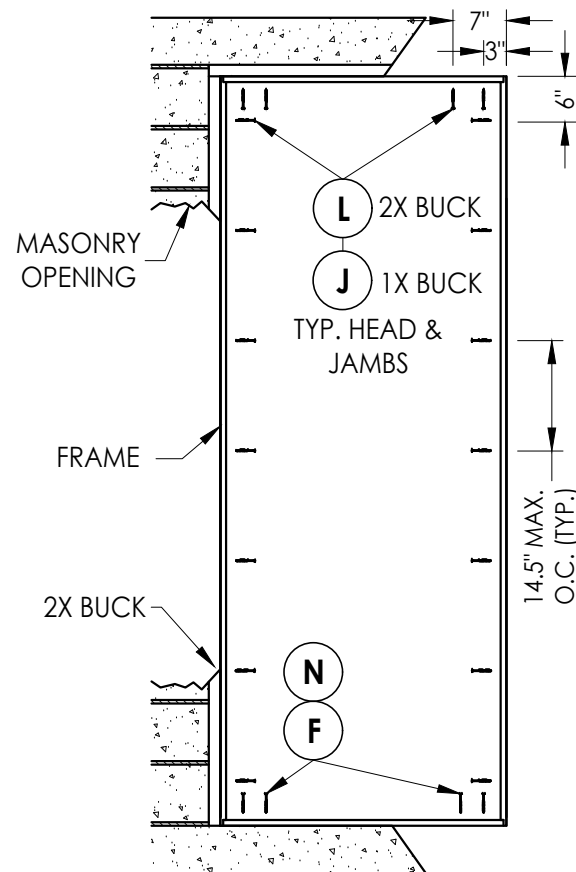

FRAME ANCHORING
Masonry construction

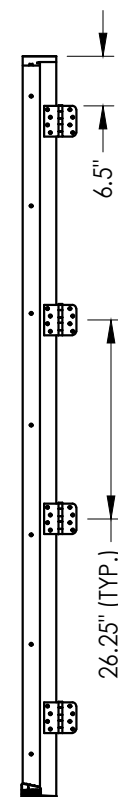

HINGE JAMB


CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA-CON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

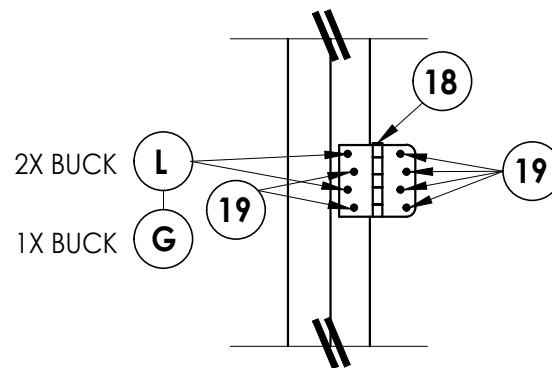

HINGE DETAIL

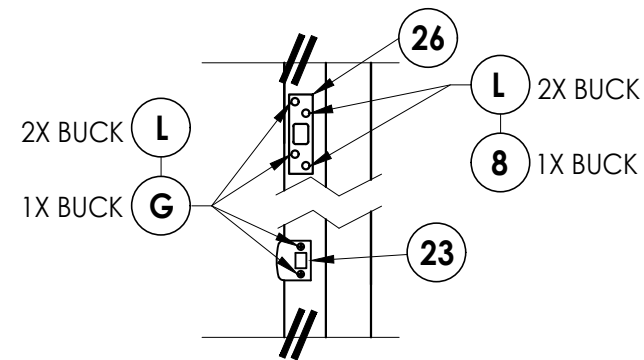

LATCH & DEADBOLT DETAIL
SECURITY STRIKE

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MASTERGRAIN
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING
(X)

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/08/20	UPDATE TO 7TH ED. (2020) FBC LFS

DATE: 11/30/09

SCALE: N.T.S.


DWG. BY: AP

CHK. BY: LFS


DRAWING NO.:

FL-13320.1


SHEET 9 OF 12

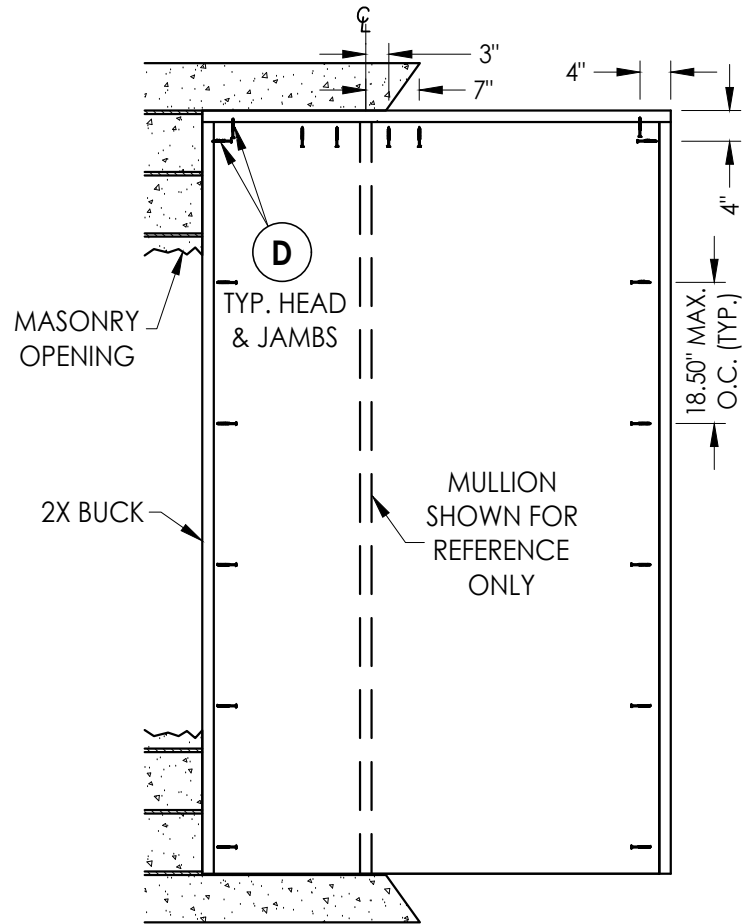


BUCK ANCHORING

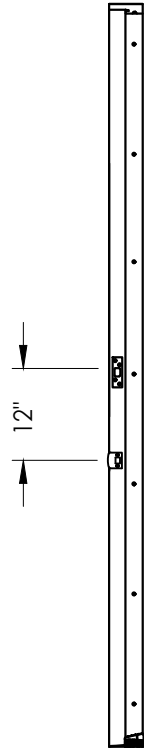

STRIKE JAMB

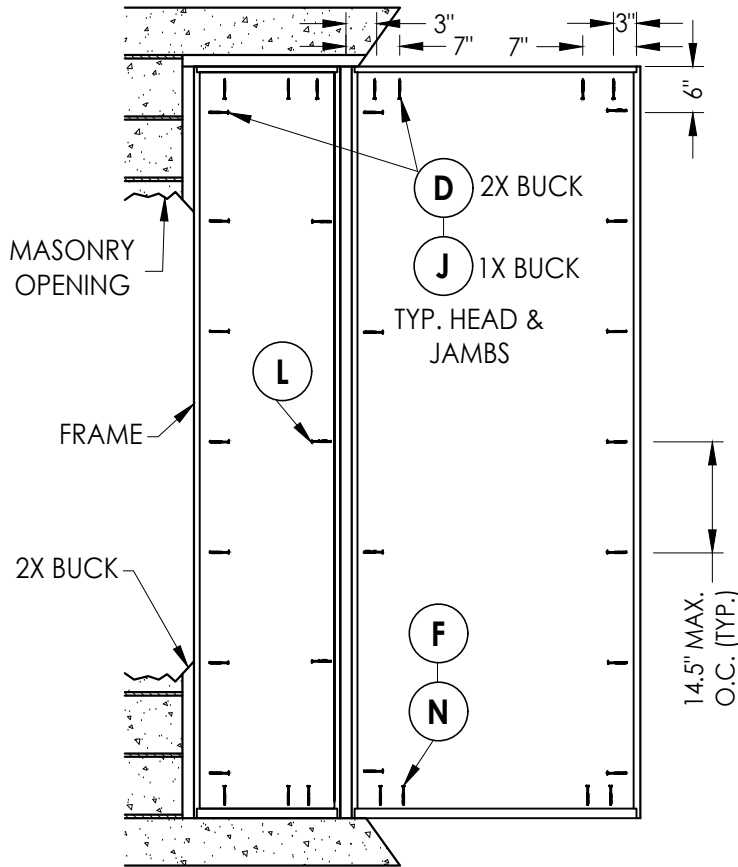

FRAME ANCHORING
Masonry construction

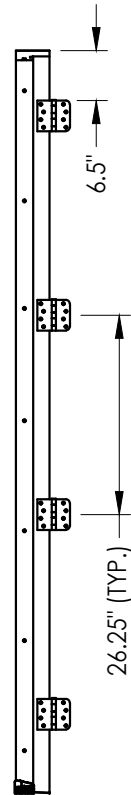

HINGE JAMB


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

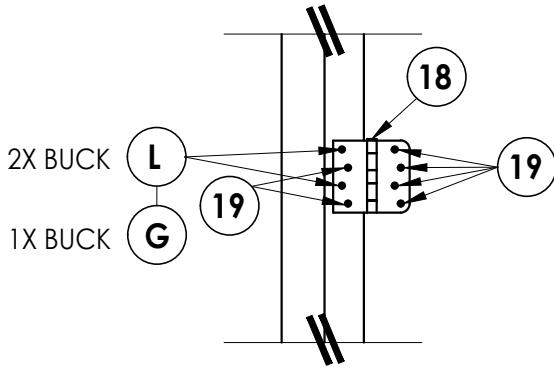

HINGE DETAIL

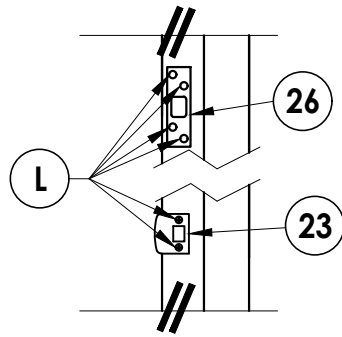

LATCH & DEADBOLT DETAIL
SECURITY STRIKE

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MASTERGRAIN
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING
(OX/XO)

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/08/20	UPDATE TO 7TH ED. (2020) FBC LFS
		BY

DATE: 11/30/09

SCALE: N.T.S.







DWG. BY: AP

CHK. BY: LFS

DRAWING NO.:

FL-13320.1

SHEET 10 OF 12

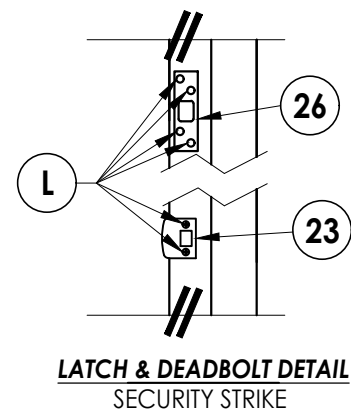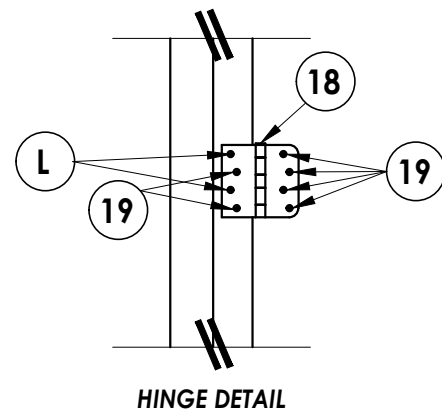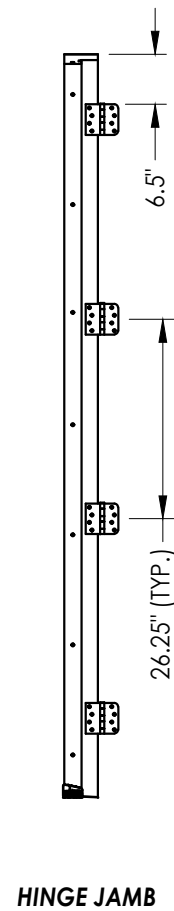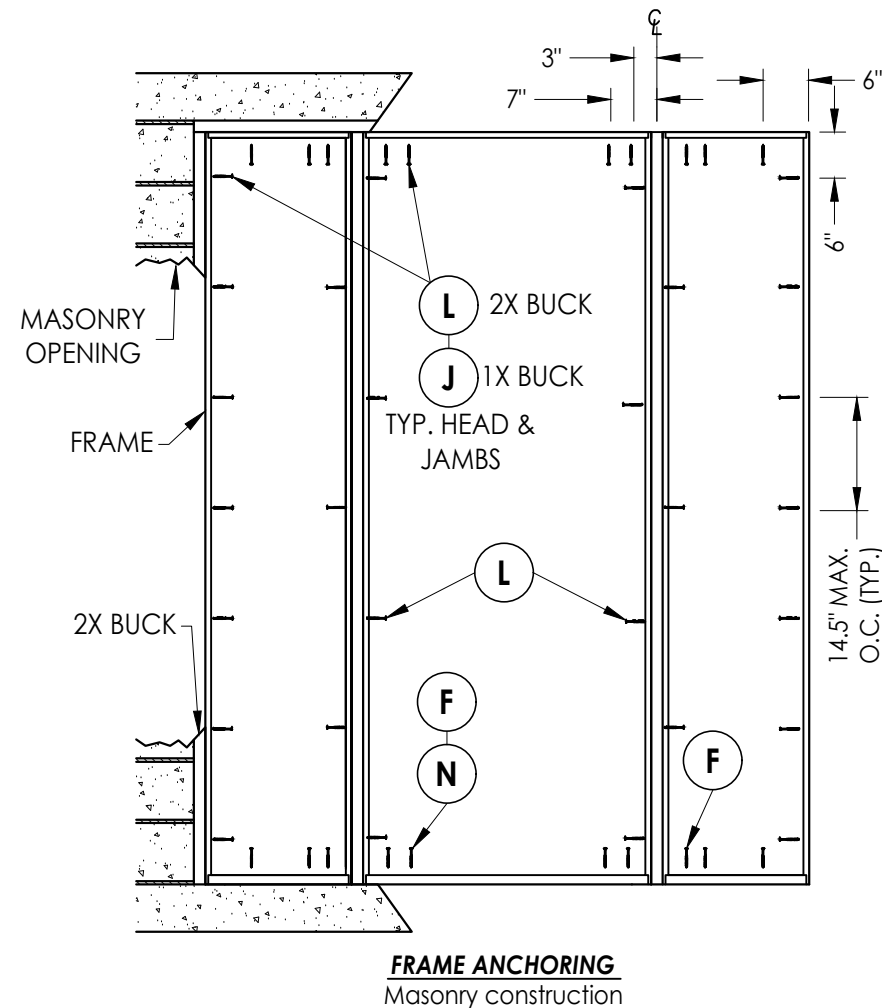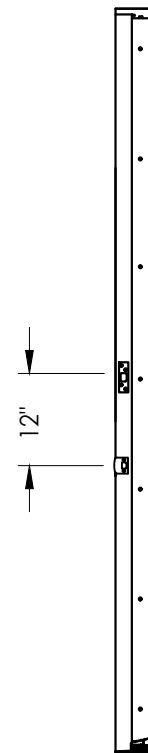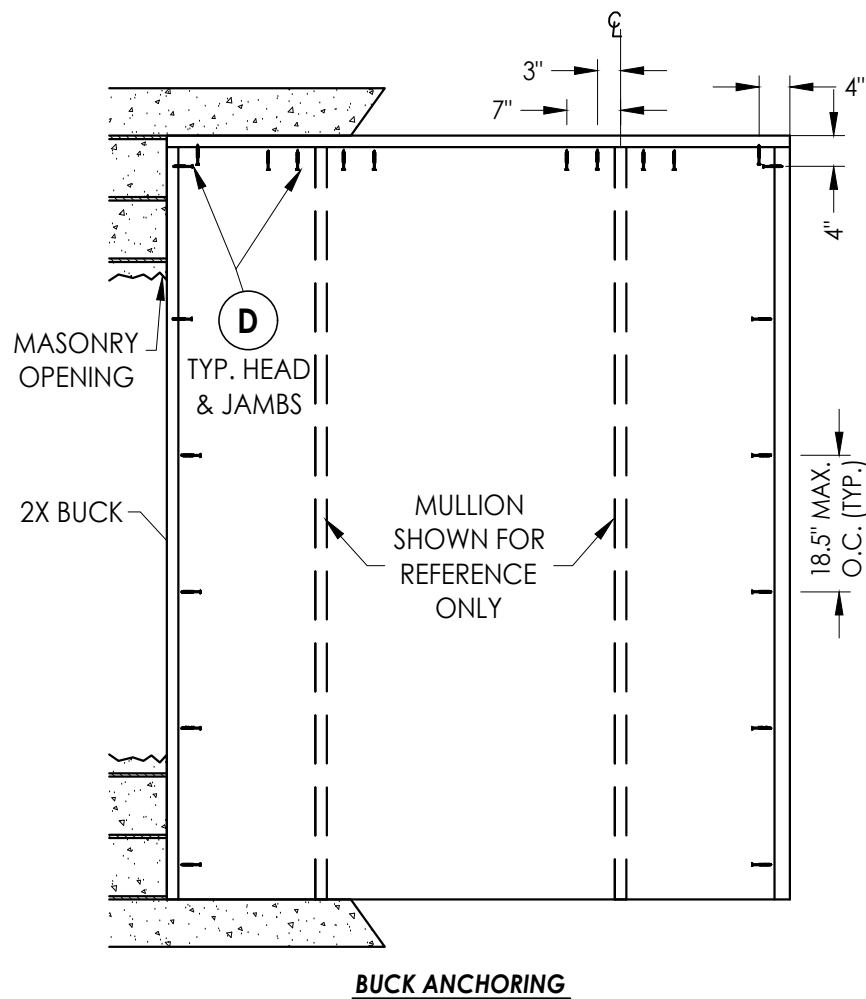

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
MASTERGRAIN
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING
(OXO)

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	7/01/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	7/08/20	UPDATE TO 7TH ED. (2020) FBC LFS
		BY

DATE: 11/30/09

SCALE: N.T.S.

DWG. BY: AP

CHK. BY: LFS

DRAWING NO.:


FL-13320.1

SHEET 11 OF 12

Z:\2023 FBC Drawings\MasterGrain\FL-13320 R7\FL-13320.1.dwg

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD
B	2X BUCK SG >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" X 3-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	#9 X 2-1/2" PFH WS	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
N	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
1	FEMALE LITE FRAME - MASTERGRAIN	POLYPROPYLENE
2	MALE LITE FRAME - MASTERGRAIN	POLYPROPYLENE
3	#8 X 1-3/4" PANHEAD SMS (LIGHT FRAME SCREW)	STEEL
4	ALUMINUM SPACER SYSTEM	ALUMINUM
5	SILICONE WEATHER SEAL MG #2500	SILICONE
6	2X MULLION SG > = 0.55	WOOD
7	WEATHER STRIP	FOAM
8	#10 X 1-1/2" PFH	STEEL
16	SIDE JAMB SG > = 0.42	WOOD
17	HEAD JAMB SG > = 0.42	WOOD
18	4" X 4" HINGE MIN 0.1" THICK	STEEL
19	#10 X 3/4" PFH WS	STEEL
20	1" BRAD NAIL	STEEL
21	DEADBOLT - KWIKSET SERIES 660	STEEL
21A	DEADBOLT - COPPER CREEK E-SERIES	STEEL
22	KNOB - KWIKSET SERIES	STEEL
22A	KNOB - COPPER CREEK E-SERIES	STEEL
23	LATCH STRIKE PLATE	STEEL
24	DEADBOLT STRIKE PLATE	STEEL
25	#8 X 2-1/2" PFH WOOD SCREW	STEEL
26	SECURITY STRIKE PLATE	STEEL
30	DOOR BOTTOM SWEEP	VINYL
31	INSWING THRESHOLD	ALUM/COMP.
32	ADA THRESHOLD	ALUM.
33	OUTSWING THRESHOLD	ALUM./WOOD
34	SIDELITE THRESHOLD	ALUM./COMP.
35	SIDELITE SWEEP	VINYL
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
41	HINGE AND LATCH REINFORCMENT	WOOD
42	HINGE AND LATCH STILE - SG >= 0.42	WOOD
44	TOP RAIL	COMP.
45	BOTTOM RAIL	COMP
47	POLYEURETHANE FOAM	POLYEURETHANE

49	FIBERGLASS SKIN 0.08" MIN. THICKNESS	FIBERGLASS
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
52	SIDELITE STILE - SG>= 0.42	WOOD
53	SIDELITE BOTTOM RAIL SG > = 0.42	WOOD
54	SIDELITE TOP RAIL SG > = 0.42	WOOD
55	SIDELITE TRIM	WOOD

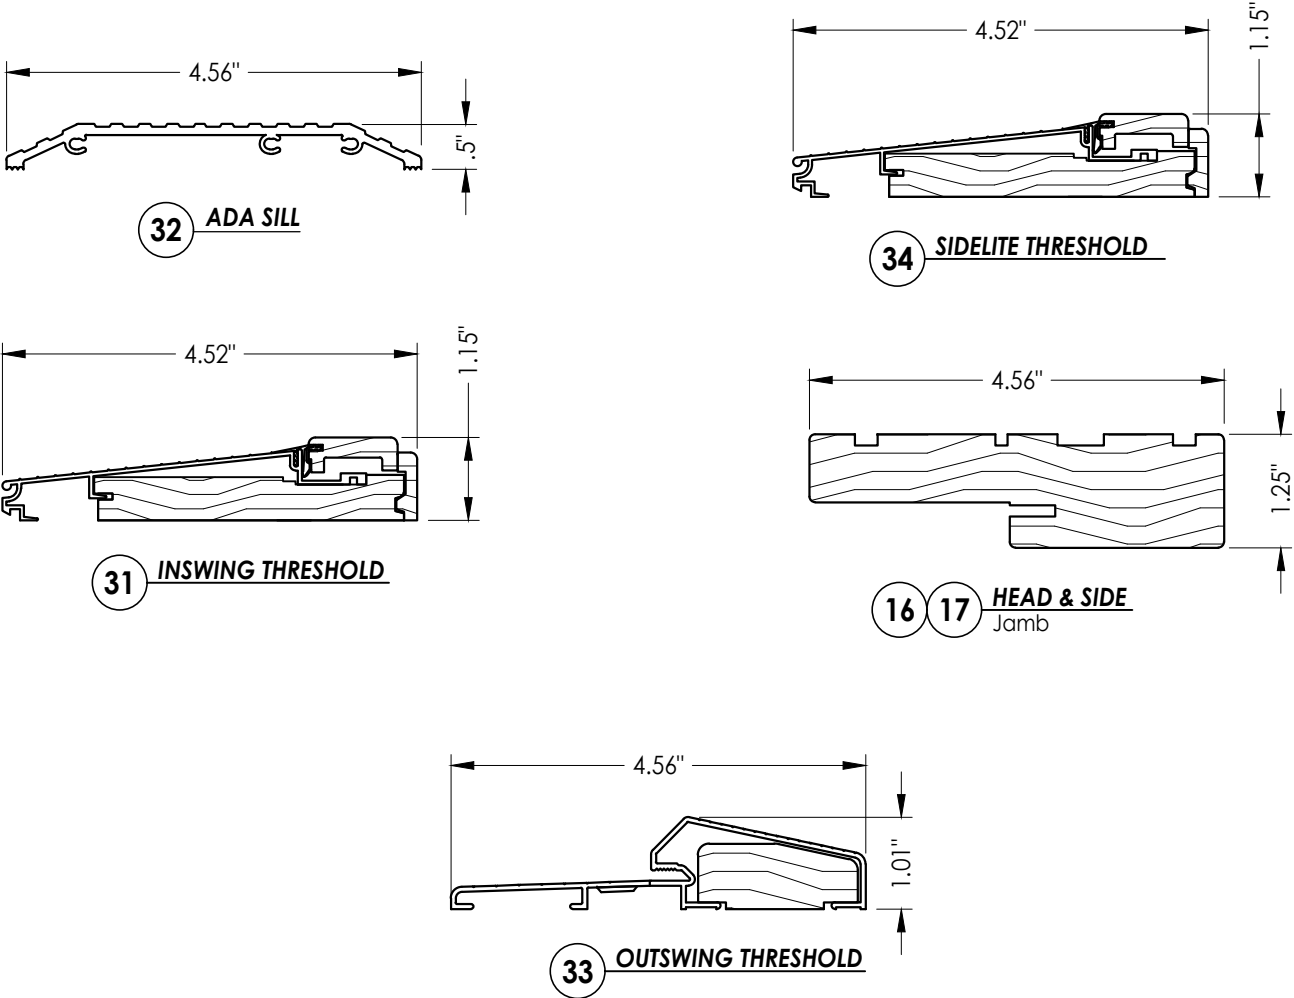

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813				
PRODUCT: MASTERGRAIN FIBERGLASS DOOR				PART OR ASSEMBLY: BILL OF MATERIALS & COMPONENTS				
				6	7/01/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
				5	7/01/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
				4	7/08/20	UPDATE TO 7TH ED. (2020)	FBC	LFS
				NO.	DATE			BY
				REVISIONS				
DATE: 11/30/09								
SCALE: N.T.S.								
DWG. BY: AP								
CHK. BY: LFS								
DRAWING NO.: FL-13320.1								
SHEET 12 OF 12								