

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED


NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND METAL STRUCTURE TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. SHIM AS NEEDED. AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
4. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
5. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
6. FRAME MATERIAL: EXTRUDED RIGID PVC.
7. UNITS MUST BE GLAZED PER ASTM E1300.
8. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
9. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
10. FOR ANCHORING THROUGH FIN INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
11. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 11.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 11.2. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI

SIGNED: 08/05/2026


TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 4	INSTALLATION DETAILS
5	COMPONENTS

KRESTMARK INDUSTRIES, L.P. 3950 BASTILLE RD., SUITE 100 DALLAS, TX 75212		
400/475 VINYL HORIZONTAL SLIDER WINDOW NON-IMPACT 72" X 44" NOTES		
DRAWN: A.R.	DWG NO. 08-03920	REV -
SCALE NTS	DATE 10/11/2023	SHEET 1 OF 5
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

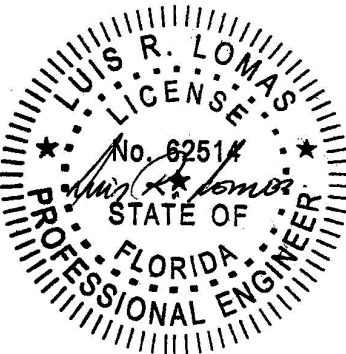

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

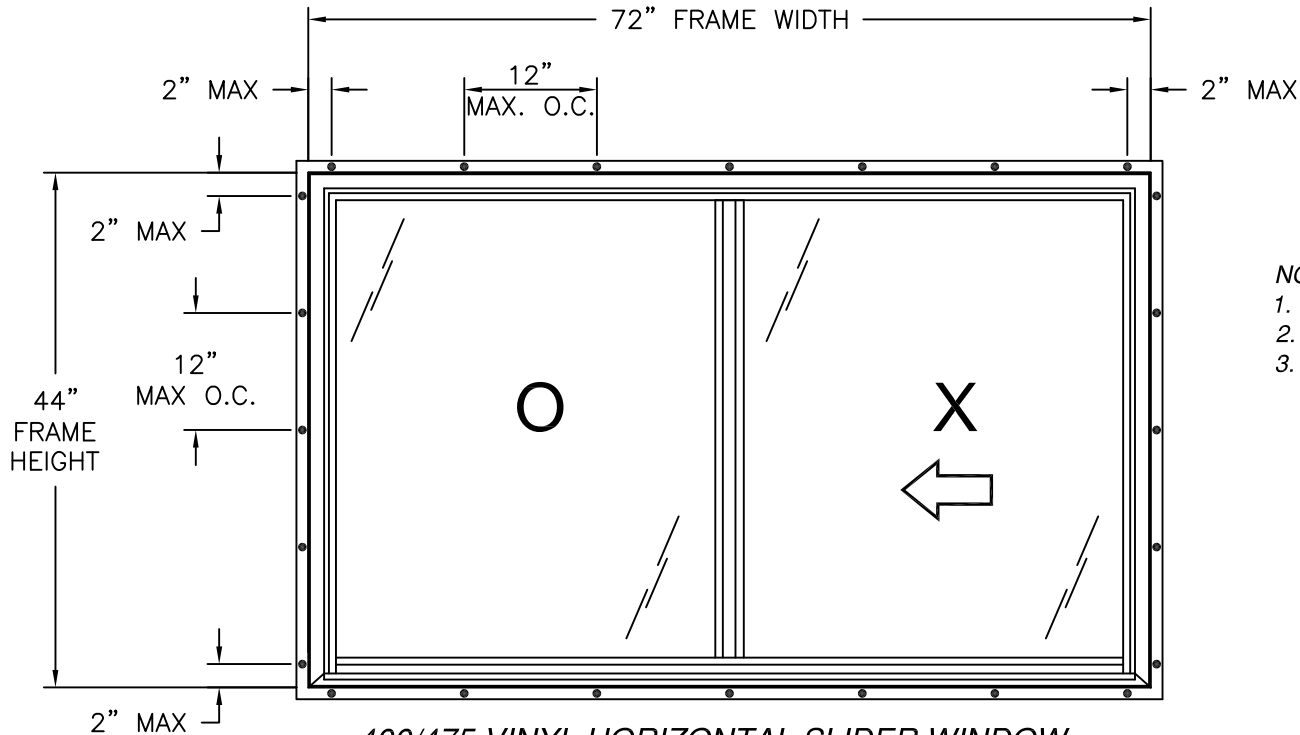


400/475 VINYL HORIZONTAL SLIDER WINDOW
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

FOR OTHER SIZES APPROVED. SEE CHART #1, THIS SHEET

- NOTES:
- SASH SIZE: 35 3/8" X 41 1/2"
 - SASH D.L.O.: 32 1/4" X 38 5/16"
 - FIXED D.L.O.: 33 3/16" X 40 15/16"

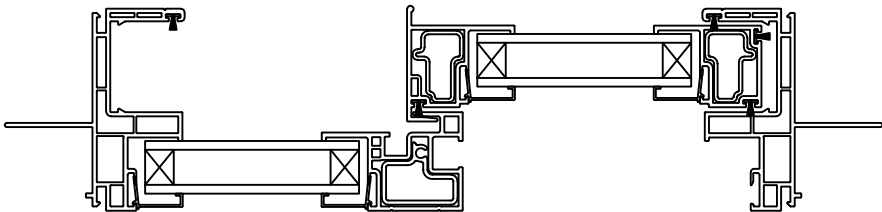

HORIZONTAL CROSS SECTION

Chart #1
Design pressure rating (psf)

Frame Height (in)	Frame Width (in)																			
	24.0		30.0		36.0		42.0		48.0		54.0		60.0		66.0		72.0		78.0	
	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg	Pos	Neg
18.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0
24.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0
30.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0
36.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	74.3	50.0	72.7	50.0	72.2	50.0	72.2
42.0	50.0	75.0	50.0	75.0	50.0	75.0	50.0	70.7	50.0	65.0	50.0	60.8	50.0	57.8	50.0	55.6	50.0	54.2	-	-
44.0	50.0	75.0	50.0	75.0	50.0	74.3	50.0	66.5	50.0	60.9	50.0	56.8	50.0	53.8	50.0	51.6	50.0	50.0	-	-
48.0	50.0	75.0	50.0	72.1	50.0	61.2	50.0	53.5	48.0	48.0	43.9	43.9	40.8	40.8	38.4	38.4	-	-	-	-
54.0	50.0	62.1	50.0	50.2	42.4	42.4	37.0	37.0	33.0	33.0	30.0	30.0	-	-	-	-	-	-	-	-
60.0	45.1	45.1	36.4	36.4	30.7	30.7	26.6	26.6	23.7	23.7	-	-	-	-	-	-	-	-	-	-
66.0	33.8	33.8	27.2	27.2	22.9	22.9	19.8	19.8	17.6	17.6	-	-	-	-	-	-	-	-	-	-
72.0	26.0	26.0	20.9	20.9	17.6	17.6	-	-	-	-	-	-	-	-	-	-	-	-	-	-

HARDWARE SCHEDULE	
A.	PVC PLASTIC CAM ACTION LOCKS, 4" FROM EACH END OF SASH LOCK STILE
B.	TANDEM METALLIC ROLLER WITH PLASTIC HOUSING SNAPPED INTO SASH BOTTOM RAIL, 2 1/4" FROM EACH END
C.	ALUMINUM REINFORCEMENT (11585) IN FIXED INTERLOCK
D.	ALUMINUM REINFORCEMENT (204A) IN ALL STILES AND RAILS

KRESTMARK INDUSTRIES, L.P.
3950 BASTILLE RD., SUITE 100
DALLAS, TX 75212


400/475 VINYL HORIZONTAL SLIDER WINDOW
NON-IMPACT 72" X 44"
ELEVATIONS

DRAWN: A.R. DWG NO. 08-03920 REV -

SCALE NTS DATE 10/11/2023 SHEET 2 OF 5


L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/05/2026

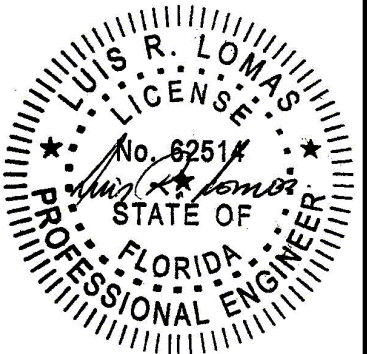


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

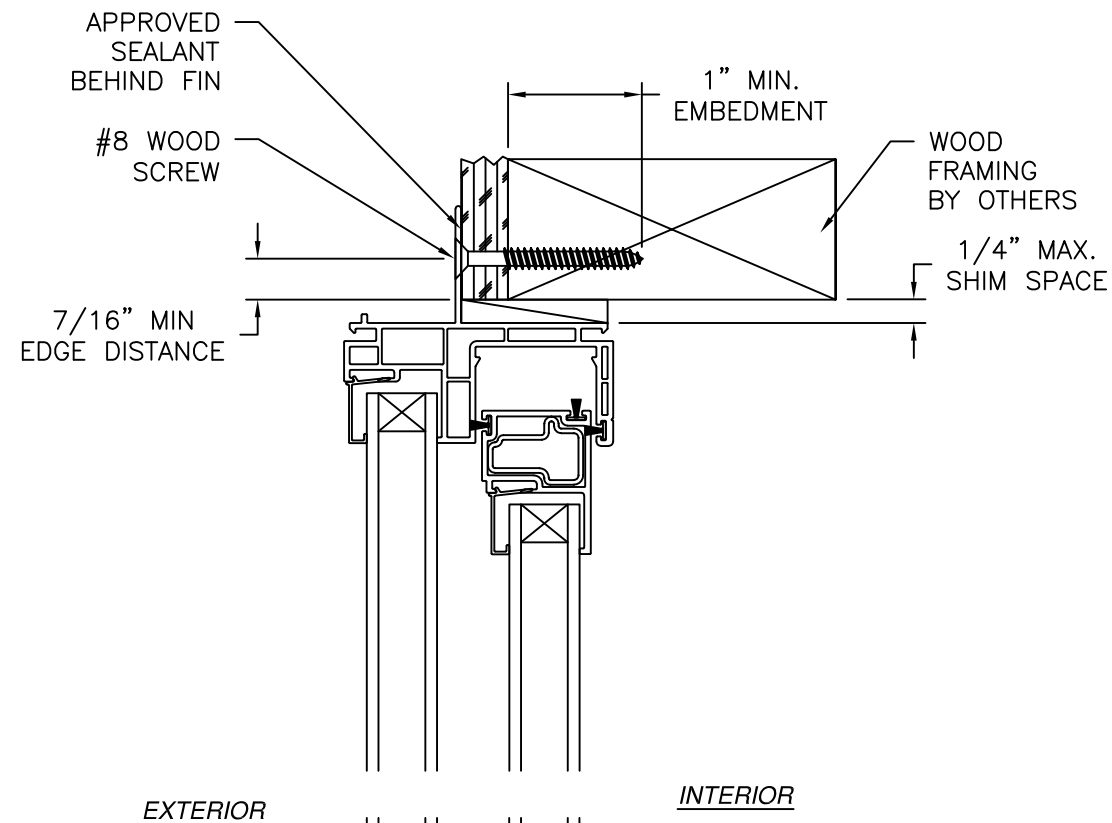

EXTERIOR INTERIOR

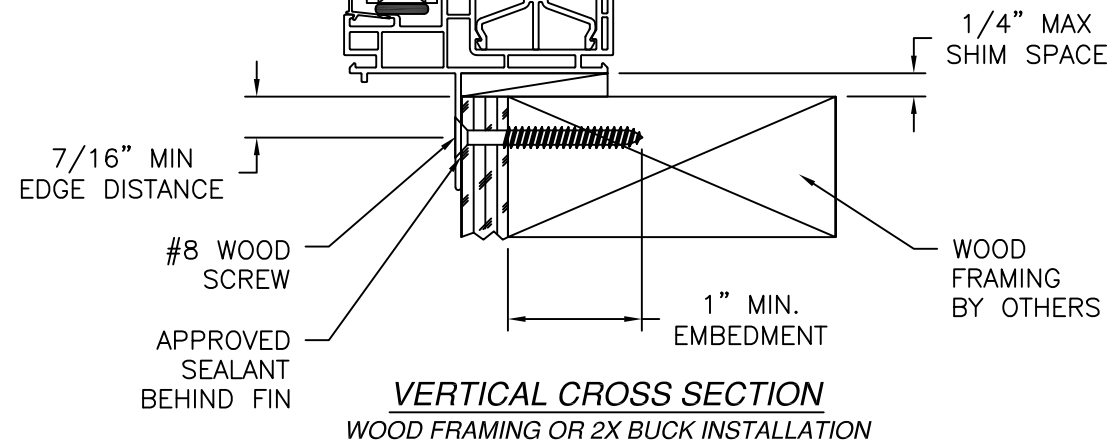

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

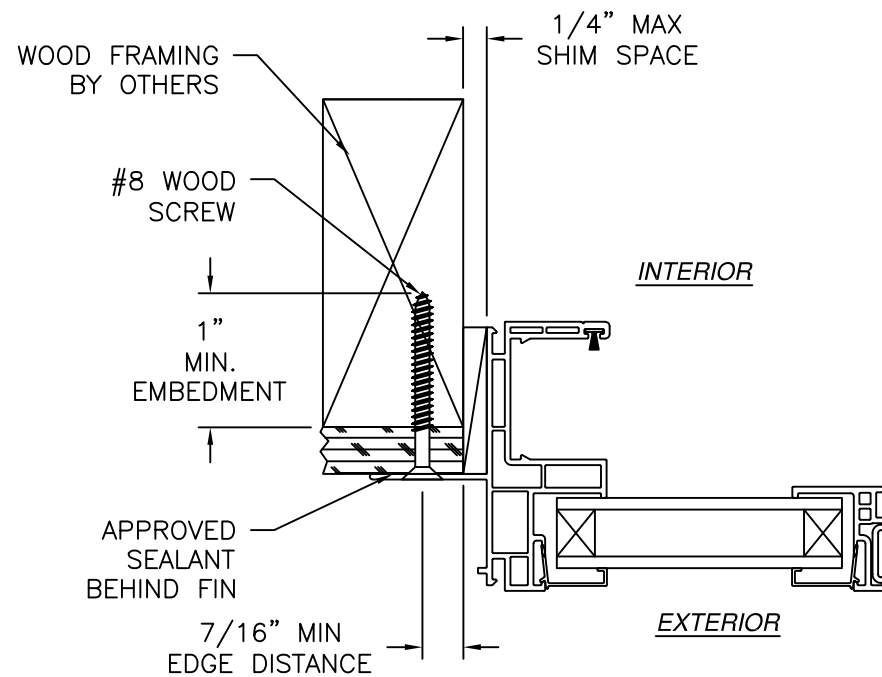

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/05/2026

KRESTMARK INDUSTRIES, L.P.

3950 BASTILLE RD., SUITE 100
DALLAS, TX 75212

400/475 VINYL HORIZONTAL SLIDER WINDOW
NON-IMPACT 72" X 44"
INSTALLATION DETAILS

DRAWN:
A.R.

DWG NO.
08-03920

REV
-


SCALE
NTS

DATE
10/11/2023

SHEET
3 OF 5

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

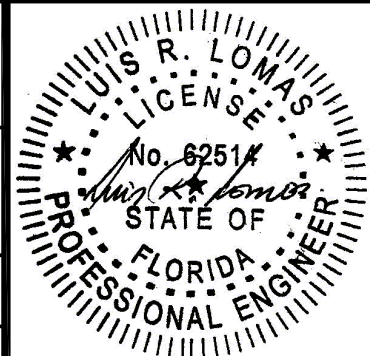

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

APPROVED SEALANT BEHIND FIN

#8 SMS OR SELF DRILLING SCREW

7/16" MIN EDGE DISTANCE

METAL STRUCTURE BY OTHERS

1/4" MAX. SHIM SPACE

EXTERIOR

INTERIOR

7/16" MIN EDGE DISTANCE

#8 SMS OR SELF DRILLING SCREW

APPROVED SEALANT BEHIND FIN

1/4" MAX SHIM SPACE

METAL STRUCTURE BY OTHERS

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

METAL STRUCTURE BY OTHERS

1/4" MAX SHIM SPACE

#8 SMS OR SELF DRILLING SCREW

APPROVED SEALANT BEHIND FIN

7/16" MIN EDGE DISTANCE

INTERIOR

EXTERIOR


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


SIGNED: 08/05/2026

KRESTMARK INDUSTRIES, L.P. 3950 BASTILLE RD., SUITE 100 DALLAS, TX 75212		
400/475 VINYL HORIZONTAL SLIDER WINDOW NON-IMPACT 72" X 44" FIN INSTALLATION DETAILS		
DRAWN: A.R.	DWG NO. 08-03920	REV -
SCALE NTS	DATE 10/11/2023	SHEET 4 OF 5
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

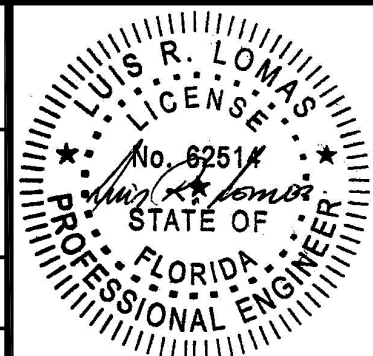


Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

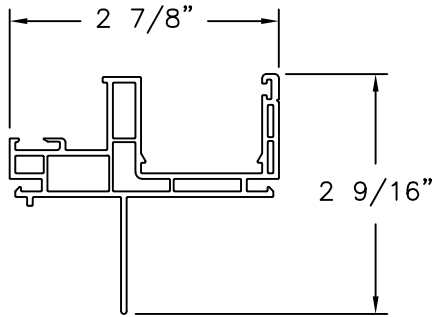


MAIN FRAME (4001)
EXTRUDED RIGID PVC

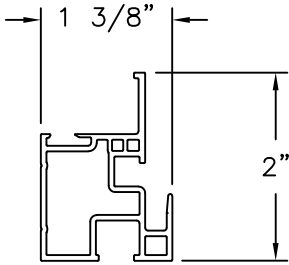


MEETING RAIL (4004)
EXTRUDED RIGID PVC

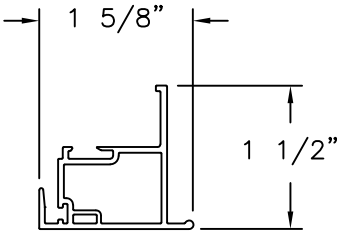


LOCK RAIL (4007)
EXTRUDED RIGID PVC

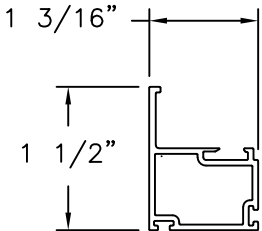


RAIL/ STILE (4005)
EXTRUDED RIGID PVC

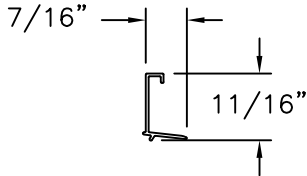


GLAZING BEAD
EXTRUDED RIGID PVC

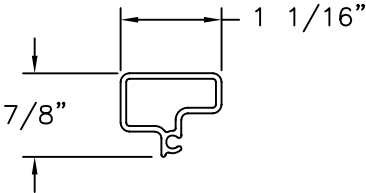

MEETING RAIL
REINFORCEMENT (11585)
ALUMINUM 6063-T5

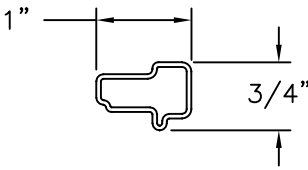


LOCK RAIL/STILE
REINFORCEMENT (204A)
ALUMINUM 6063-T5

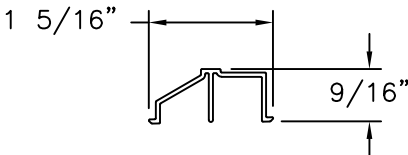

SILL TRACK (9247)
EXTRUDED RIGID PVC

SIGNED: 08/05/2026

KRESTMARK INDUSTRIES, L.P. 3950 BASTILLE RD., SUITE 100 DALLAS, TX 75212		
400/475 VINYL HORIZONTAL SLIDER WINDOW NON-IMPACT 72" X 44" COMPONENTS		
DRAWN: A.R.	DWG NO. 08-03920	REV -
SCALE NTS	DATE 10/11/2023	SHEET 5 OF 5
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

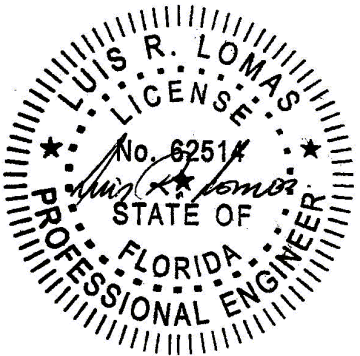

Luis R. Lomas P.E.
FL No.: 62514