


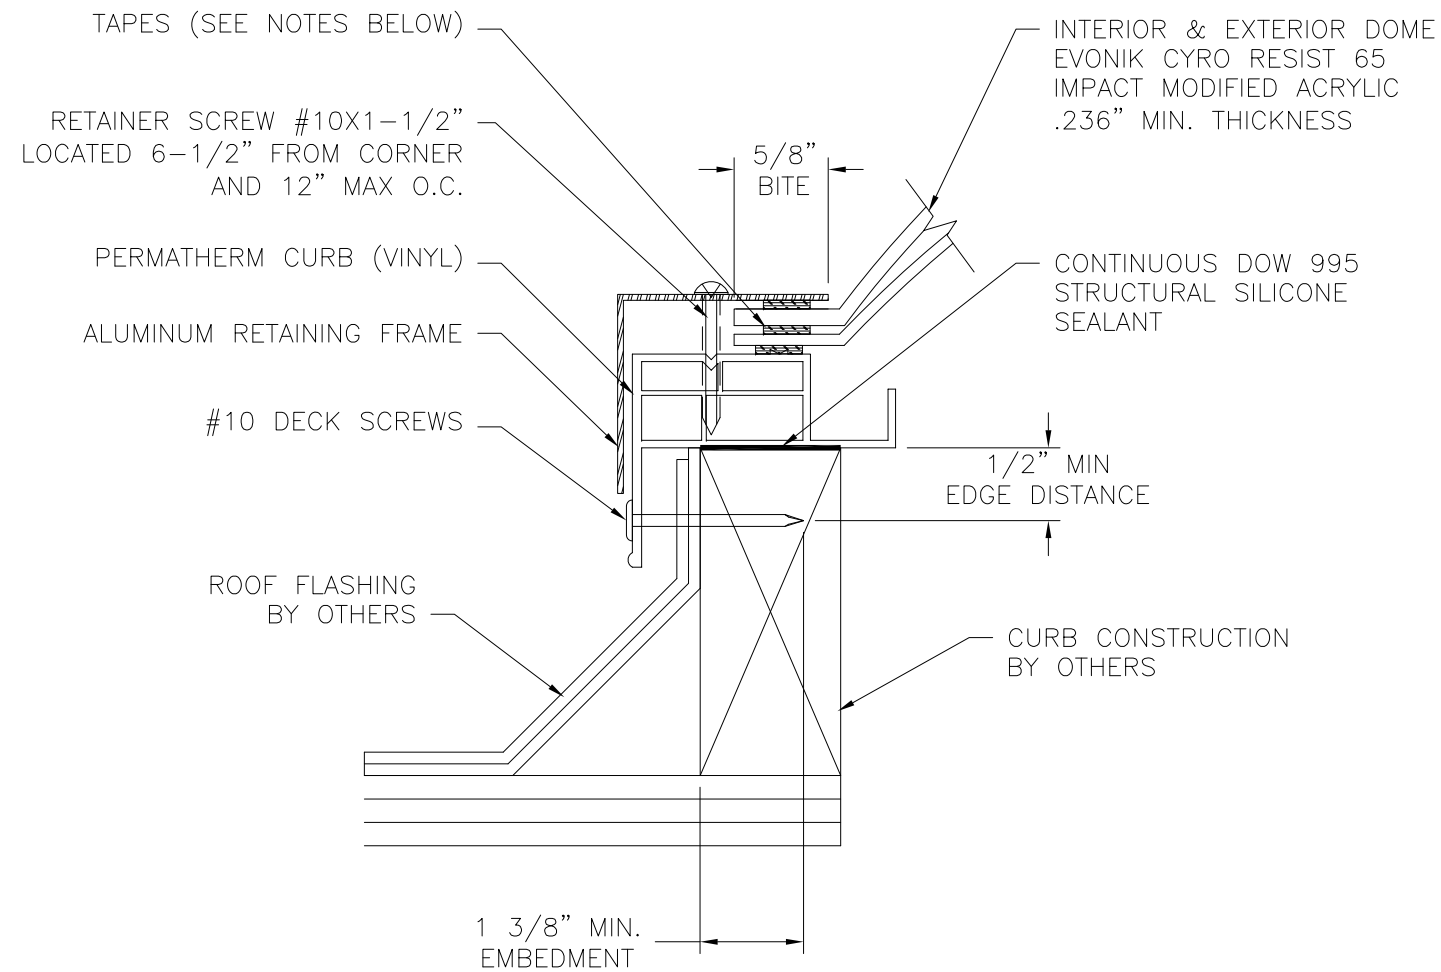


INSTALLATION DETAIL (WITH DOUBLE GLAZING)

TAPE ASSEMBLY DETAILS:

1. .090 X 1/2" VHB TAPE (BETWEEN CURB & INNER DOME)
2. 1/8" X 5/8" EXPRESS TAPE (BETWEEN INNER & OUTER DOMES)
3. 1/8" X 1/2" BUTYL TAPE (BETWEEN OUTER DOME & RETAINER)

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED PER HVHZ TESTING	06/11/15	R.L.
B	ADD TRIPLE GLAZING OPTION	03/12/18	R.L.
C	CHANGE COMPANY'S NAME	10/28/19	R.L.

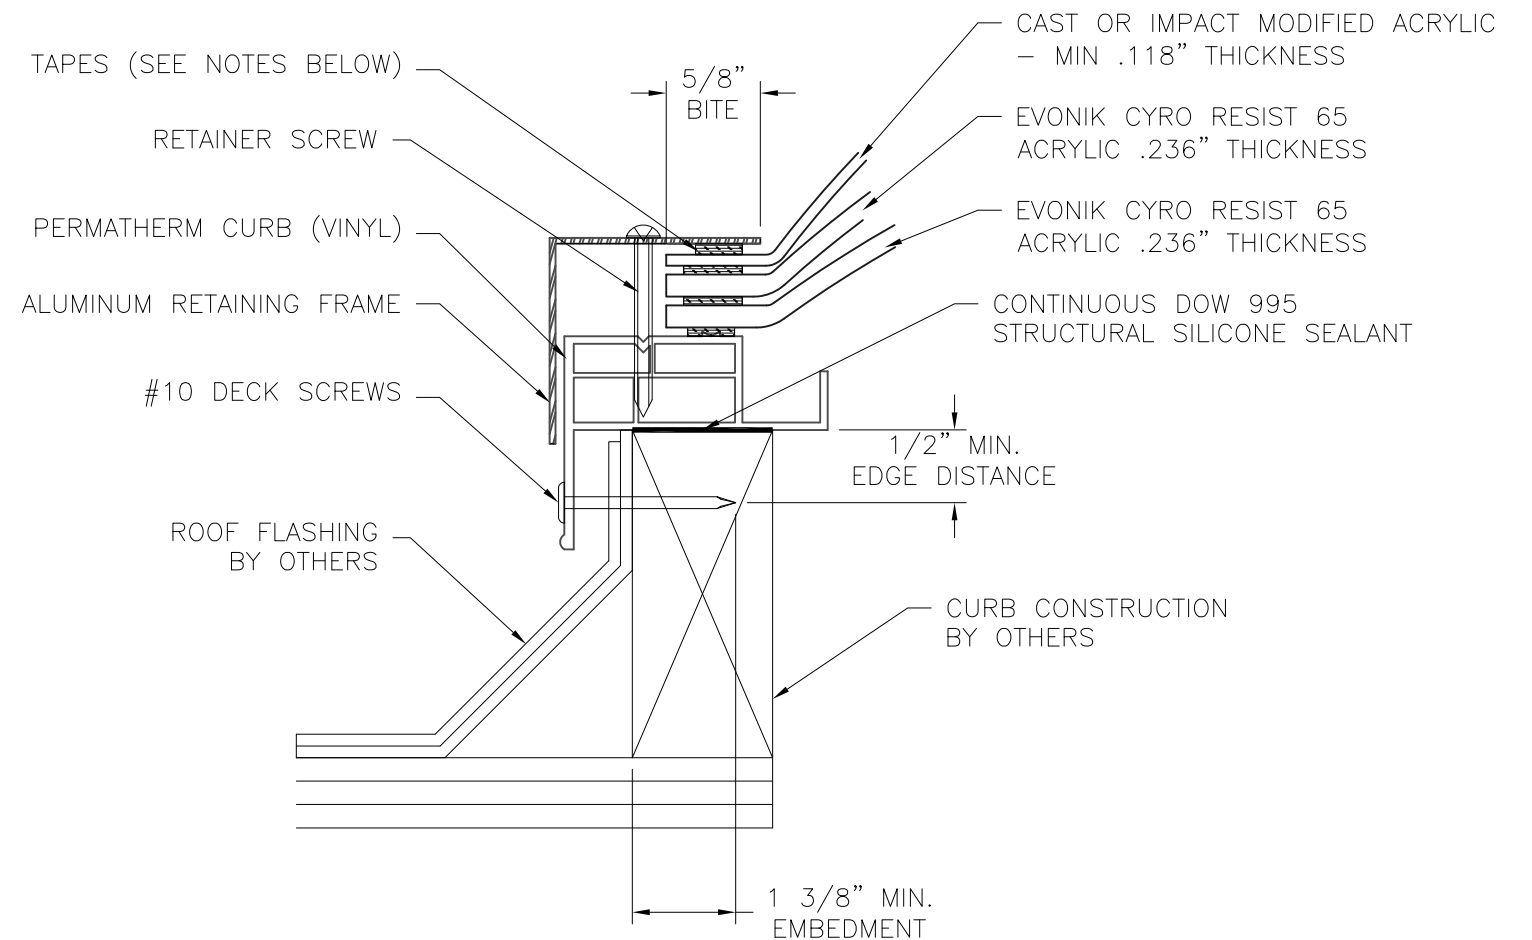


INSTALLATION DETAIL (WITH TRIPLE GLAZING)

TAPE ASSEMBLY DETAILS:

1. .090 X 1/2" VHB TAPE (BETWEEN CURB & INNER DOME)
2. 1/8" X 5/8" EXPRESS TAPE (BETWEEN INNER & MIDDLE DOMES)
3. 1/8" X 5/8" EXPRESS TAPE (BETWEEN MIDDLE AND OUTER DOMES)
3. 1/8" X 1/2" BUTYL TAPE (BETWEEN OUTER DOME & RETAINER)

SIGNED: 10/28/2019

VELUX AMERICA, LLC. 85 SPENCER DRIVE, UNIT A WELLS, ME 04090		
CWS2 DOME SKYLIGHT 52" X 52" – IMPACT – MODIFIED ACRYLIC INSTALLATION DETAILS		
DRAWN: J.L.	DWG NO. 08-02305	REV C
SCALE NTS	DATE 03/25/14	SHEET 2 OF 2
L. ROBERTO LOMAS P.E. 1432 WOODFORD RD LEWISVILLE, NC 27023 434-688-0609 rllomas@lrlomaspe.com		

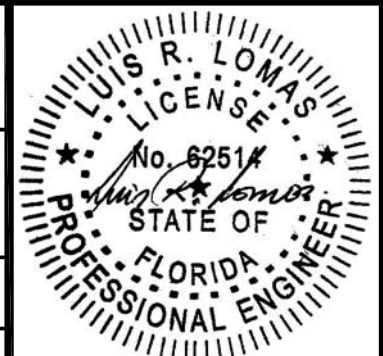

Luis R. Lomas P.E.
FL No.: 62514