



WEATHER SHIELD

WINDOWS & DOORS


1111/1110 DH TRANSOM INSTALLATION

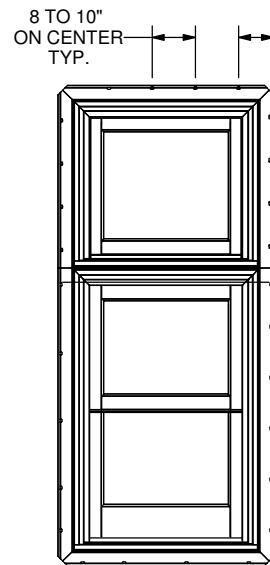

NAILING FIN METHOD

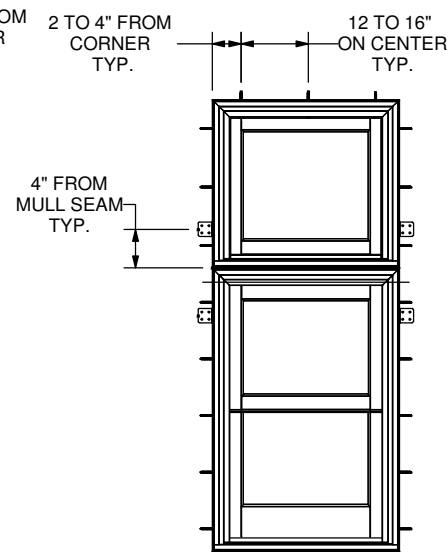

THROUGH JAMB METHOD


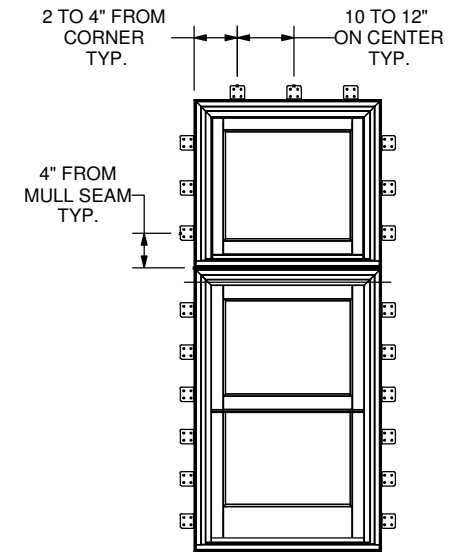


INSTALLATION CLIP METHOD

DESC.		FRAME SIZE		DAYLIGHT OPENING		DESIGN PRESSURE (psf)	FRAME MATERIAL
		WIDTH (IN.)	HEIGHT (IN.)	WIDTH (IN.)	HEIGHT (IN.)		
1104 DOUBLE HUNG STACK WITH 1111 DH TRANSOM	DH	47.5	95.5	41	85.33	+55 / -70	ALUM / WOOD
	TRANS	47.5	42	41	35.63		
1105 DOUBLE HUNG STACK WITH 1111 DH TRANSOM	DH	47.5	95.5	41	85.33	+55 / -70	ALUM / WOOD
	TRANS	47.5	42	41	35.63		

GENERAL NOTE(S):

- THESE UNITS HAVE BEEN TESTED, ANALYZED, HALLMARK CERTIFIED AND FBC APPROVED.
- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT EDITION FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/1.5.2/A440-11
 - TAS201
 - TAS202
 - TAS203
- GLASS MEETS THE REQUIREMENTS OF ASTM E1300.
- SETTING BLOCK SHOULD BE 70-90 DUROMETER AS PER 2411.3.3.1 OF THE CURRENT FBC.
- GLASS LITES THAT EXCEED 36" IN WIDTH SHALL USE SETTING BLOCKS AT ¼ SPAN FROM CORNERS AS PER 2411.3.3.1 OF THE CURRENT FBC.
- LARGE AND SMALL MISSILE IMPACT RESISTANT. WINDOW AND DOOR UNITS REQUIRED TO MEET SMALL MISSILE IMPACT WIND-BORNE DEBRIS PROTECTION REQUIRE THE EXTERIOR LITE OF AN INSULATED UNIT TO BE TEMPERED PER FBC, SECTION 2411.3.3.7.

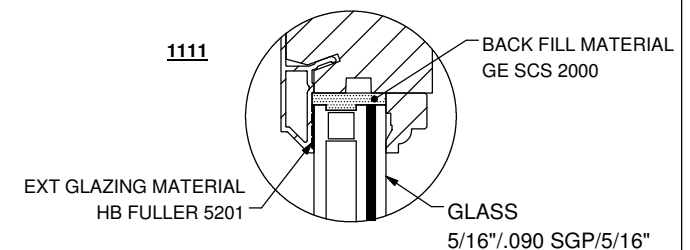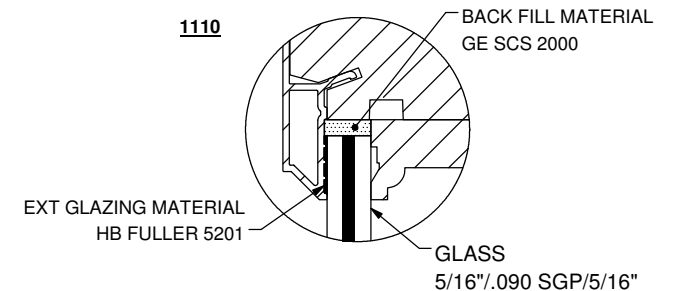

TOLERANCES UNLESS SPECIFIED:	
INCHES	ANGLE
.X ± .1"	XX ± 1°
.XX ± .03"	XX.X ± .5° (1/2°)
.XXX ± .015"	XX.XX ± .25° (1/4°)

PRODUCTS:
1110, 1111

DRAWN BY:
MK

DATE:
08-14-2018

TITLE:
DH TRANSOM INSTALLATION

DWG NO.:
45-18753

SCALE: 1:16 SHEET NAME: Sheet3 SHEET 3 OF 3

WEATHER SHIELD.
WINDOWS & DOORS

DO NOT SCALE DRAWING

REV	DATE	DESCRIPTION	PCR NO.	ENG	PDR #:	PROFILE #:

TYP. WALL THICKNESS:

WT/FT:

AREA:

MAT:

FINISH: