


Windstorm-rated Assemblies

[See General Information for Windstorm-rated Assemblies](#)

Assembly No. 63

May 8, 2023

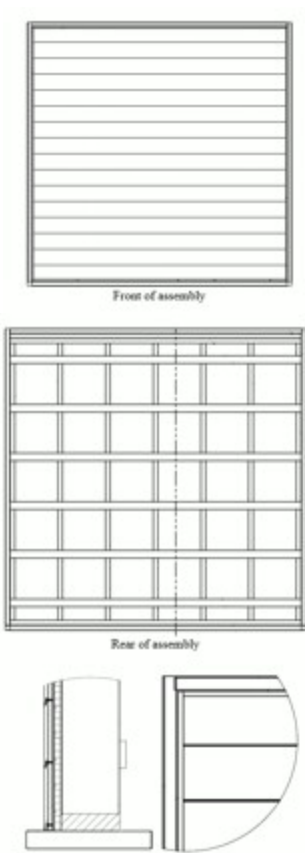

Assembly Type	Standard	Permitted Size Maximum	Design Pressure (psf)	Missile Criteria
Architectural Wall, Fixed	ASTM E1886, ASTM E1996	96 in x 96 in	+/- 75 psf	Large Missile Impact- Level D
	TAS 201, TAS 202, TAS 203			

1. **Wall Assembly** — — Max. size 8 ft 0 in. by 8 ft 0 in.

MAC METAL ARCHITECTURAL INC ([View Classification](#)) — Models Harrywood (MS 14) and Harrywood+ Exterior Cladding.

Note: All products bear the UL Classification Mark or Enhanced UL Certification Mark unless otherwise noted.

Last Updated on 2023-05-08

The appearance of a company's name or product in this database does not in itself assure that products so identified have been manufactured under UL Solutions' Follow - Up Service. Only those products bearing the UL Mark should be considered to be Certified and covered under UL Solutions' Follow - Up Service. Always look for the Mark on the product.

UL Solutions permits the reproduction of the material contained in Product iQ subject to the following conditions: 1. The Guide Information, Assemblies, Constructions, Designs, Systems, and/or Certifications (files) must be presented in their entirety and in a non-misleading manner, without any manipulation of the data (or drawings). 2. The statement "Reprinted from Product iQ with permission from UL Solutions" must appear adjacent to the extracted material. In addition, the reprinted material must include a copyright notice in the following format: "©2024 UL LLC."