

Smooth / Wood Grain / White Wood Grain
Rustic / Mahogany
Series N Fiberglass Door
OUTSWING
"IMPACT"

GENERAL NOTES

1.

This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ).
2.

Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3.


When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
4.

When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E1996.
5.

For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6.

Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7.



Outswing configurations (using sill Item #29) meet water infiltration requirements for "HVHZ". The ADA configuration (using sill Item #35) does not meet the water infiltration requirements for the "HVHZ" and must be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

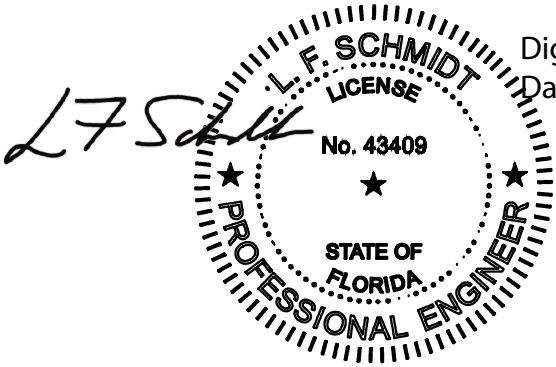

Digitally signed by Lyndon F Schmidt
Date: 2026.07.28 12:38:46 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

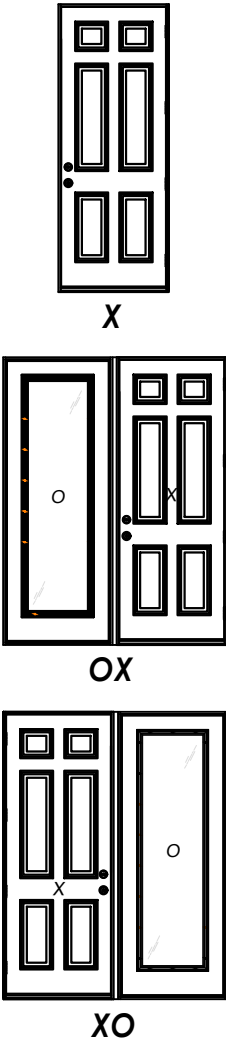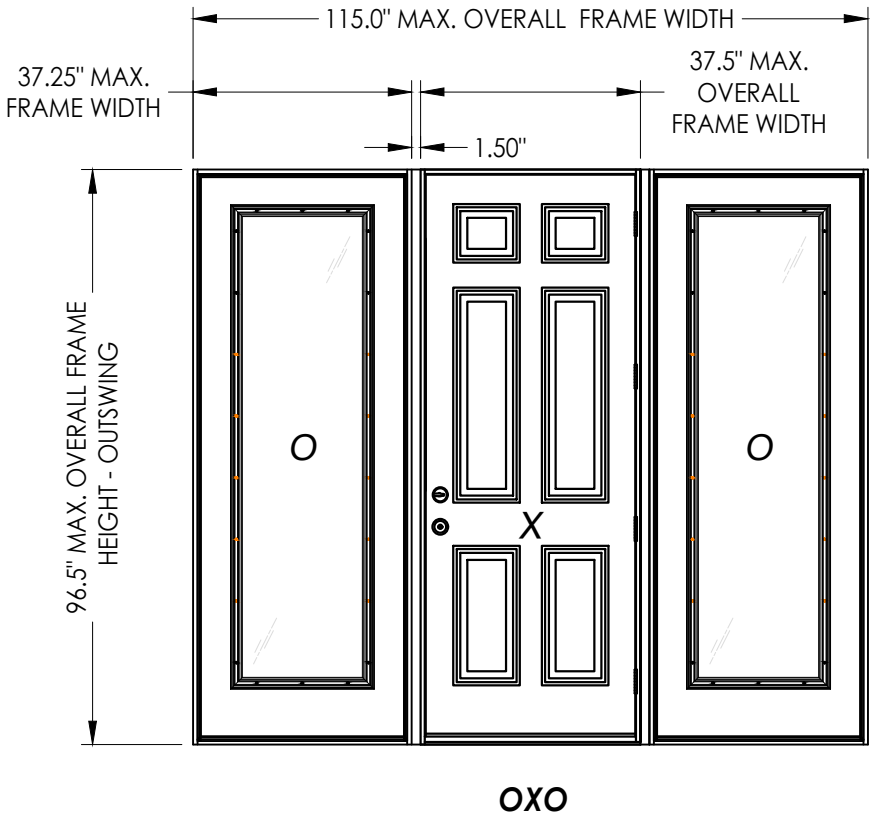

CONFIGURATION	MAX. FRAME DIMENSION	MAX. SIDELITE D.L.O. DIMENSION	DESIGN PRESSURE (PSF) OUTSWING	
			POSITIVE	NEGATIVE
X	37.5" X 96.5"	N/A	+50.0	-50.0
OX/XO	76.25" X 96.5"	20.63" X 78.75"	+50.0	-50.0
OXO	115.0" X 96.5"	20.63" X 78.75"	+50.0	-50.0

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Door panel details
3	Sidelite panel details and glazing detail
4	Elevations
5	Horizontal cross sections
6	Vertical cross sections
7	Vertical cross sections
8	Buck anchoring
9	Frame anchoring
10	Hardware details
11	Bill of materials and components

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC.
FIBERGLASS DOOR

Part or Assembly:
TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES

DATE: 02/21/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-15180.7


SHEET 1 OF 11

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

REVISIONS


© 2012 R.W. BUILDING CONSULTANTS INC.

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15180 R6\FL-15180.5,.7.dwg

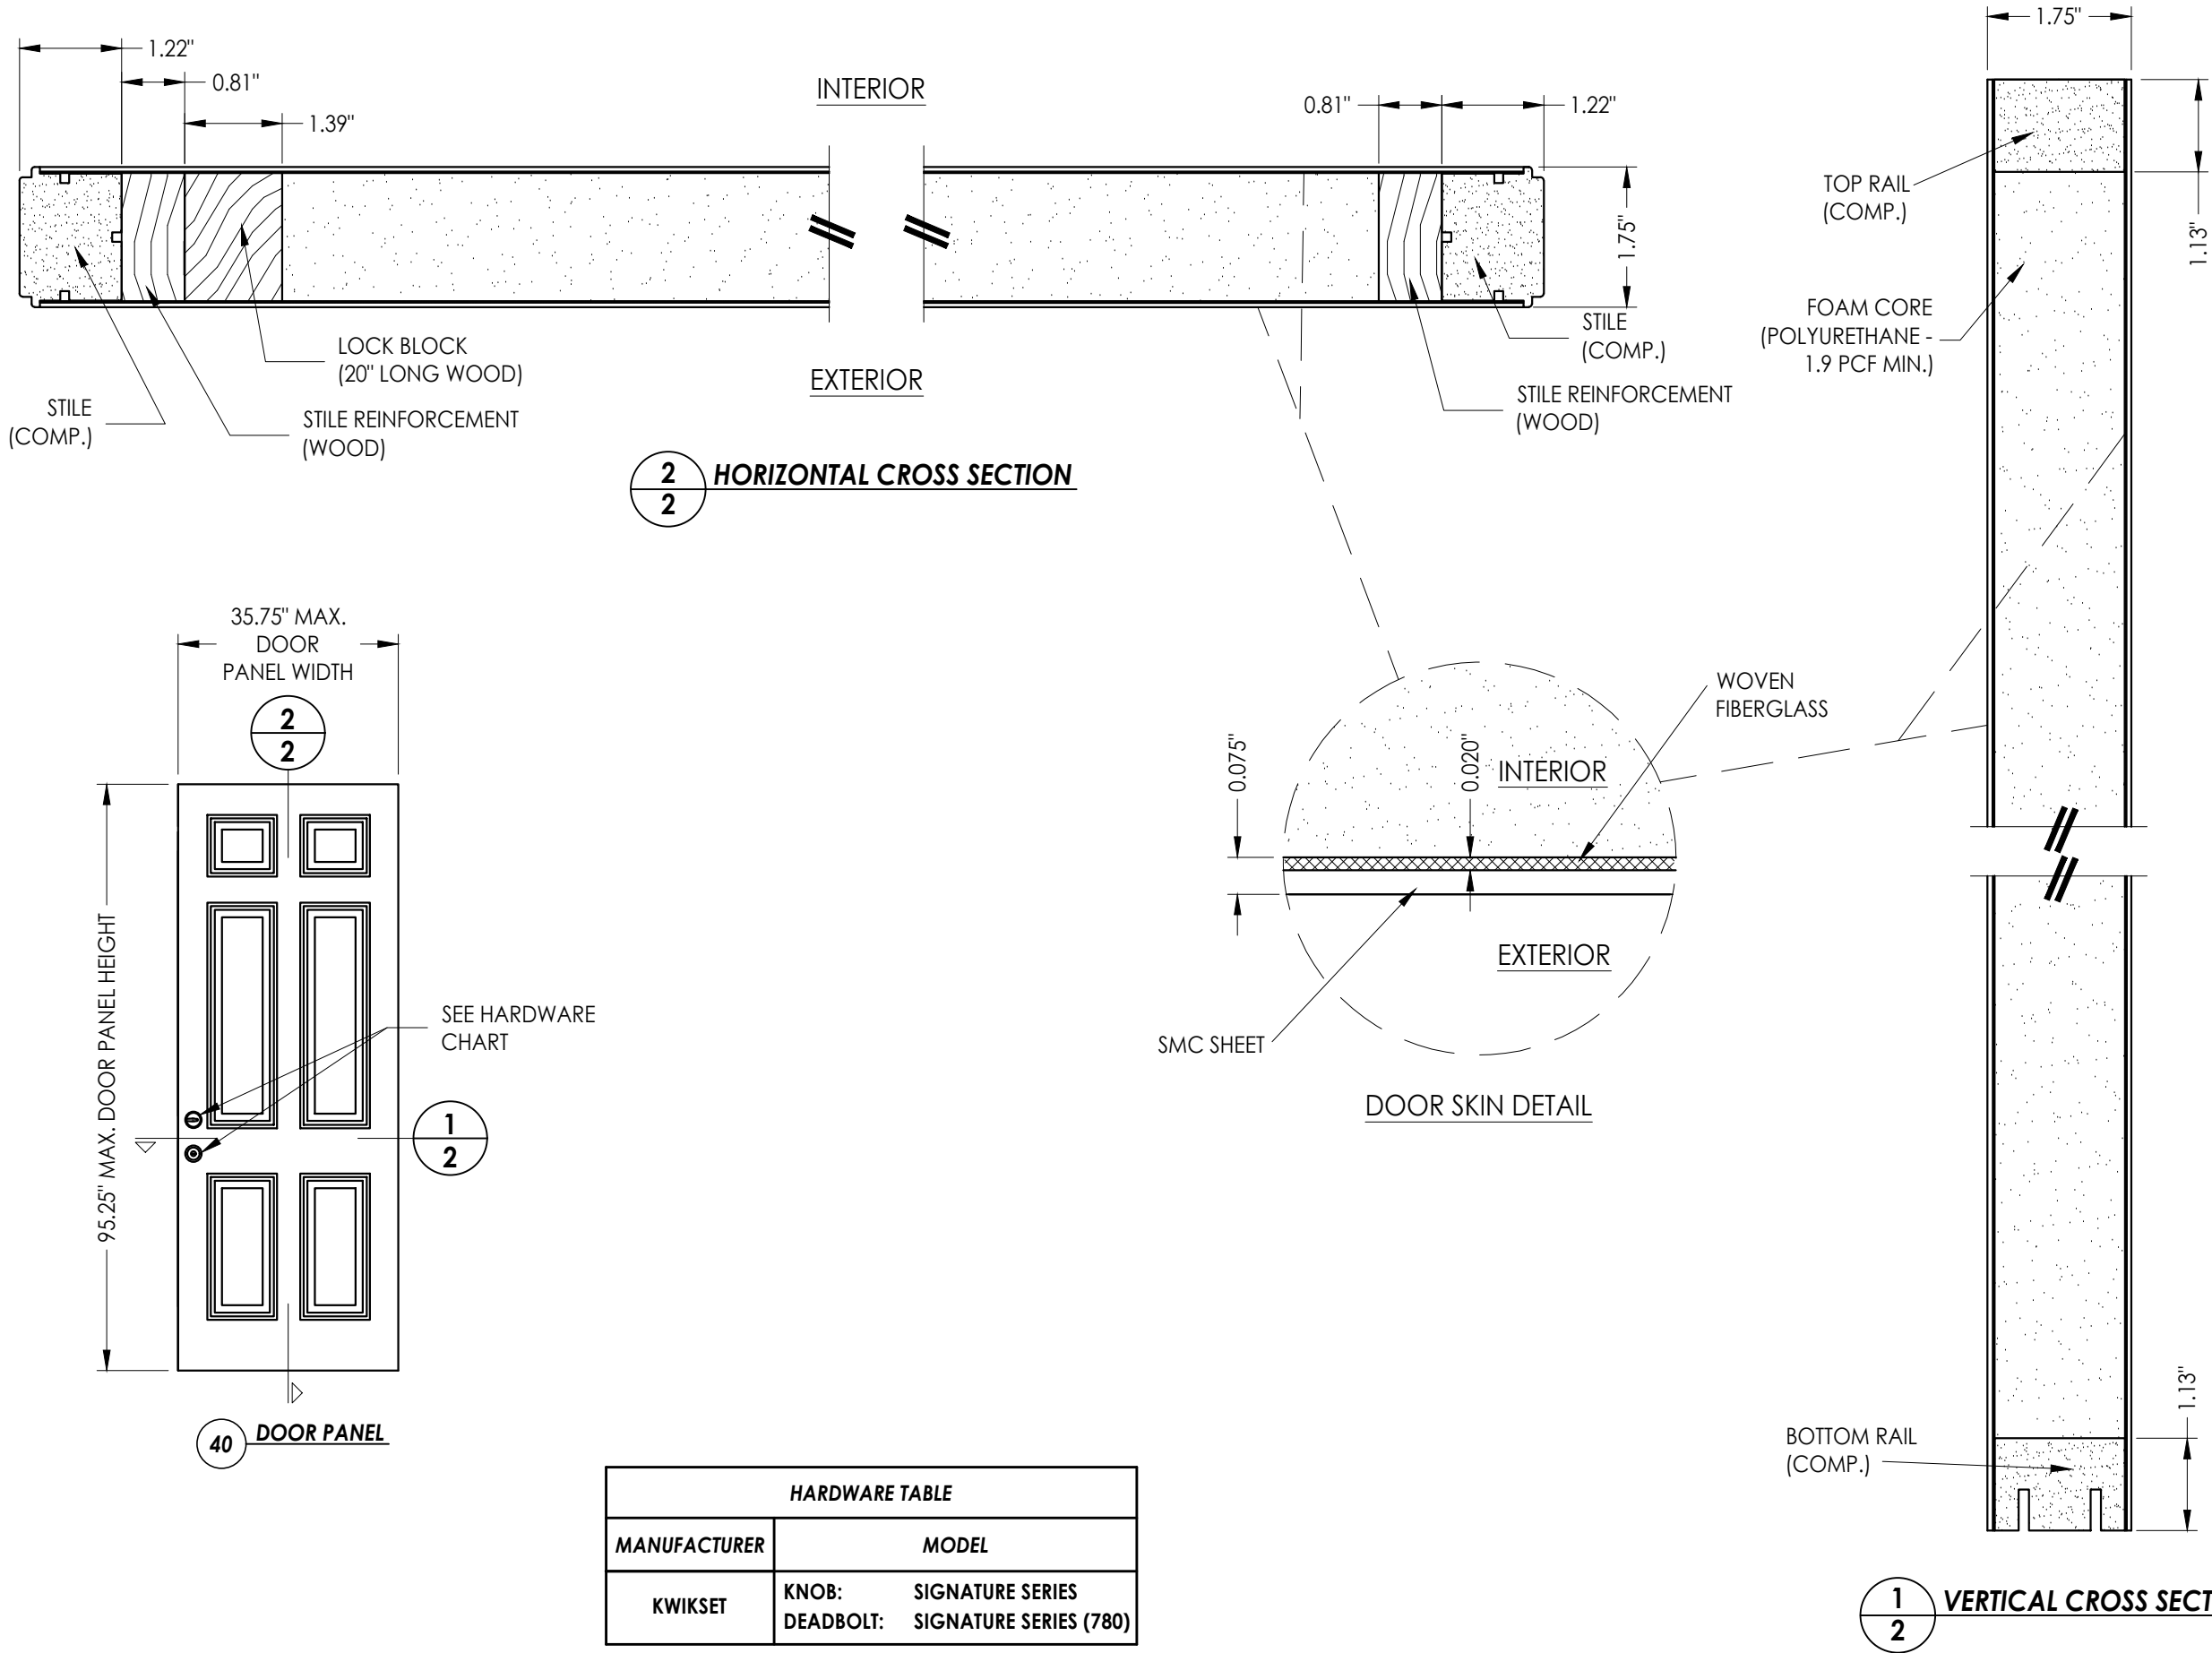


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Vairico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT:		PLASTPRO INC. FIBERGLASS DOOR		PART OR ASSEMBLY:		DOOR PANEL DETAILS	
			LFS		LFS		BY
		6	7/01/26	UPDATE TO 9TH ED. (2026)	FBC		
		5	8/15/23	UPDATE TO 8TH ED. (2023)	FBC		
		4	6/28/22	ADD ADA THRESHOLD	LFS		
		NO.	DATE				
				REVISIONS			
DATE: 02/21/12							
SCALE: N.T.S.							
DWG. BY: JK							
CHK. BY: LFS							
DRAWING NO.: FL-15180.7							
SHEET 2 OF 11							


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15180 R6\FL-15180.5, 7.dwg

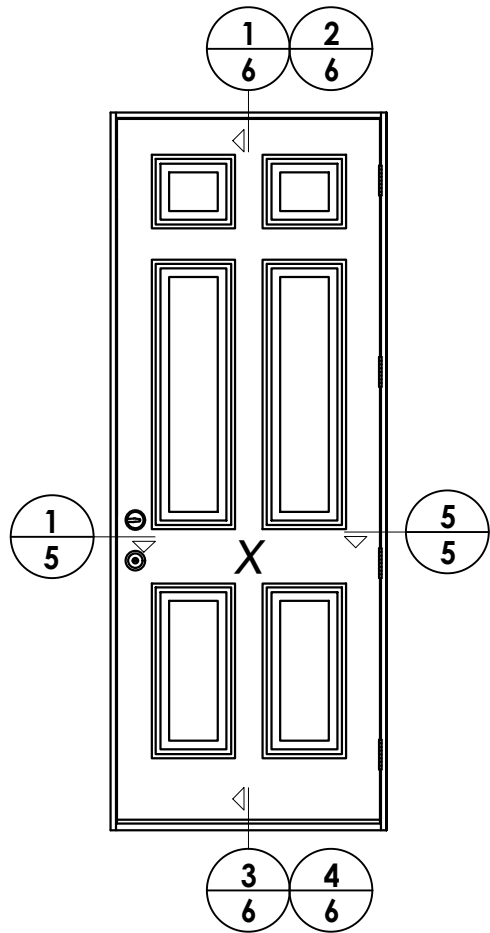

ELEVATION (X)

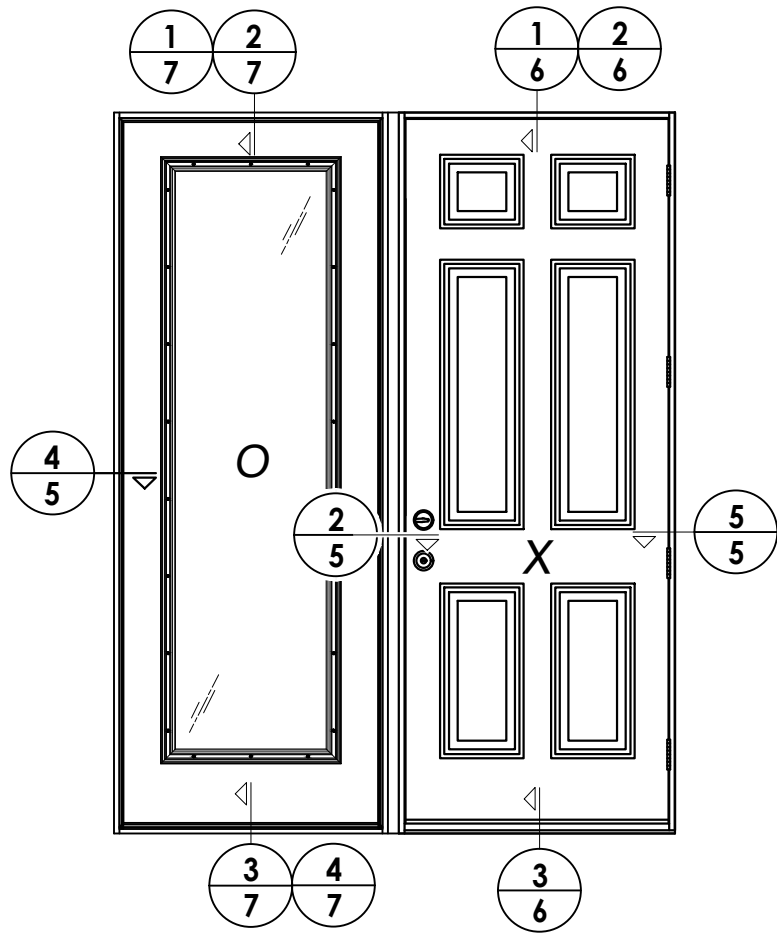

ELEVATION (XO - OX)

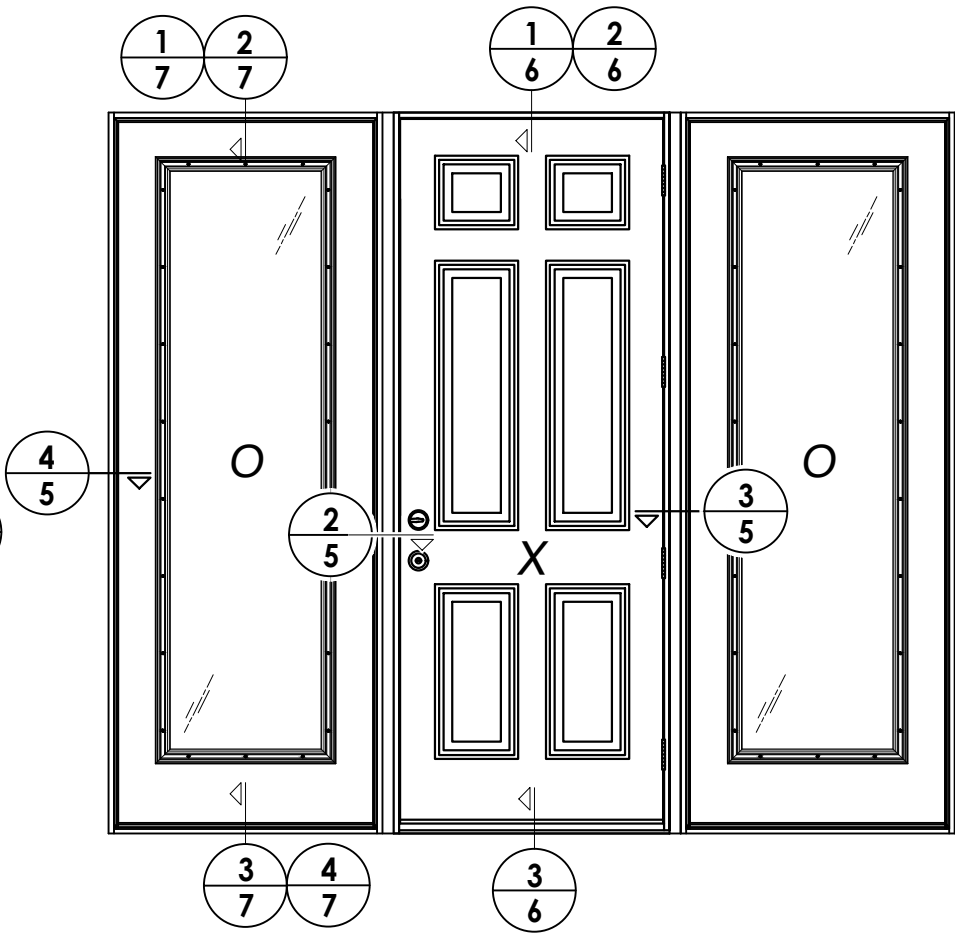

ELEVATION (OXO)

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	6/28/22	ADD ADA THRESHOLD LFS
3		BY

DATE: 02/21/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-15180.7




SHEET 4 OF 11

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
ELEVATIONS



Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

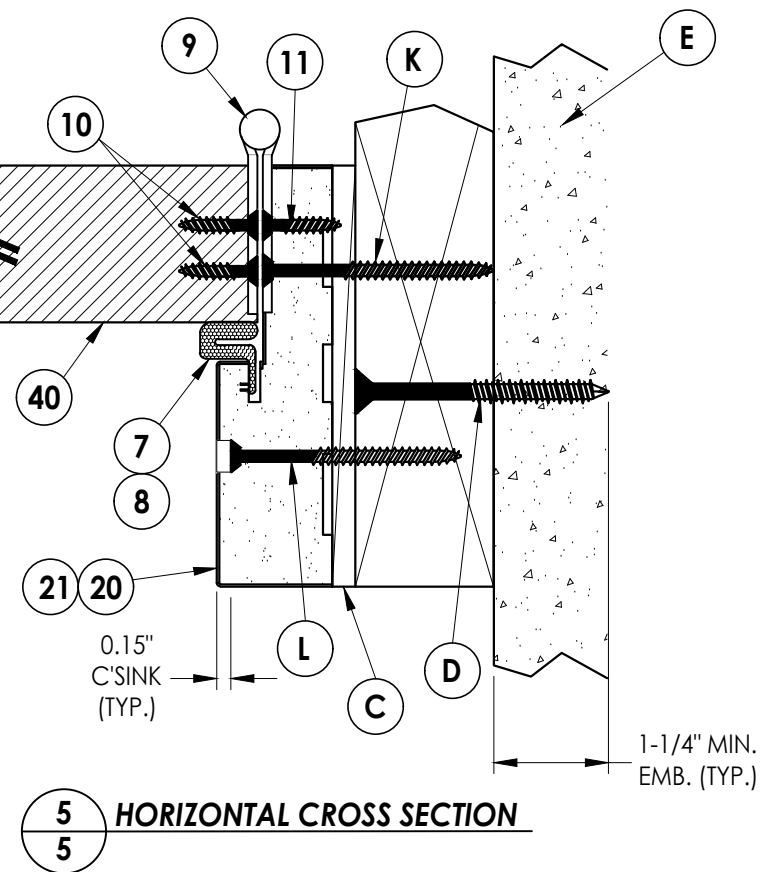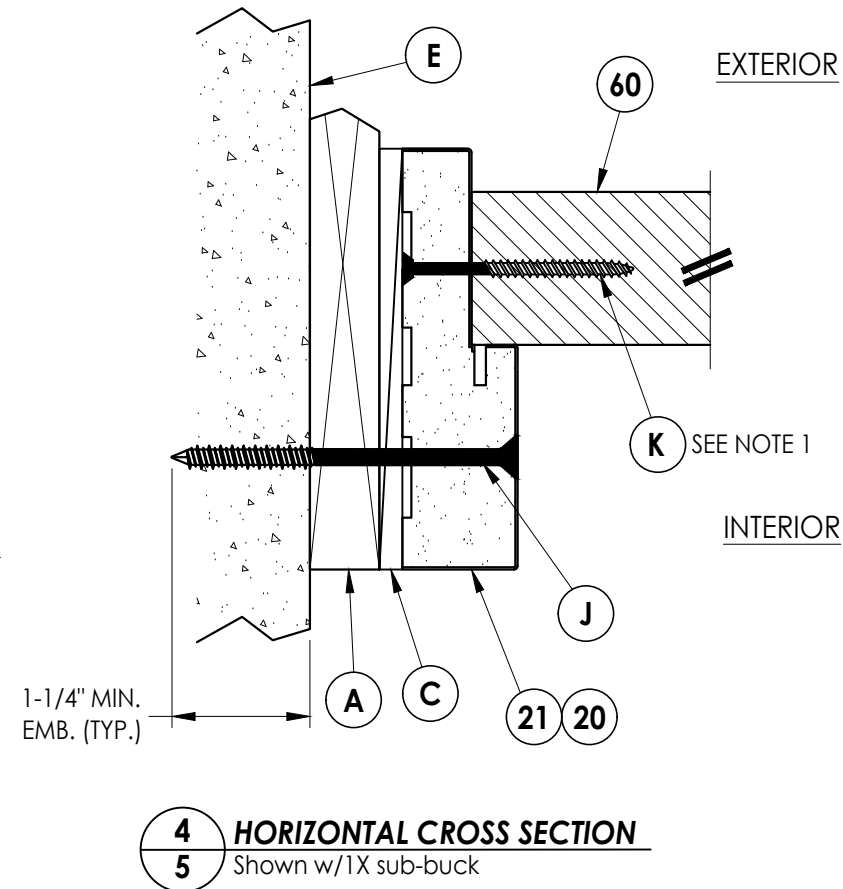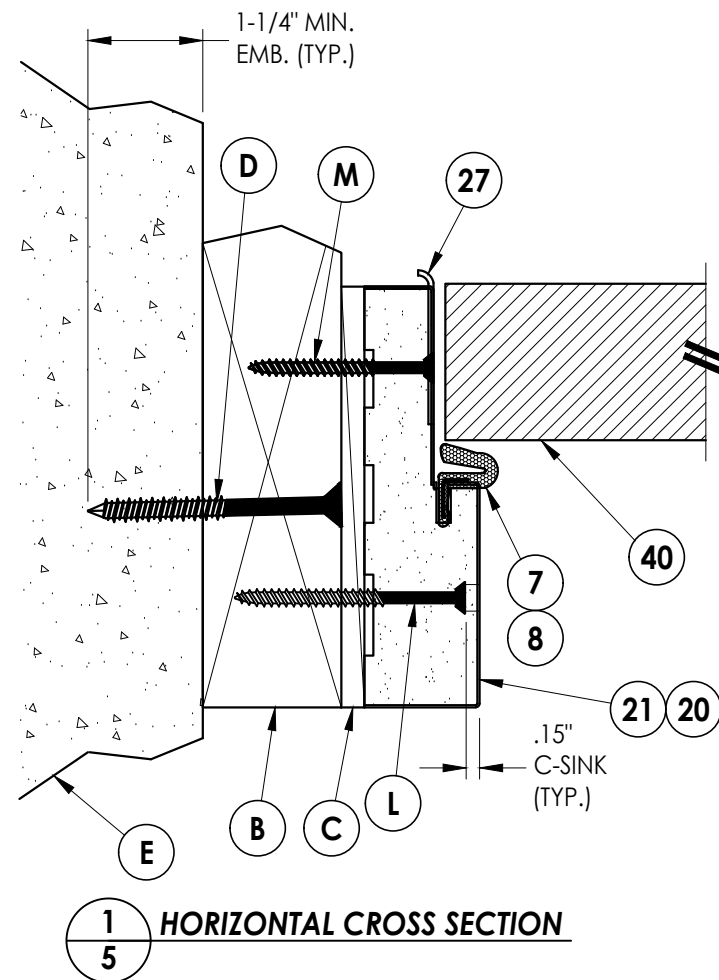

NOTE:





1. Spacing for item K: 6" from ends and 8 more equally spaced along sidelite (10 total).

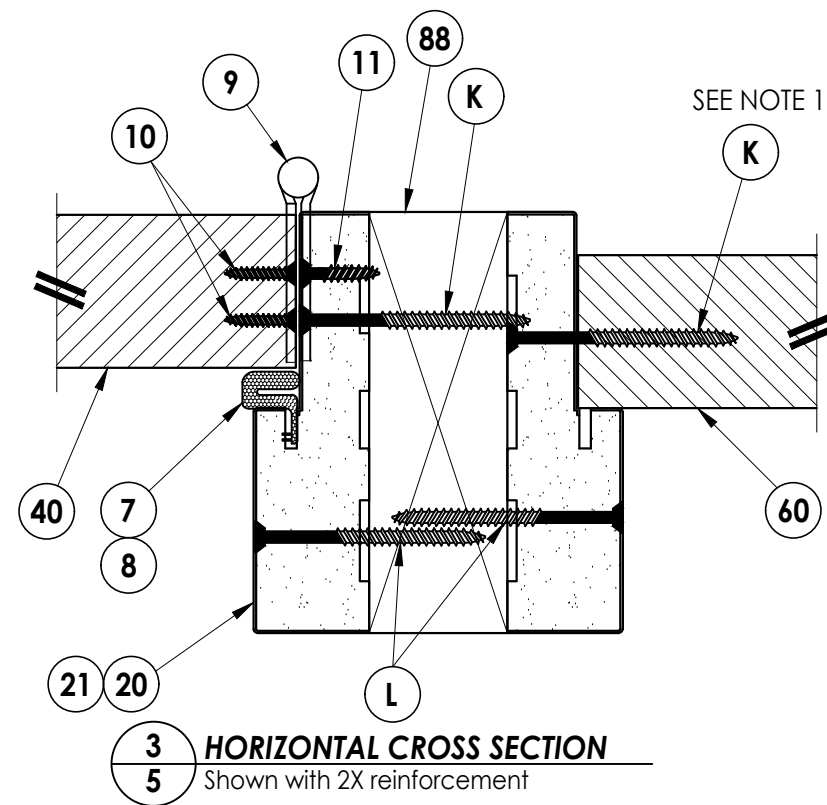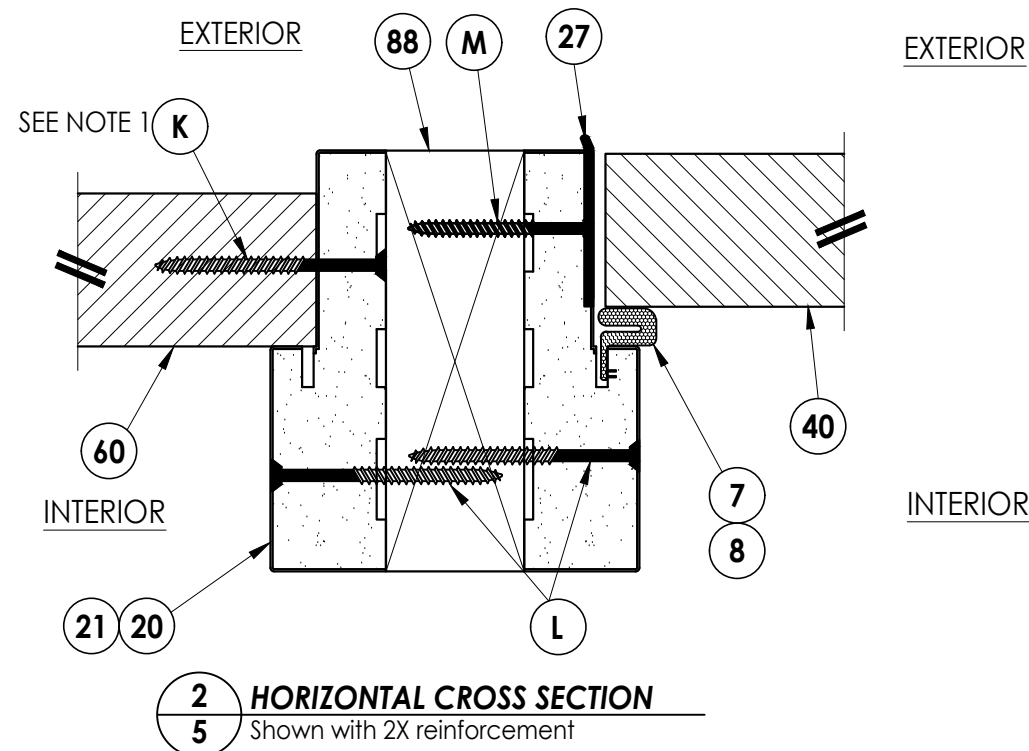

DATE: 02/21/12		REVISIONS	
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-15180.7			
SHEET 5	OF 11		

6	7/01/26	UPDATE TO 9TH ED. (2026)	FBC	LFS			
5	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS			
4	6/28/22	ADD ADA THRESHOLD		LFS			
NO.	DATE			BY			

PRODUCT: PLASTPRO INC. FIBERGLASS DOOR	PART OR ASSEMBLY: HORIZONTAL CROSS SECTIONS	Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409 RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813
---	--	--

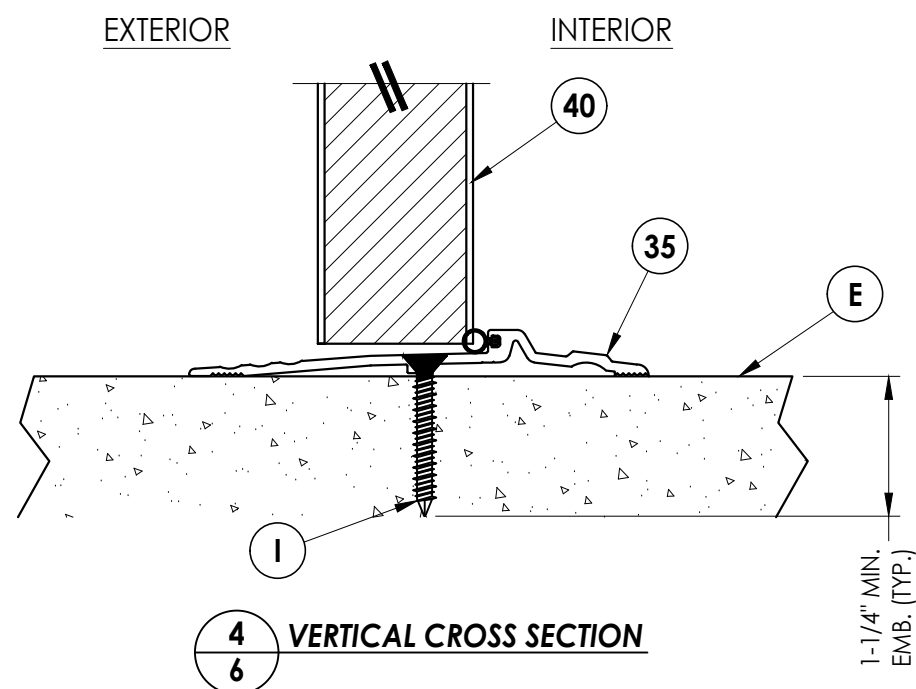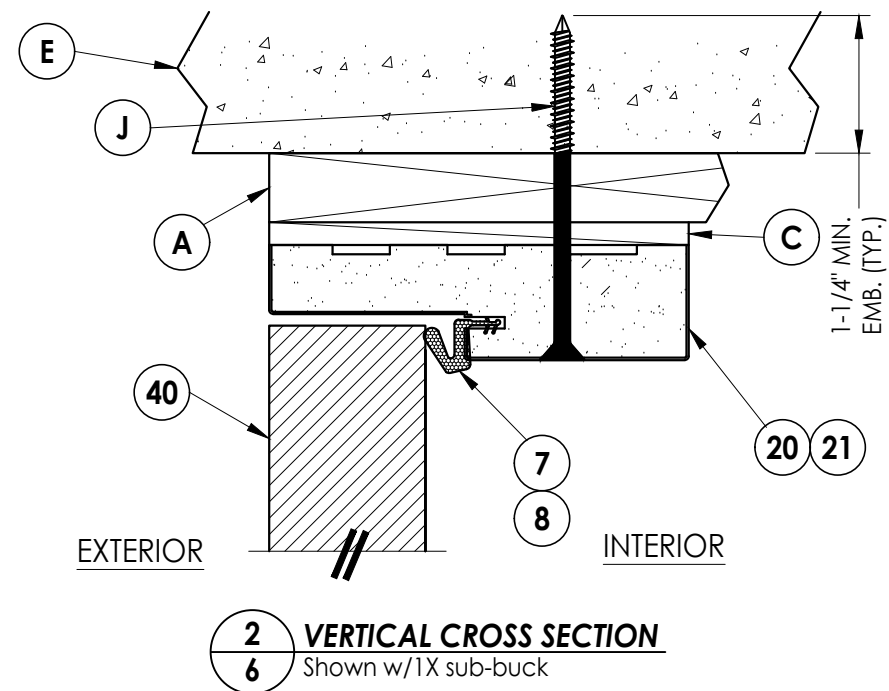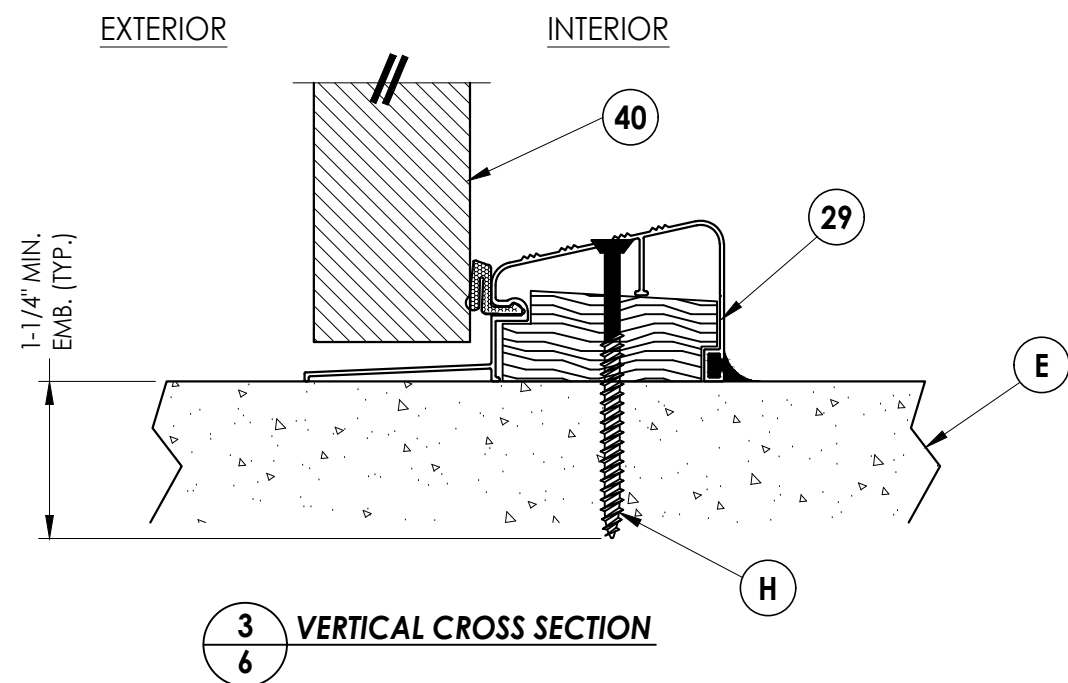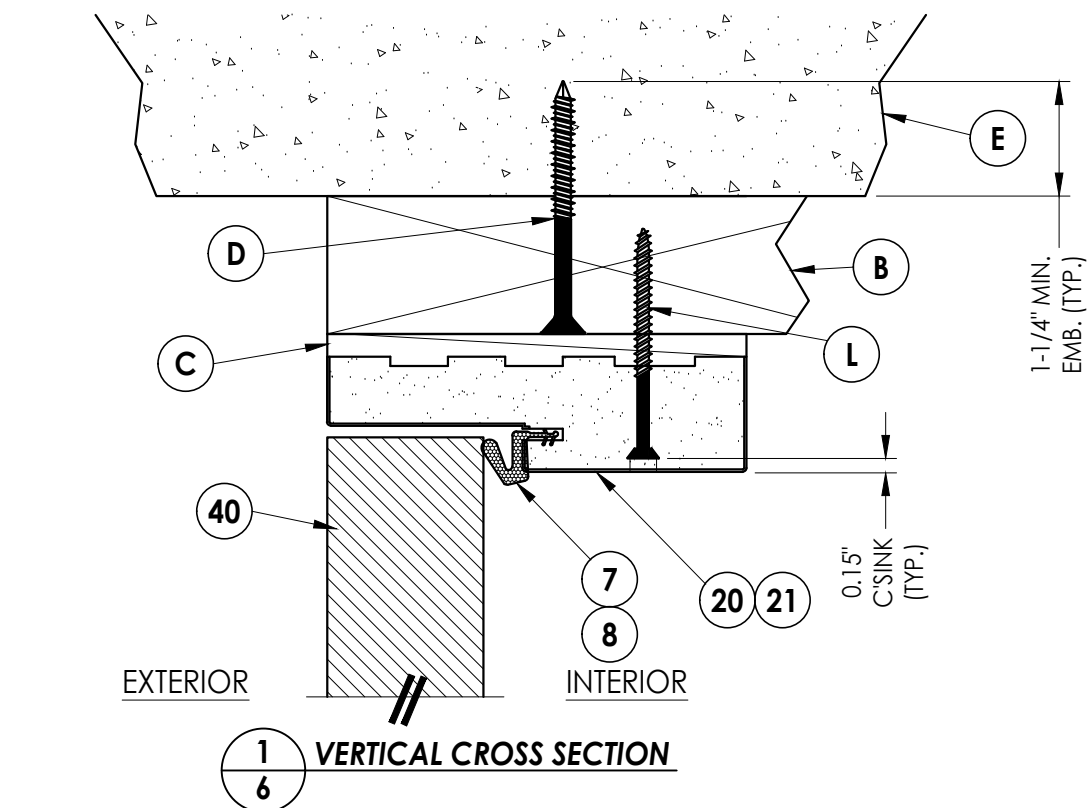
[illegible]

PRODUCT:	PLASTPRO INC. FIBERGLASS DOOR
PART OR ASSEMBLY:	VERTICAL CROSS SECTIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15180 R6\FL-15180.5-.7.dwg

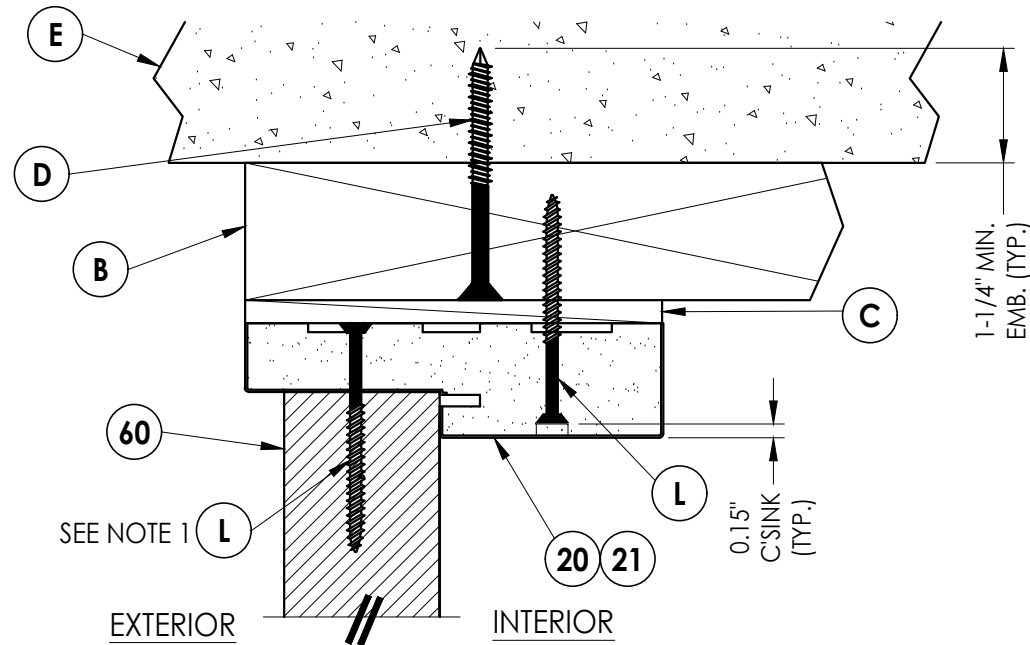


1
7 VERTICAL CROSS SECTION


NOTE
1. Spacing for item K: 6" from each end and at centerline (3 total).

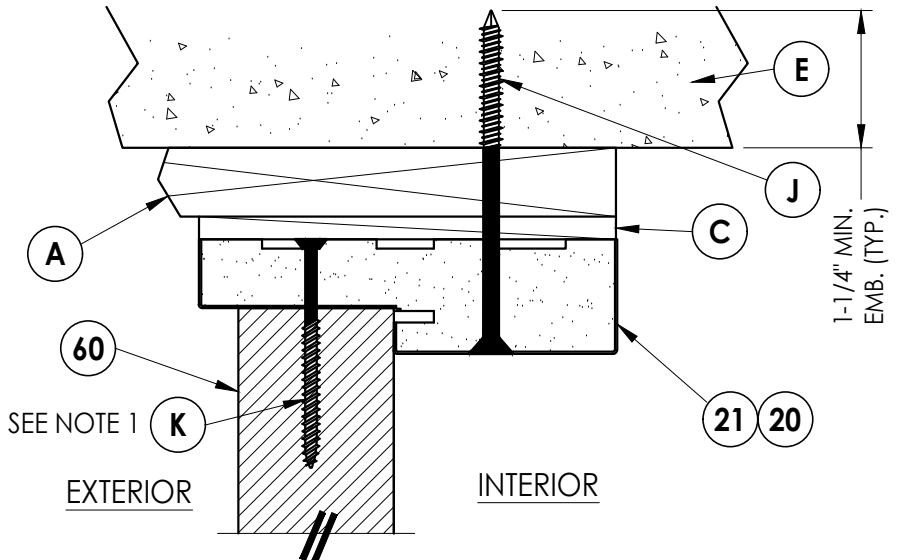

2
7 VERTICAL CROSS SECTION
Shown w/1X sub-buck

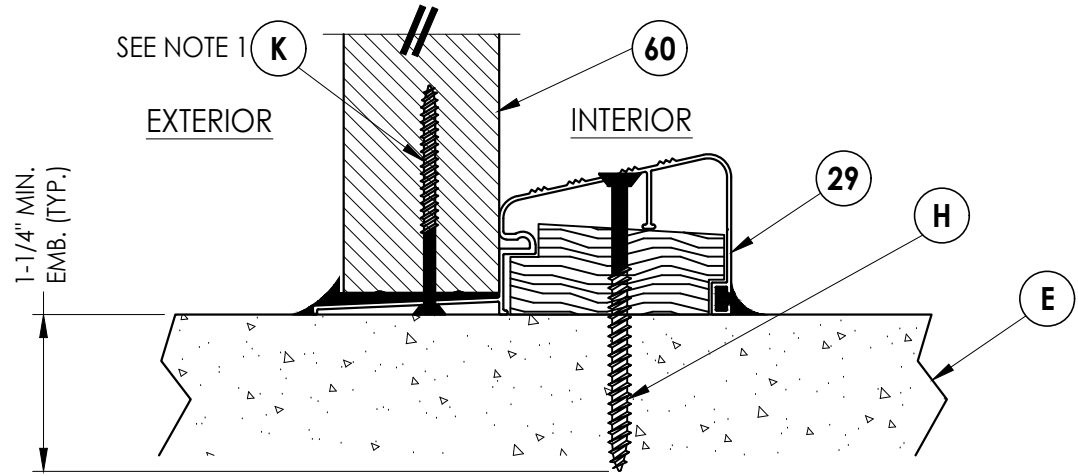

3
7 VERTICAL CROSS SECTION

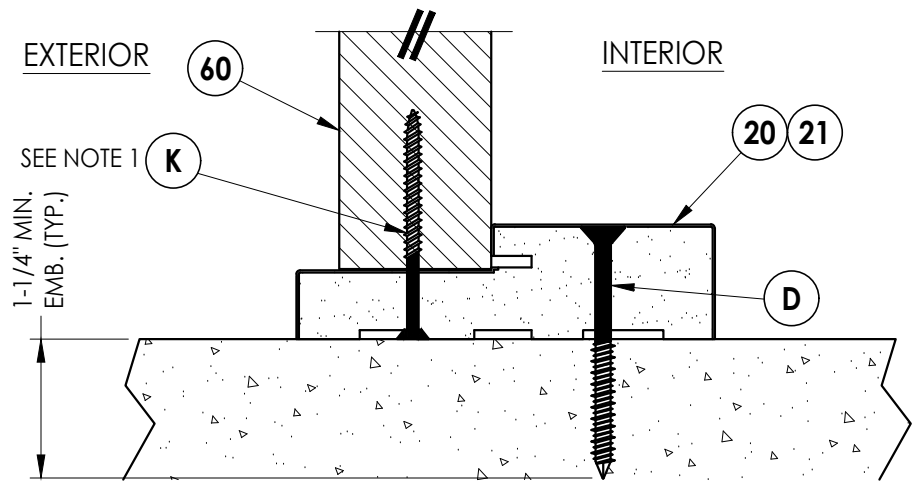

4
7 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409


BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC. FIBERGLASS DOOR
PART OR ASSEMBLY: VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	6/28/22	ADD ADA THRESHOLD LFS
3		
2		
1		

DATE: 02/21/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15180.7
SHEET 7 OF 11

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15180 R6\FL-15180.5-.7.dwg

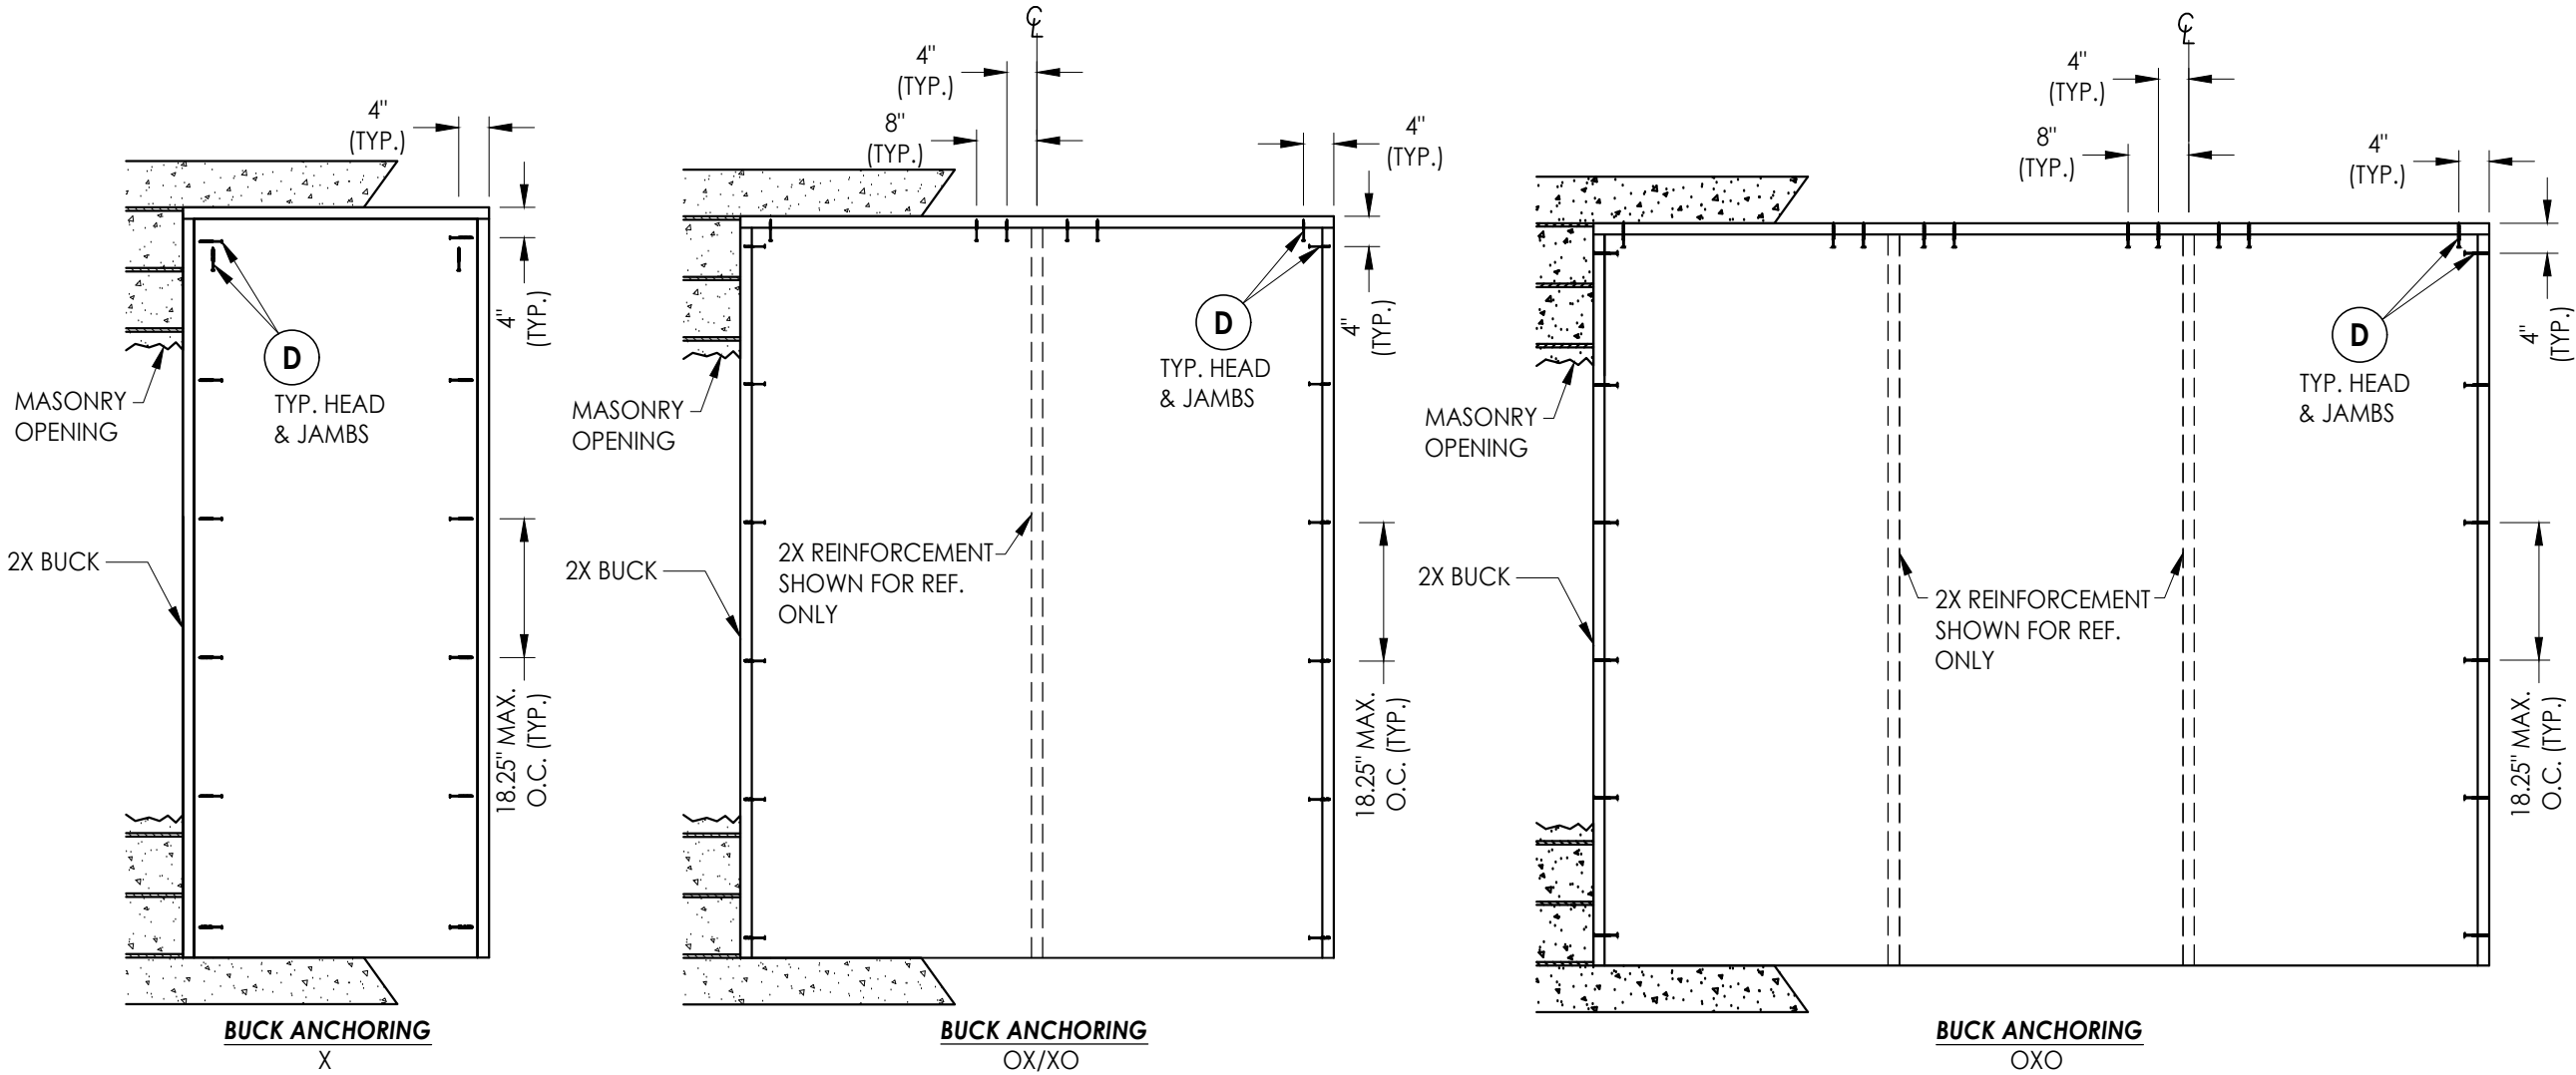

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409



PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	6/28/22	ADD ADA THRESHOLD LFS
3		
2		
1		

DATE: 02/21/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15180.7
SHEET 8 OF 11

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15180 R6\FL-15180.5-.7.dwg

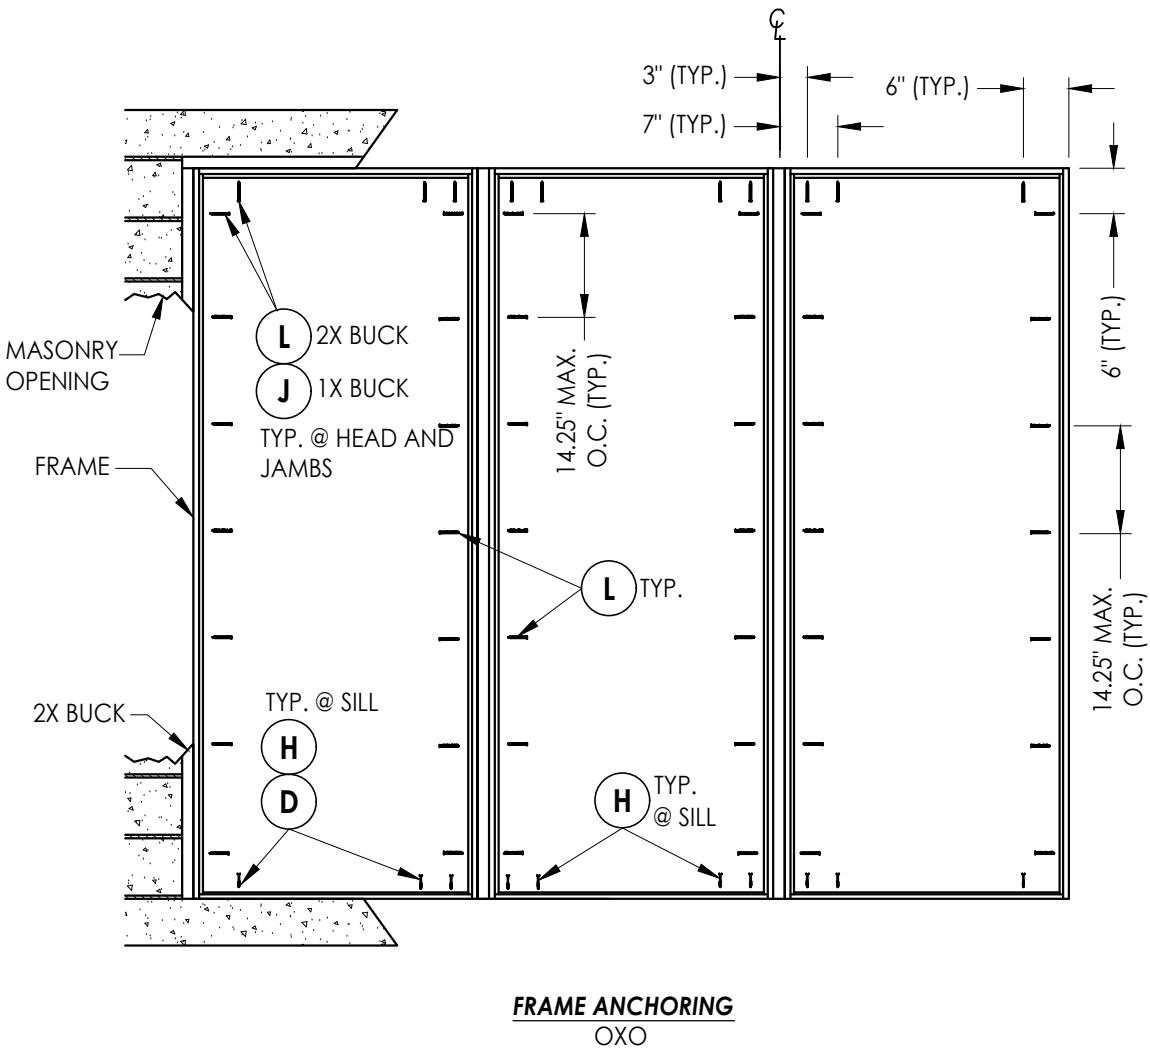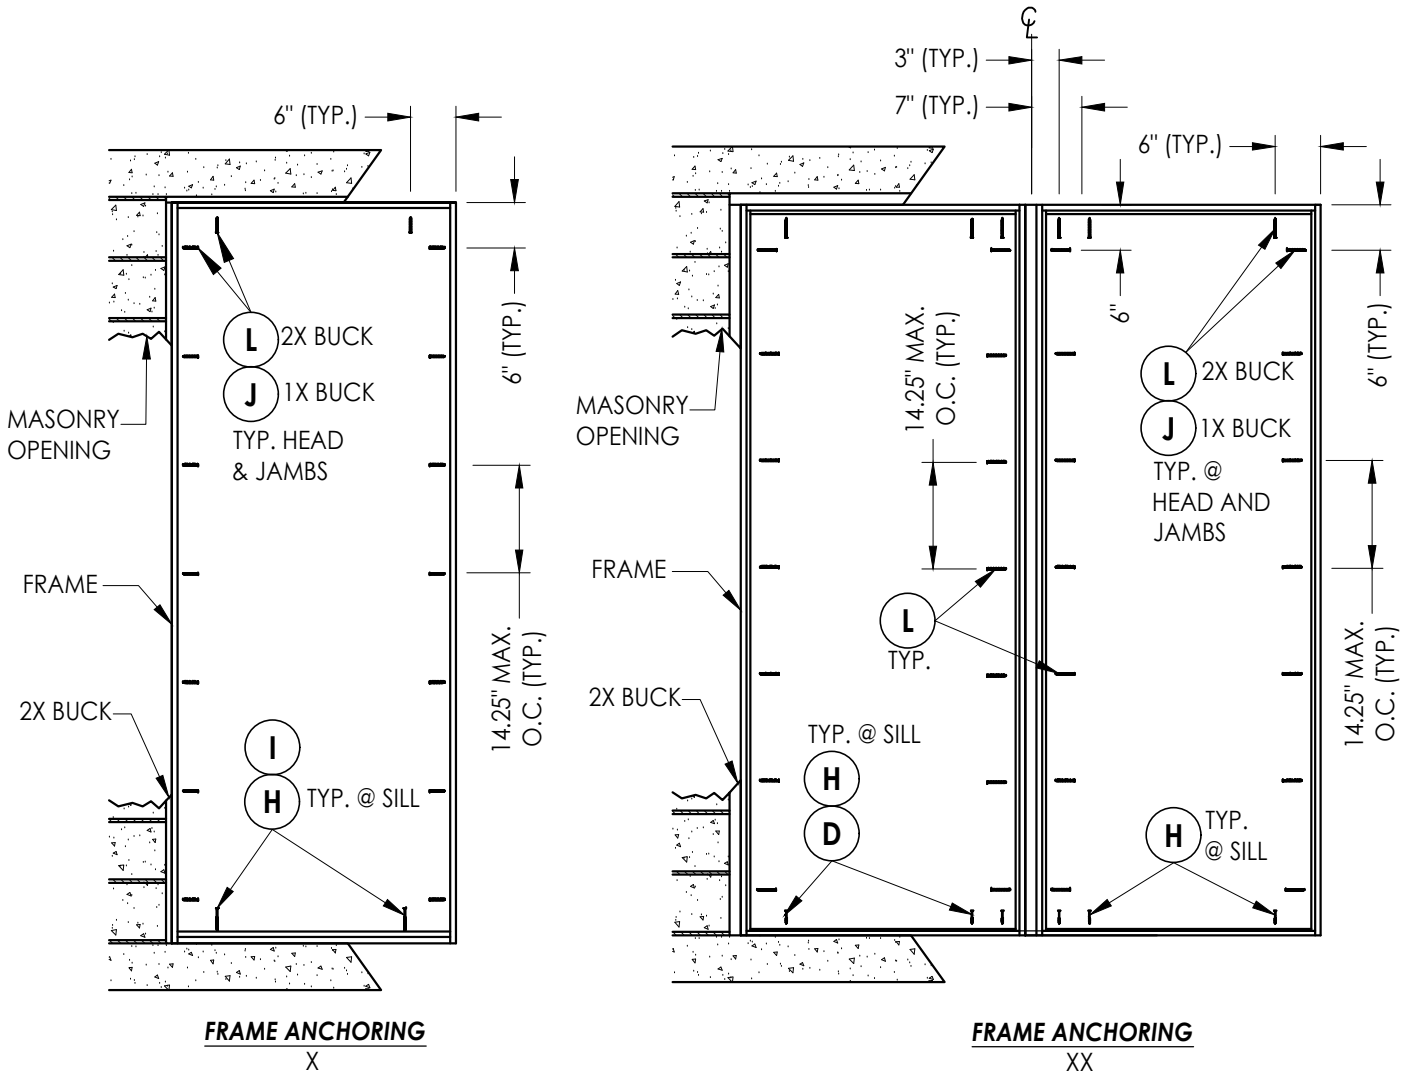

CORROSION RESISTANCE - SALTWATER ENVIRONMENT

Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	6/28/22	ADD ADA THRESHOLD LFS
NO.	DATE	BY

DATE: 02/21/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-15180.7


SHEET 9 OF 11

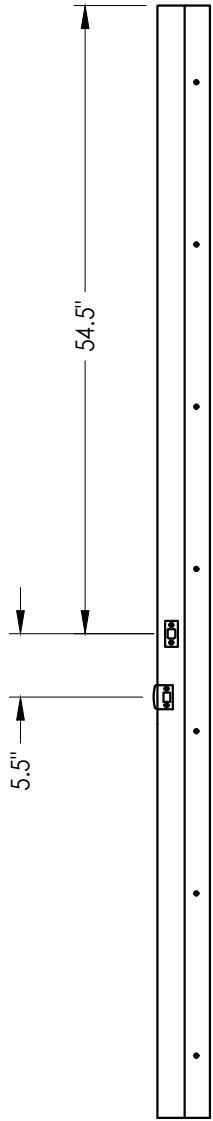


STRIKE JAMB

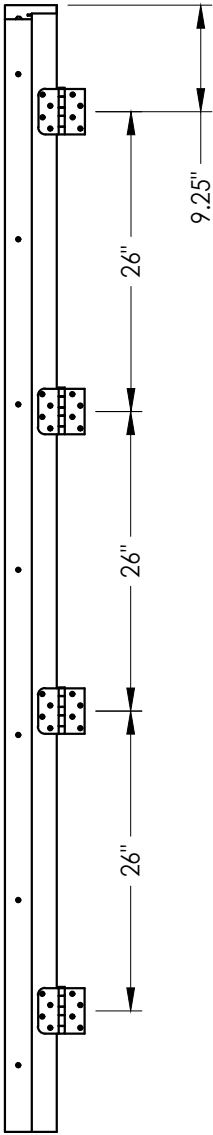

HINGE JAMB

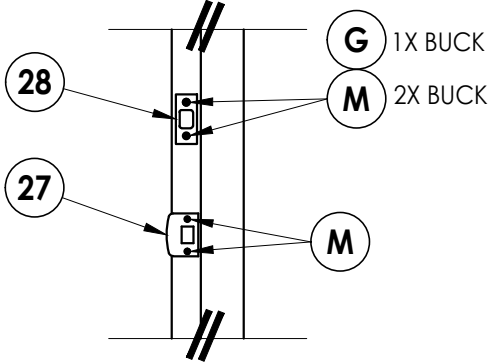

LATCH & DEADBOLT DETAIL

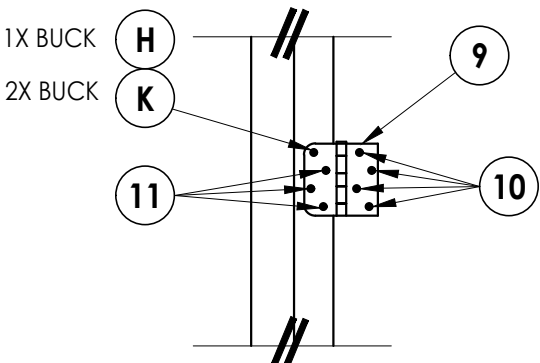

HINGE DETAIL


[illegible]

PRODUCT: <u>PLASTPRO INC. FIBERGLASS DOOR</u>	PART OR ASSEMBLY: <u>HAREWARE DETAILS</u>
---	---


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.55)	WOOD
B	2X BUCK (SG >= 0.55)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" x 3-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	#9 X 2-1/2" PFH WOOD SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	#8 X 2" PFH WOOD SCREW	STEEL
7	FORCE 5 WEATHERSTRIP (ENDURA)	FOAM
8	COMPRESSION WEATHERSTRIP QLON 650 (SCHLEGEL)	FOAM
9	4" X 4" BUTT HINGE	STEEL
10	#9 X 1" PFH WOOD SCREW	STEEL
11	#9 X 3/4" PFH WOOD SCREW	STEEL
20	FINGER JOINTED PINE FRAME, HEAD & HINGE JAMBS	WOOD
21	POLY FIBER JAMB	COMP/VINYL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE	STEEL
29	OUTSWING THRESHOLD	ALUM/WOOD
35	ADA THRESHOLD	ALUM
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
60	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
88	2X REINFORCEMENT (CLEAR PINE: SG >= 0.49)	WOOD

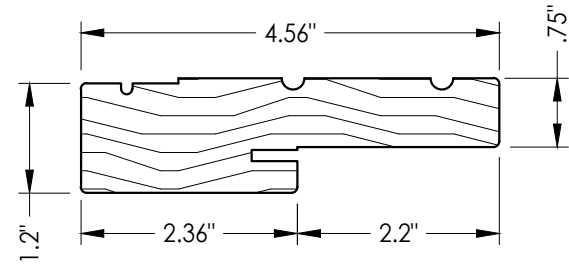


20 **HEAD & SIDE**
Jamb

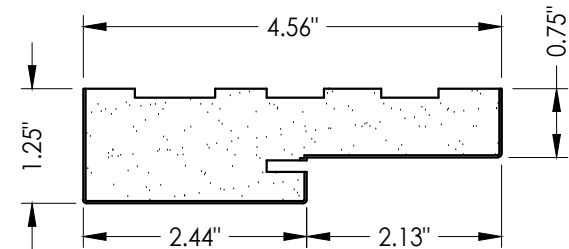

21 **HEAD & SIDE**
Poly fiber jamb

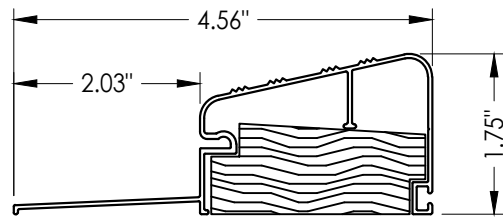

29 OUTSWING THRESHOLD

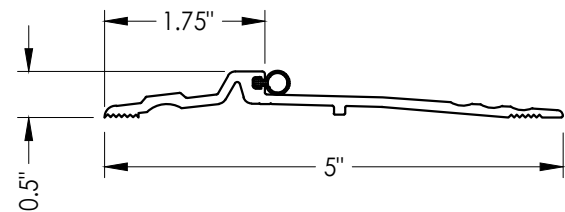

35 **ADA THRESHOLD**
NGP 896V

[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813