



5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045

Smooth / Wood Grain / Mahogany / Rustic
Series Fiberglass Door
INSWING / OUTSWING
"IMPACT"


GENERAL NOTES

- 1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
- 2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- 3. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and excludes Wind Zone 4 as defined in ASTM E1996.
- 4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- 5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.


TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Door panel details
3	Sidelite panel details and glazing detail
4	Elevations
5	Horizontal and vertical cross sections (2X BUCK)
6	Horizontal and vertical cross sections (1X BUCK)
7	Horizontal and vertical cross sections (Direct to Masonry)
8	Horizontal and vertical cross sections (Direct to Masonry)
9	Vertical cross sections
10	Buck and frame anchoring
11	Buck anchoring
12	Frame anchoring
13	Bill of materials and components

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

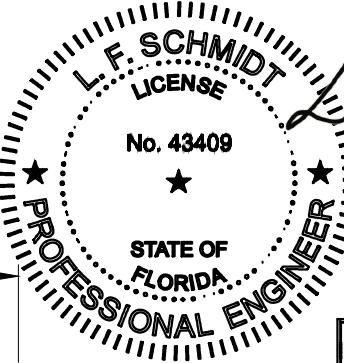

Digitally signed by
Lyndon F Schmidt
Date: 2026.07.28
13:28:20 -04'00'

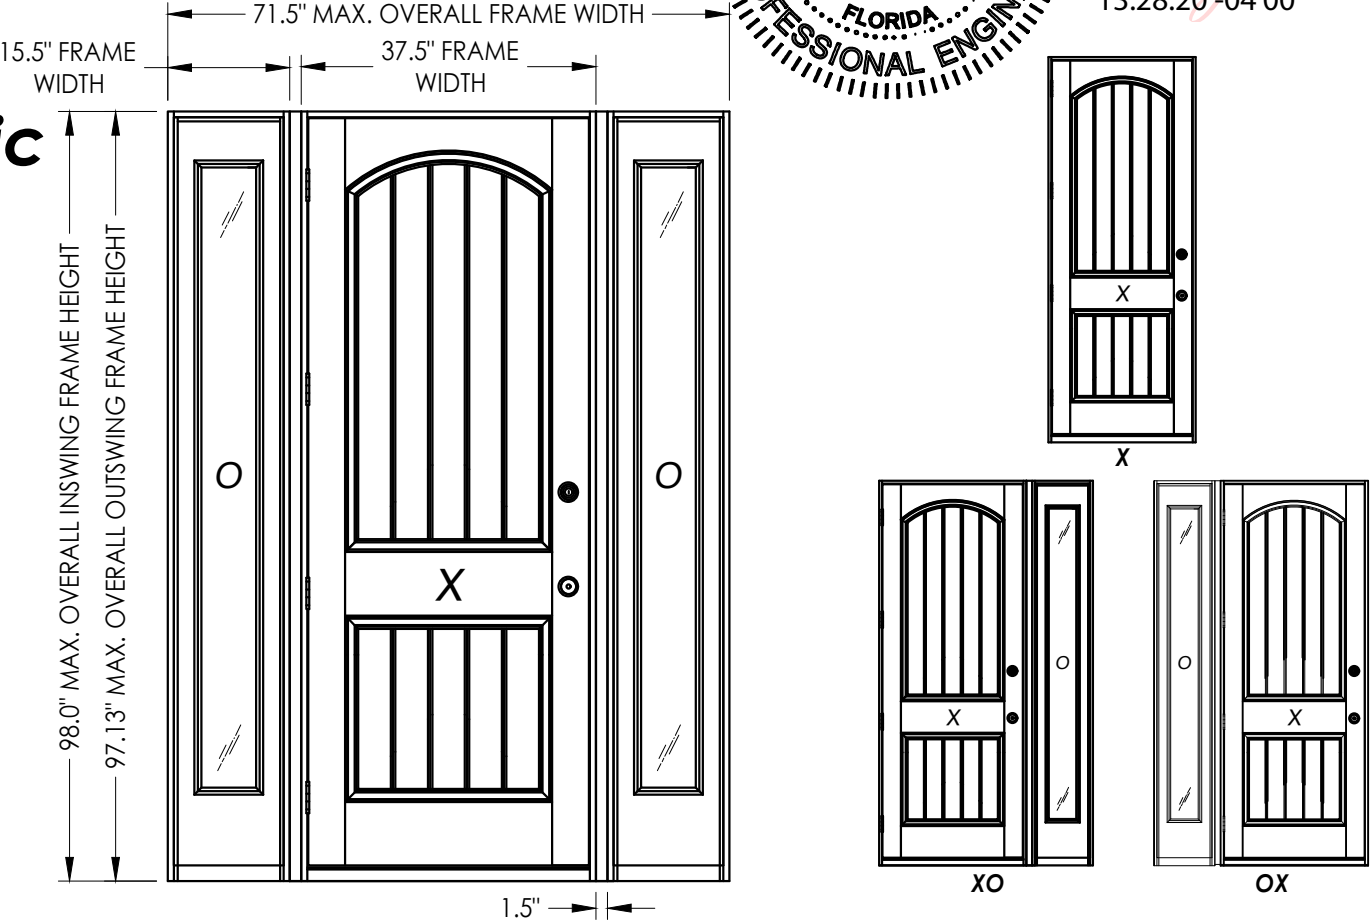

CONFIGURATION	MAX. FRAME DIMENSION	MAX. SIDELITE D.L.O. DIMENSION	STRIKE	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
				POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	37.5" x 98.0"	N/A	STANDARD	+55.0	-55.0	+55.0	-55.0
			SECURITY	+60.0	-60.0	+60.0	-60.0
OX or XO (Back to Back Jambs)	53.0" x 98.0"	6.75" X 78.75"	STANDARD	+40.0	-45.0	+40.0	-40.0
OX or XO (1X Reinforcement)	53.75" x 98.0"	6.75" X 78.75"	STANDARD	+55.0	-60.0	+55.0	-55.0
OX or XO (2X Reinforcement)	54.5" x 98.0"	6.75" X 78.75"	SECURITY	+60.0	-65.0	+60.0	-60.0
OXO (Back to Back Jambs)	68.5" x 98.0"	6.75" X 78.75"	STANDARD	+40.0	-45.0	+40.0	-40.0
OXO (1X Reinforcement)	70.0" x 98.0"	6.75" X 78.75"	STANDARD	+55.0	-60.0	+55.0	-55.0
OXO (2X Reinforcement)	71.5" x 98.0"	6.75" X 78.75"	SECURITY	+60.0	-65.0	+60.0	-60.0


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES

6	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS	REVISIONS
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC	LFS	
4	8/16/22	REVISE DOOR PANEL/WIND ZONE	LFS	
NO.	DATE		BY	
DATE: 02/15/12				
SCALE: N.T.S.				
DWG. BY: JK				
CHK. BY: LFS				
DRAWING NO.: FL-15209.4				
SHEET 1 OF 13				

© 2012 R.W. BUILDING CONSULTANTS INC.

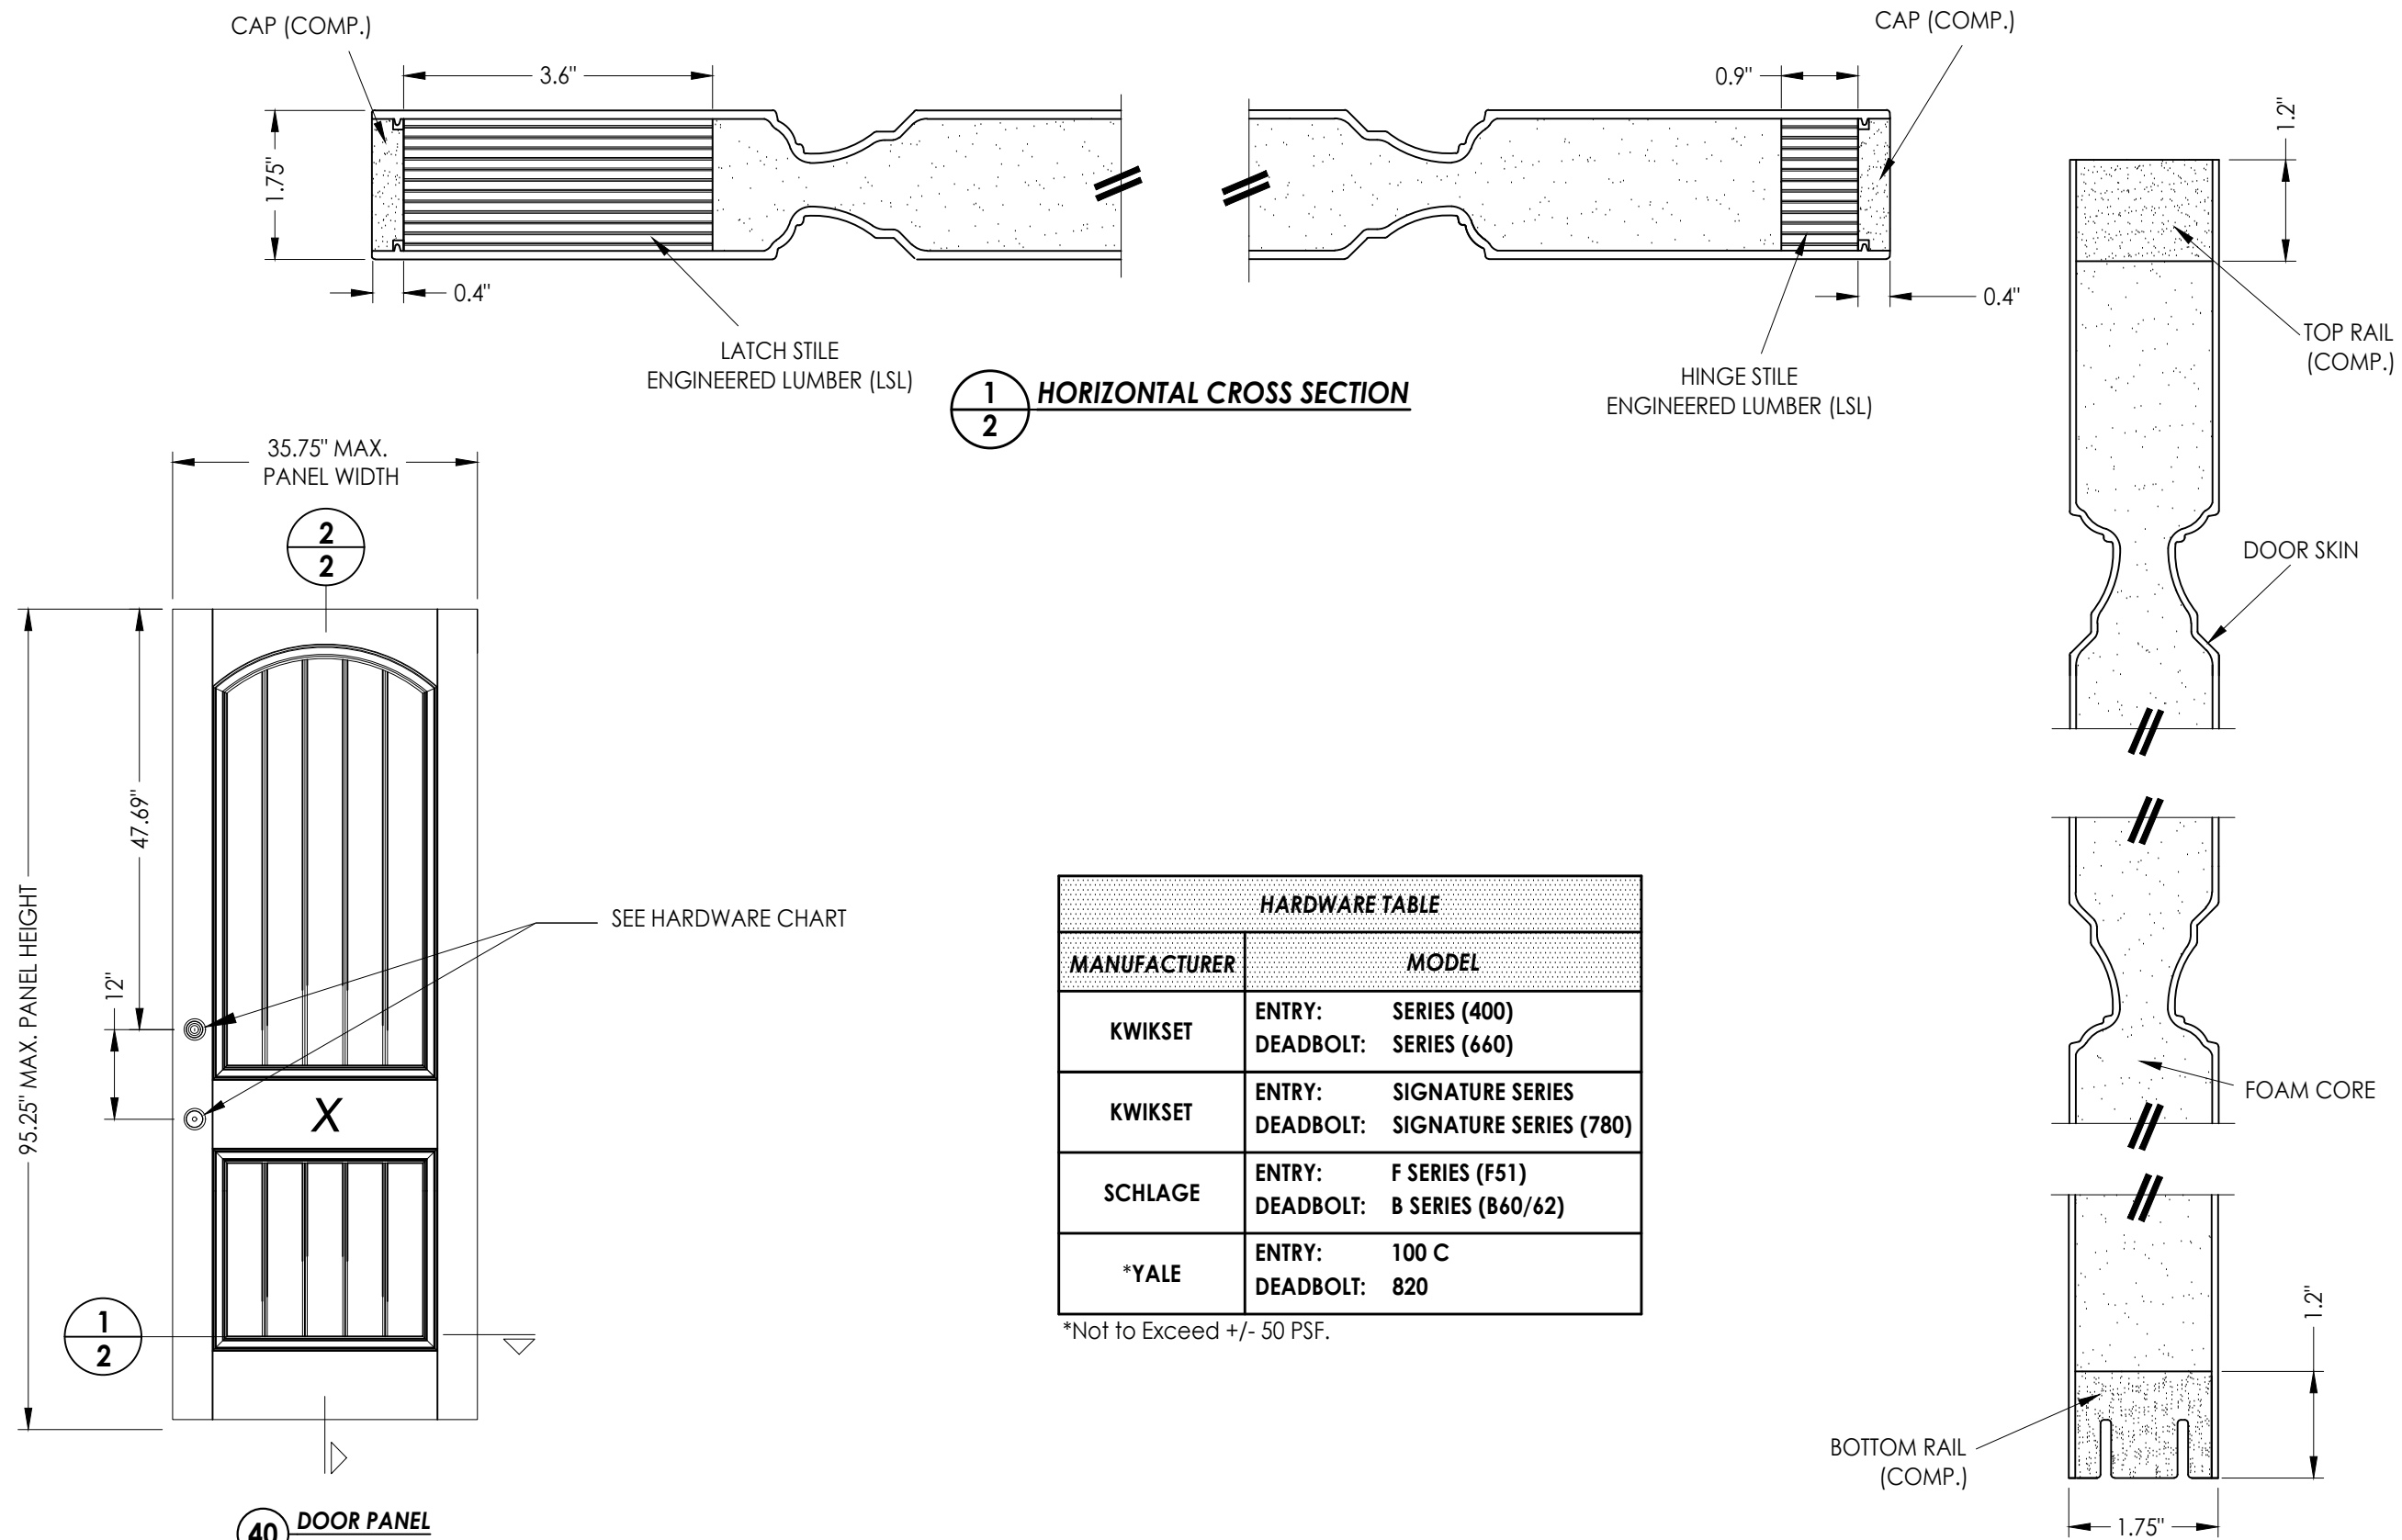

HARDWARE TABLE		
MANUFACTURER	MODEL	
KWIKSET	ENTRY: DEADBOLT:	SERIES (400) SERIES (660)
KWIKSET	ENTRY: DEADBOLT:	SIGNATURE SERIES SIGNATURE SERIES (780)
SCHLAGE	ENTRY: DEADBOLT:	F SERIES (F51) B SERIES (B60/62)
*YALE	ENTRY: DEADBOLT:	100 C 820

*Not to Exceed +/- 50 PSF.

FIBERGLASS DOOR SKIN: MIN. 0.100" THK.
CORE MATERIAL: POLYURETHANE FOAM (1.9 PCF MIN.)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

DOOR ASSEMBLY:

[illegible]

DATE: 02/15/12

SCALE: *N.T.S.*


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:
FL-15209.4

SHEET 2 OF 13


© 2012 R.W. BUILDING CONSULTANTS INC.

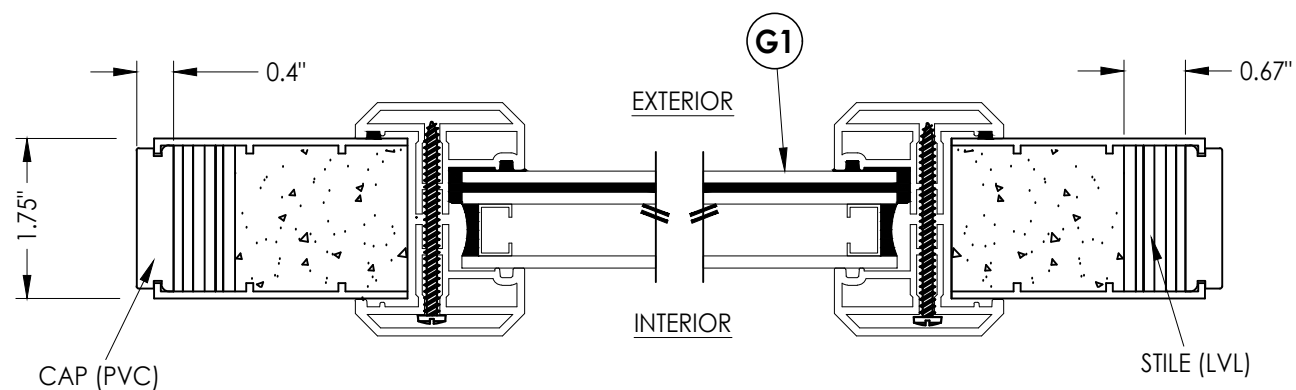


1 **HORIZONTAL CROSS SECTION**
3

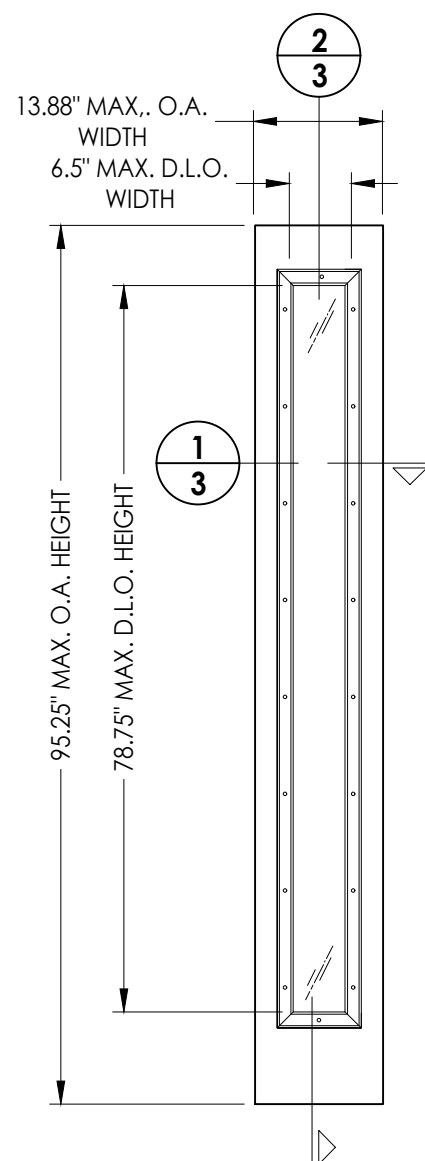


50 SIDELITE PANEL

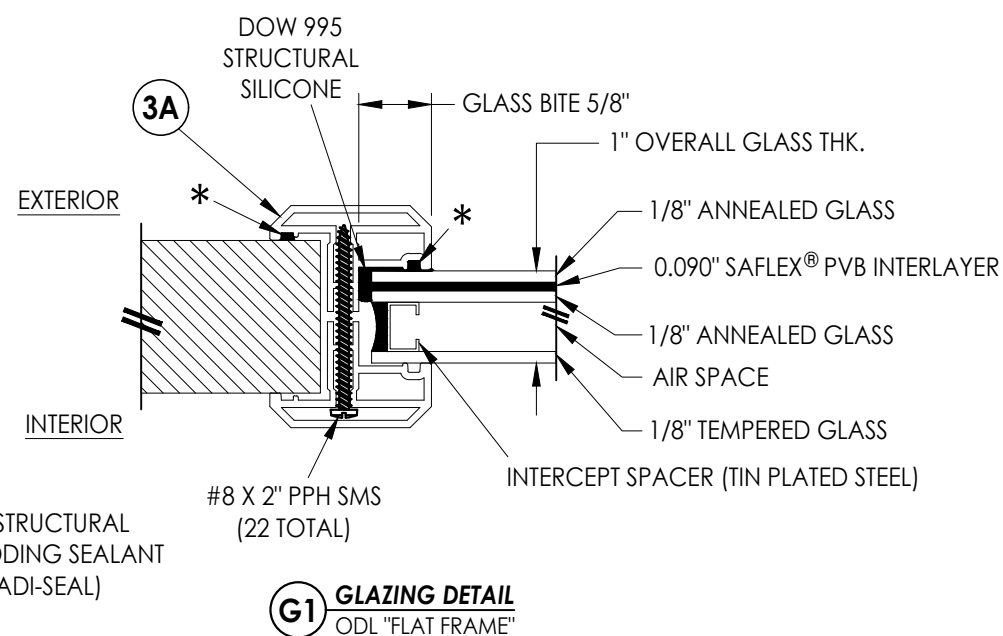

G1 **GLAZING DETAIL**
ODL "FLAT FRAME"

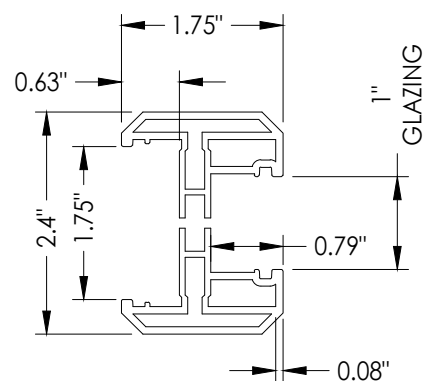


3A **ODL LITE FRAME**
"FLAT FRAME" PROFILE
(6063-T5 ALUM)

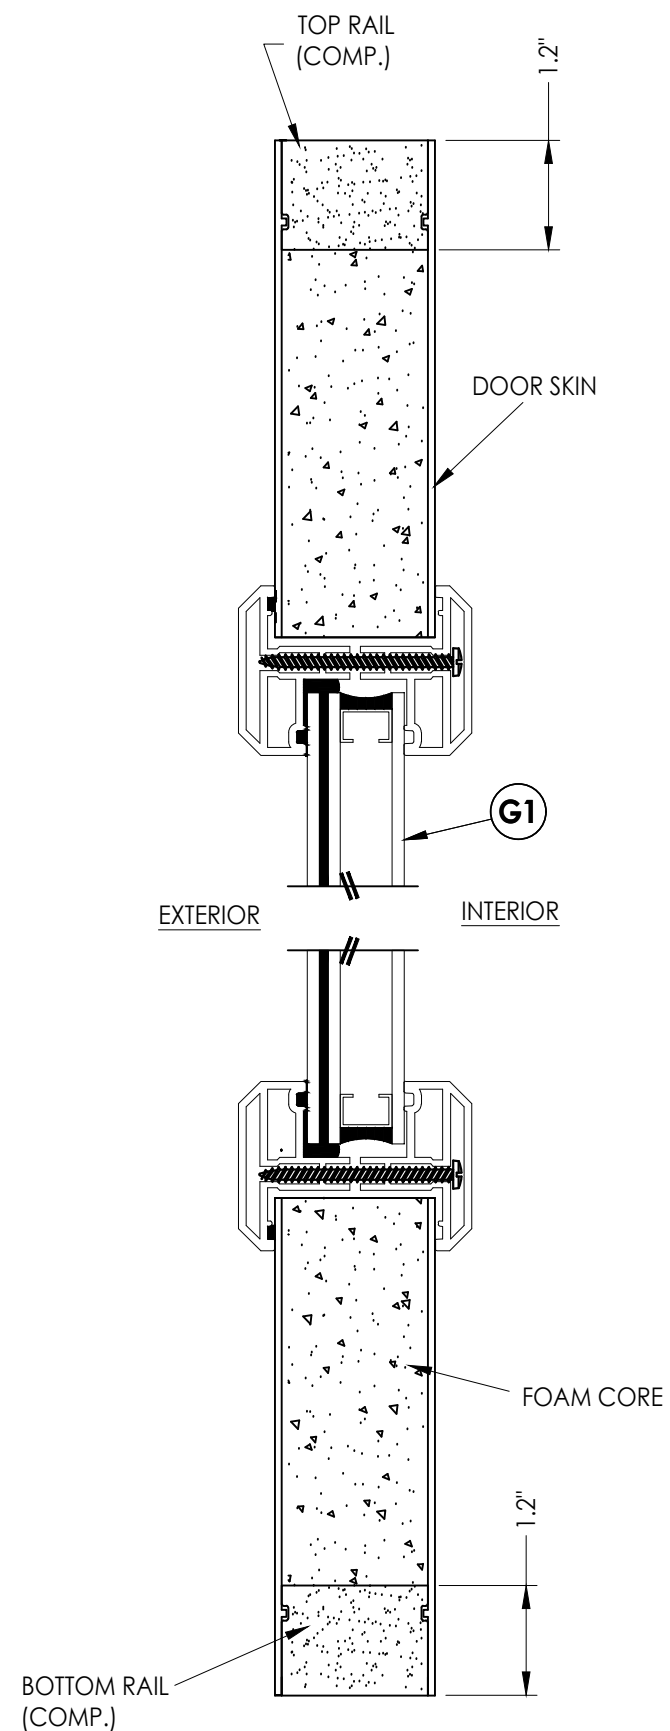


2 VERTICAL CROSS SECTION

DATE: 02/15/12		PRODUCT: PLASTPRO INC. FIBERGLASS DOOR		Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409	
SCALE: N.T.S.		PART OR ASSEMBLY: SIDELITE PANEL DETAILS AND GLAZING DETAIL		 BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
DWG. BY: JK		LFS			
CHK. BY: LFS		LFS			
DRAWING NO.: FL-15209.4		LFS			
SHEET 3 OF 13		BY			
		NO. DATE		REVISIONS	
		6 7/01/26 UPDATE TO 9TH ED. (2026) FBC		LFS	
		5 8/14/23 UPDATE TO 8TH ED. (2023) FBC		LFS	
		4 8/16/22 REVISE DOOR PANEL/WIND ZONE		LFS	


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg

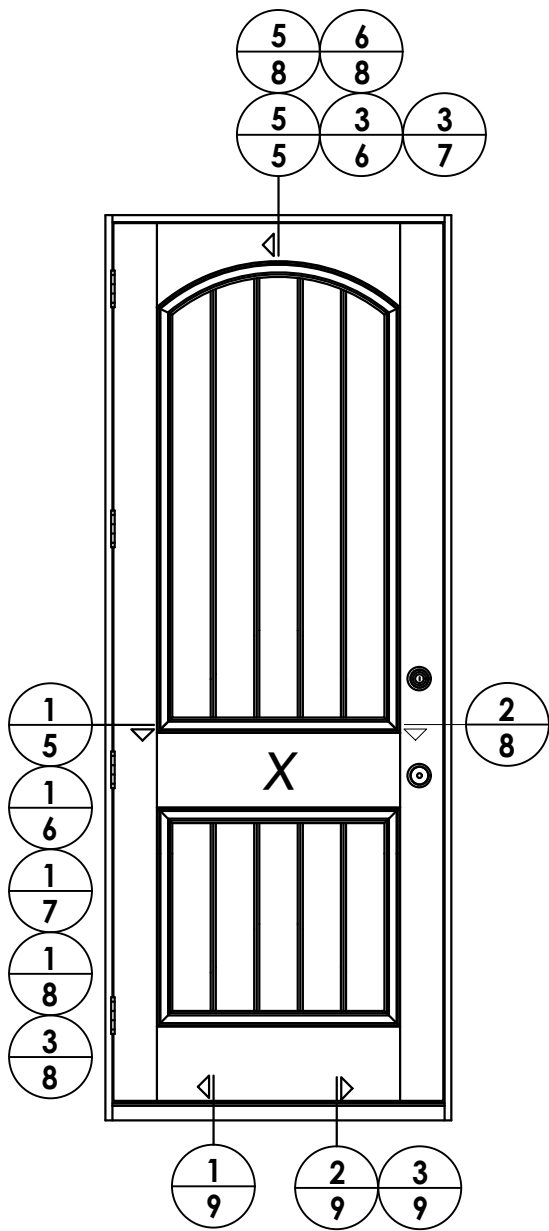

ELEVATION (X)

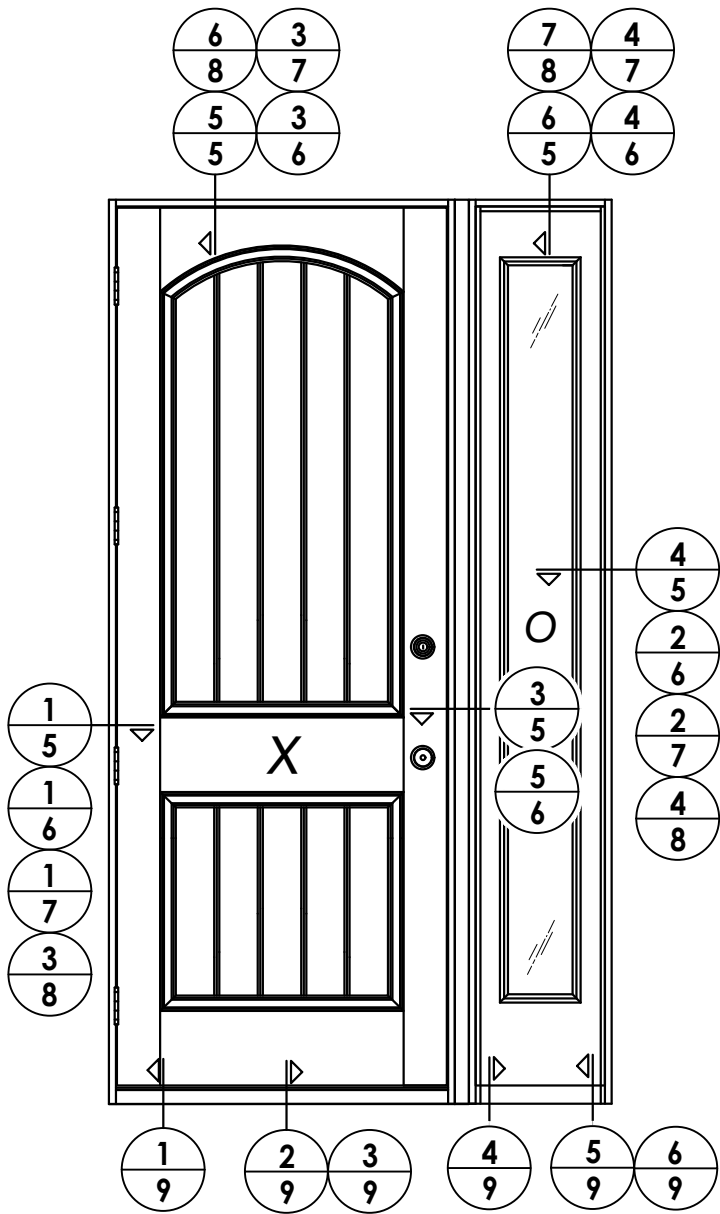

ELEVATION (XO - OX)

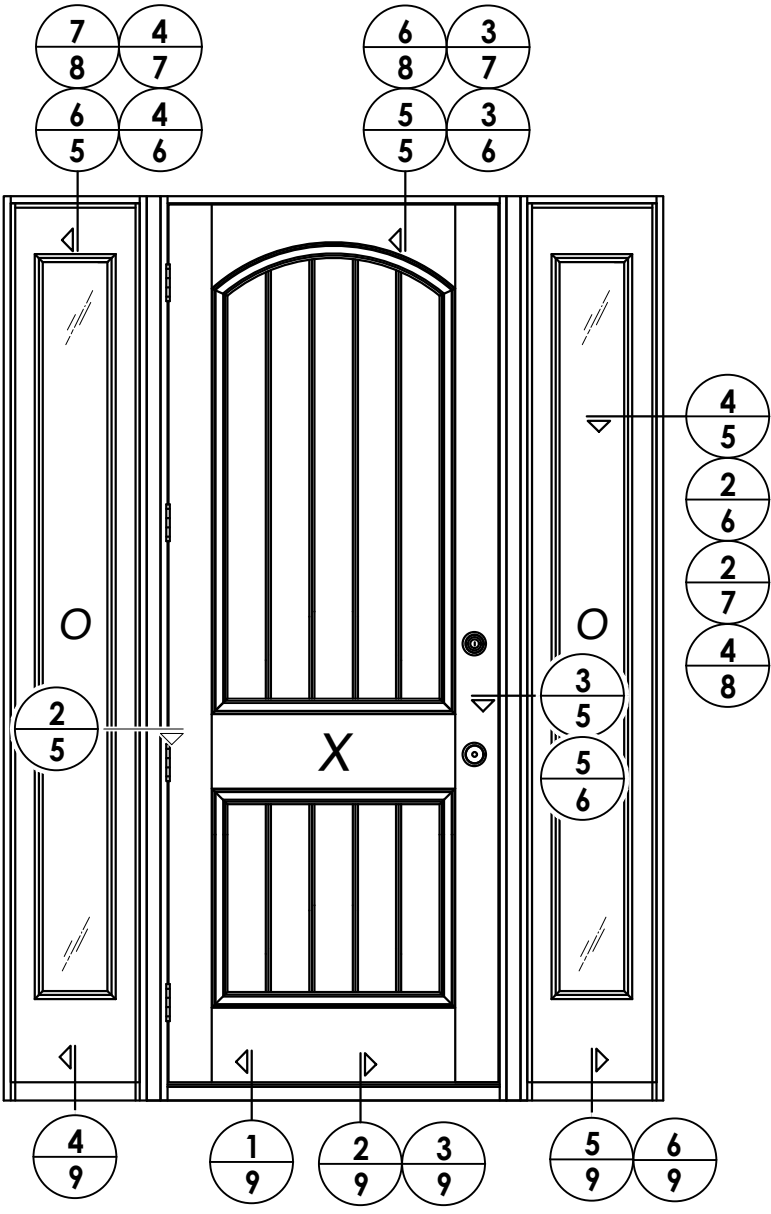

ELEVATION (OXO)


NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	8/16/22	REVISE DOOR PANEL/WIND ZONE LFS

DATE: 02/15/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15209.4
SHEET 4 OF 13

PRODUCT:	PLASTPRO INC. FIBERGLASS DOOR
PART OR ASSEMBLY:	ELEVATIONS





Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

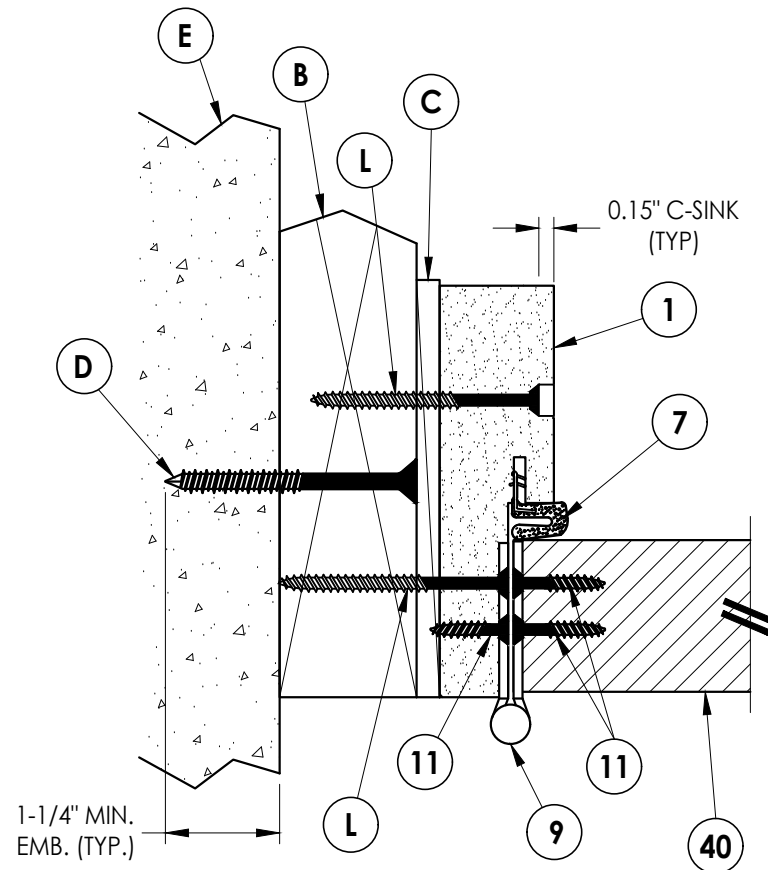

1 **HORIZONTAL CROSS SECTION**
5 Outswing shown (Inswing similar)

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg

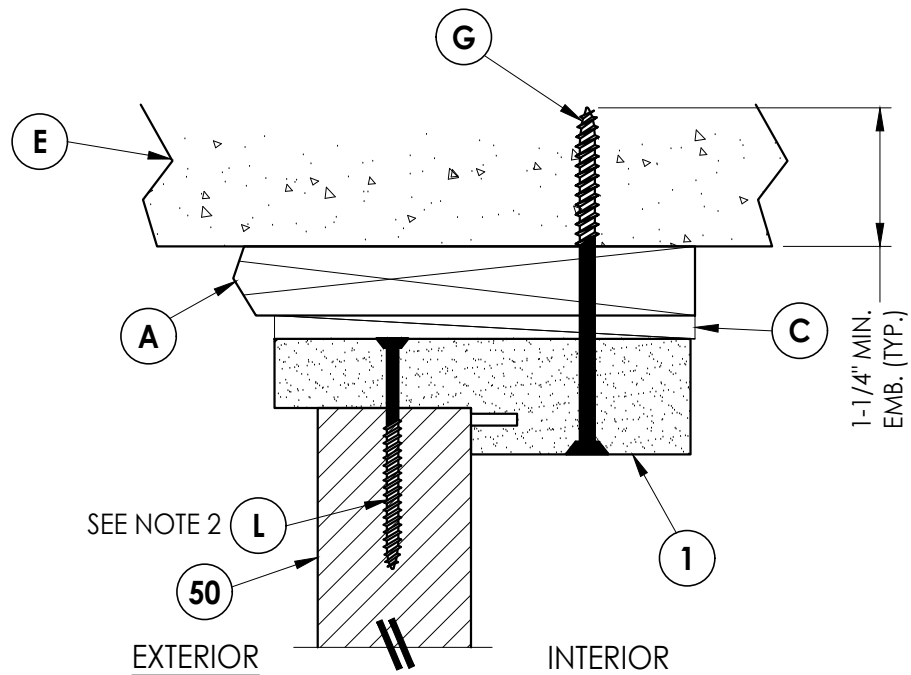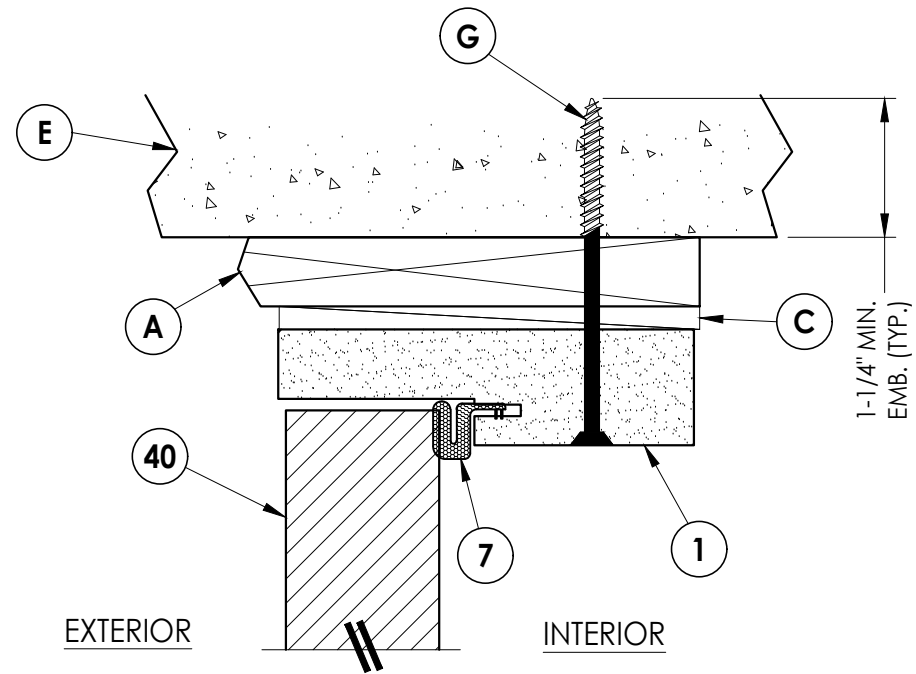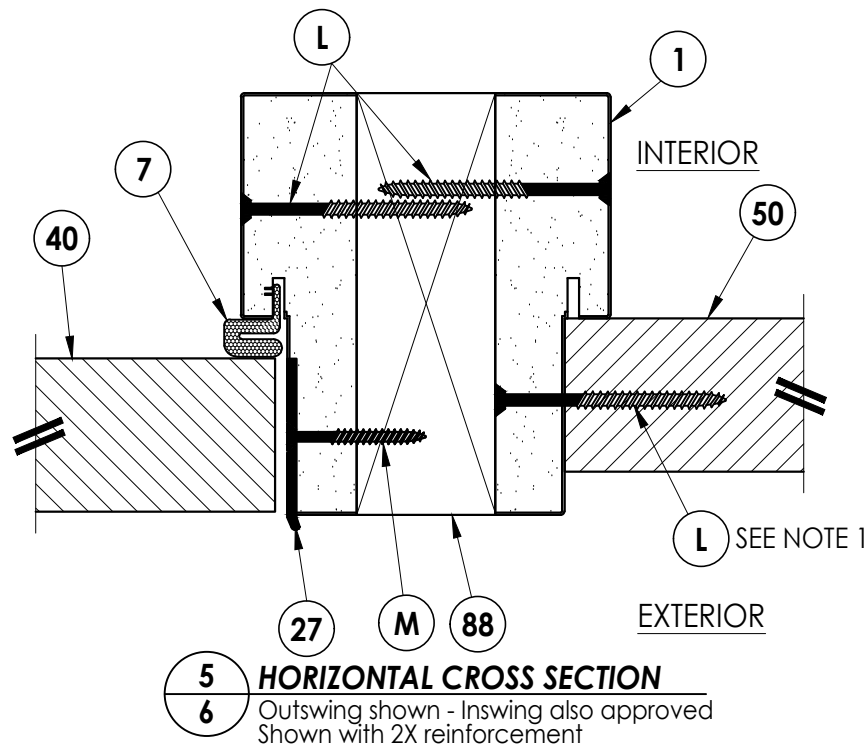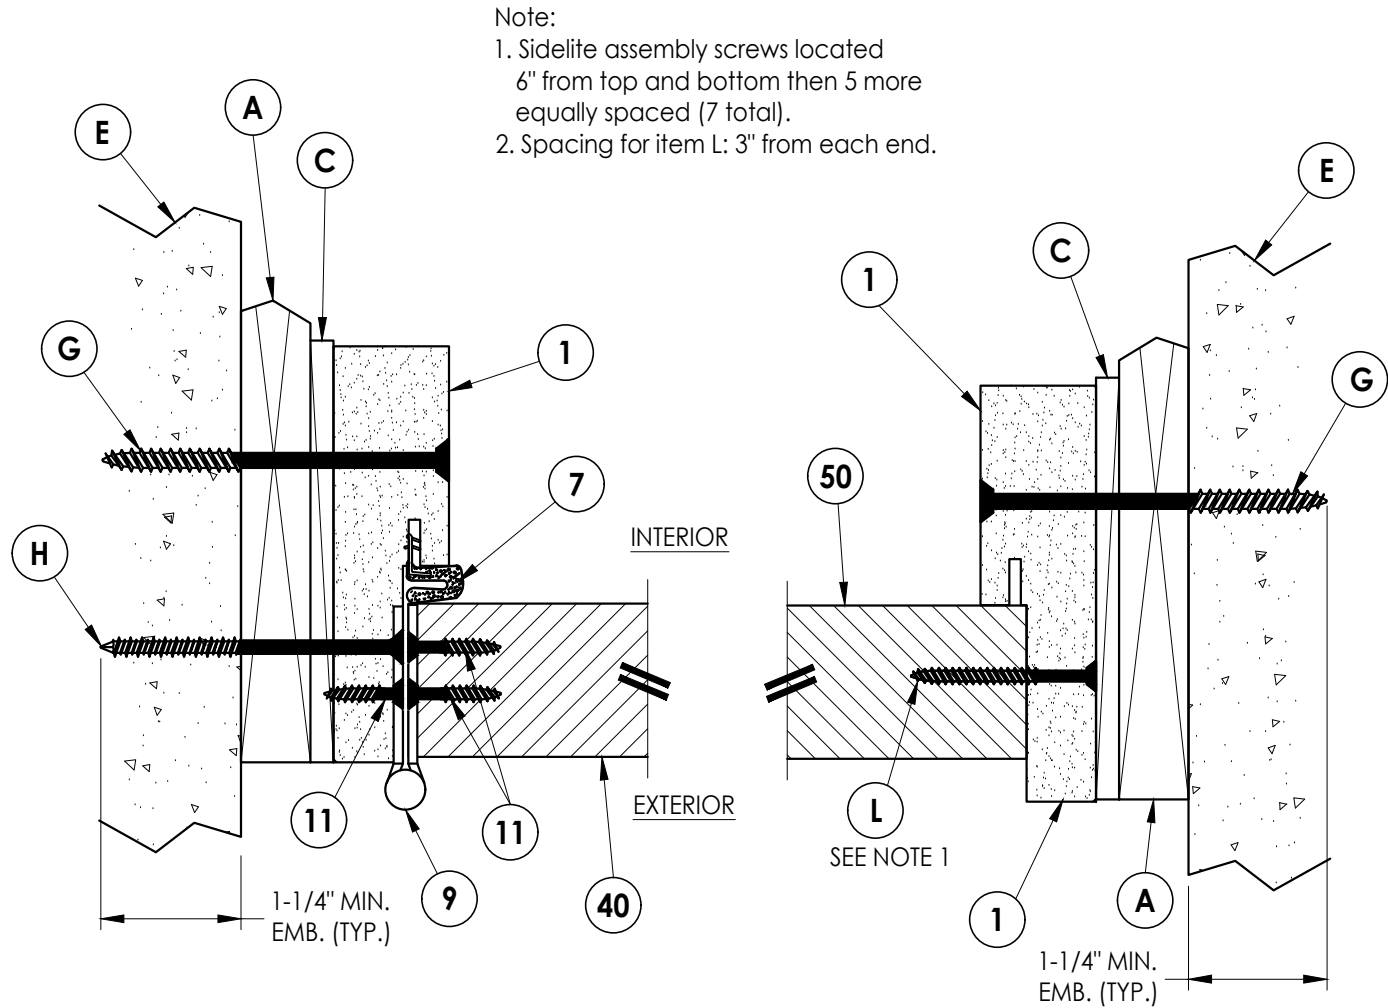

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	BY	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC	LFS
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC	LFS
4	8/16/22	REVISE DOOR PANEL/WIND ZONE	LFS

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-15209.4


SHEET 6 OF 13

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg


Note:
1. Sidelite assembly screws located
6" from top and bottom then 5 more
equally spaced (7 total).
2. Spacing for item L: 3" from each end.

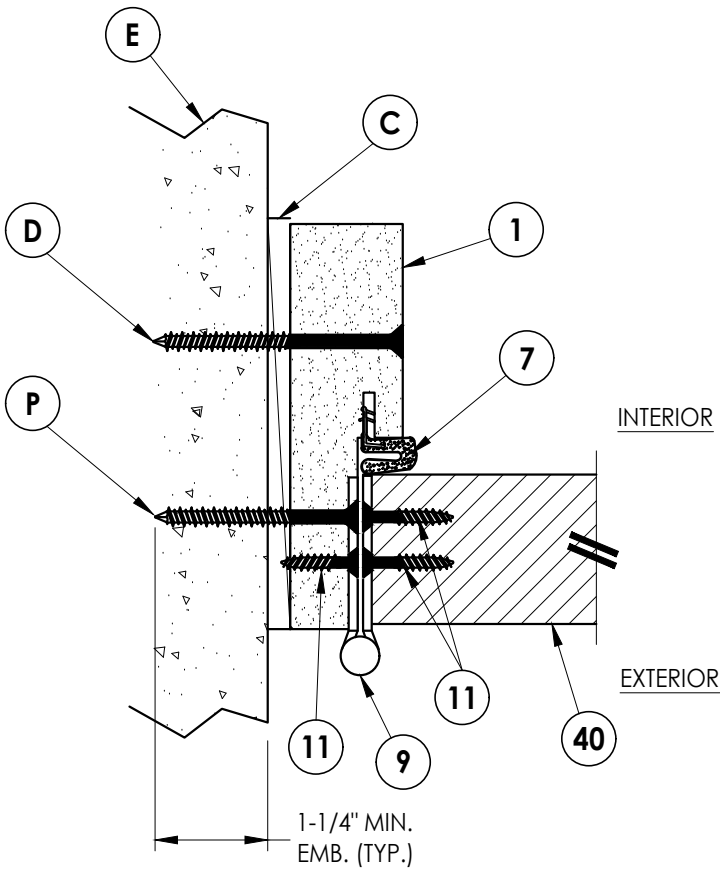


1
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

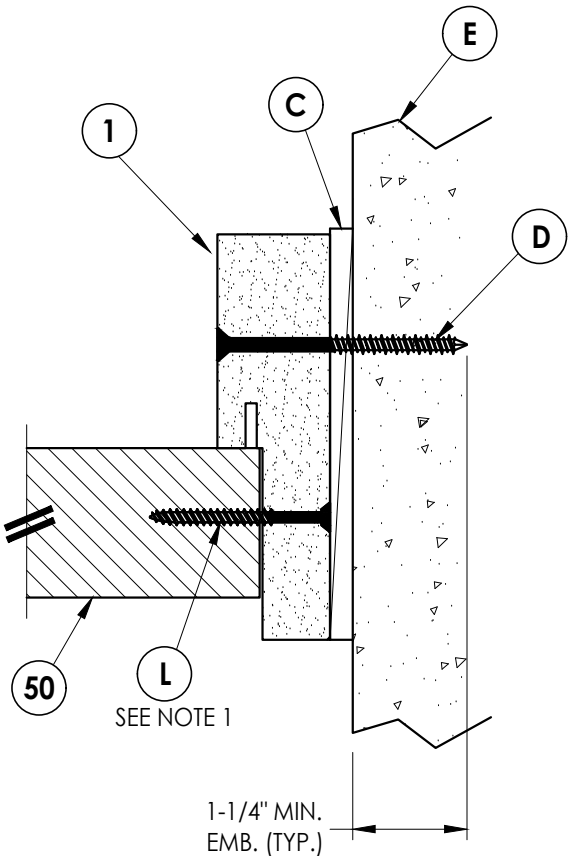

2
7 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

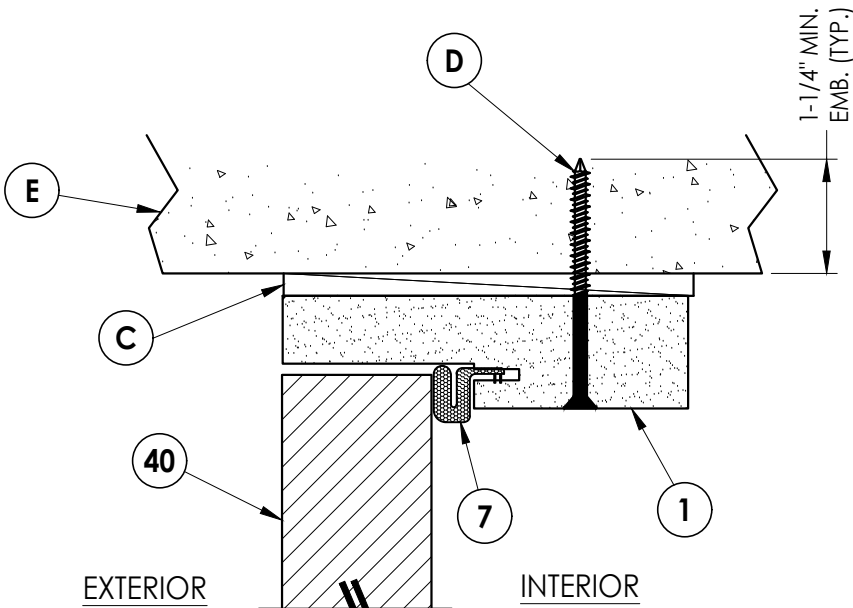

3
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

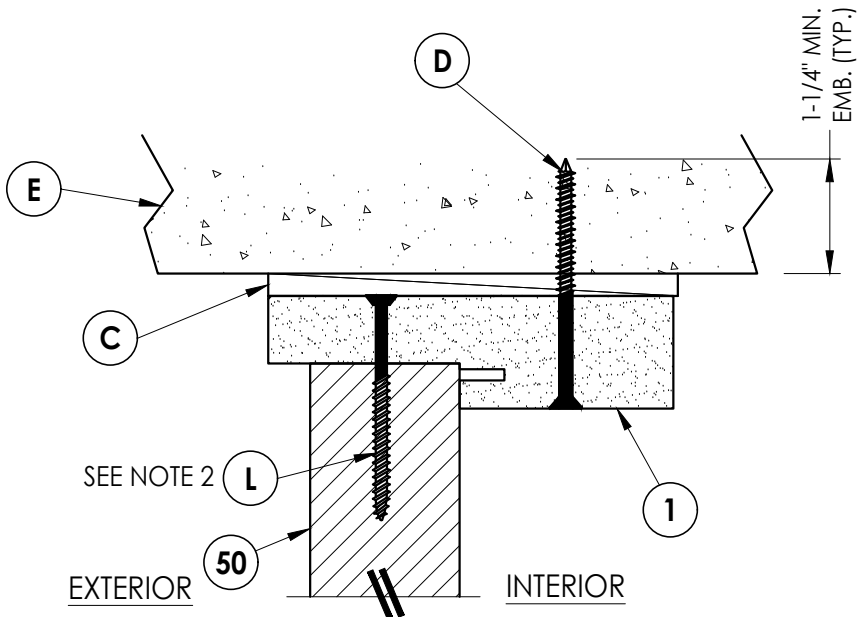

4
7 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL CROSS
SECTIONS (DIRECT TO MASONRY)

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	8/16/22	REVISE DOOR PANEL/WIND ZONE LFS
3		
2		
1		

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-15209.4


SHEET 7 OF 13

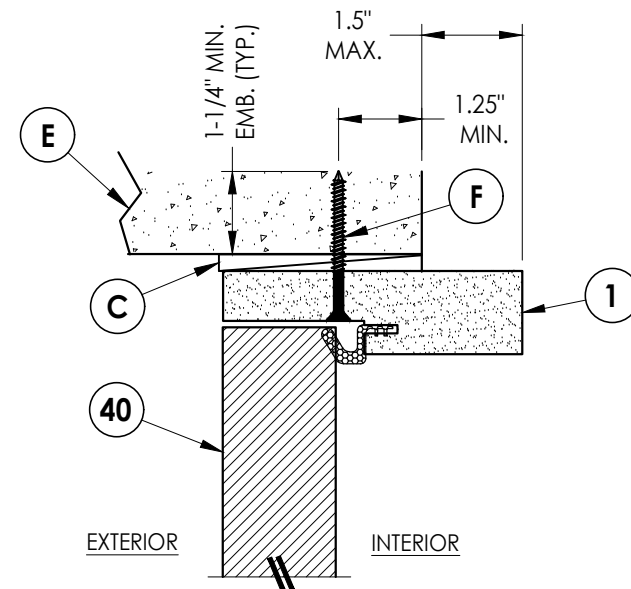

5 **VERTICAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 4-9/16" jamb
 Single Door Only (N/A w/ Sidelites)

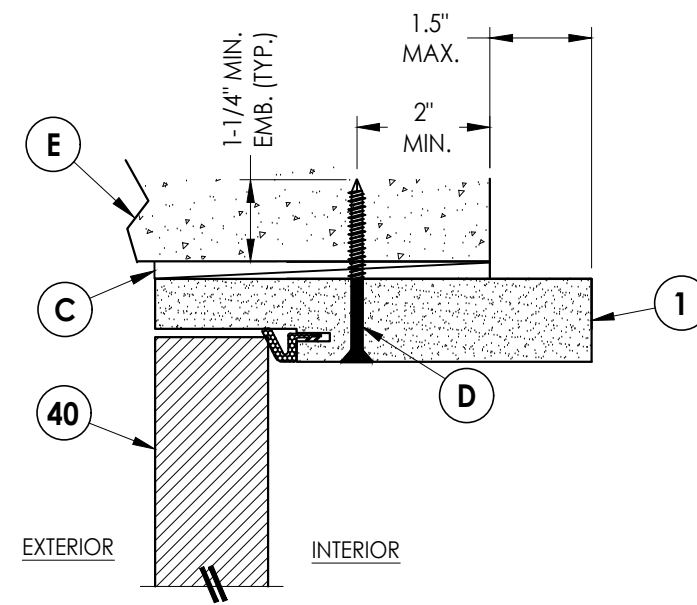


6 VERTICAL CROSS SECTION
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb

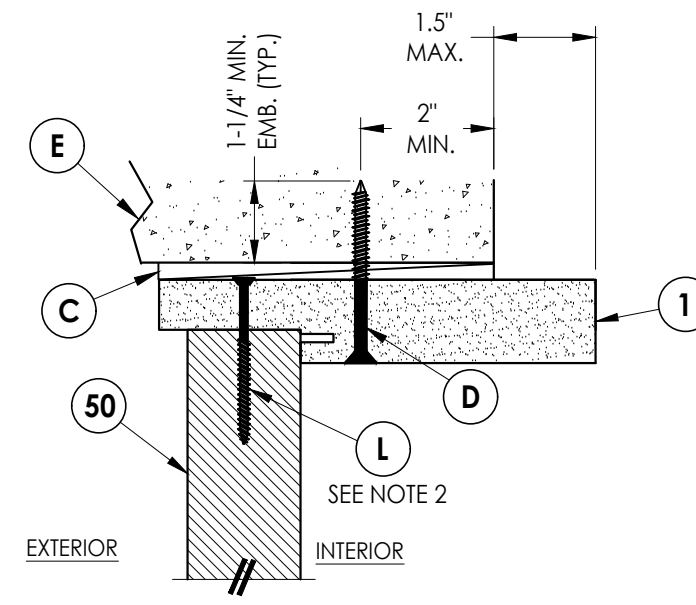

7 VERTICAL CROSS SECTION
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb


Notes:

1. Spacing for item L: 6" from ends and 5 more equally spaced along sidelite (7 total).
2. Spacing for item L: 3" from each end.

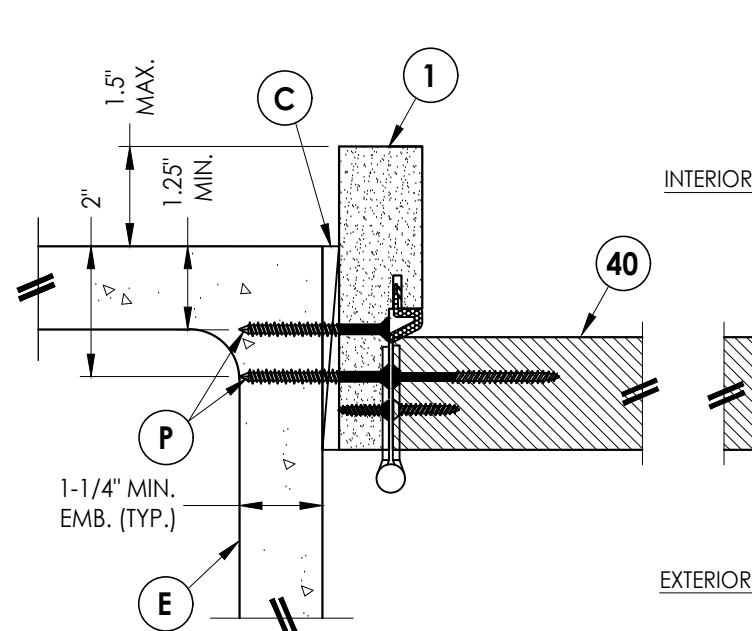


1 8 **HORIZONTAL CROSS SECTION**


Shown Direct to Masonry
Outswing only w/ 4-9/16" jamb
Single Door Only (N/A w/ Sidelites)

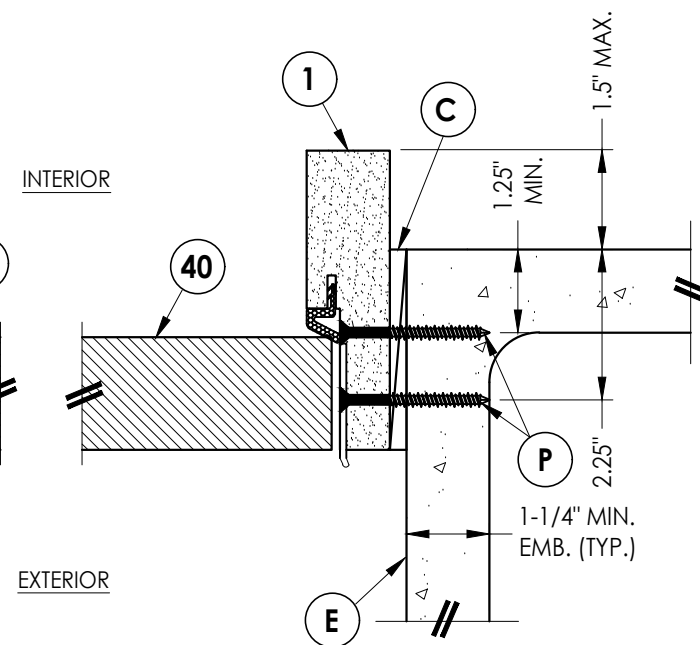

2 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 4-9/16" jamb
 Single Door Only (N/A w/ Sidelites)

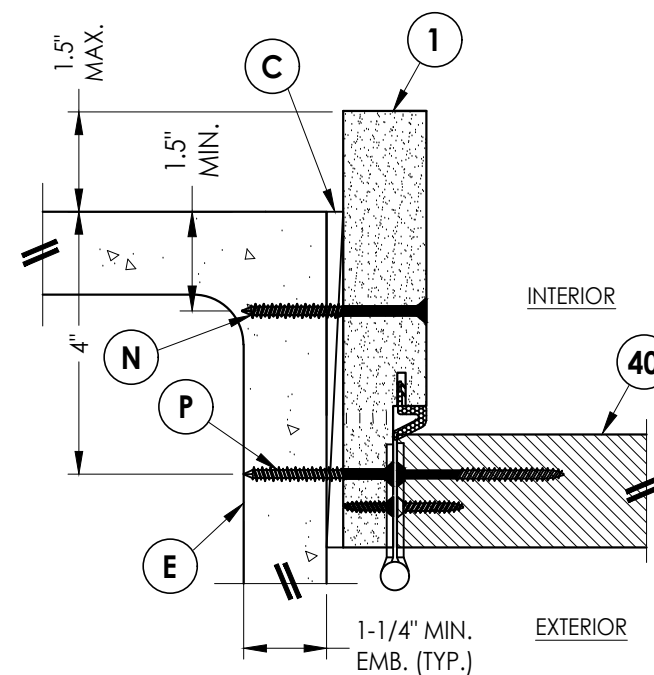




3 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb

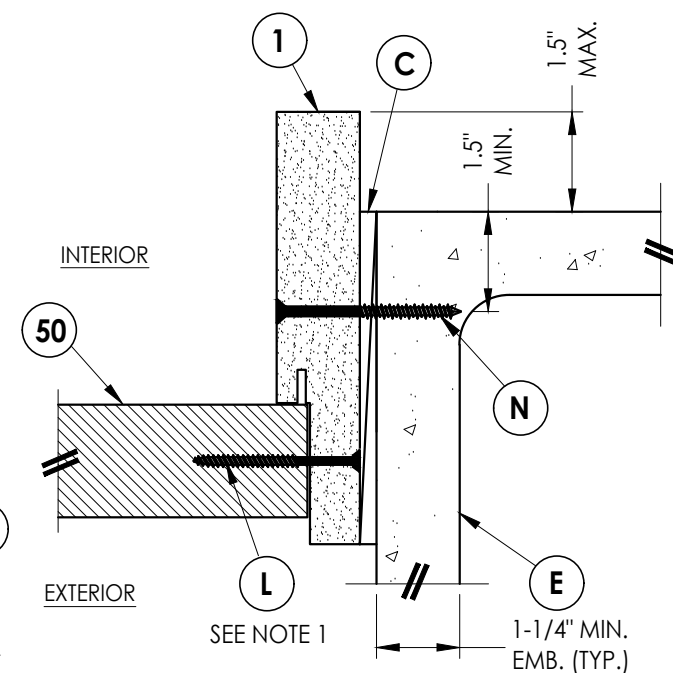




4 **HORIZONTAL CROSS SECTION**
8 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

DATE: 02/15/12		REVISIONS	
SCALE: N.T.S.			
DWG. BY: JK		REVISED BY:	
CHK. BY: LFS			
DRAWING NO.: FL-15209.4		DATE	
SHEET 8 OF 13			
NO.		DATE	
4			
8/16/22		REVISE DOOR PANEL/WIND ZONE	
REVISE DOOR PANEL/WIND ZONE			
UPDATE TO 8TH ED. (2023) FBC		UPDATE TO 9TH ED. (2026) FBC	
8/14/23			
7/01/26		UPDATE TO 8TH ED. (2023) FBC	
6			
LFS		FIBERGLASS DOOR	
PLASTPRO INC.			
PRODUCT:		PART OR ASSEMBLY:	
HORIZONTAL & VERTICAL SECTIONS (DIRECT TO MASONRY)			
Documents Prepared By:		BUILDING CONSULTANTS, INC.	
Lyndon F. Schmidt			
P.E. No. 43409		P.O. Box 230, Valrico, FL 33595	
Phone No.: 813.659.9197			
FBPE Registry No. 9813		R ^g W	

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg

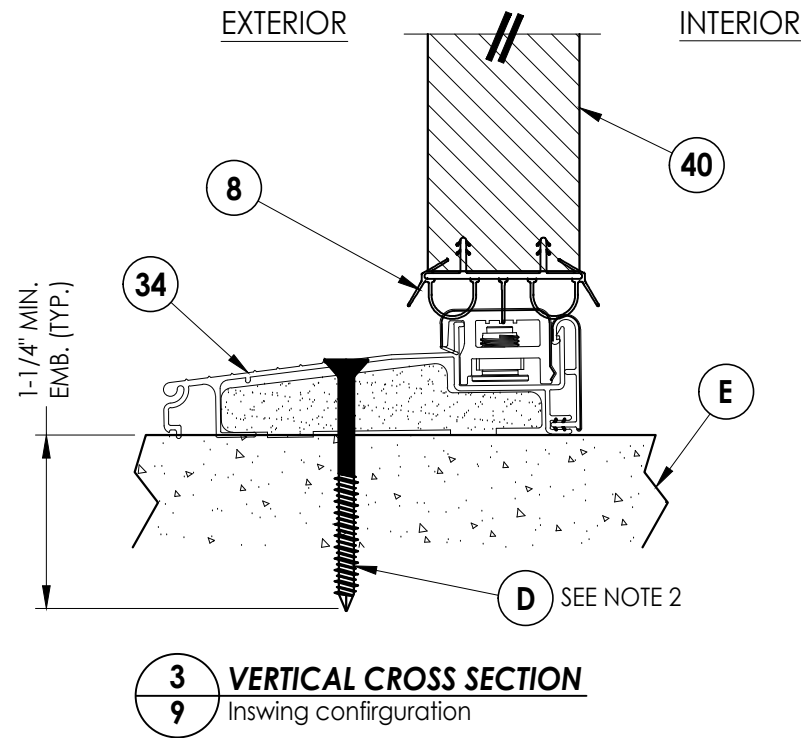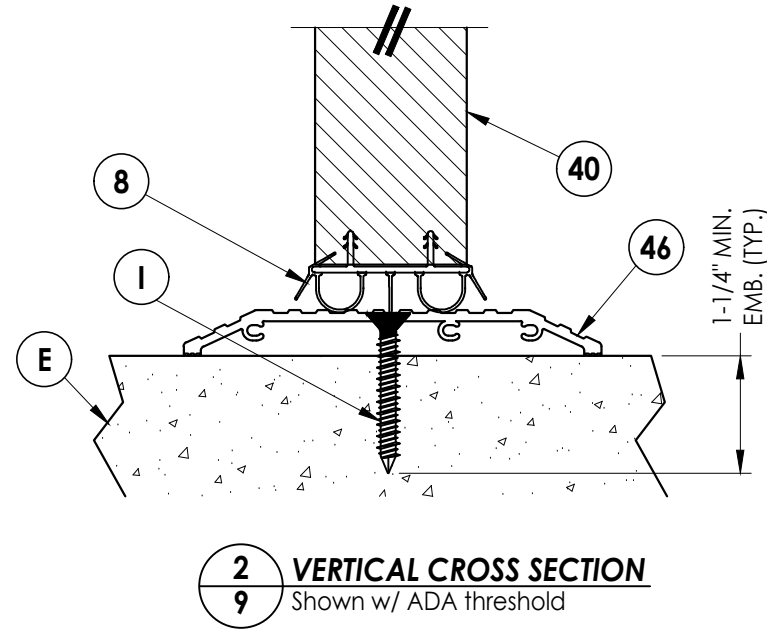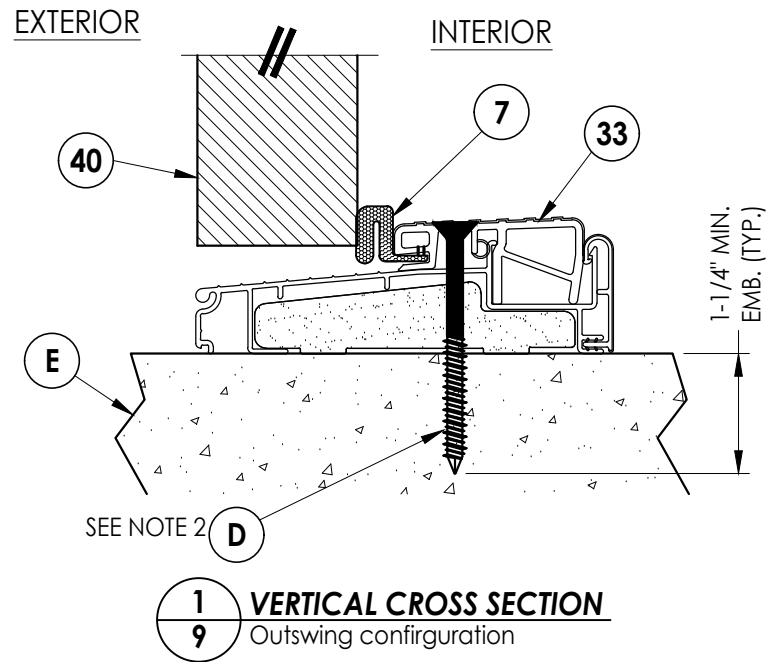

NOTE
1. Spacing for item L: 3" from each end.
2. Not required for single without sidelites.

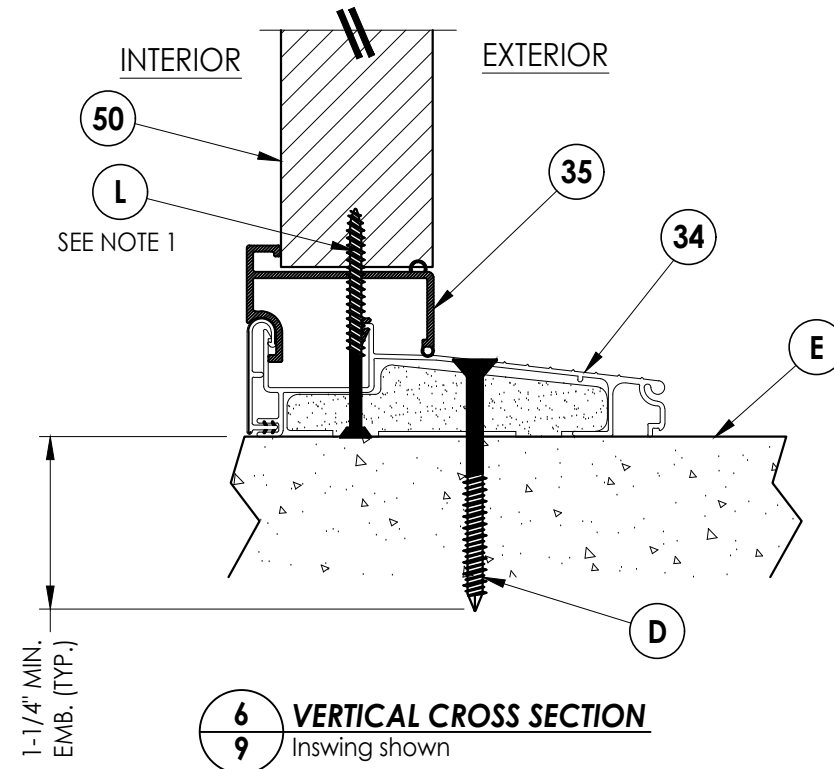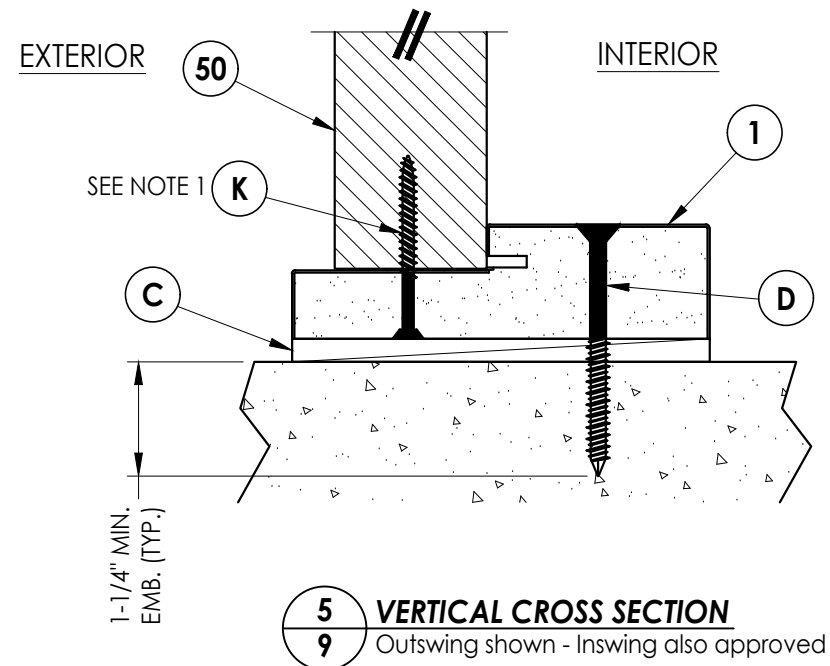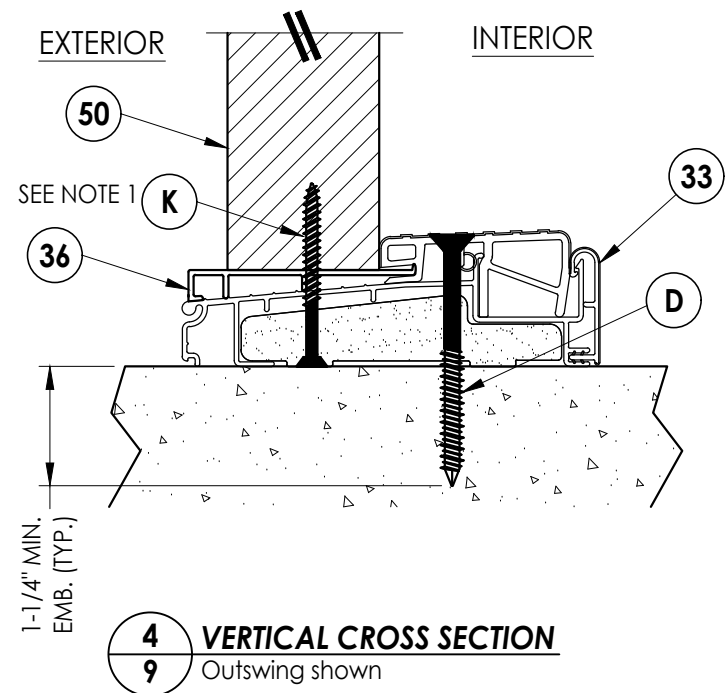

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL
CROSS SECTIONS

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC LFS
4	8/16/22	REVISE DOOR PANEL/WIND ZONE LFS
3		
2		
1		

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.: FL-15209.4

SHEET 9 OF 13

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg

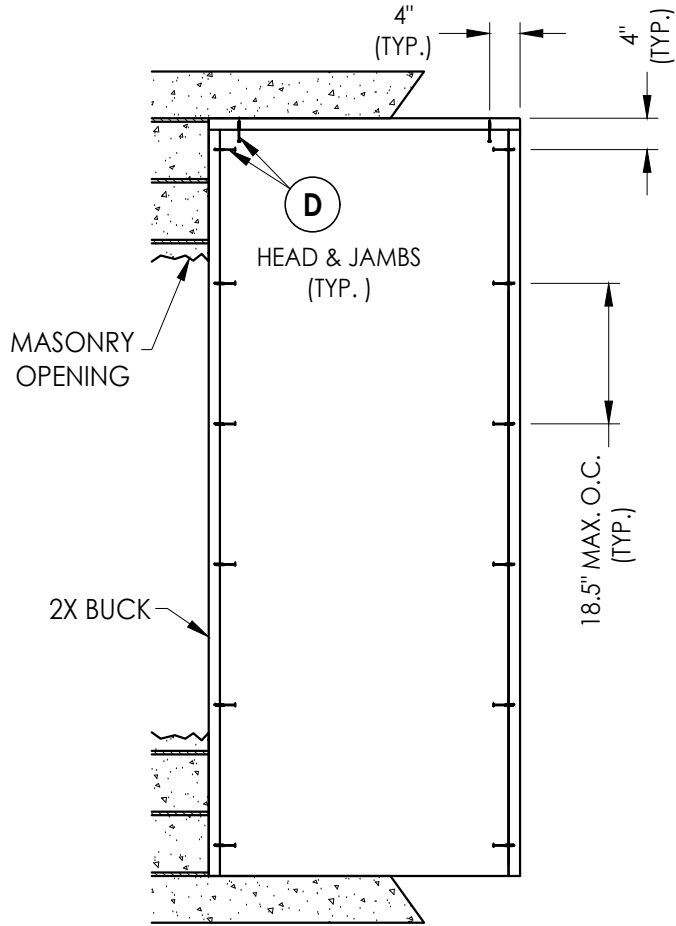


BUCK ANCHORING
(X)

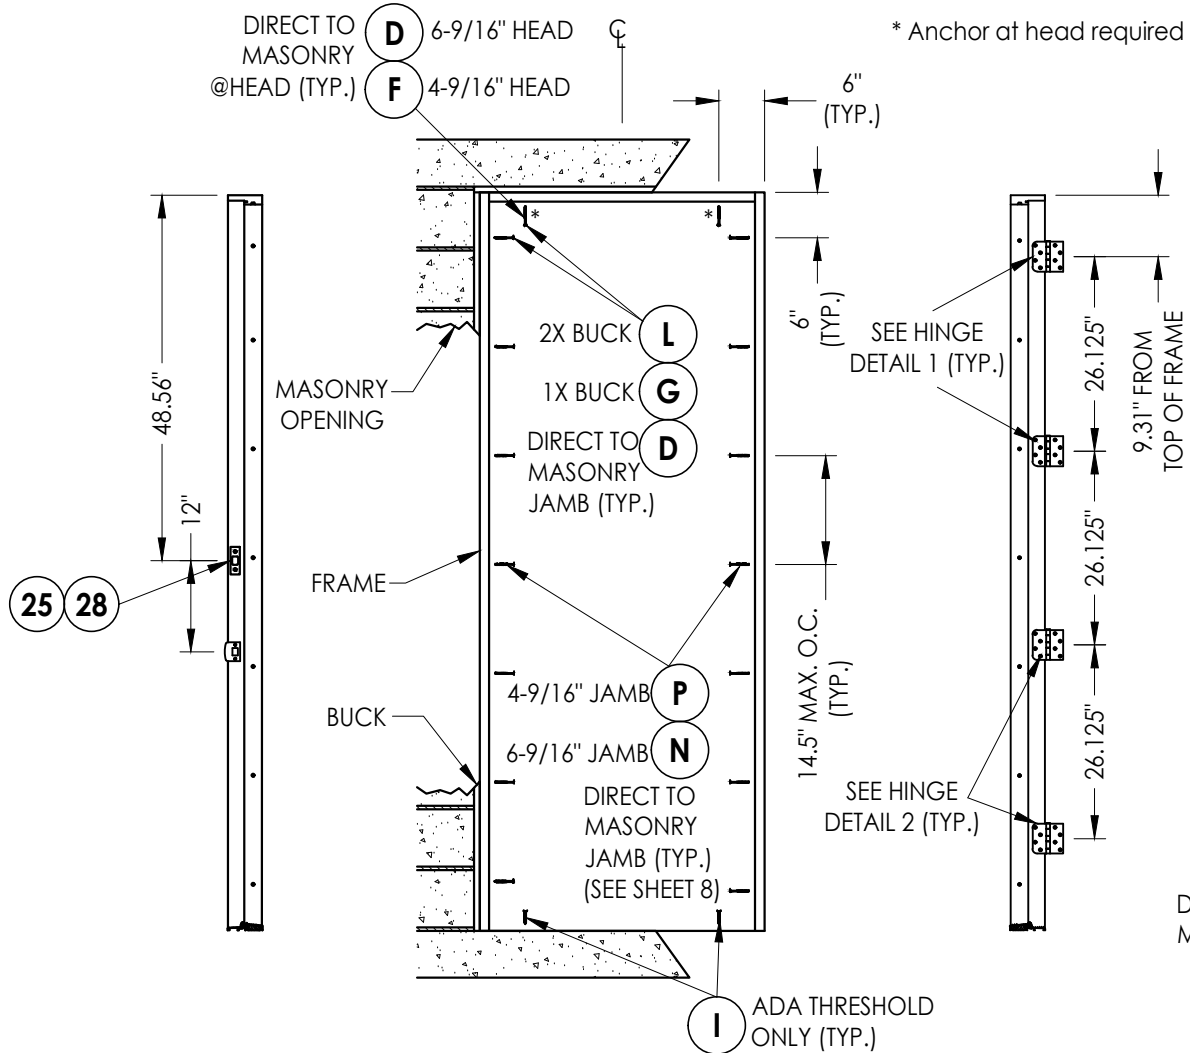


STRIKE JAMB

FRAME ANCHORING
(X)


HINGE JAMB

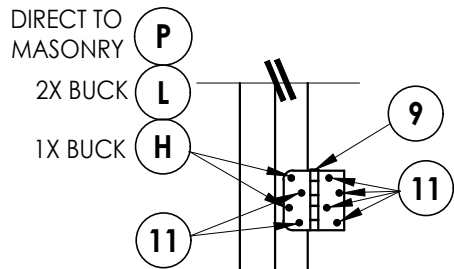


HINGE DETAIL 1

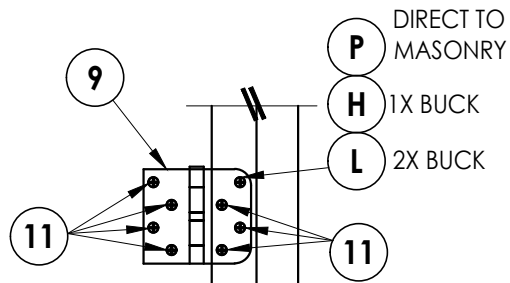

HINGE DETAIL 2

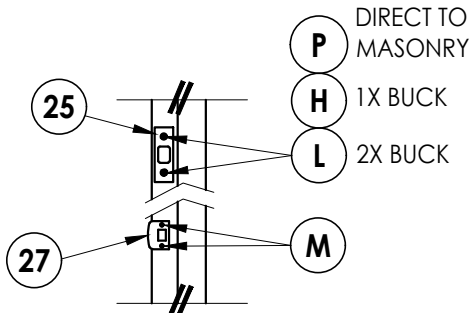

LATCH & DEADBOLT DETAIL
Standard Strike

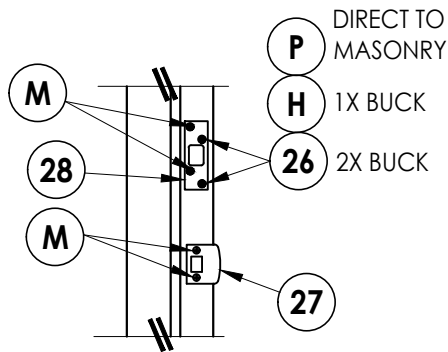

LATCH & DEADBOLT DETAIL
Security Strike

CORROSION RESISTANCE - SALTWATER ENVIRONMENT

Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK AND FRAME
ANCHORING

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

DATE: 02/15/12

SCALE: N.T.S.



DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-15209.4

SHEET 10 OF 13

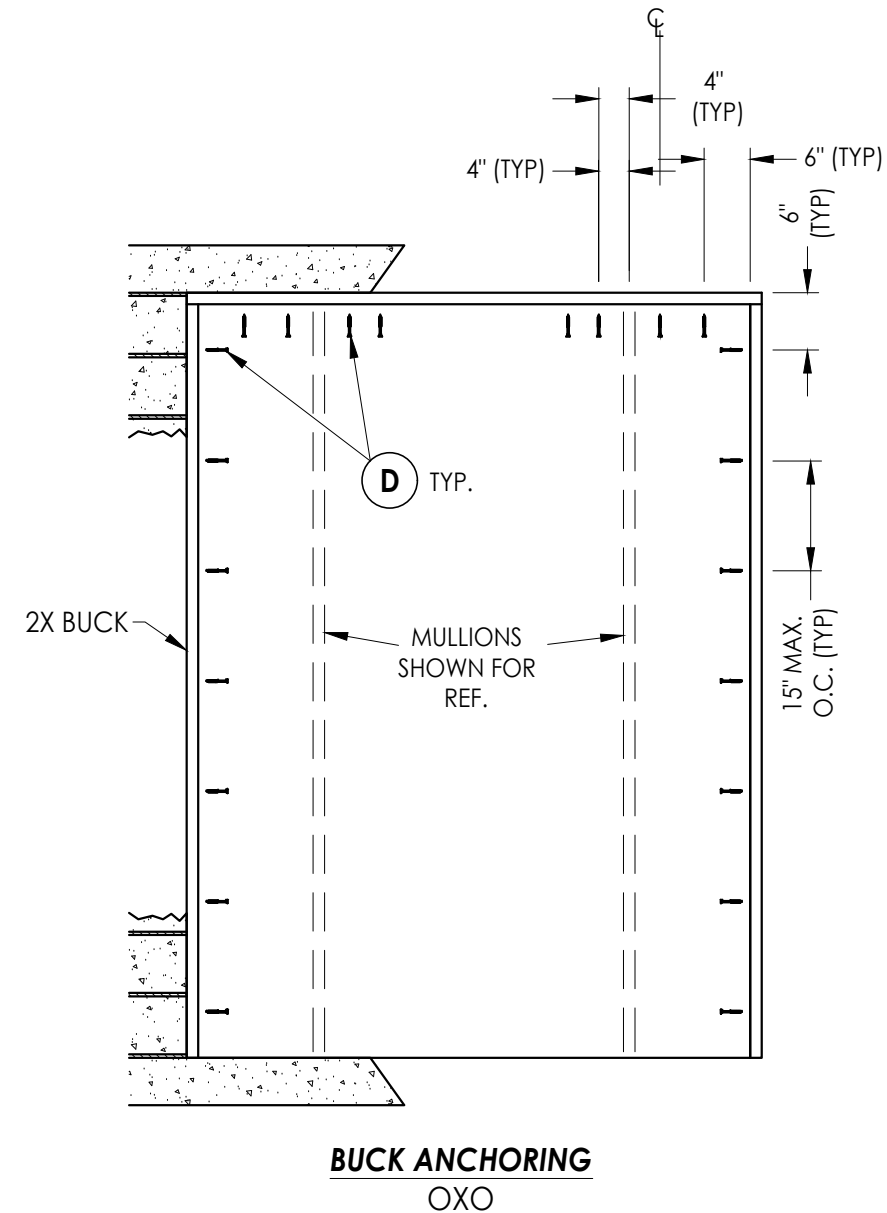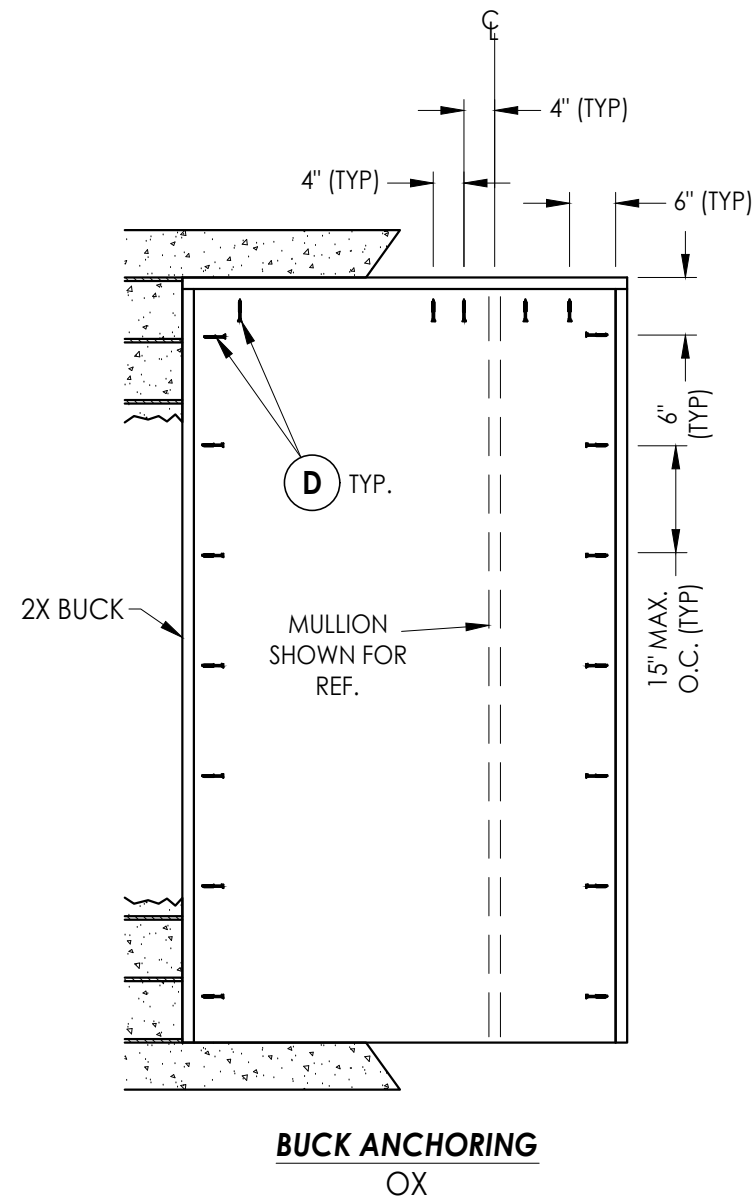

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA-CON®	1/4"	1-1/4"	1"	4"

6	7/01/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS	
5	8/14/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS	
4	8/16/22	REVISE DOOR PANEL/WIND ZONE			LFS	
NO.	DATE				BY	
						REVISIONS

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: *LFS*

DRAWING NO.:
FL-15209.4

SHEET 11 OF 13

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

F: PLASTPRO INC.
FIBERGLASS DOOR

R ASSEMBLY:


BUCK ANCHORING

RCW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 333

Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2012 R.W. BUILDING CONSULTANTS INC.

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg

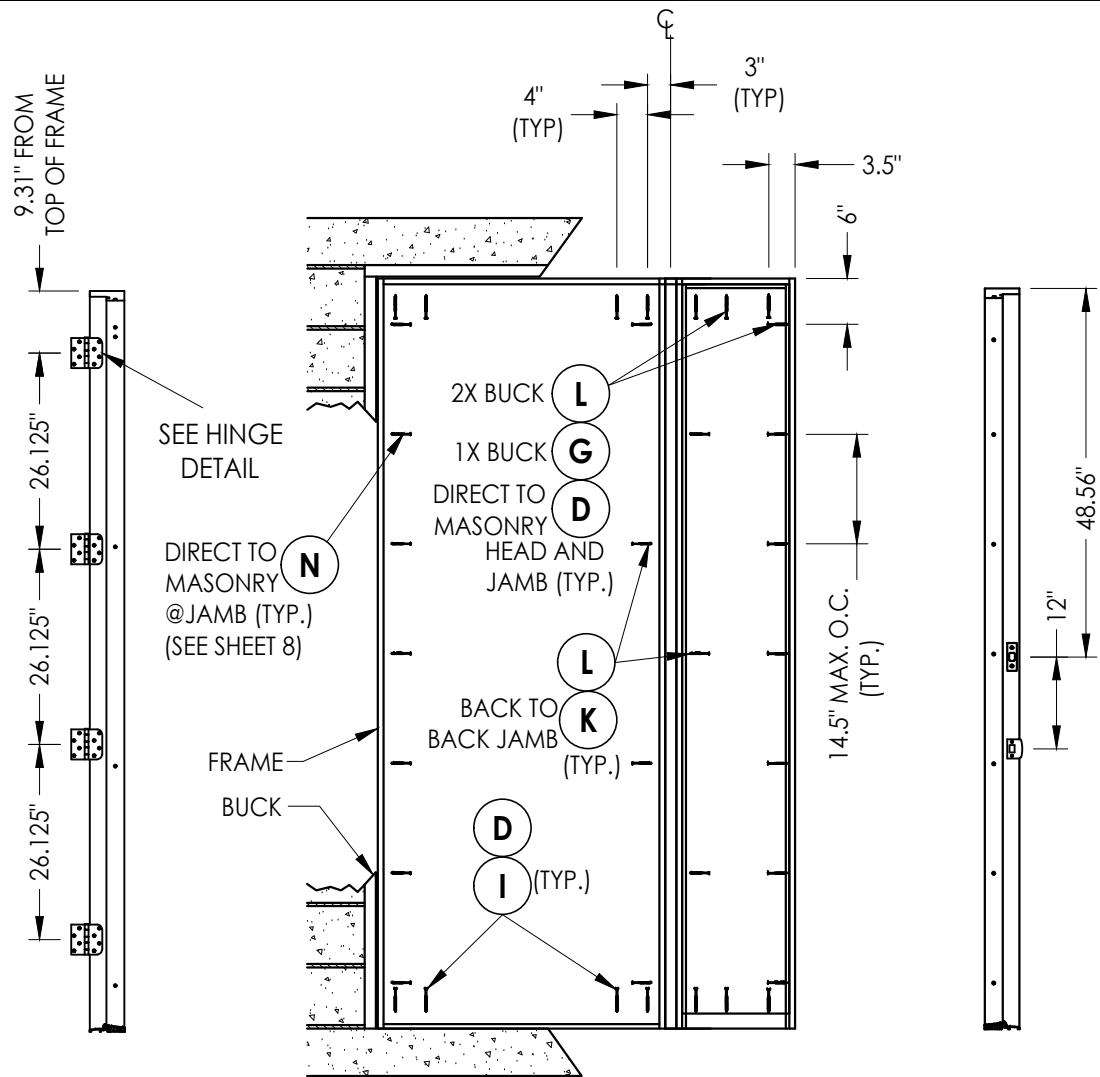


HINGE JAMB

FRAME ANCHORING
OX

STRIKE MULLION

HINGE MULLION

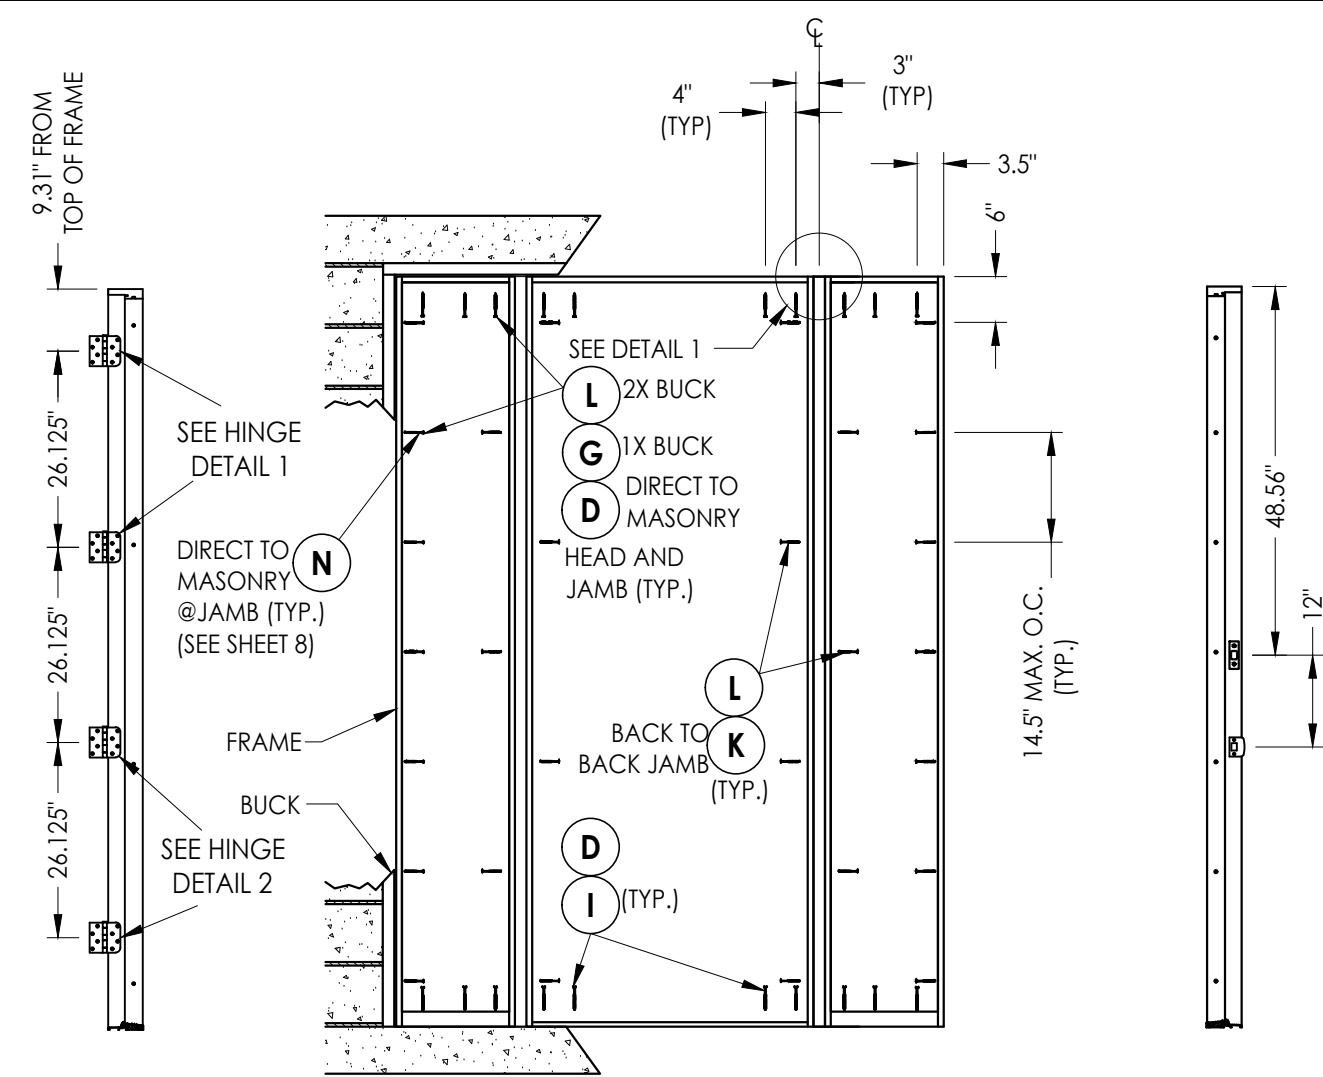

FRAME ANCHORING
OXO

STRIKE MULLION

CORROSION RESISTANCE - SALTWATER ENVIRONMENT

Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:


- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

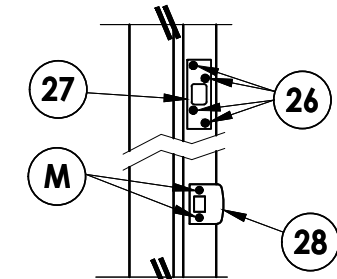

LATCH AND DEADBOLT DETAIL
Security Strike

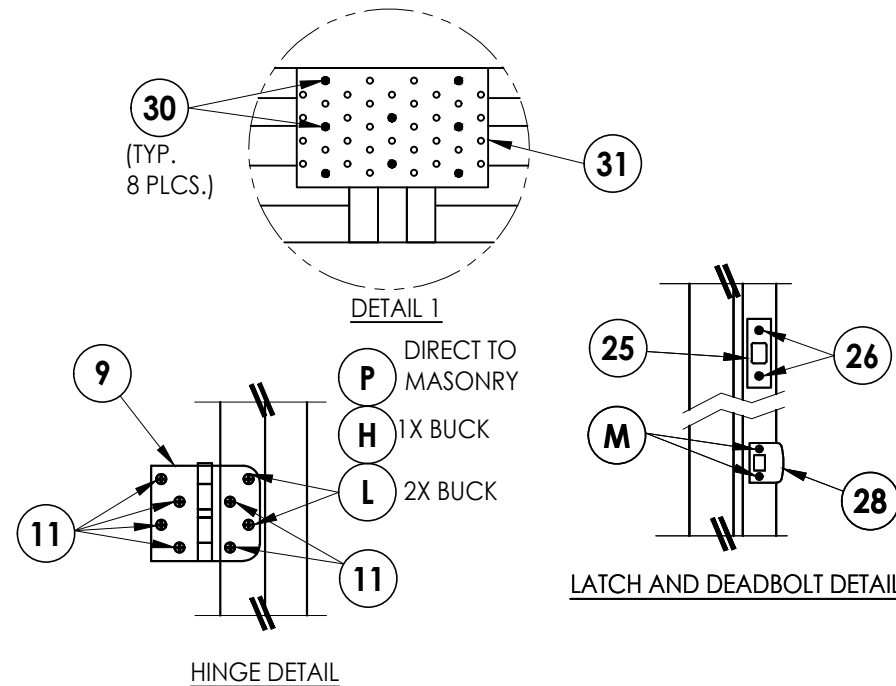

HINGE DETAIL

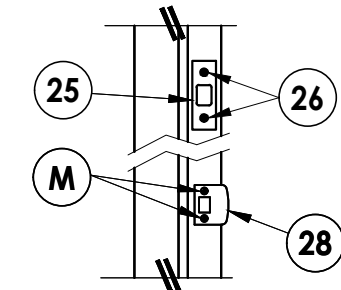

LATCH AND DEADBOLT DETAIL

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC
4	8/16/22	REVISE DOOR PANEL/WIND ZONE
BY		

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:



FL-15209.4

SHEET 12 OF 13


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15209 R7\FL-15209.3-5.dwg


BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD
B	2X BUCK SG >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 2-1/4" DeWALT CONCRETE SCREW	STEEL
G	1/4" x 3-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
H	3/16" x 3-1/4" PFH ITW CONCRETE SCREW	STEEL
I	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	#10 X 2" PFH WOOD SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	#8 X 1-1/2" PFH WOOD SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
P	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
1	POLY FIBER JAMB	POLY FIBER
7	WEATHERSTRIP	FOAM
8	DOOR BOTTOM SWEEP	VINYL
9	4" X 4" BUTT HINGE	STEEL
11	#9 X 3/4" PFH WOOD SCREW	STEEL
25	DEADBOLT STRIKE PLATE (STANDARD)	STEEL
26	#8 X 3" PFH WOOD SCREW	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE (SECURITY)	STEEL
30	#6 X 3/4" PFH WOOD SCREW	STEEL
31	TIE PLATE (7" X 3.125" X 0.09" THICK)	STEEL
33	OUTSWING THRESHOLD	ALUM / COMP
34	INSWING ADJUSTABLE THRESHOLD	ALUM / COMP
35	INSWING SIDELITE ADAPTER	PVC
36	OUTSWING SIDELITE ADAPTER	PVC
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
46	ADA THRESHOLD	ALUM
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
88	2X REINFORCEMENT SG >= 0.55	WOOD
89	1X REINFORCEMENT SG >= 0.55	WOOD

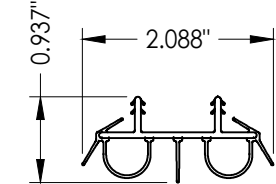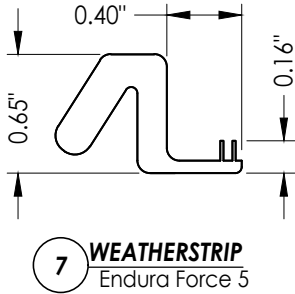


8 DOOR BOTTOM SWEEP

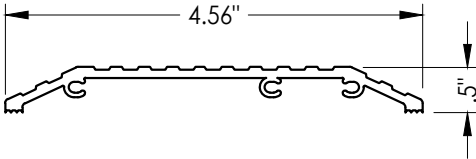


46 ADA THRESHOLD
DLP

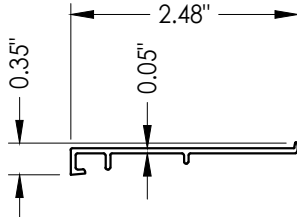


36 OUTSWING SIDELITE SPACER
Endura (Z-Series)




35 INSWING SIDELITE SPACER

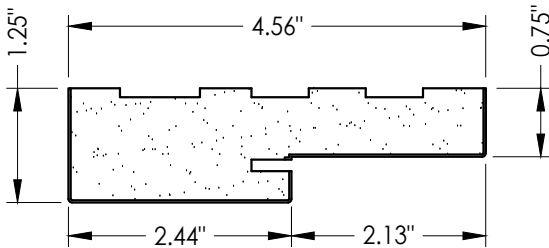

1 HEAD & SIDE
Poly fiber jamb

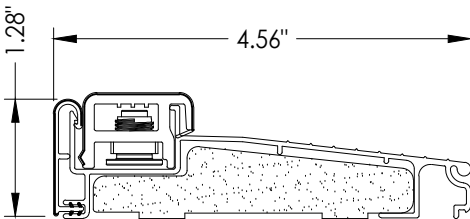

34 ADJUSTABLE INSWING THRESHOLD
Endura

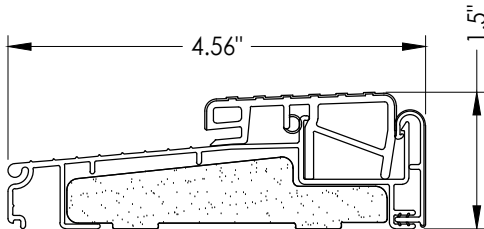

33 OUTSWING THRESHOLD
Endura (Z-Series)

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS
AND COMPONENTS

NO.	DATE	REVISIONS
6	7/01/26	UPDATE TO 9TH ED. (2026) FBC
5	8/14/23	UPDATE TO 8TH ED. (2023) FBC
4	8/16/22	REVISE DOOR PANEL/WIND ZONE
NO.	DATE	REVISIONS

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-15209.4

SHEET 13 OF 13