




5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045

Smooth / Wood Grain / White Wood Grain
Rustic / Mahogany
Series O Fiberglass Door
INSWING / OUTSWING
"IMPACT"

GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
4. When used in areas outside of the "HVHZ" requiring wind borne debris protection, this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. Outswing configurations meet water infiltration requirements for "HVHZ". All other configurations do not meet the water infiltration requirements for the "HVHZ" and must be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

TABLE OF CONTENTS			
SHEET#	DESCRIPTION	SHEET#	
1	Typical elevations, design pressures & general notes	9	Vertical Cross Sections (Thresholds)
2	Door panel details	10	Horizontal & Vertical Cross Sections (Direct to Masonry)
3	Sidelite panel details	11	3-Point lock details
4	Life frame details and glazing details	12	3-Point lock details
5	Elevations	13	Buck anchoring
6	Horizontal & Vertical Cross Sections (2X Buck)	14	Frame anchoring
7	Horizontal & Vertical Cross Sections (1X Buck)	15	Components
8	Horizontal & Vertical Cross Sections (Direct to Masonry)	16	Bill of materials

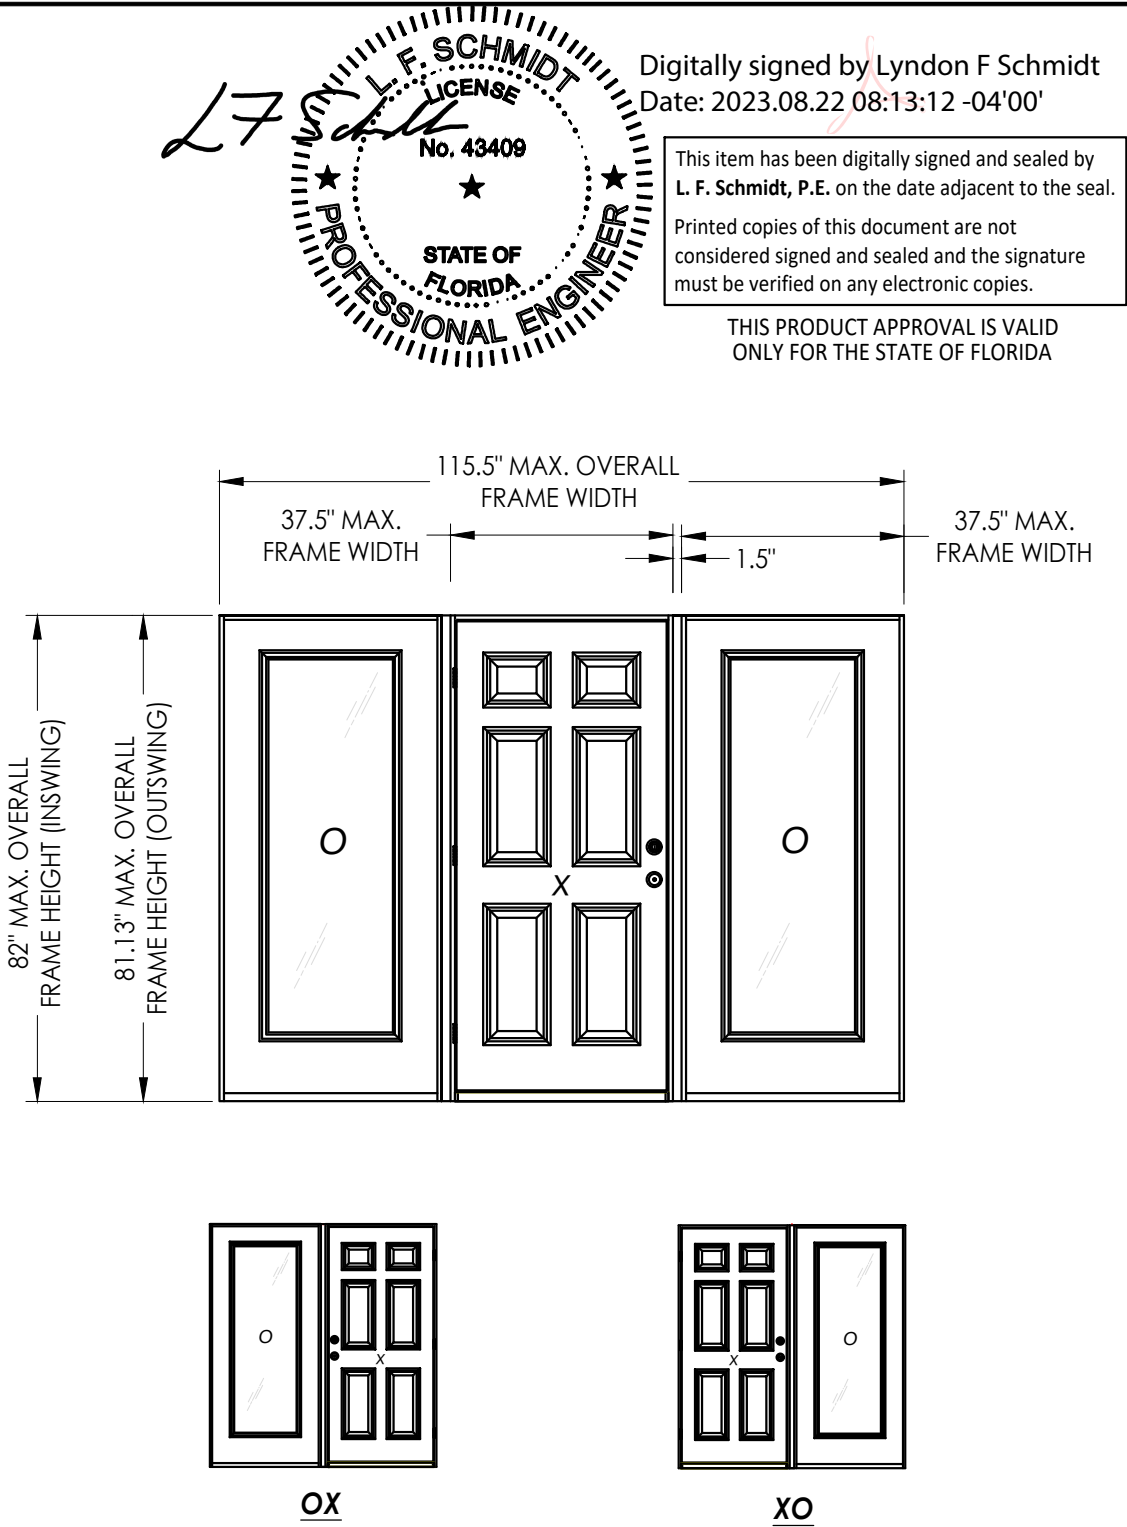

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF)	
		POSITIVE	NEGATIVE
OX/XO	76.5" x 82.0"	+65.0	-65.0
OXO	115.5" x 82.0"	+65.0	-65.0

See Sheet 2 for hardware design pressure limitations

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

48/17/23
UPDATE TO 8TH ED. (2023)

37/27/20
UPDATE TO 7TH ED. (2020)

27/24/17
UPDATE TO 6TH ED. (2017)

13/9/15
UPDATE TO 5TH ED. (2014)

NO. 1

DATE

REVISIONS

DATE: 02/16/12

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.: FL-15210.2


SHEET 1 OF 16

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

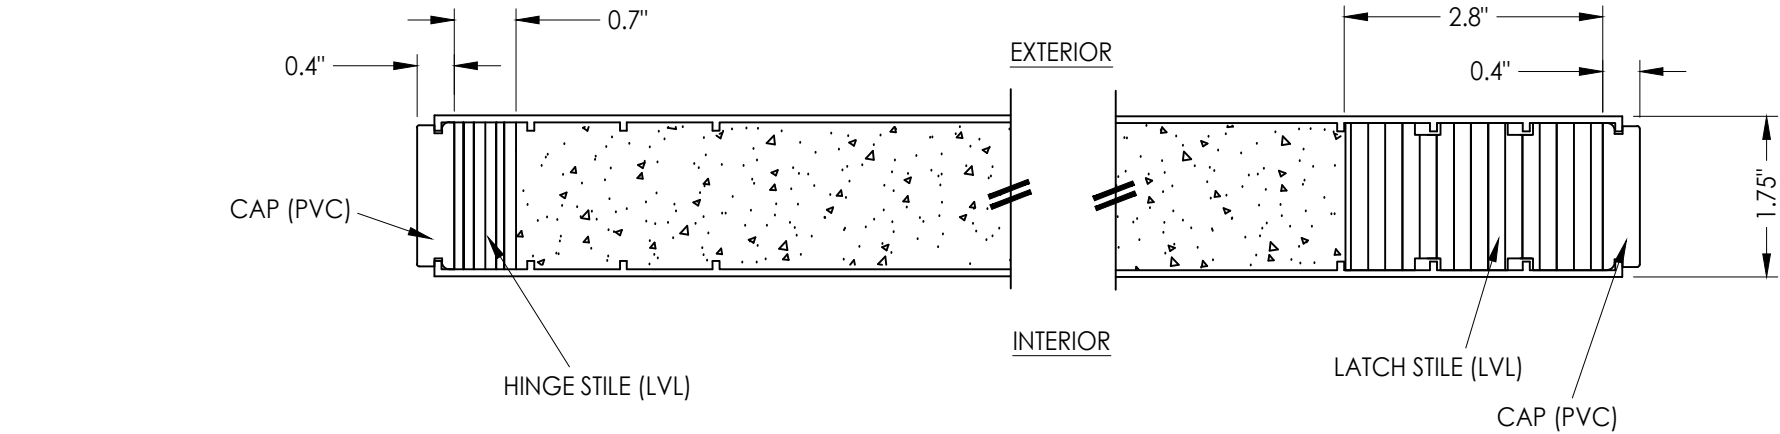



1
2 **HORIZONTAL CROSS SECTION**

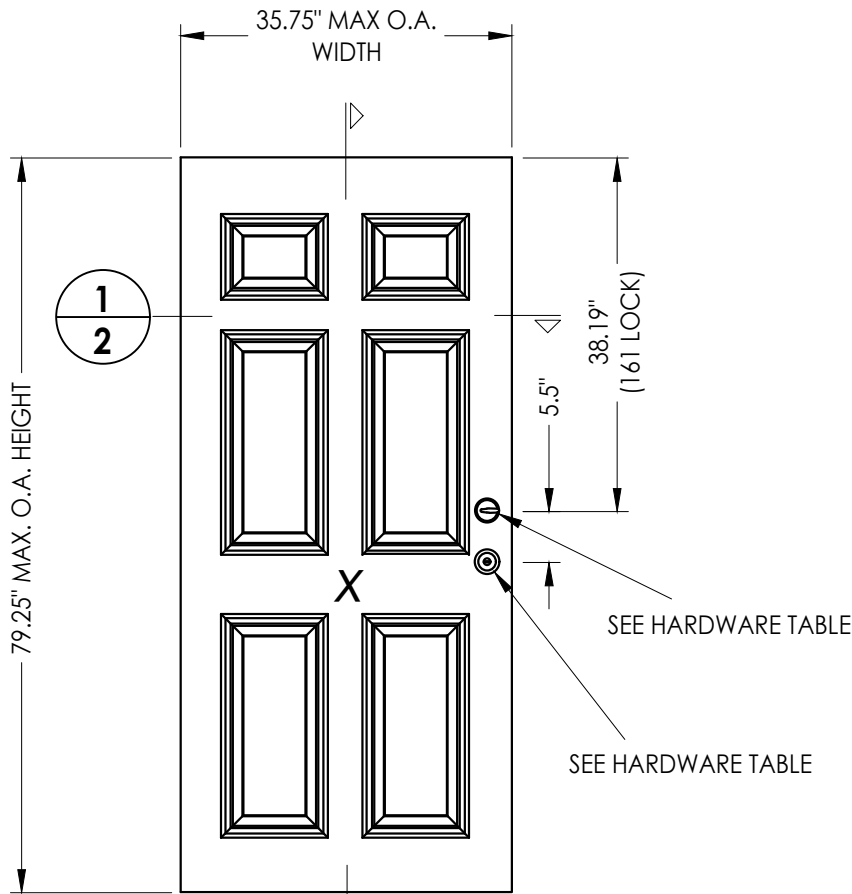

2
2 **DOOR PANEL**
Plastpro
Fiberglass

HARDWARE TABLE			
MANUFACTURER	MODEL		MAX. DESIGN PRESSURE (PSF)
KWIKSET	KNOB:	SIGNATURE SERIES	± 65
	DEADBOLT:	SIGNATURE SERIES (980)	
SCHLAGE	KNOB:	"F" SERIES (F51)	± 65
	DEADBOLT:	"B" SERIES (B60/62)	
PAMEX	LEVER:	FL3B SERIES	± 65
	DEADBOLT:	FD7 SERIES	
HOPPE	MULTIPOINT LOCK:	HLS9000 3-POINT TONGUE	± 50
ENDURA	MULTIPOINT LOCK:	TRILENNIUM 3000 (3-PT)	± 65

See Sheets 11 & 12 for multipoint lock details.

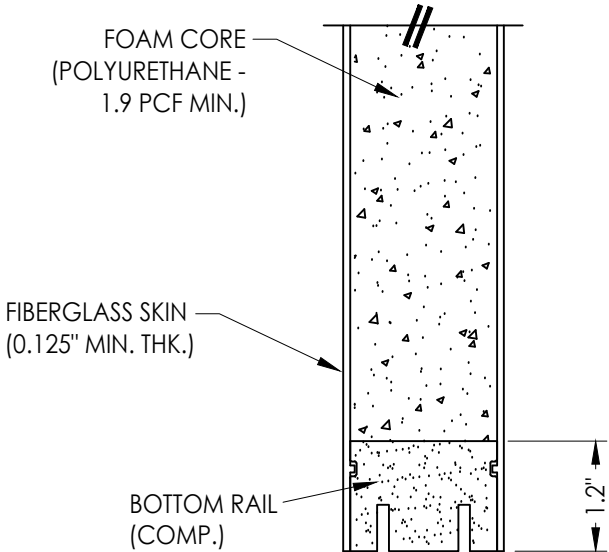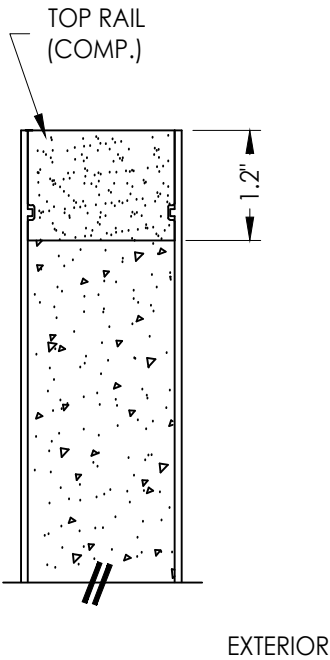

2
2 **VERTICAL CROSS SECTION**

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS

REVISIONS			
NO.	DATE	BY	
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC LFS
3	7/27/20	UPDATE TO 7TH ED (2020)	FBC LFS
2	7/24/17	UPDATE TO 6TH ED. (2017)	FBC JK
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC JK

DATE: 02/16/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:
FL-15210.2

SHEET 2 OF 16


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

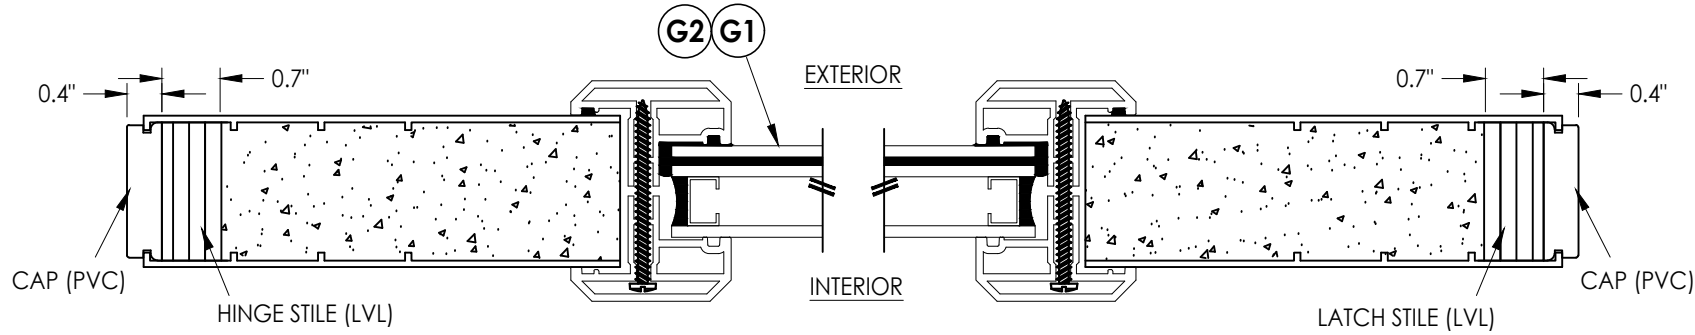

1
3 **HORIZONTAL CROSS SECTION**

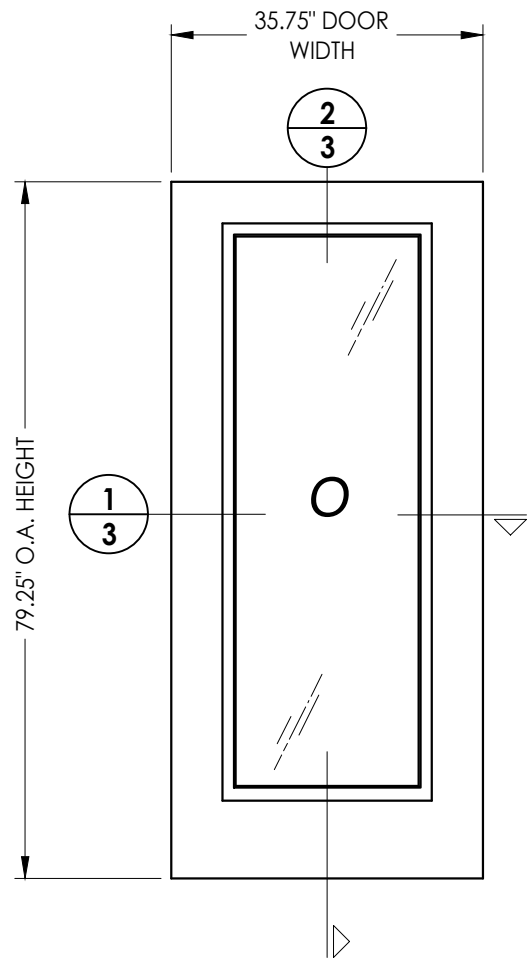


50 **SIDELITE PANEL**

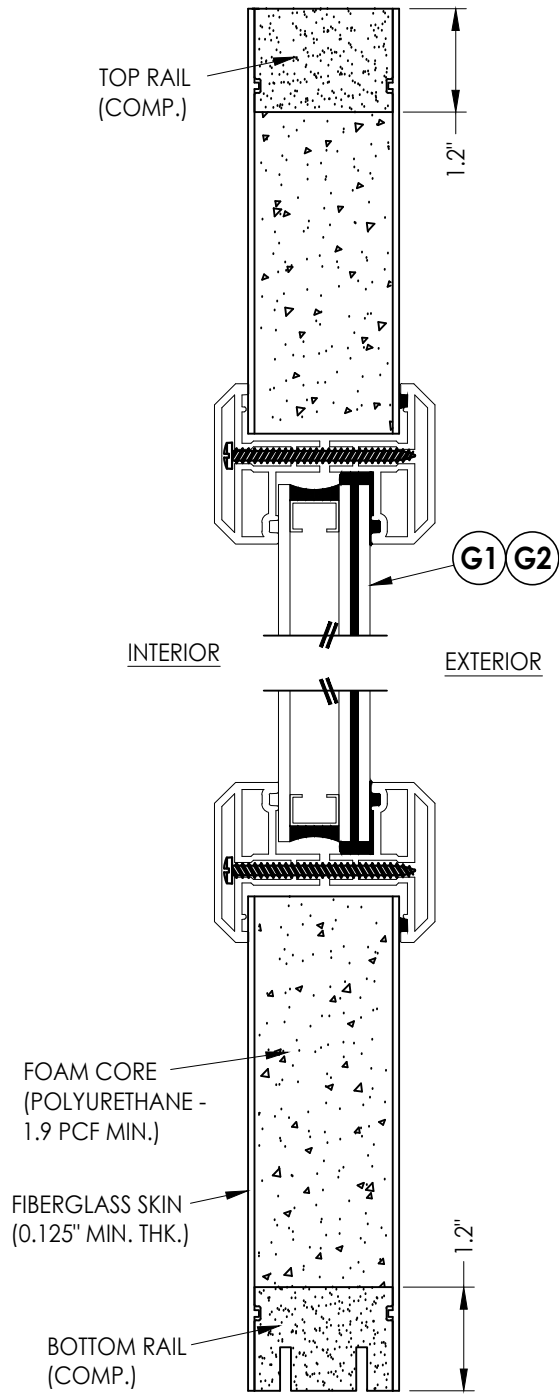


2
3 **VERTICAL CROSS SECTION**

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: PLASTPRO INC. FIBERGLASS DOOR		PART OR ASSEMBLY: SIDELITE PANEL DETAILS	
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC
3	7/27/20	UPDATE TO 7TH ED (2020)	FBC
2	7/24/17	UPDATE TO 6TH ED. (2017)	JK
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC
	NO.	DATE	BY
REVISIONS			
DATE: 02/16/12			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-15210.2			
SHEET 3 OF 16			


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

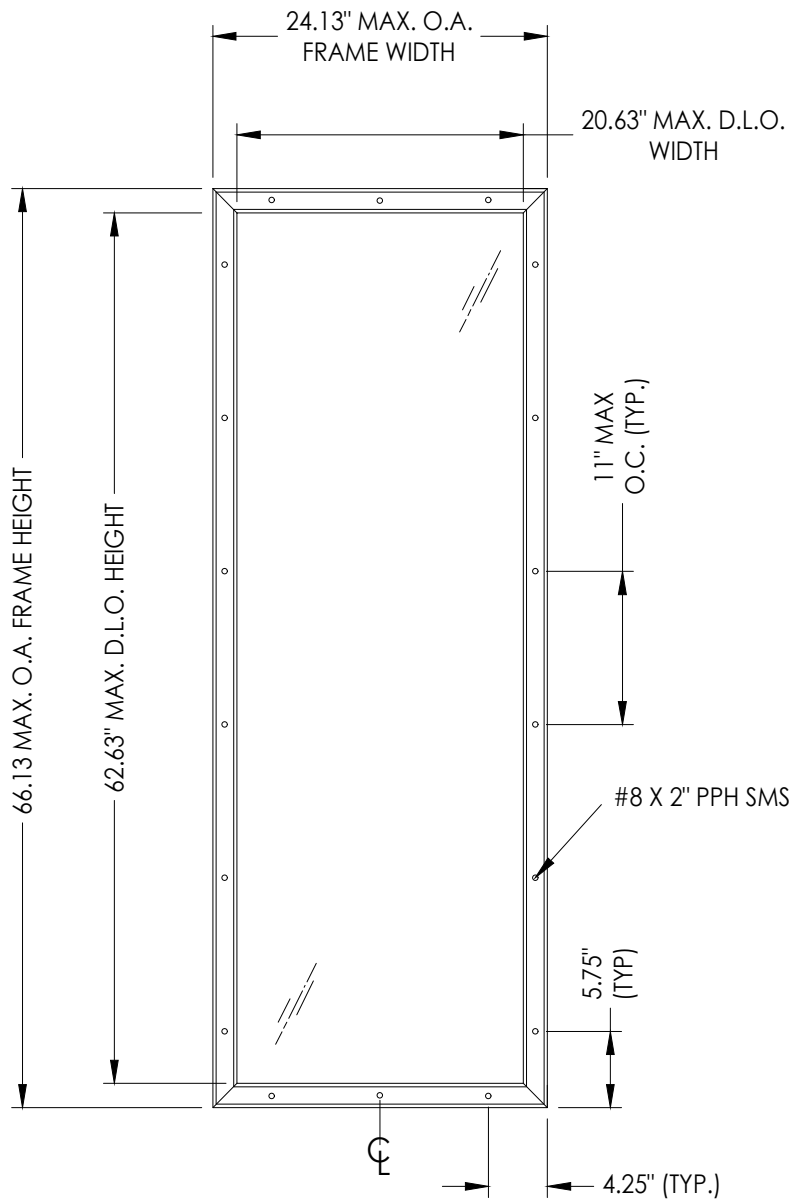

ODL LITE FRAME


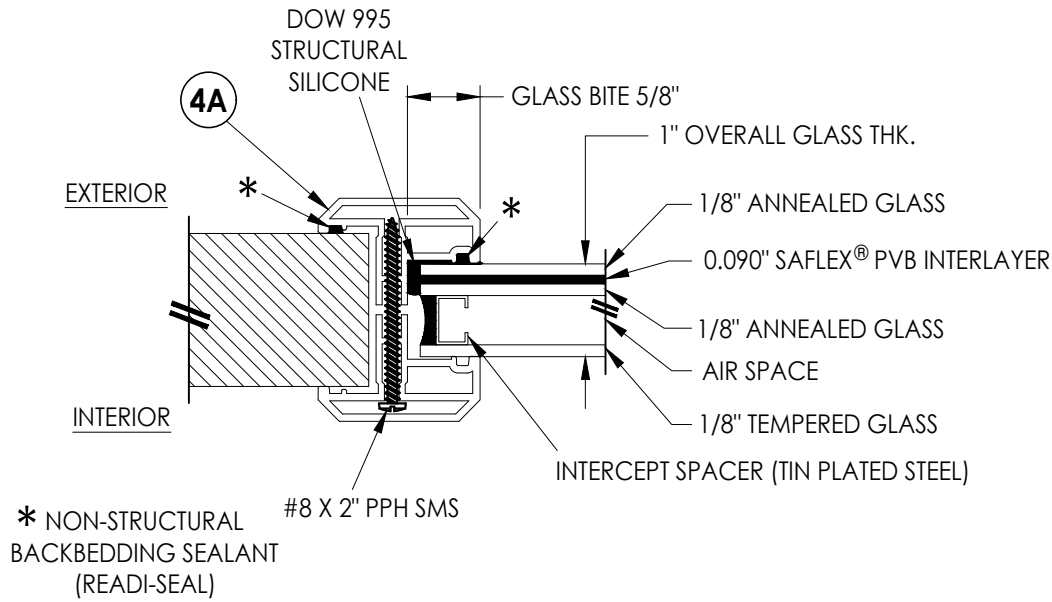


G1 GLAZING DETAIL
ODL "FLAT FRAME"

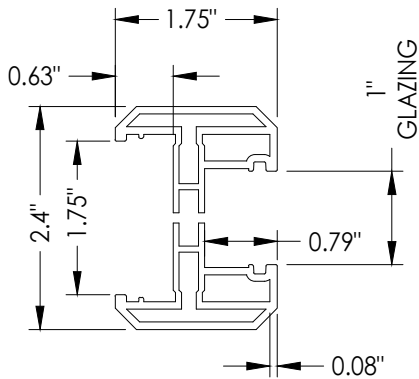

4A ODL LITE FRAME
"FLAT FRAME" PROFILE
(6063-T5 ALUM)

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: PLASTPRO INC. FIBERGLASS DOOR				PART OR ASSEMBLY: LITE FRAME DETAILS AND GLAZING DETAILS			
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC	LFS			
3	7/27/20	UPDATE TO 7TH ED (2020)	FBC	LFS			
2	7/24/17	UPDATE TO 6TH ED. (2017)	FBC	JK			
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC	JK			
NO.	DATE			BY			
REVISIONS							
DATE: 02/16/12							
SCALE: N.T.S.							
DWG. BY: JK							
CHK. BY: LFS							
DRAWING NO.: FL-15210.2							
SHEET 4 OF 16							

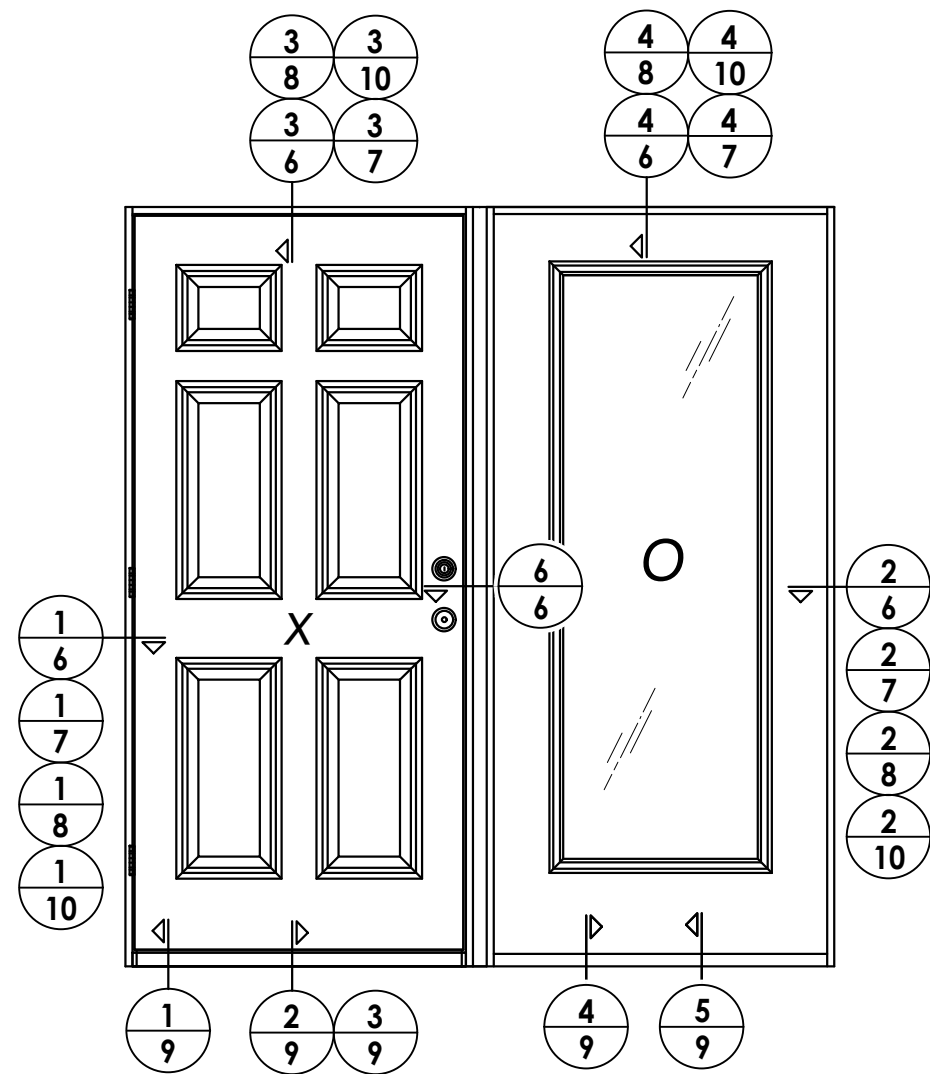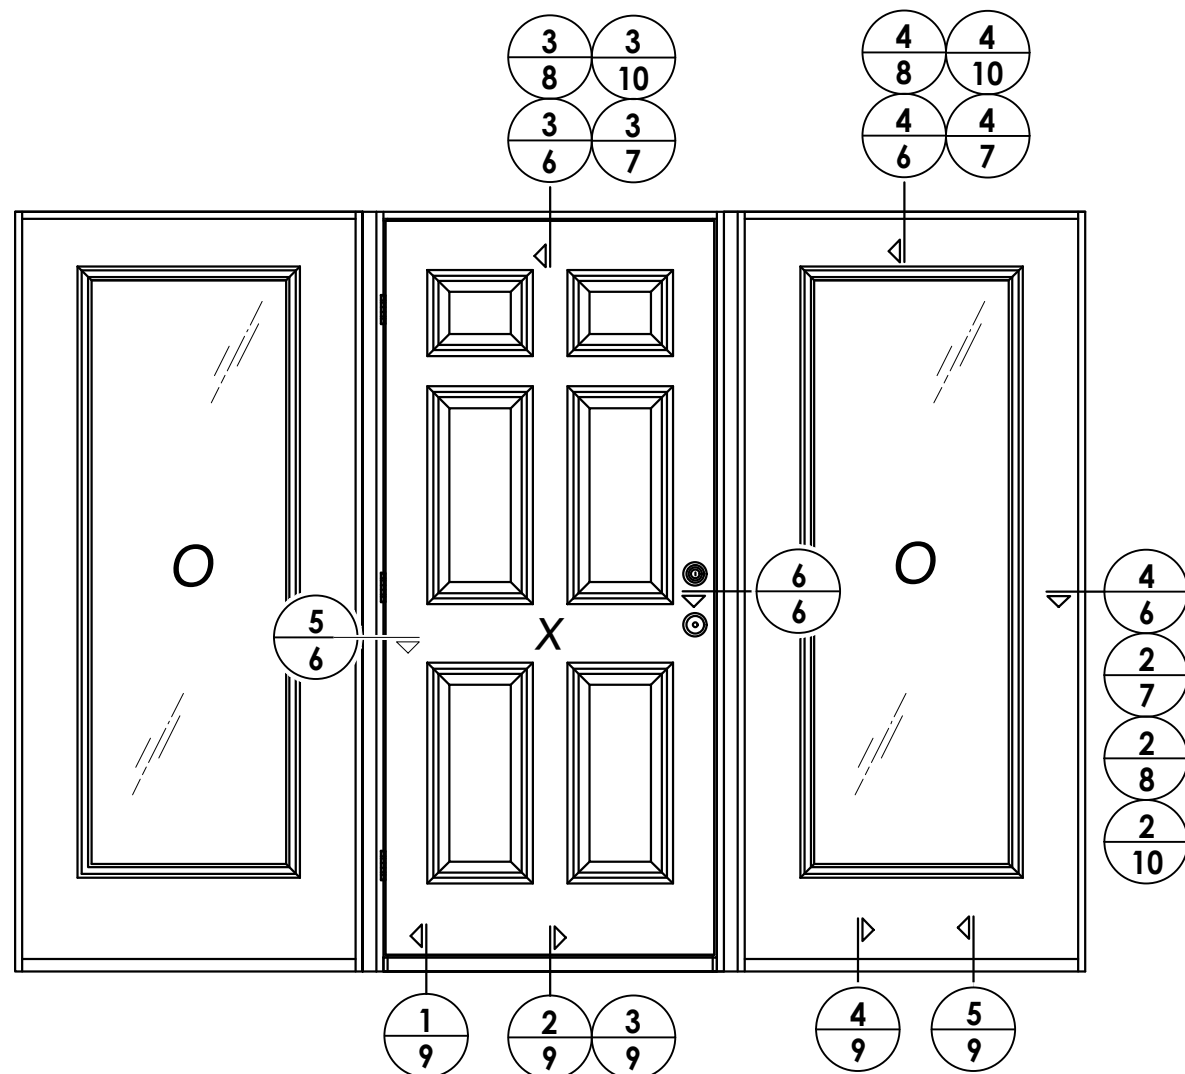ELEVATION (XO - OX)

ELEVATION (OXO)

4	8/17/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS	
3	7/27/20	UPDATE TO 7TH ED	(2020)	FBC	LFS	
2	7/24/17	UPDATE TO 6TH ED.	(2017)	FBC	JK	
1	3/9/15	UPDATE TO 5TH ED.	(2014)	FBC	JK	
NO.	DATE					BY
						REVISIONS

DATE: 02/16/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-15210.2

SHEET 5 OF 16

PRODUCT:

PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:

EVALUATIONS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W
BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


1. Spacing for item K: 6" from each end and at centerline. (3 Total)
2. Sidelite assembly screws located 6" from top and bottom then 5 more equally spaced (7 total).




ERT OR ASSEMBLY:
**HORIZONTAL & VERTICAL
CROSS SECTIONS (2X BUCK)**

[illegible]


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

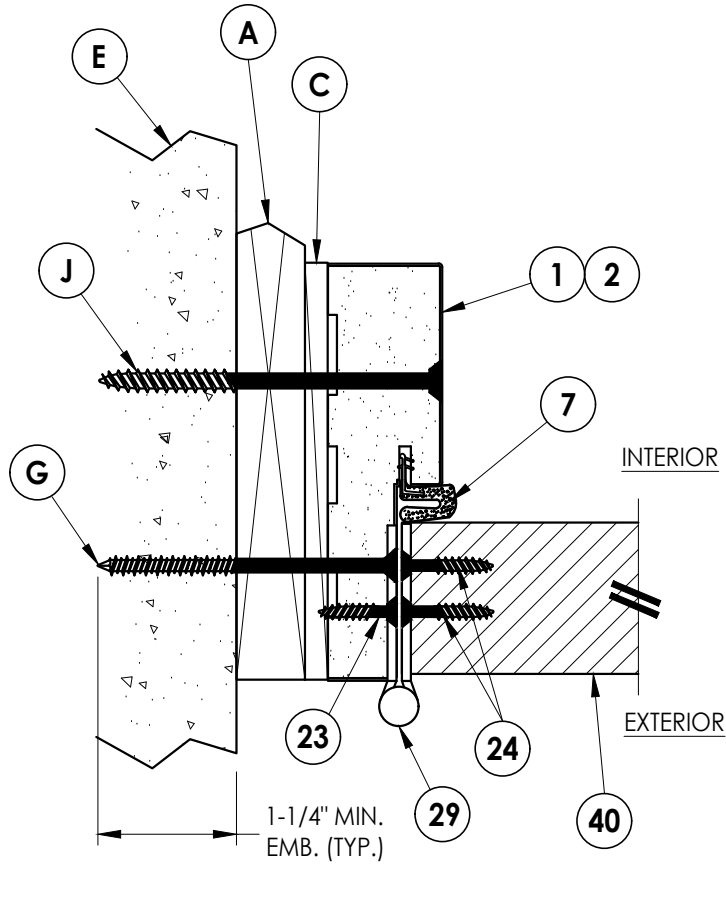


1
7 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

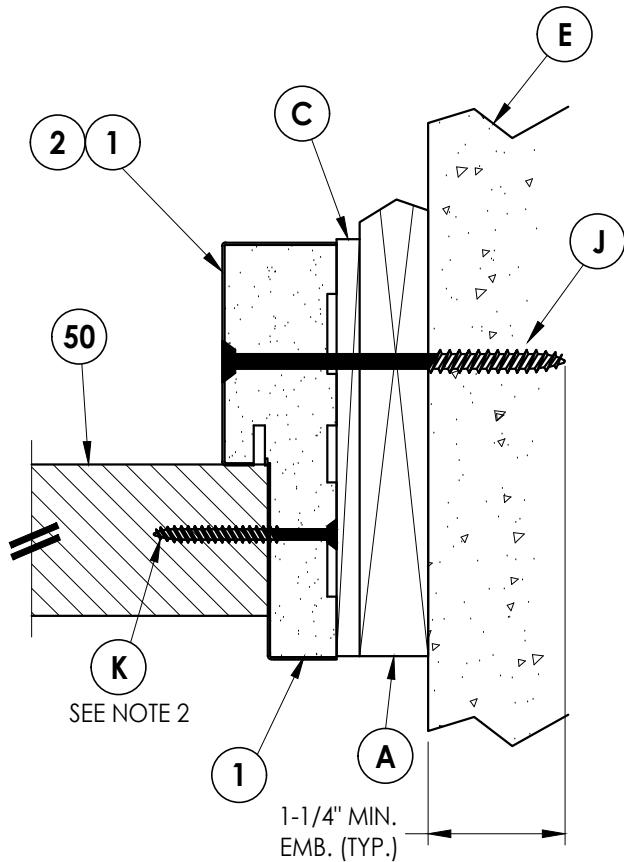

2
7 **HORIZONTAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

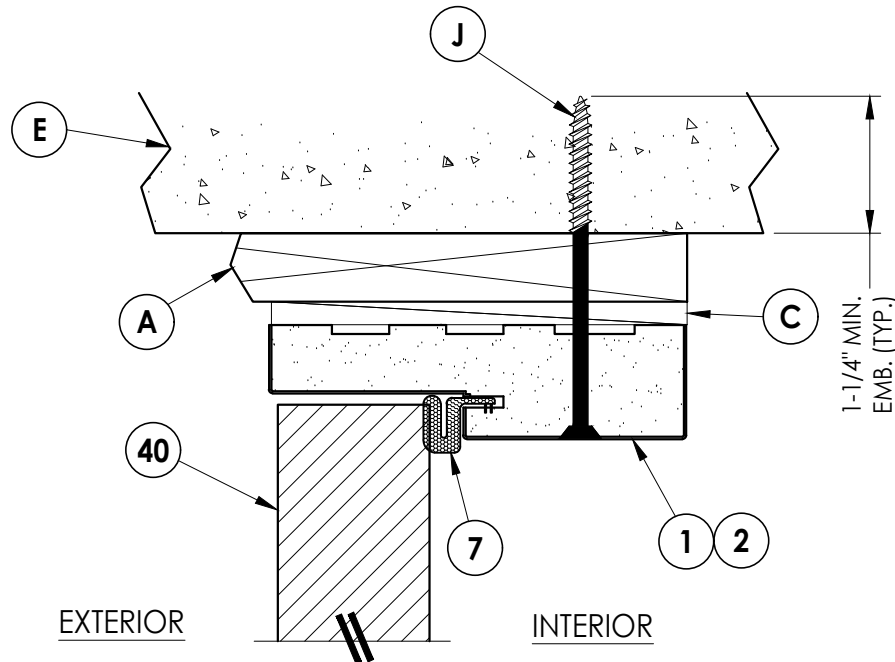

3
7 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

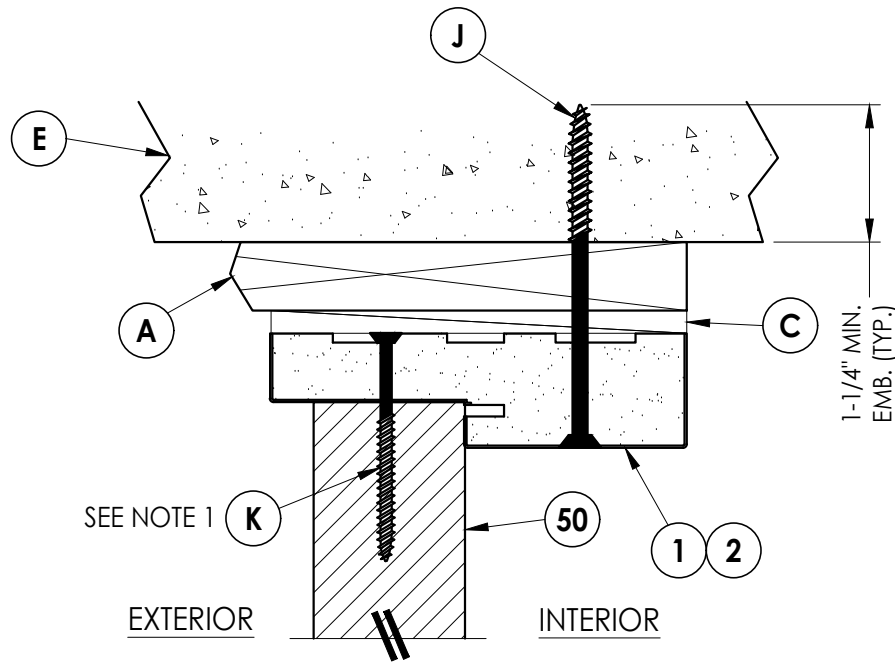

4
7 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck
Outswing shown (Inswing similar)

NOTE

1. Spacing for item K: 6" from each end and at centerline. (3 Total)
2. Sidelite assembly screws located 6" from top and bottom then 5 more equally spaced (7 total).

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL & VERTICAL
CROSS SECTIONS (1X BUCK)

NO.	DATE	REVISIONS
4	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	7/27/20	UPDATE TO 7TH ED (2020) FBC LFS
2	7/24/17	UPDATE TO 6TH ED. (2017) FBC JK
1	3/9/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/16/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:
FL-15210.2

SHEET 7 OF 16


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

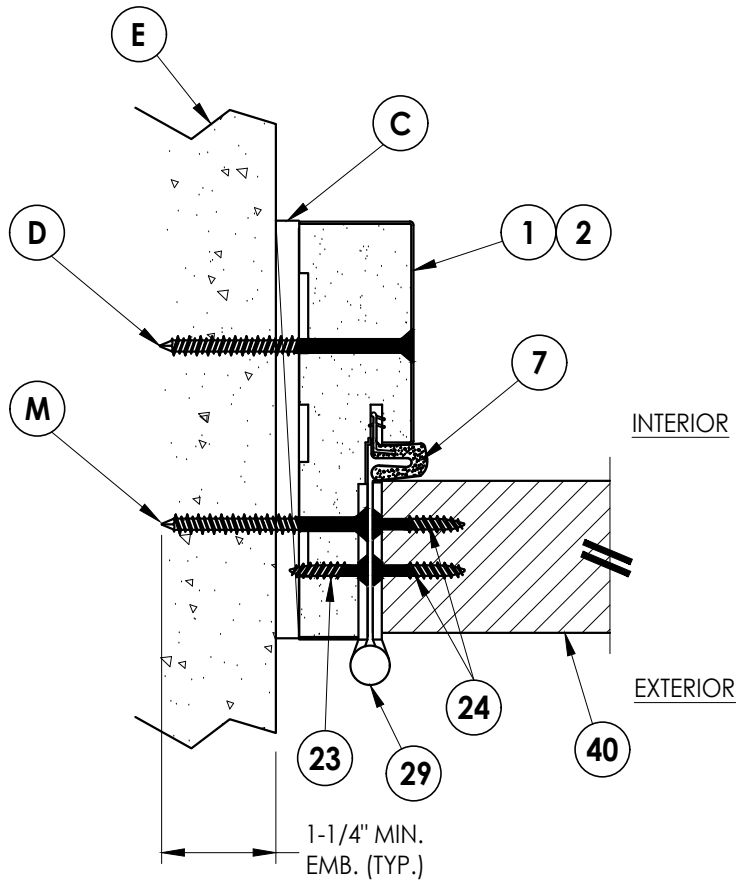


1
8 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

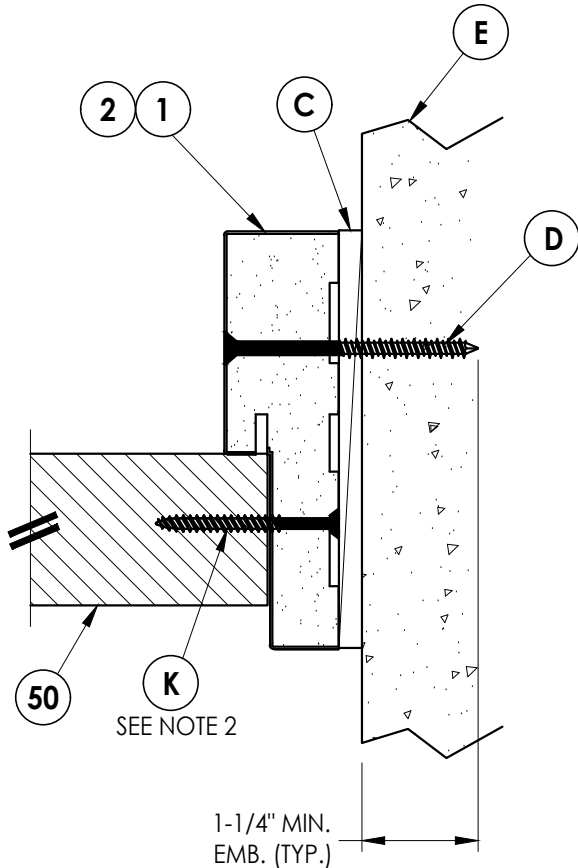

2
8 **HORIZONTAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

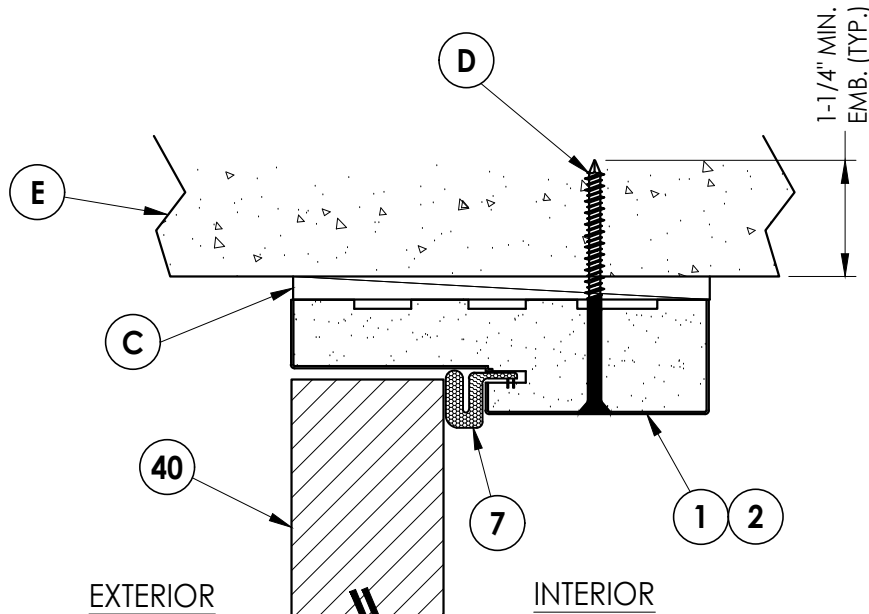

3
8 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)

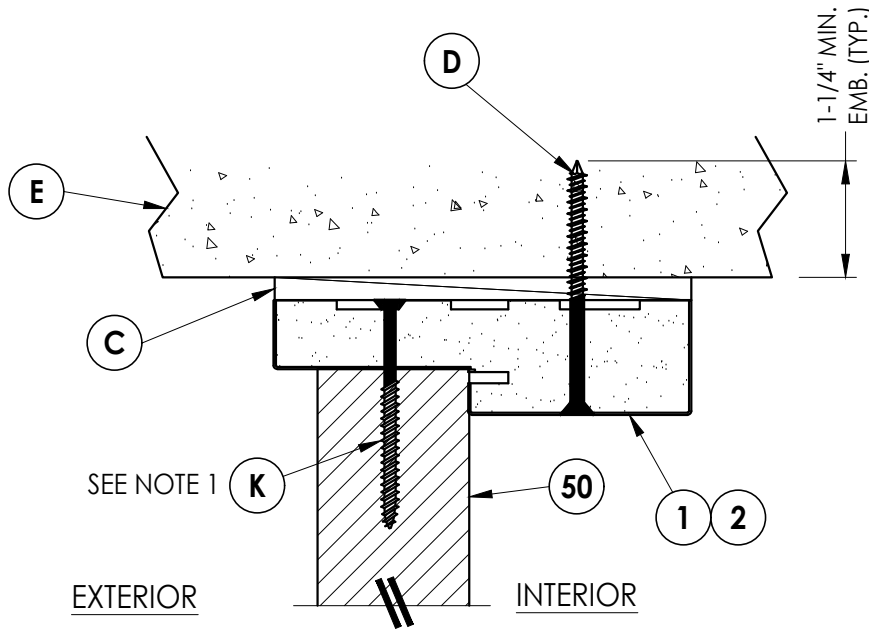

4
8 **VERTICAL CROSS SECTION**
Shown Direct to Masonry
Outswing shown (Inswing similar)


NOTE

1. Spacing for item K: 6" from each end and at centerline. (3 Total)
2. Sidelite assembly screws located 6" from top and bottom then 5 more equally spaced (7 total).

PRODUCT:		PART OR ASSEMBLY:	
PLASTPRO INC. FIBERGLASS DOOR		HORIZONTAL & VERTICAL CROSS SECTIONS (DIRECT TO MASONRY)	
NO.	DATE	BY	REVISIONS
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC LFS
3	7/27/20	UPDATE TO 7TH ED. (2020)	FBC LFS
2	7/24/17	UPDATE TO 6TH ED. (2017)	FBC JK
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC JK
DATE: 02/16/12			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-15210.2			
SHEET 8 OF 16			


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

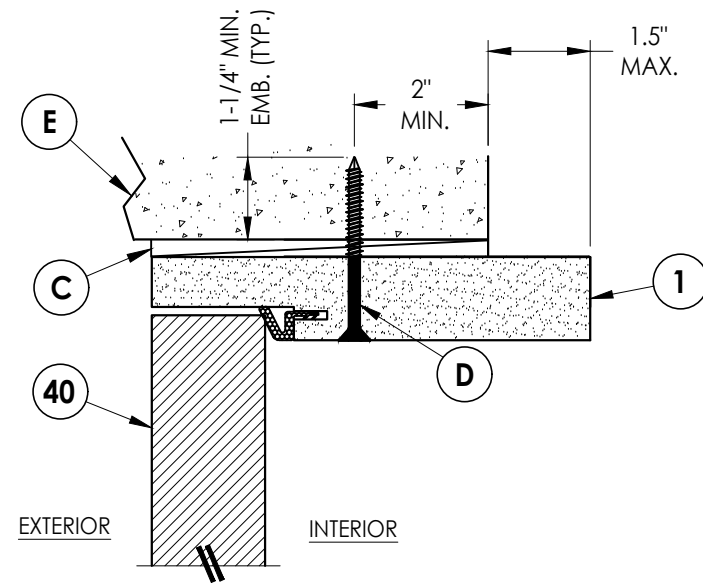

3 10 VERTICAL CROSS SECTION


Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

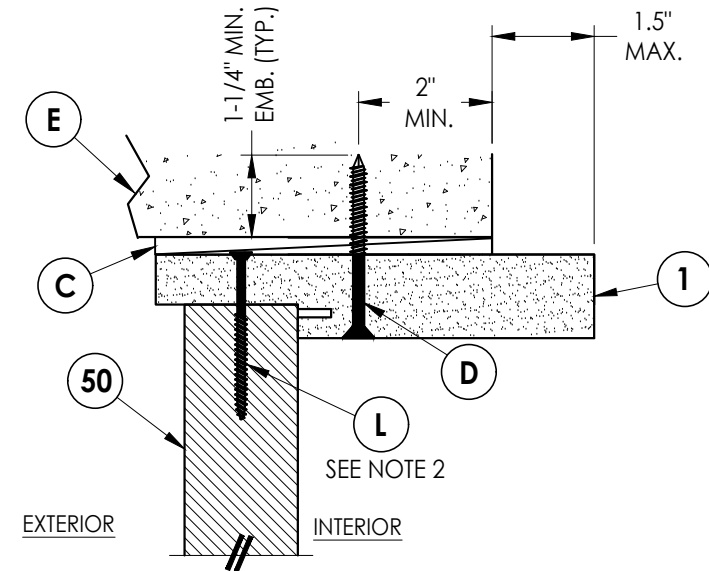

4 **VERTICAL CROSS SECTION**
10 Shown Direct to Masonry
 Outswing only w/ 6-9/16" jamb


Notes:

1. Spacing for item L: 6" from ends and 5 more equally spaced along sidelite (7 total).
2. Spacing for item L: 3" from each end.

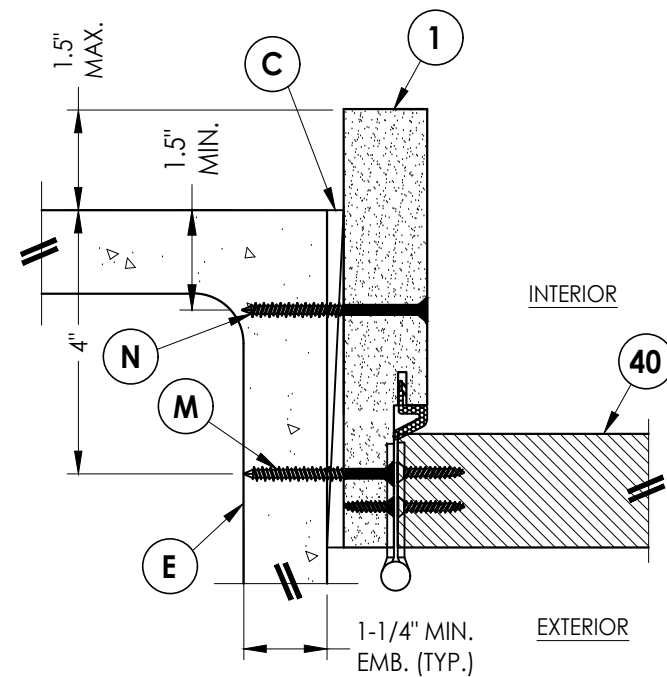

1 10 **HORIZONTAL CROSS SECTION**

Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

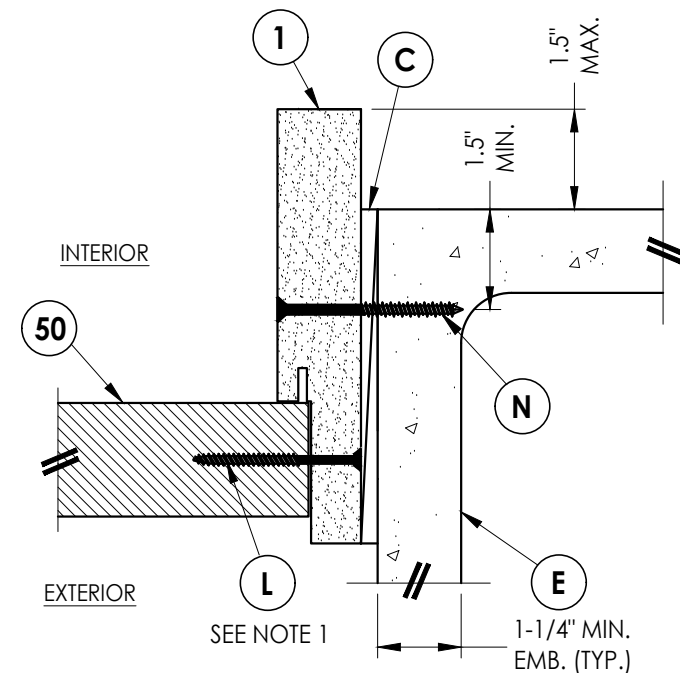

2 **HORIZONTAL CROSS SECTION**
10 Shown Direct to Masonry
Outswing only w/ 6-9/16" jamb

DATE: 02/16/12									
SCALE: N.T.S.									
DWG. BY: JK									
CHK. BY: LFS									
DRAWING NO.: FL-15210.2									
SHEET 10 OF 16									



Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


© 2012 R.W. BUILDING CONSULTANTS INC.

Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg


MANUAL RAISED TONGUE GEAR SYSTEM

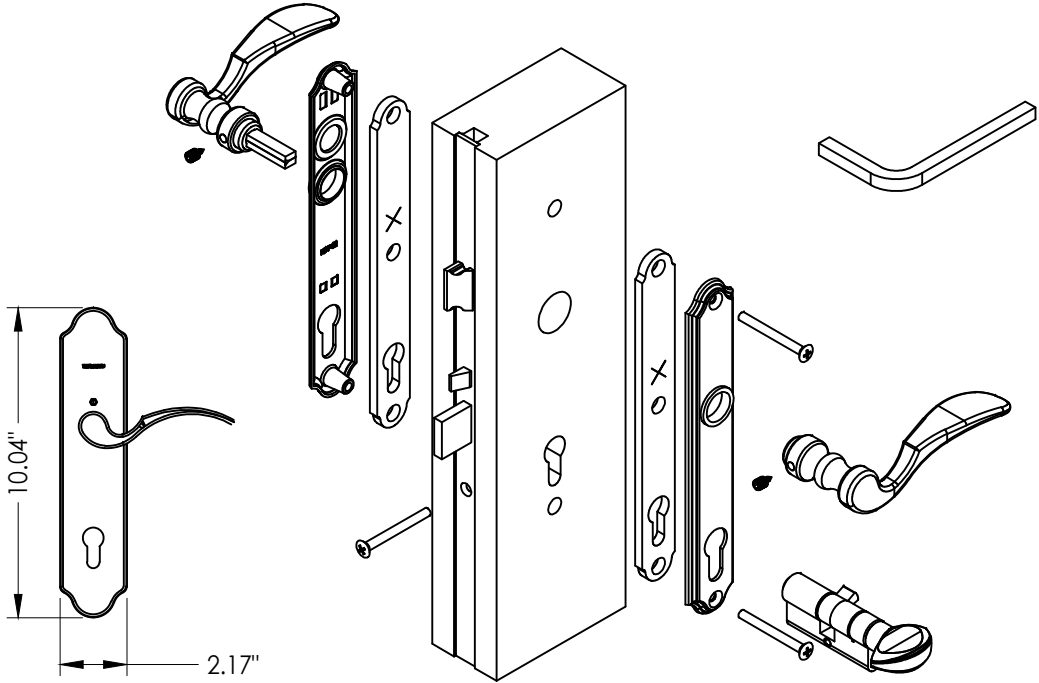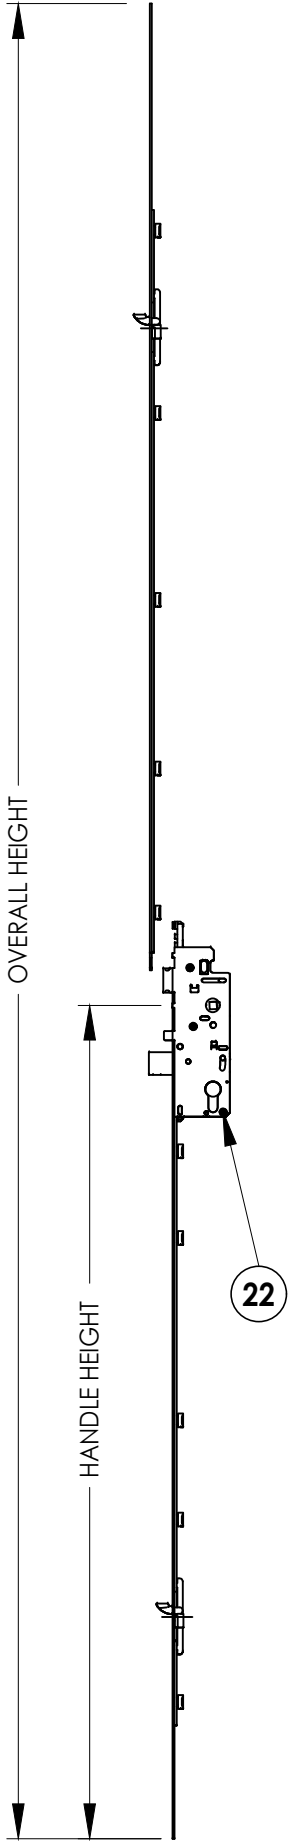


22 **HOPPE MULTIPOINT LOCKSET**
HLS9000 3-Point "Tongue"

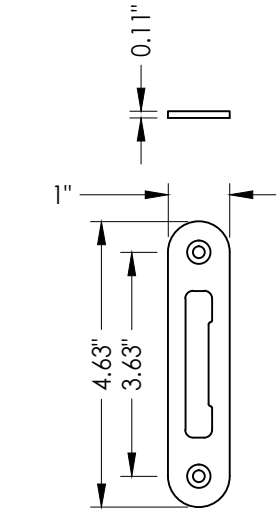

23 **MULTIPOINT STRIKE PLATE**

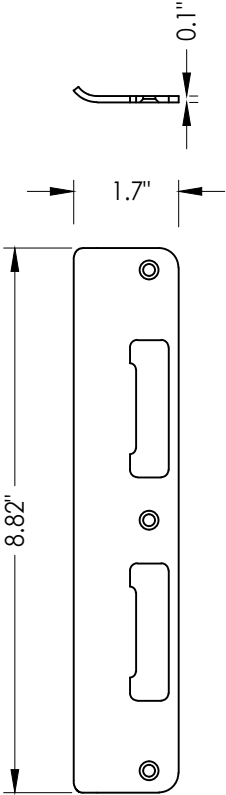

25 **LATCH AND DEADBOLT STRIKE PLATE**
Tongue system

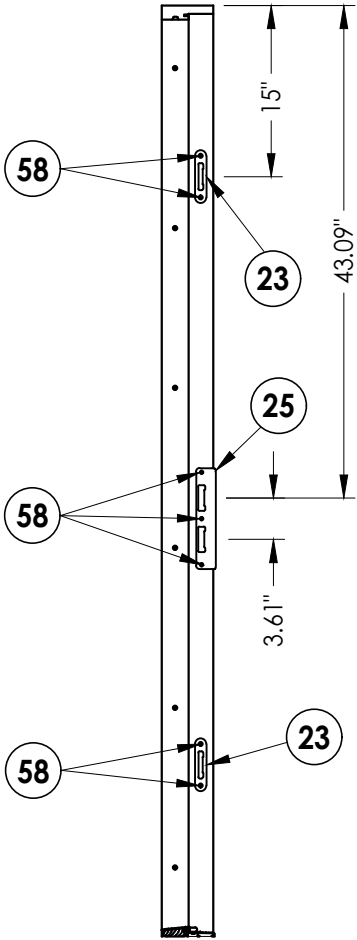

STRIKE JAMB

DATE: 02/16/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-15210.2


SHEET 11 OF 16

PRODUCT:		PLASTPRO INC. FIBERGLASS DOOR	
PART OR ASSEMBLY:		3-POINT LOCK DETAILS	


REVISIONS		DATE		BY	
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	7/27/20	UPDATE TO 7TH ED. (2020)	FBC	LFS	
2	7/24/17	UPDATE TO 6TH ED. (2017)	FBC	JK	
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC	JK	

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW
BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

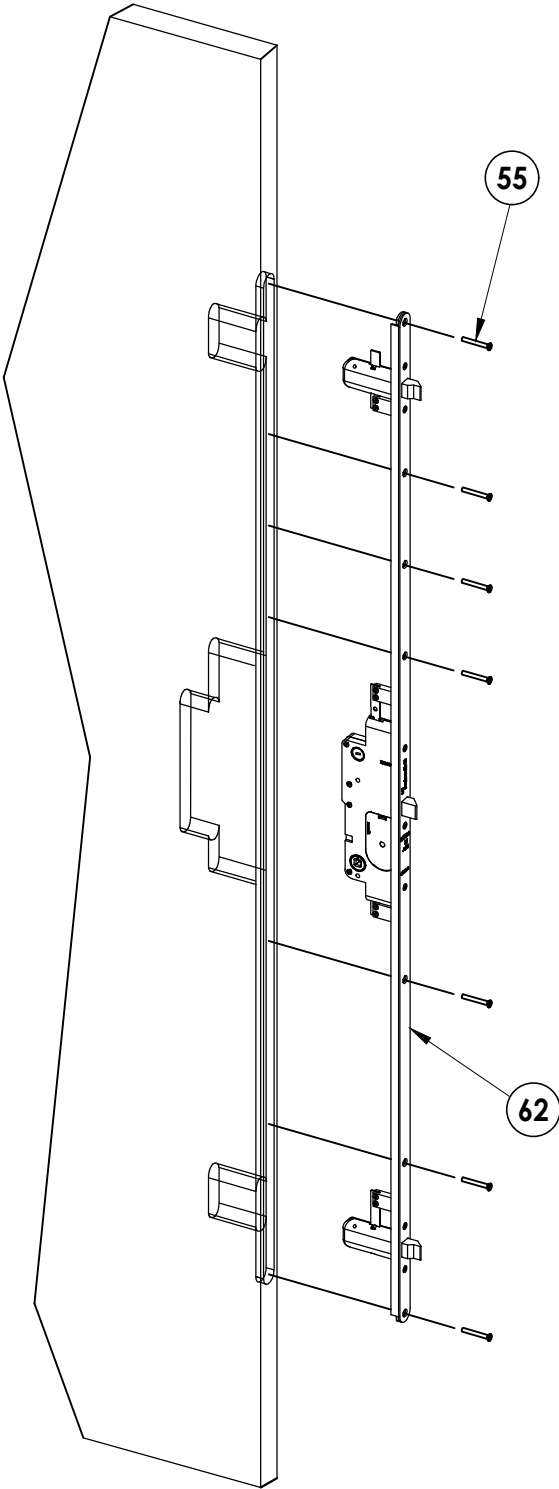

ENDURA TRILENNIUM 3000
3 pt. Lock

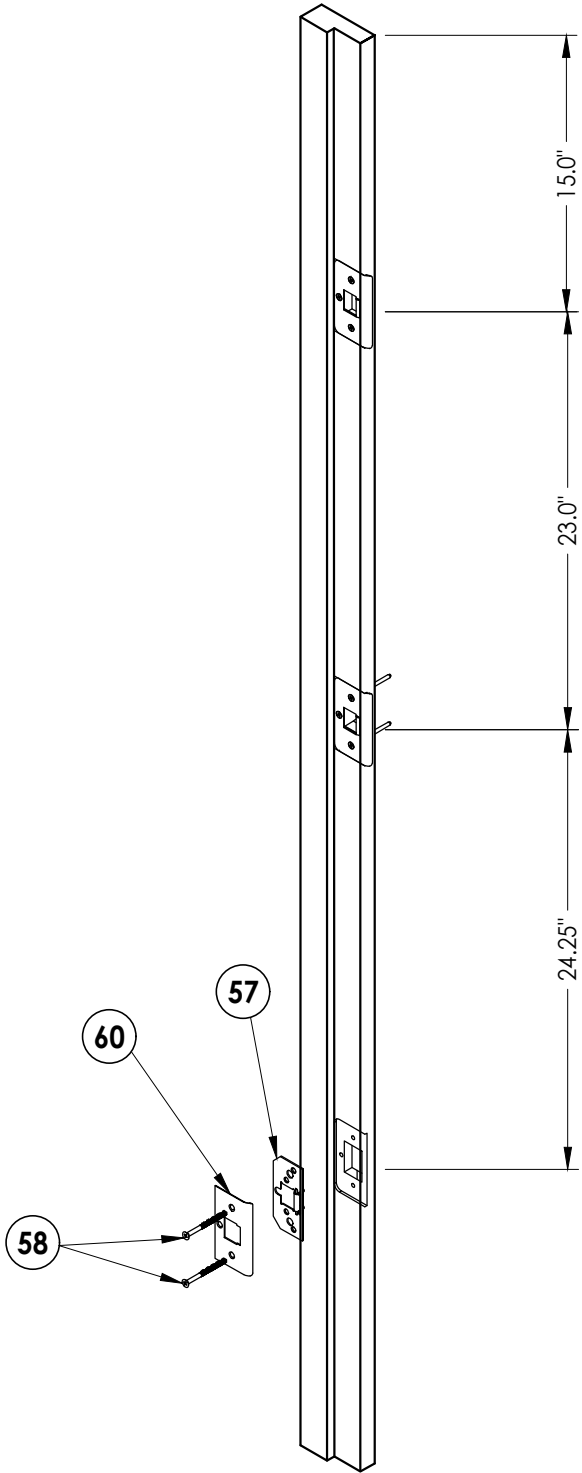

STRIKE JAMB DETAIL

DATE: 02/16/12	
SCALE:	N.T.S.
DWG. BY:	JK
CHK. BY:	LFS
DRAWING NO.:	FL-15210.2
SHEET	12 OF 16

NO.	DATE	REVISIONS
4	8/17/23	UPDATE TO 8TH ED. (2023) FBC
3	7/27/20	UPDATE TO 7TH ED (2020) FBC
2	7/24/17	UPDATE TO 6TH ED. (2017) FBC
1	3/9/15	UPDATE TO 5TH ED. (2014) FBC
		BY

PRODUCT:	PLASTPRO INC. FIBERGLASS DOOR
	PART OR ASSEMBLY: 3-POINT LOCK DETAILS


Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409	<i>RW</i>	BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813

Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg


CONCRETE ANCHOR NOTES:

- 1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- 2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- 3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"

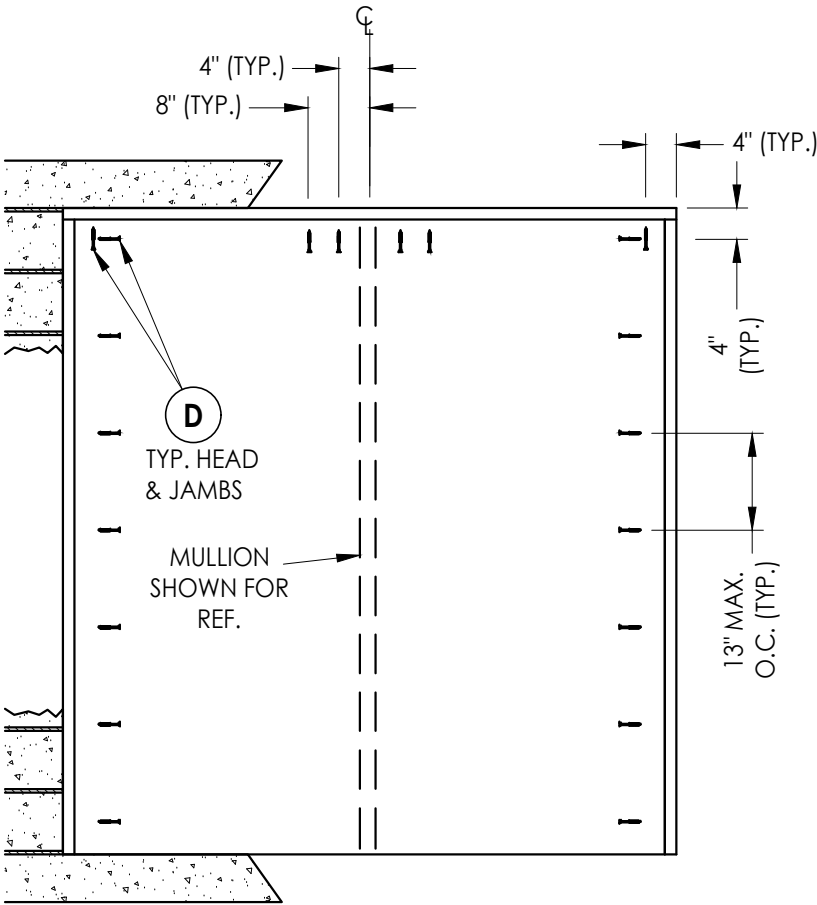

BUCK ANCHORING
OX

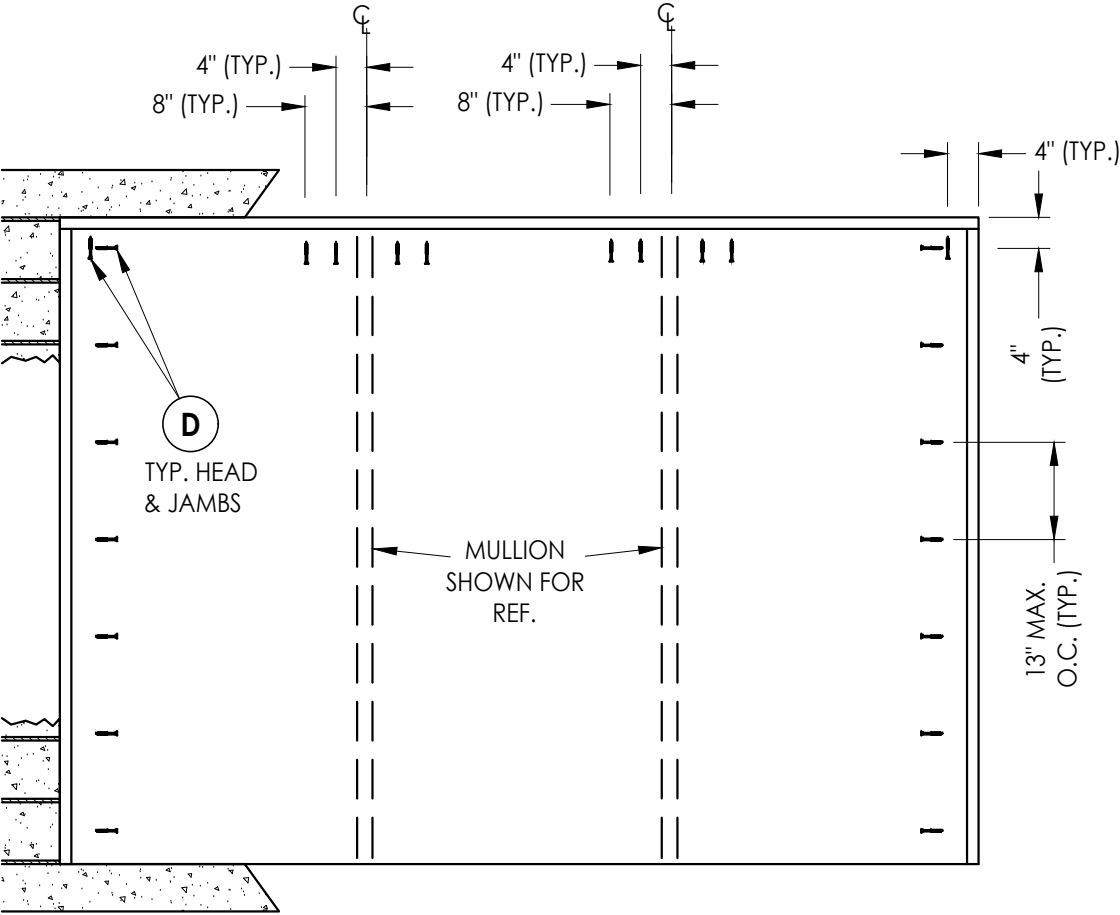

BUCK ANCHORING
OXO

NO.	DATE	REVISIONS
4	8/17/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	7/27/20	UPDATE TO 7TH ED (2020) FBC LFS
2	7/24/17	UPDATE TO 6TH ED. (2017) FBC JK
1	3/9/15	UPDATE TO 5TH ED. (2014) FBC JK
		BY


DATE: 02/16/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15210.2
SHEET 13 OF 16

PRODUCT:	PLASTPRO INC. FIBERGLASS DOOR
PART OR ASSEMBLY:	BUCK ANCHORING

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

**BUILDING CONSULTANTS, INC.**
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

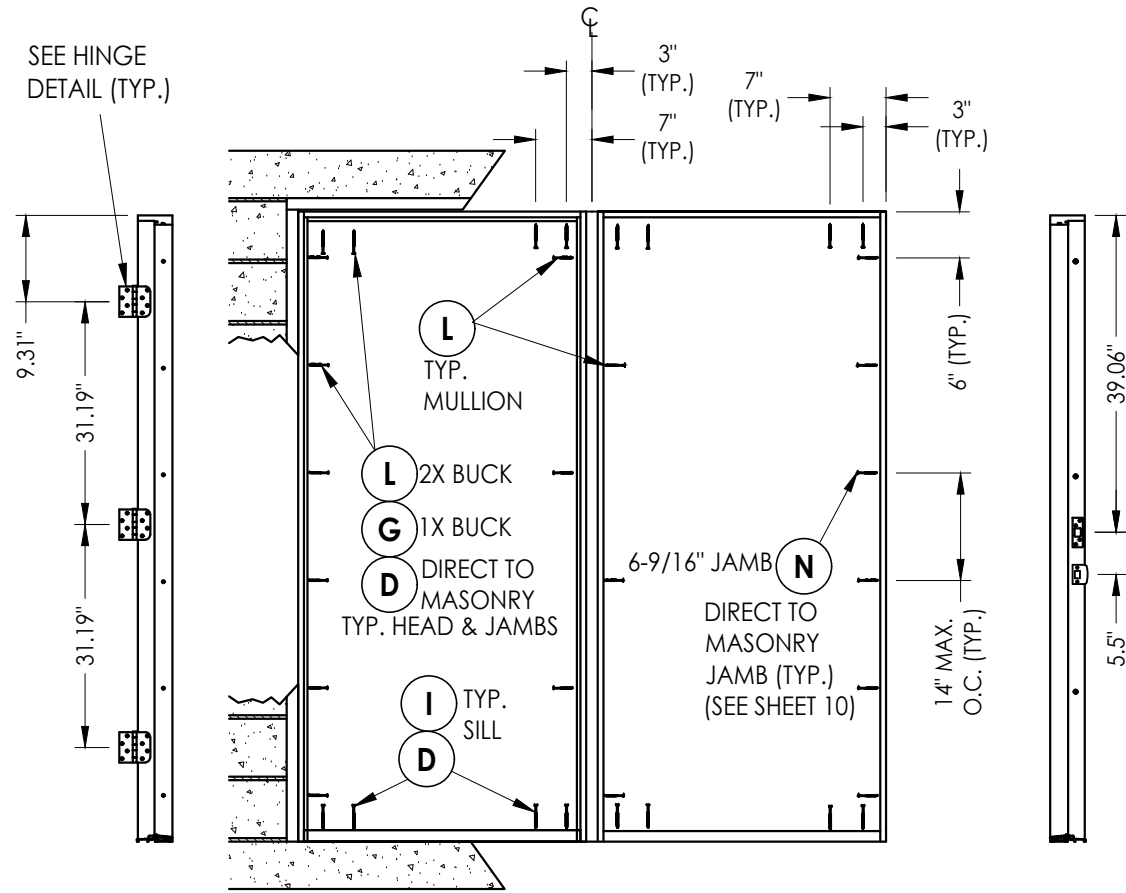


HINGE JAMB

FRAME ANCHORING
OX

STRIKE MULLION

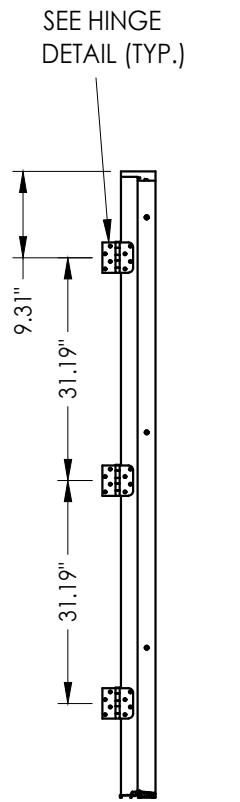

HINGE MULLION

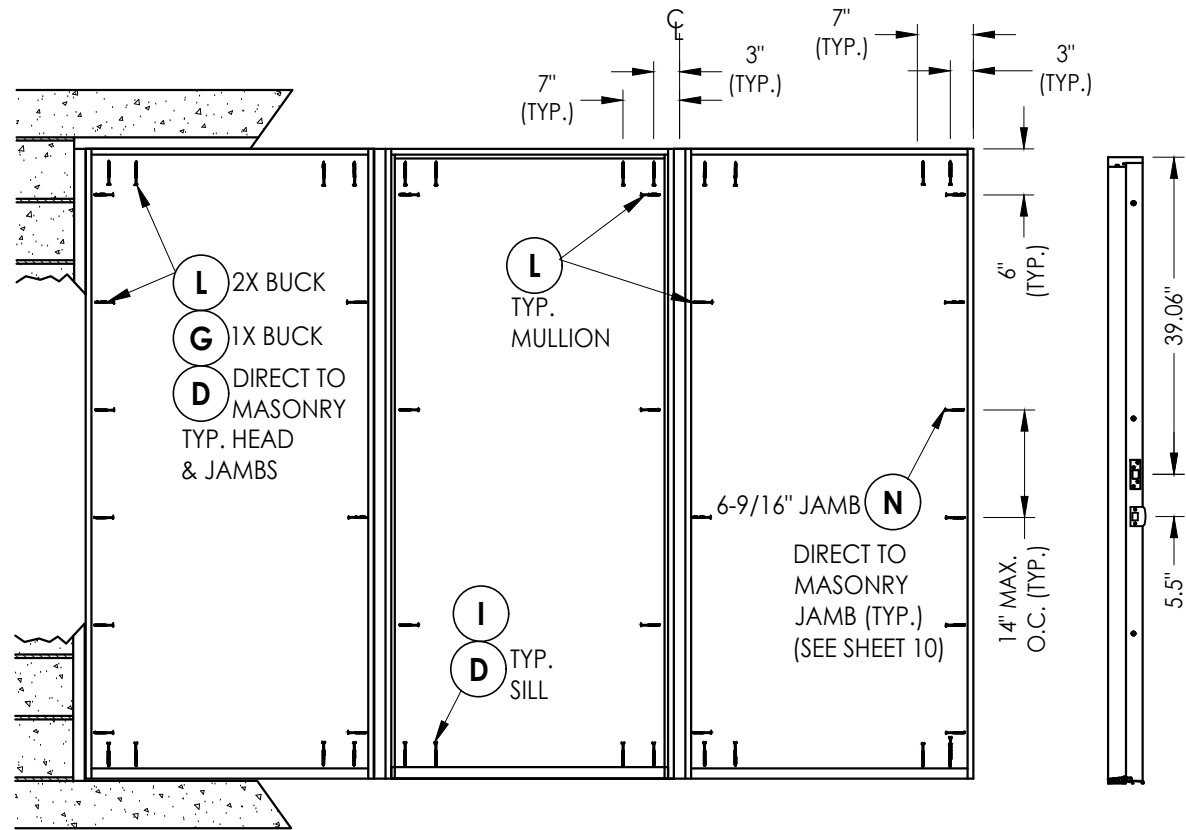

FRAME ANCHORING
OXO

STRIKE MULLION


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA CON+®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	AS SHOWN	1-1/2"

WOOD SCREW INSTALLATION NOTES:


- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

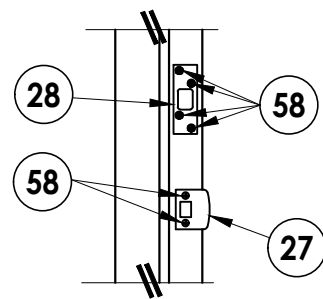

LATCH AND DEADBOLT
Details

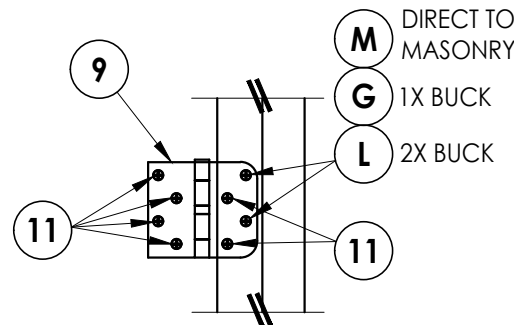

HINGE DETAIL
Inswing

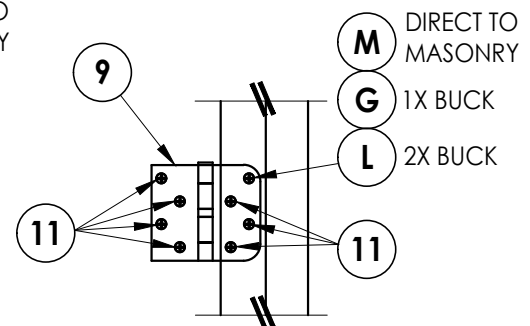

HINGE DETAIL
Outswing

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING

NO.	DATE	REVISIONS
4	8/17/23	UPDATE TO 8TH ED. (2023) FBC
3	7/27/20	UPDATE TO 7TH ED. (2020) FBC
2	7/24/17	UPDATE TO 6TH ED. (2017) FBC
1	3/9/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 02/16/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-15210.2


SHEET 14 OF 16

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Plastpro\FL-15210 R10\FL-15210.1.2.4.5.dwg

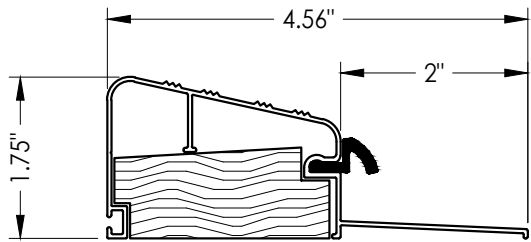


30 **OUTSWING THRESHOLD**
DLP (QOSR)

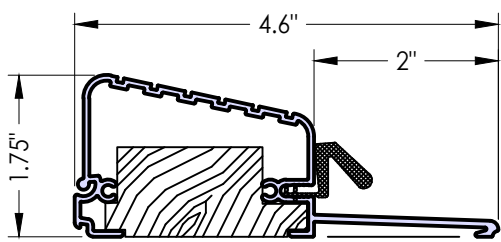


34 **OUTSWING THRESHOLD**
Columbia High Dam (581)

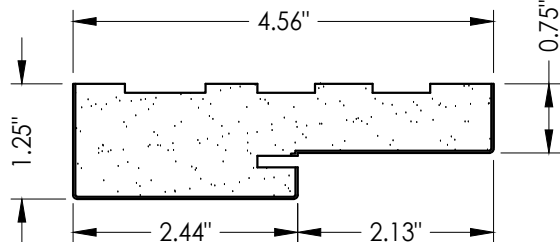


1 **POLY FIBER JAMB**
Plastpro

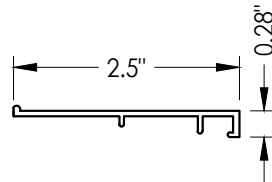


35 **OUTSWING SIDELITE ADAPTER**

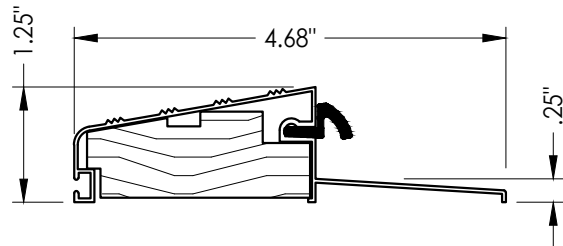


32 **OUTSWING THRESHOLD**
DLP (QOSH)

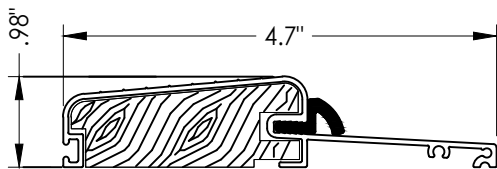


31 **OUTSWING THRESHOLD**
Columbia (575)

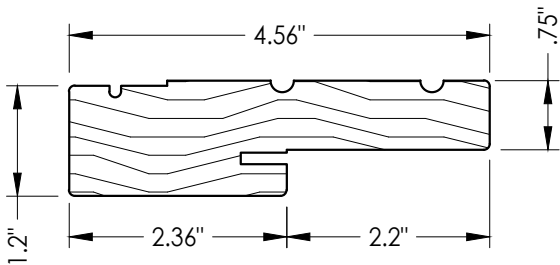


2 **WOOD JAMB**

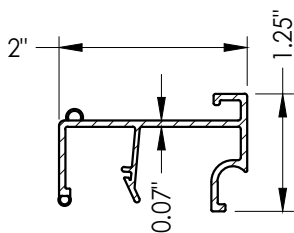


39 **INSWING SIDELITE ADAPTER**

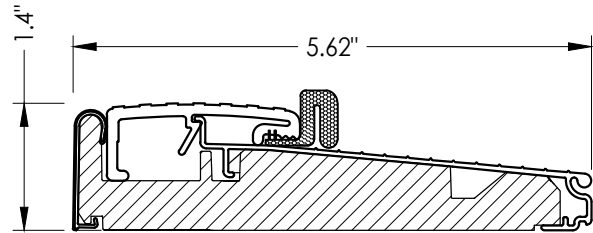


33 **OUTSWING THRESHOLD**
Endura (Z-Series)

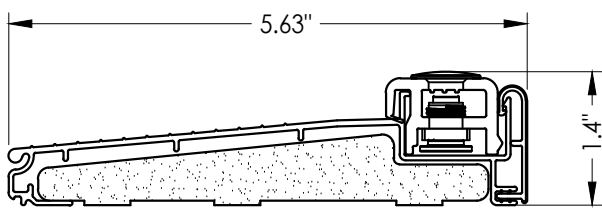


38 **INSWING THRESHOLD**
Columbia

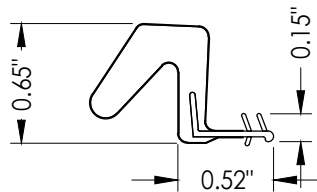


7 **WEATHERSTRIP**
Endura Force 5

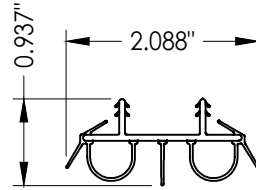


8 **DOOR BOTTOM SWEEP**

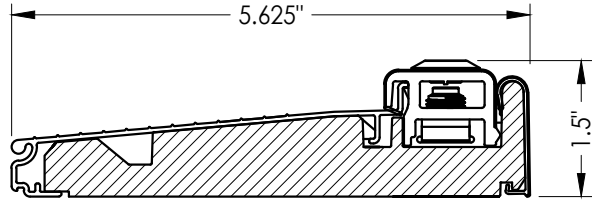

36 **INSWING THRESHOLD**
Endura (Z-Series)

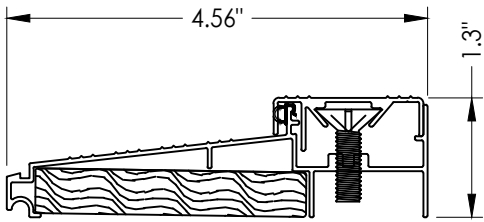

37 **INSWING THRESHOLD**
DLP (ISCS)

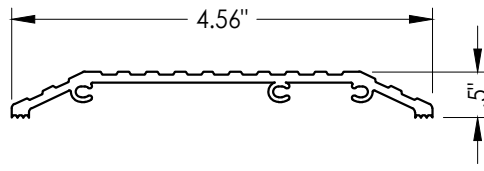

29 **ADA THRESHOLD**
DLP

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:

COMPONENTS

NO.	DATE	REVISIONS			
		BY	JK	LFS	FBC
4	8/17/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
3	7/27/20	UPDATE TO 7TH ED.	(2020)	FBC	LFS
2	7/24/17	UPDATE TO 6TH ED.	(2017)	FBC	JK
1	3/9/15	UPDATE TO 5TH ED.	(2014)	FBC	JK

DATE: 02/16/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:

FL-15210.2

SHEET 15 OF 16

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD
B	2X BUCK SG >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	3/16" x 3-1/4" PFH ITW CONCRETE SCREW	STEEL
I	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	1/4" X 2-1/4" ITW CONCRETE SCREW	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	3/16" X 2-1/4" ITW CONCRETE SCREW	STEEL
N	3/16" X 2-3/4" ITW CONCRETE SCREW	STEEL
1	POLY FIBER JAMB	COMP. / VINYL
2	FINGER JOINTED PINE FRAME	WOOD
7	WEATHERSTRIP	FOAM
8	DOOR BOTTOM SWEEP	VINYL
9	4" X 4" BUTT HINGE	STEEL
11	#9 X 3/4" PFH WOOD SCREW	STEEL
22	3 POINT "TONGUE" MULTIPOINT LOCKSET (Mfg. BY HOPPE)	STEEL
23	MULTIPOINT STRIKE PLATE (TONGUE SYSTEM)	STEEL
25	LATCH AND DEADBOLT STRIKE PLATE (TONGUE SYSTEM)	STEEL
27	LATCH STRIKE PLATE	STEEL
28	DEADBOLT STRIKE PLATE (SECURITY)	STEEL
29	ADA THRESHOLD	ALUM
30	OUTSWING THRESHOLD	ALUM/WOOD
31	OUTSWING THRESHOLD	ALUM/WOOD
32	OUTSWING THRESHOLD	ALUM/WOOD
33	OUTSWING THRESHOLD	ALUM/COMP
34	OUTSWING THRESHOLD	ALUM/WOOD
35	OUTSWING SIDELITE ADAPTER	VINYL
36	INSWING THRESHOLD	ALUM/COMP
37	INSWING THRESHOLD	ALUM/WOOD
38	INSWING THRESHOLD	ALUM/COMP
39	INSWING SIDELITE ADAPTER	VINYL
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR DETAILS	-
55	#10 X 1-1/2" PFH SCREW	STEEL
57	BACKING PLATE	STEEL
58	#8 X 2" PFH WS	STEEL
60	MULTIPOINT STRIKE PLATE	STEEL
62	ENDURA TRILENNIUM 3000 LOCK ASSEMBLY	STEEL
88	2X REINFORCEMENT SG >= 0.55	WOOD

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: PLASTPRO INC. FIBERGLASS DOOR		PART OR ASSEMBLY: BILL OF MATERIALS	
4	8/17/23	UPDATE TO 8TH ED. (2023)	FBC LFS
3	7/27/20	UPDATE TO 7TH ED (2020)	FBC LFS
2	7/24/17	UPDATE TO 6TH ED. (2017)	FBC JK
1	3/9/15	UPDATE TO 5TH ED. (2014)	FBC JK
NO.	DATE		BY
			REVISIONS
DATE: 02/16/12			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-15210.2			
SHEET 16 OF 16			