




5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045

ONELITE SERIES
FLUSH GLAZED FIBERGLASS DOORS
w/ SIDELITES
INSWING / OUTSWING
"NON-IMPACT"


GENERAL NOTES

1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with Section 1609.1.2 & R301.2.1.2 of the FBC.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevation, design pressures, & general notes
2	Door panel details
3	Sidelite panel details
4	Horizontal cross sections
5	Vertical cross sections
6	Vertical cross sections
7	Buck anchoring
8	Frame anchoring - 2X buck masonry construction
9	Frame anchoring - 1X buck masonry construction
10	Endura astragal details
11	Bill of materials, glazing detail & components

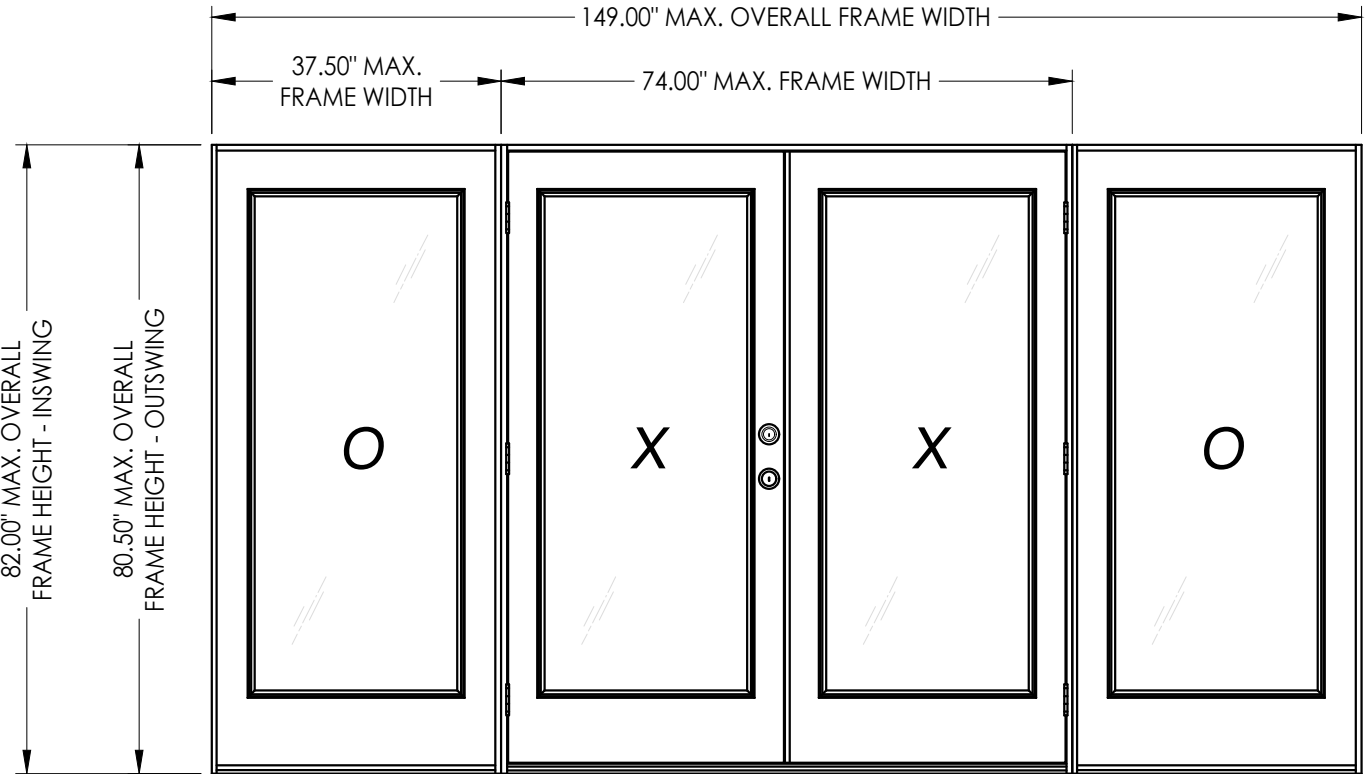

SWING	OVERALL FRAME DIMENSION	DOOR D.L.O. DIMENSION	SIDELITE D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
					POSITIVE	NEGATIVE
INSWING	149.00" x 82.00"	26.25" x 65.93"	26.25" x 65.93"	G1	+50.0	-50.0
OUTSWING	149.00" x 80.50"	26.25" x 65.93"	26.25" x 65.93"		+50.0	-50.0

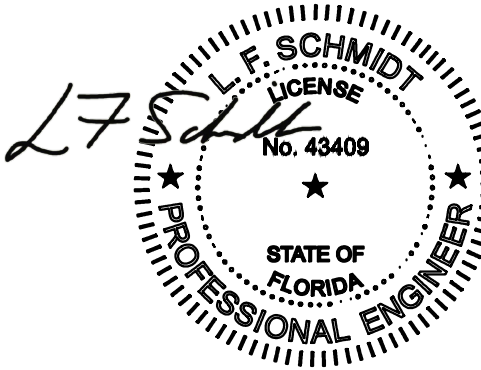

Digitally signed by
Lyndon F Schmidt
Date: 2026.07.31
08:46:34 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

Part or Assembly:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
4	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
2	7/25/17	UPDATE TO 6TH ED. (2017)	FBC	JK
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK
	NO.	DATE		BY

REVISIONS

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS



DRAWING NO.: FL-15215.5

SHEET 1 OF 11


Building Consultants, Inc.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2012 R.W. BUILDING CONSULTANTS INC.


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

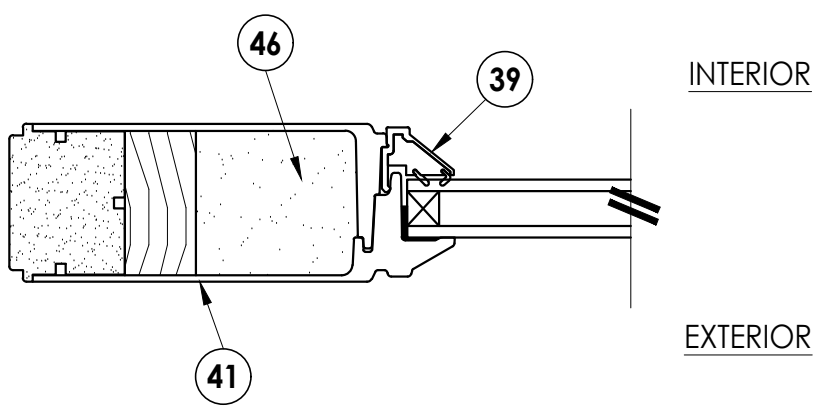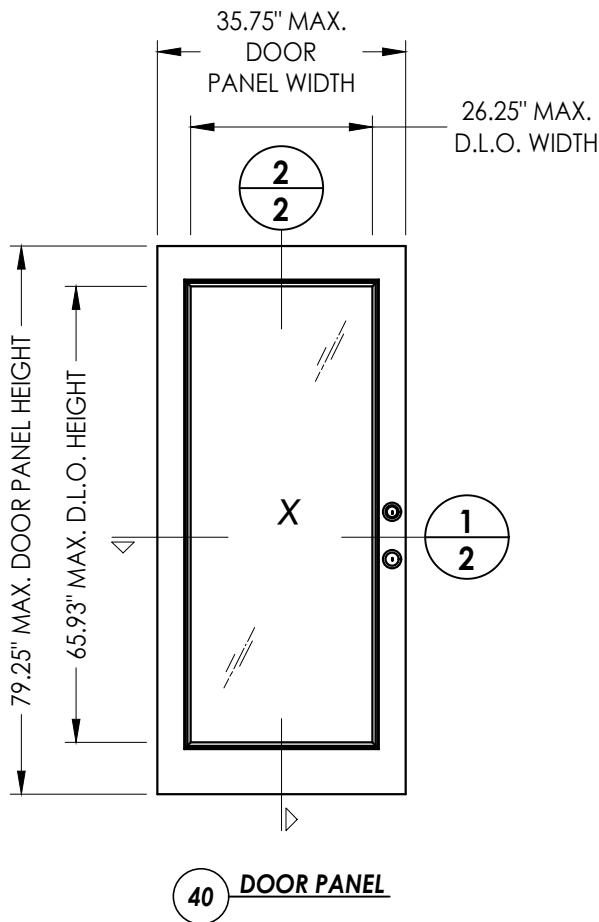



1
2 **HORIZONTAL CROSS SECTION**

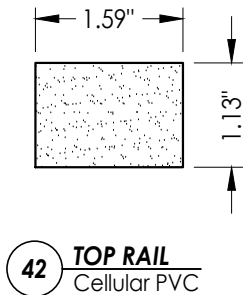


42 **TOP RAIL**
Cellular PVC

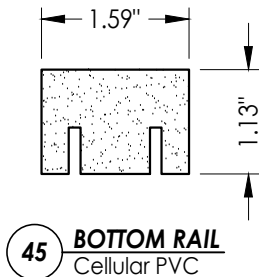


45 **BOTTOM RAIL**
Cellular PVC

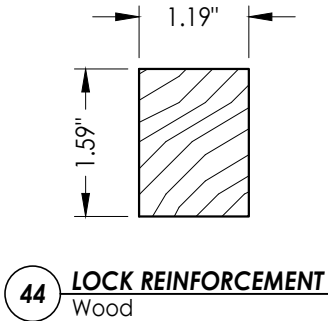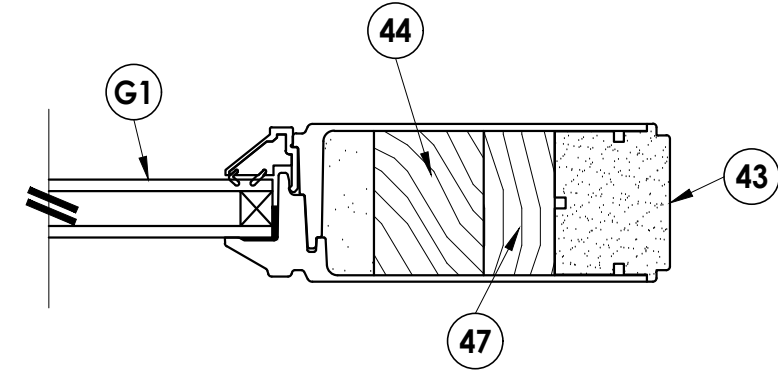


44 **LOCK REINFORCEMENT**
Wood

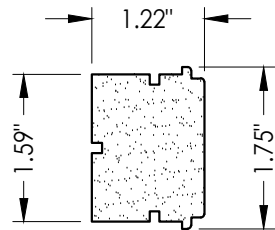


43 **LATCH & HINGE STILE**
Cellular PVC



47 **LATCH & HINGE STILE**
LVL wood reinforcement

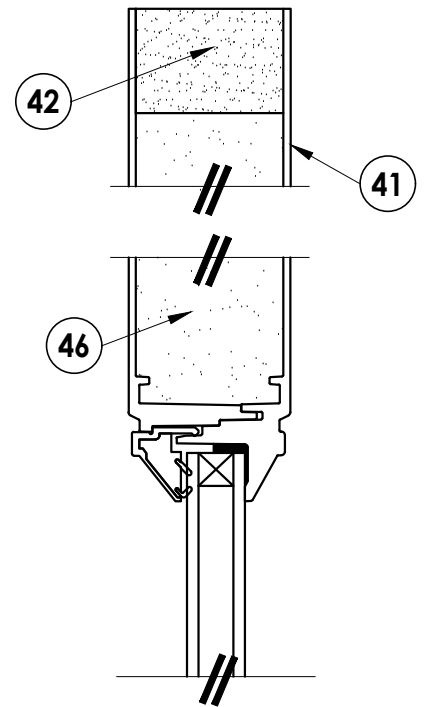

INTERIOR EXTERIOR

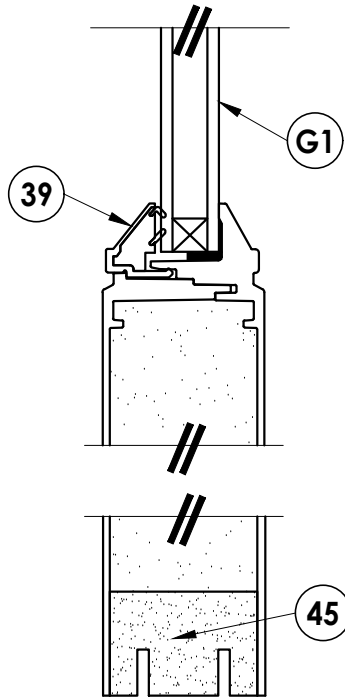

2
2 **VERTICAL CROSS SECTION**

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:
FL-15215.5

SHEET 2 OF 11


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813



PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
DOOR PANEL DETAILS


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

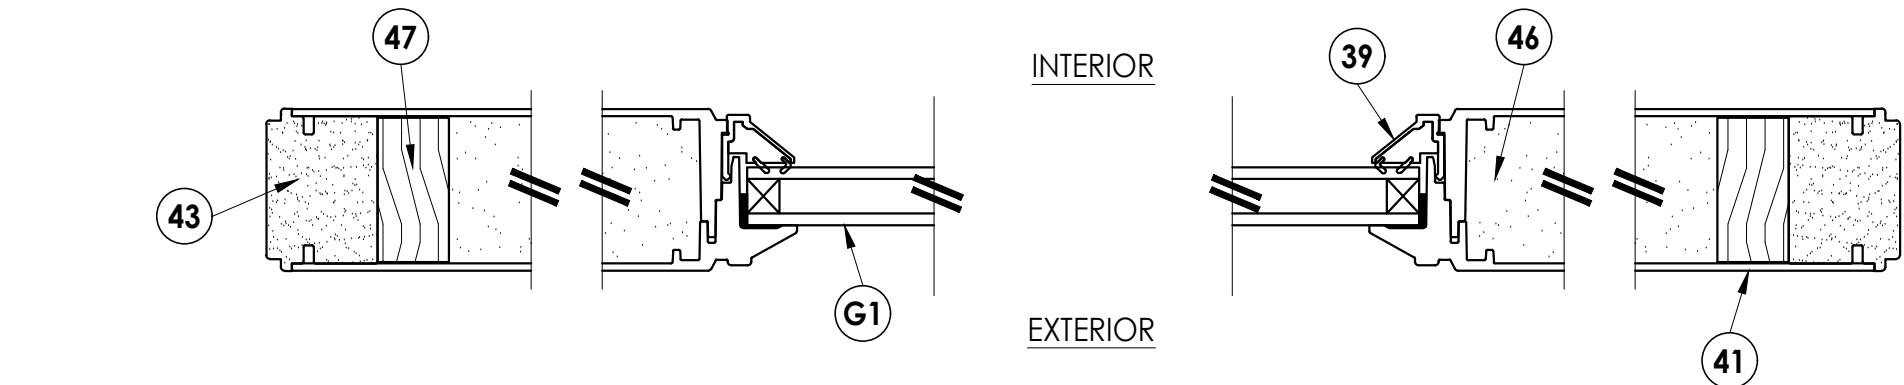


1
3 HORIZONTAL CROSS SECTION

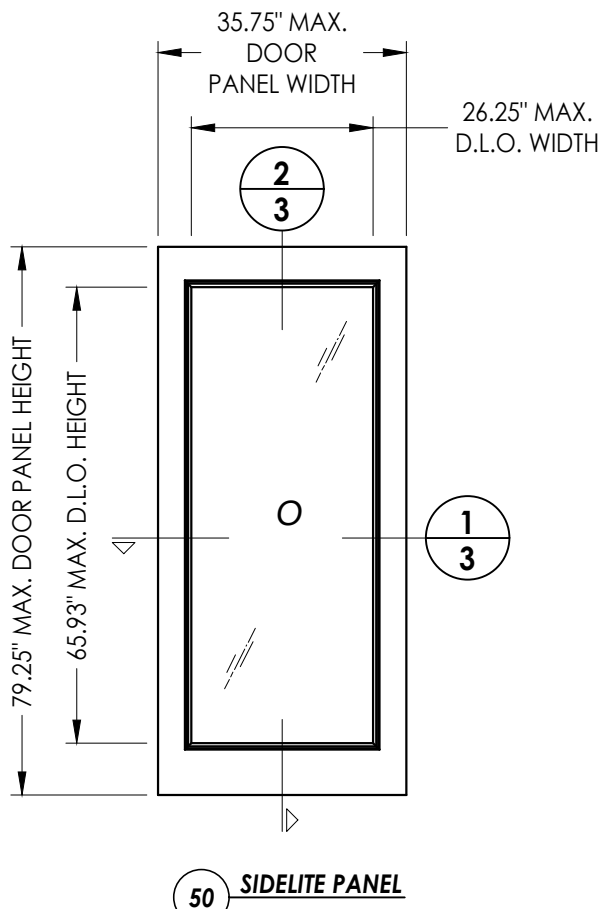


42 TOP RAIL
Cellular PVC

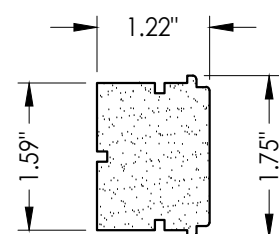


43 LATCH & HINGE STILE
Cellular PVC




45 BOTTOM RAIL
Cellular PVC



47 LATCH & HINGE STILE
LVL wood reinforcement

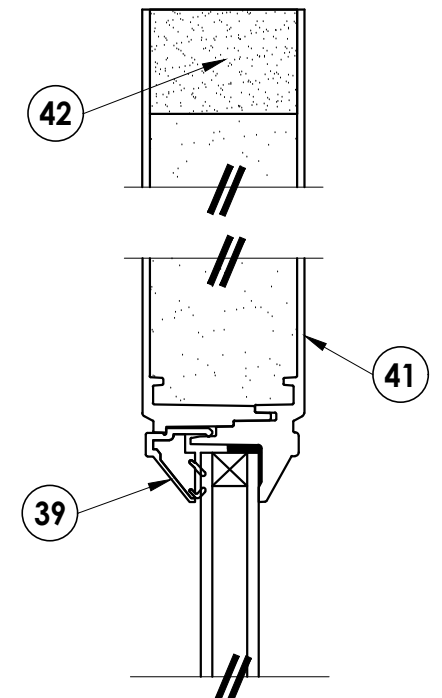


2
3 VERTICAL CROSS SECTION

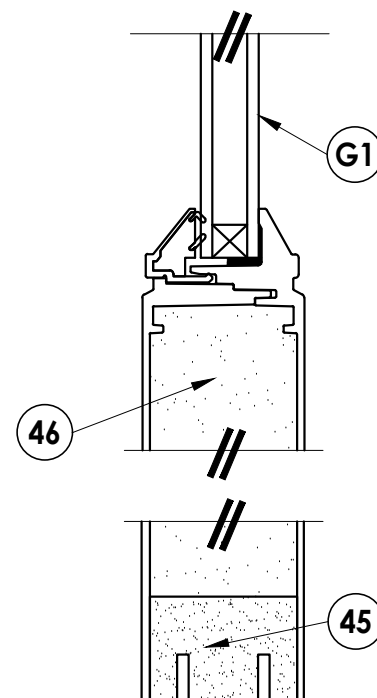

Documents Prepared By:		Lyndon F. Schmidt		P.E. No. 43409		BUILDING CONSULTANTS, INC.		P.O. Box 230, Vairico, FL 33595		Phone No.: 813.659.9197		FBPE Registry No. 9813	
PRODUCT:		PLASTPRO INC.		FIBERGLASS DOOR		PART OR ASSEMBLY:		SIDELITE PANEL DETAILS					
5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS									
4	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS									
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC									
2	7/25/17	UPDATE TO 6TH ED. (2017)	FBC	JK									
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK									
	NO.	DATE		BY									
REVISIONS													
DATE: 02/15/12													
SCALE: N.T.S.													
DWG. BY: JK													
CHK. BY: LFS													
DRAWING NO.: FL-15215.5													
SHEET 3 OF 11													




G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

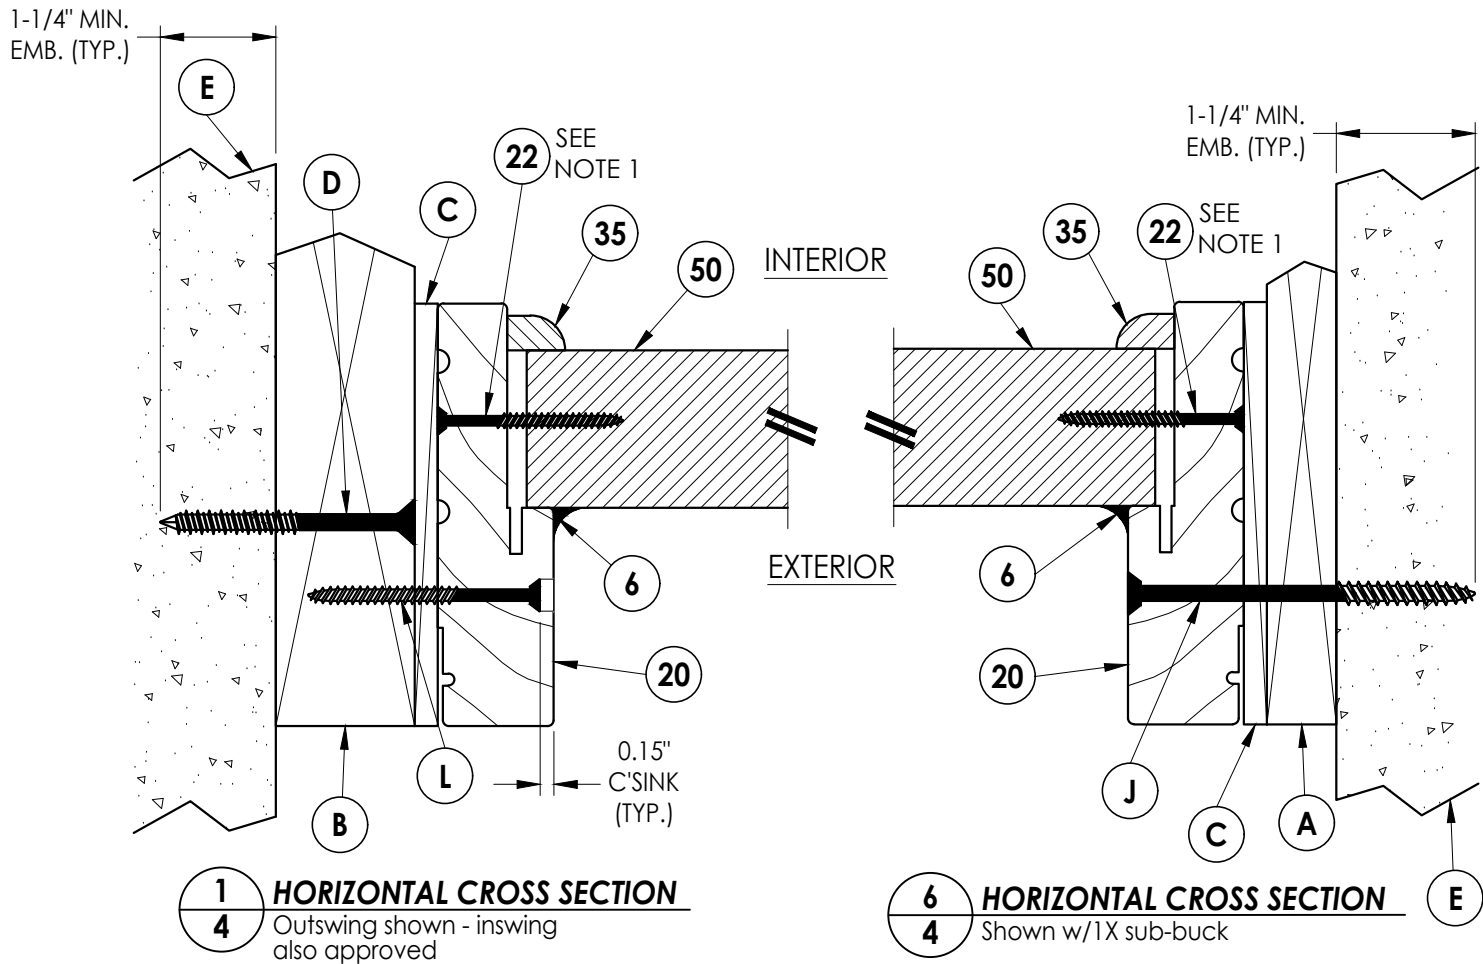

NOTE:

1. Sidelite panel secured to the sidelite frame with (4) of item #22 located 10", 30.5", 51" and 71.5" from top of each jamb and (2) of item #22 in the head and sill 3" from each end.

2. As noted in the test report astragal was attached to the inactive leaf with (10) #8 x 3" psh sms and (4) #10 x 2-1/2" pfh sms for all 6'-8" (outswing). Astragal was attached to the inactive leaf with (9) #8 x 3" psh sms and (4) #10 x 2-1/2" pfh sms for all 6'-8" (inswing).

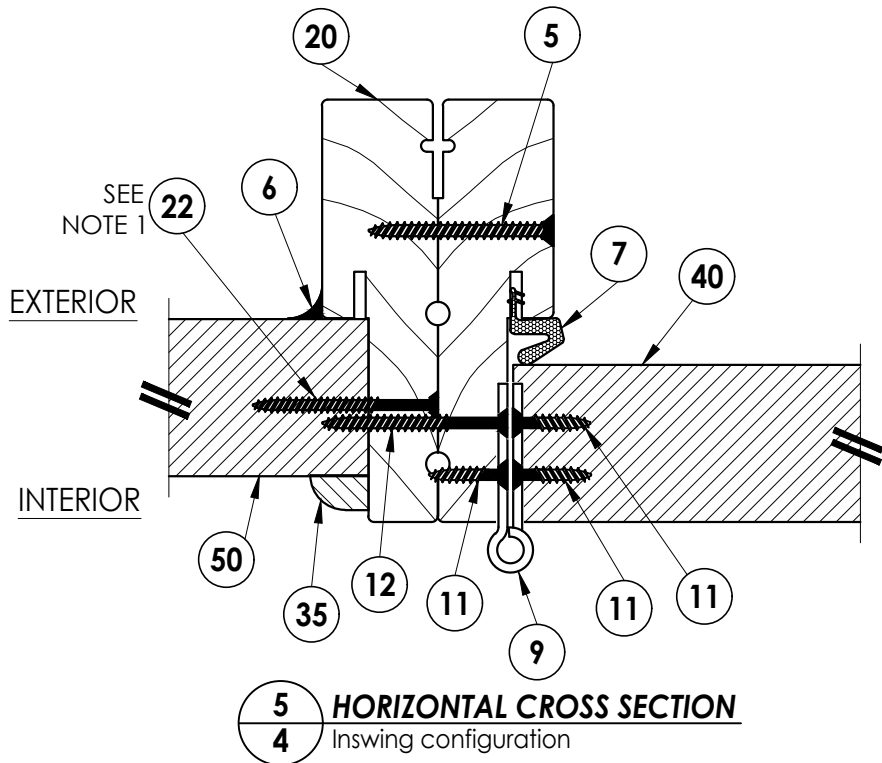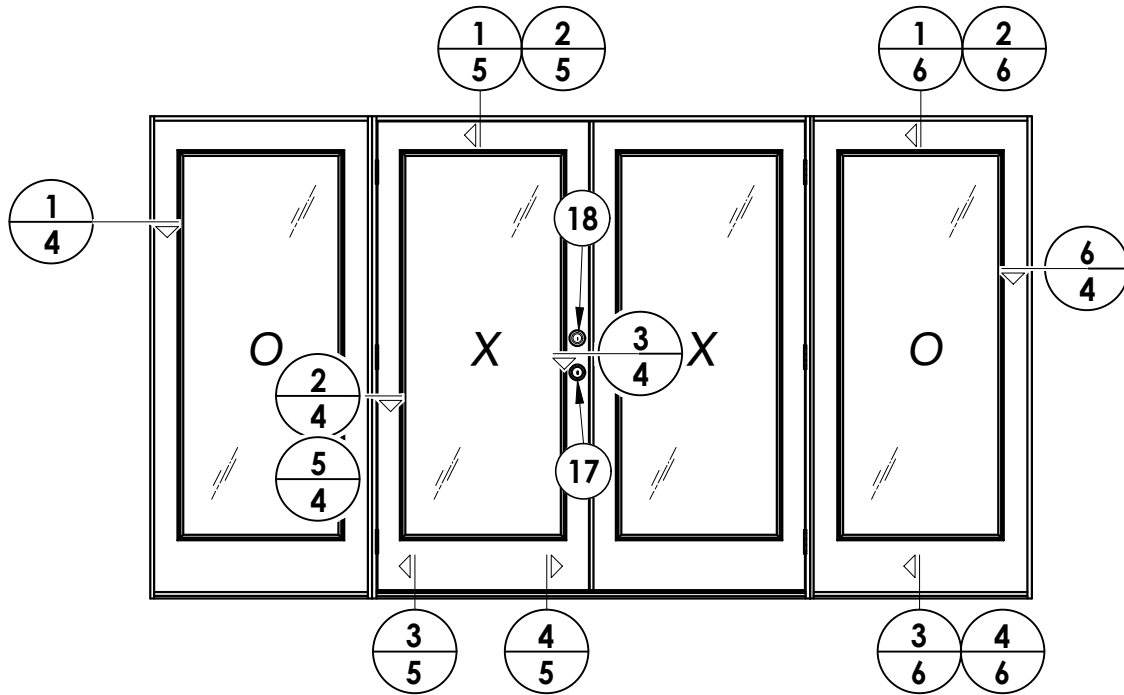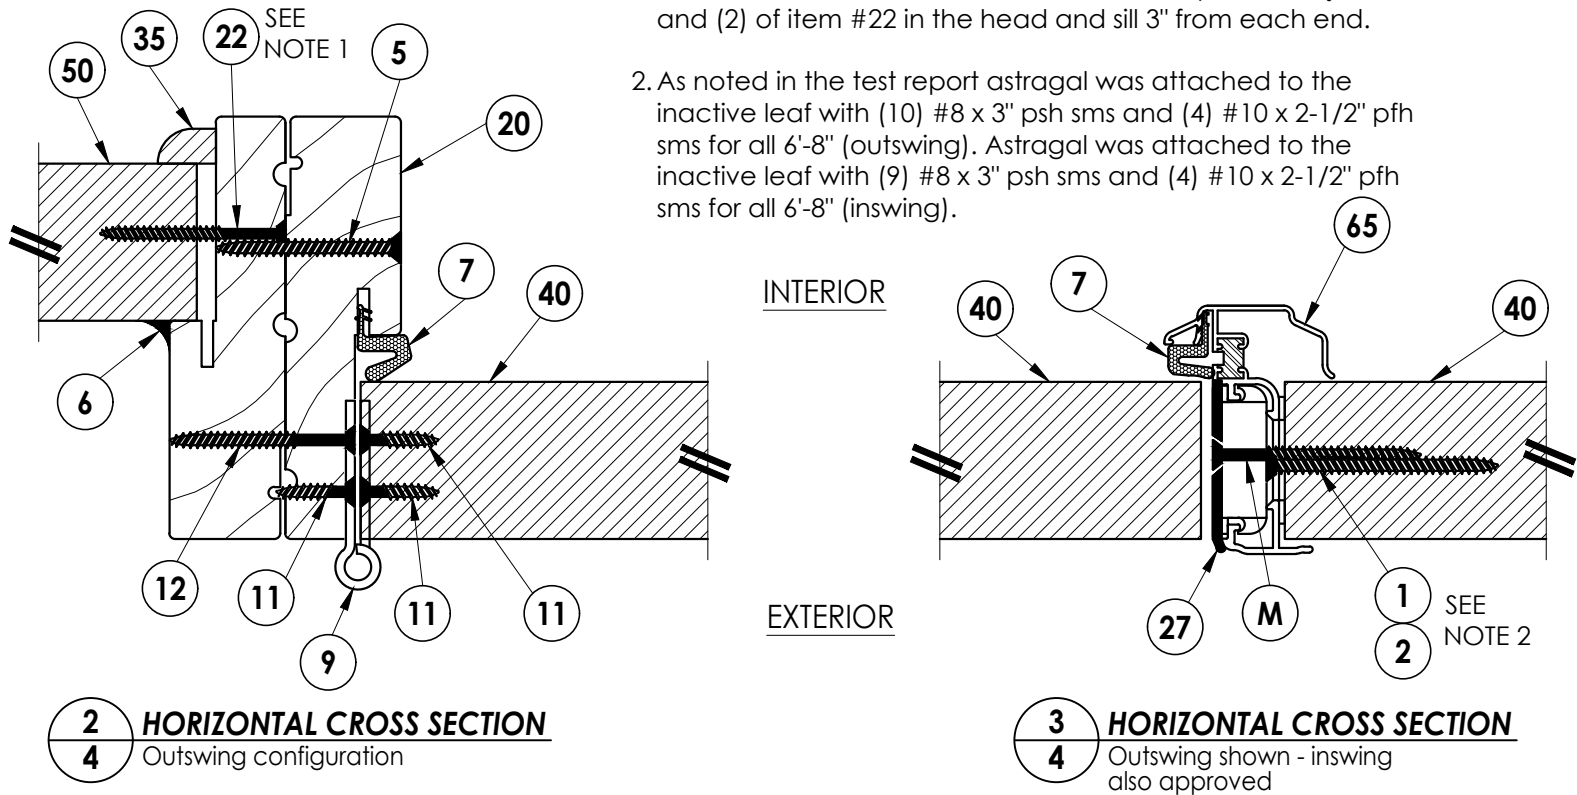

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL CROSS SECTIONS

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.: FL-15215.5

SHEET 4 OF 11


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

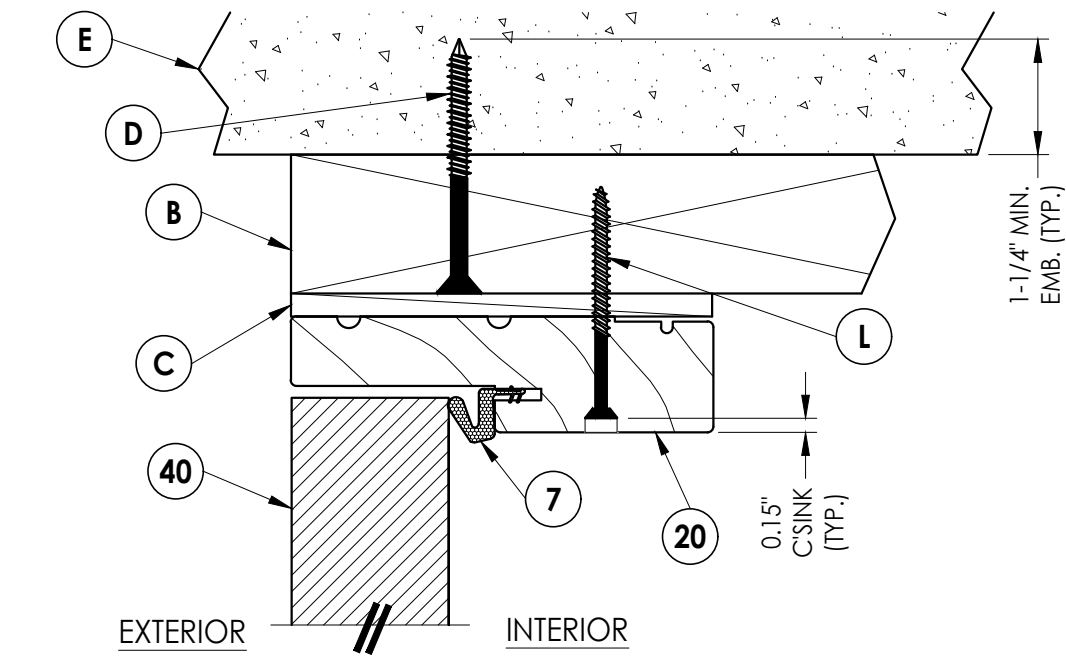


1
5 **VERTICAL CROSS SECTION**
Outswing shown - inswing
also approved

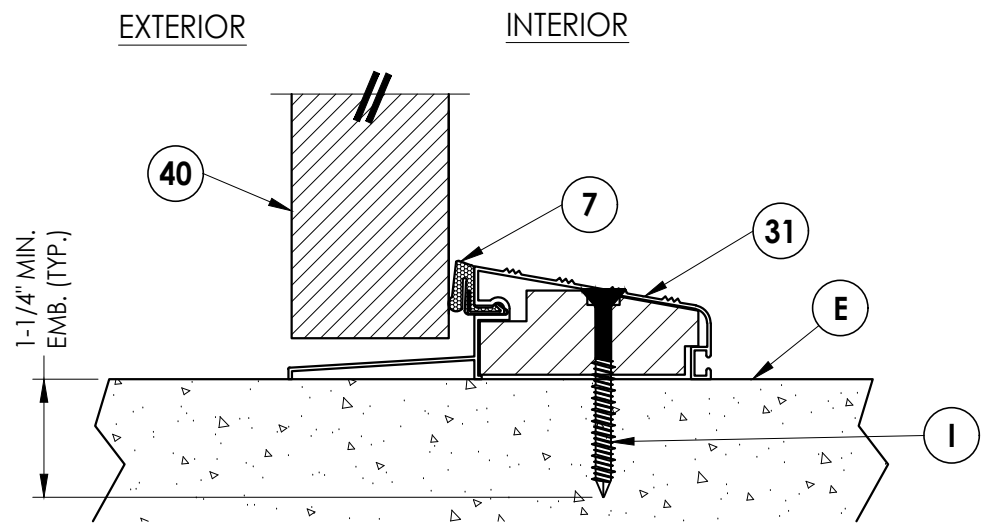

3
5 **VERTICAL CROSS SECTION**
Outswing configuration

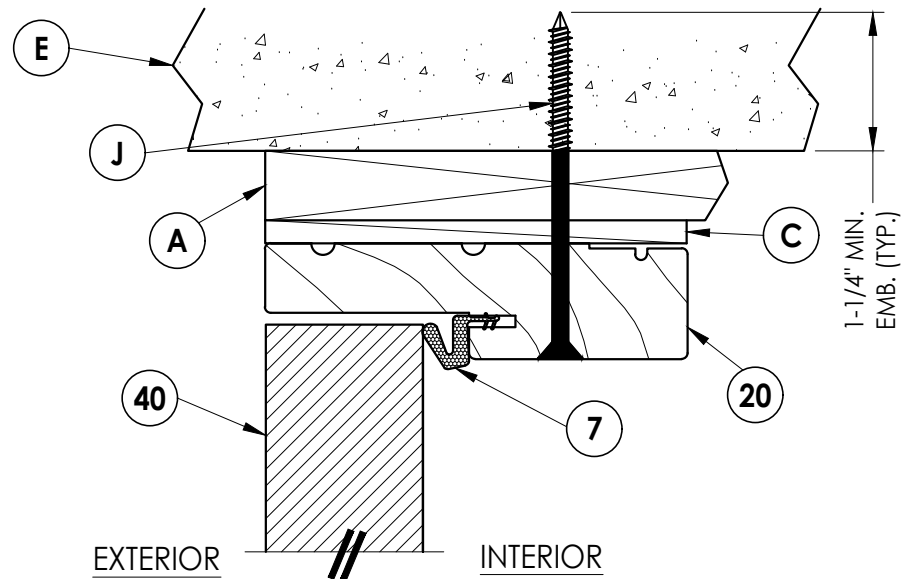

2
5 **VERTICAL CROSS SECTION**
Shown w/1X sub-buck

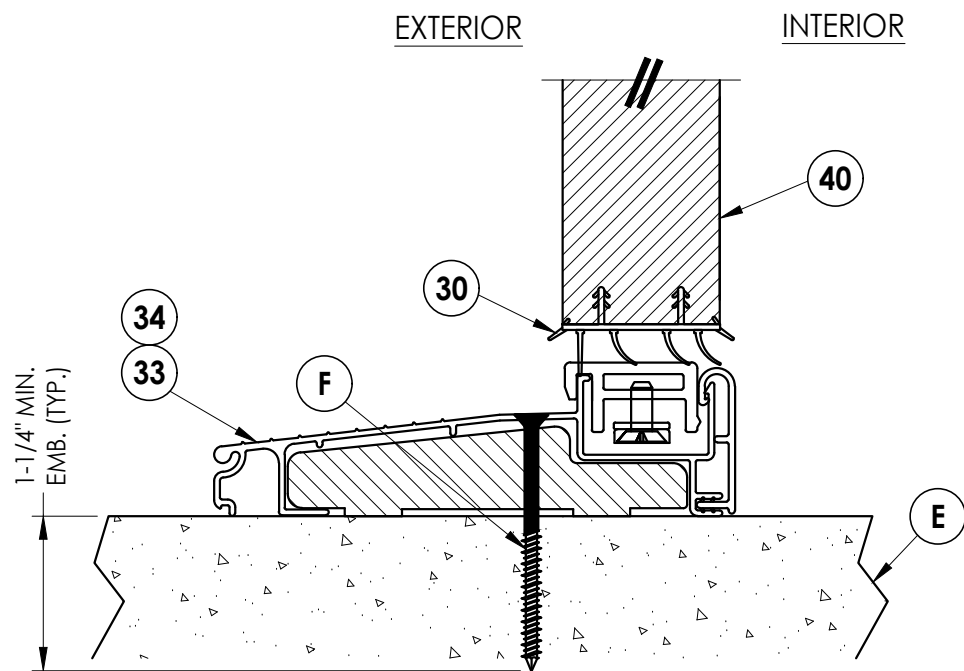

4
5 **VERTICAL CROSS SECTION**
Inswing configuration

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR
PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:
FL-15215.5


SHEET 5 OF 11

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

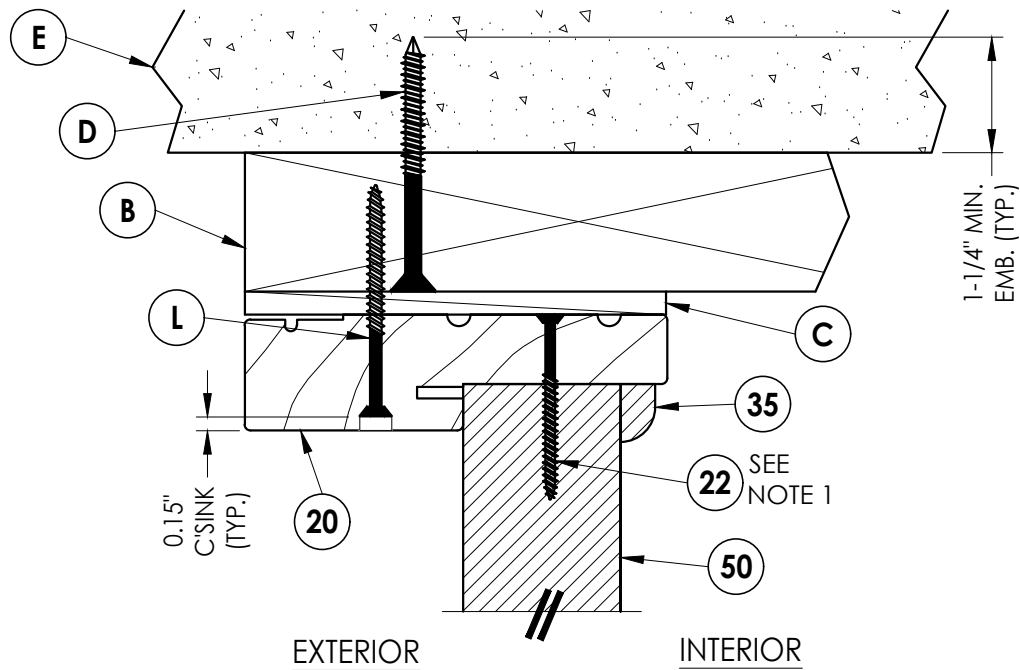


1
6 **VERTICAL CROSS SECTION**
Outswing shown - inswing
also approved


NOTE:
1. Sidelite panel secured to the sidelite
frame with (4) of item #22 located
10", 30.5", 51" and 71.5" from top of
each jamb and (2) of item #22 in
the head and sill 3" from each end

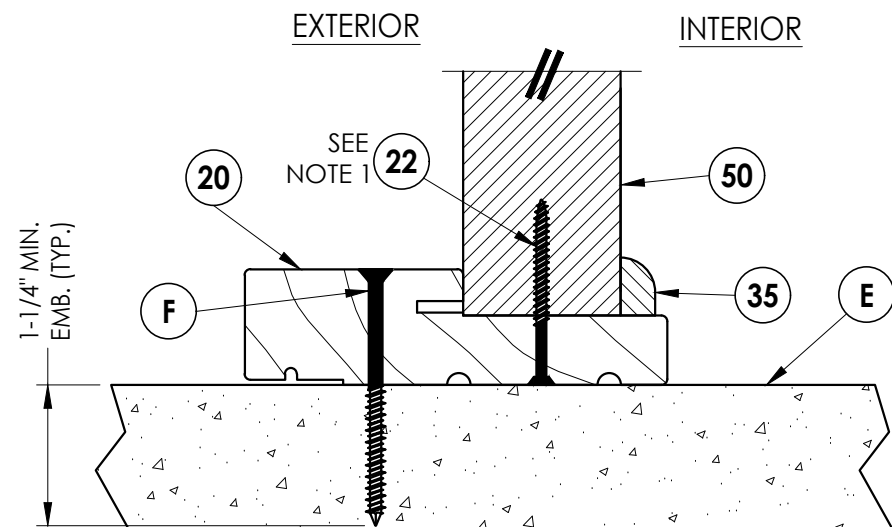

3
6 **VERTICAL CROSS SECTION**
Outswing configuration

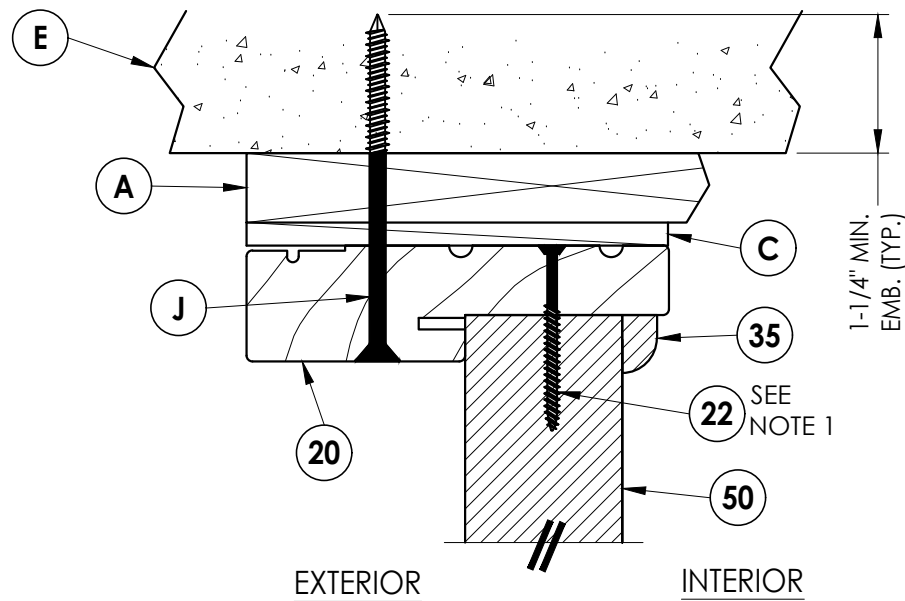

2
6 **VERTICAL CROSS SECTION**
Shown w/1X sub-buck

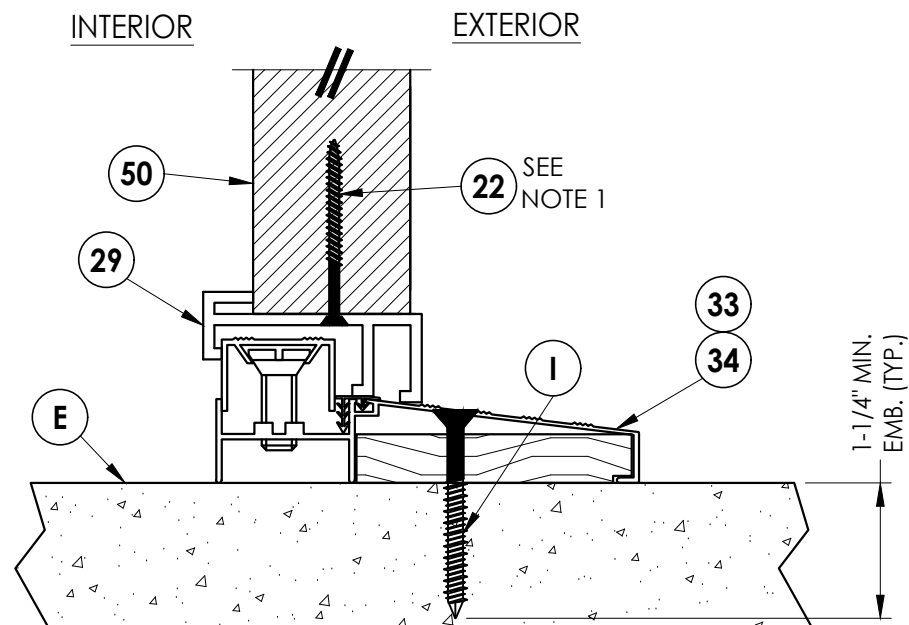

4
6 **VERTICAL CROSS SECTION**
Inswing configuration

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR
PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:
FL-15215.5

SHEET 6 OF 11

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

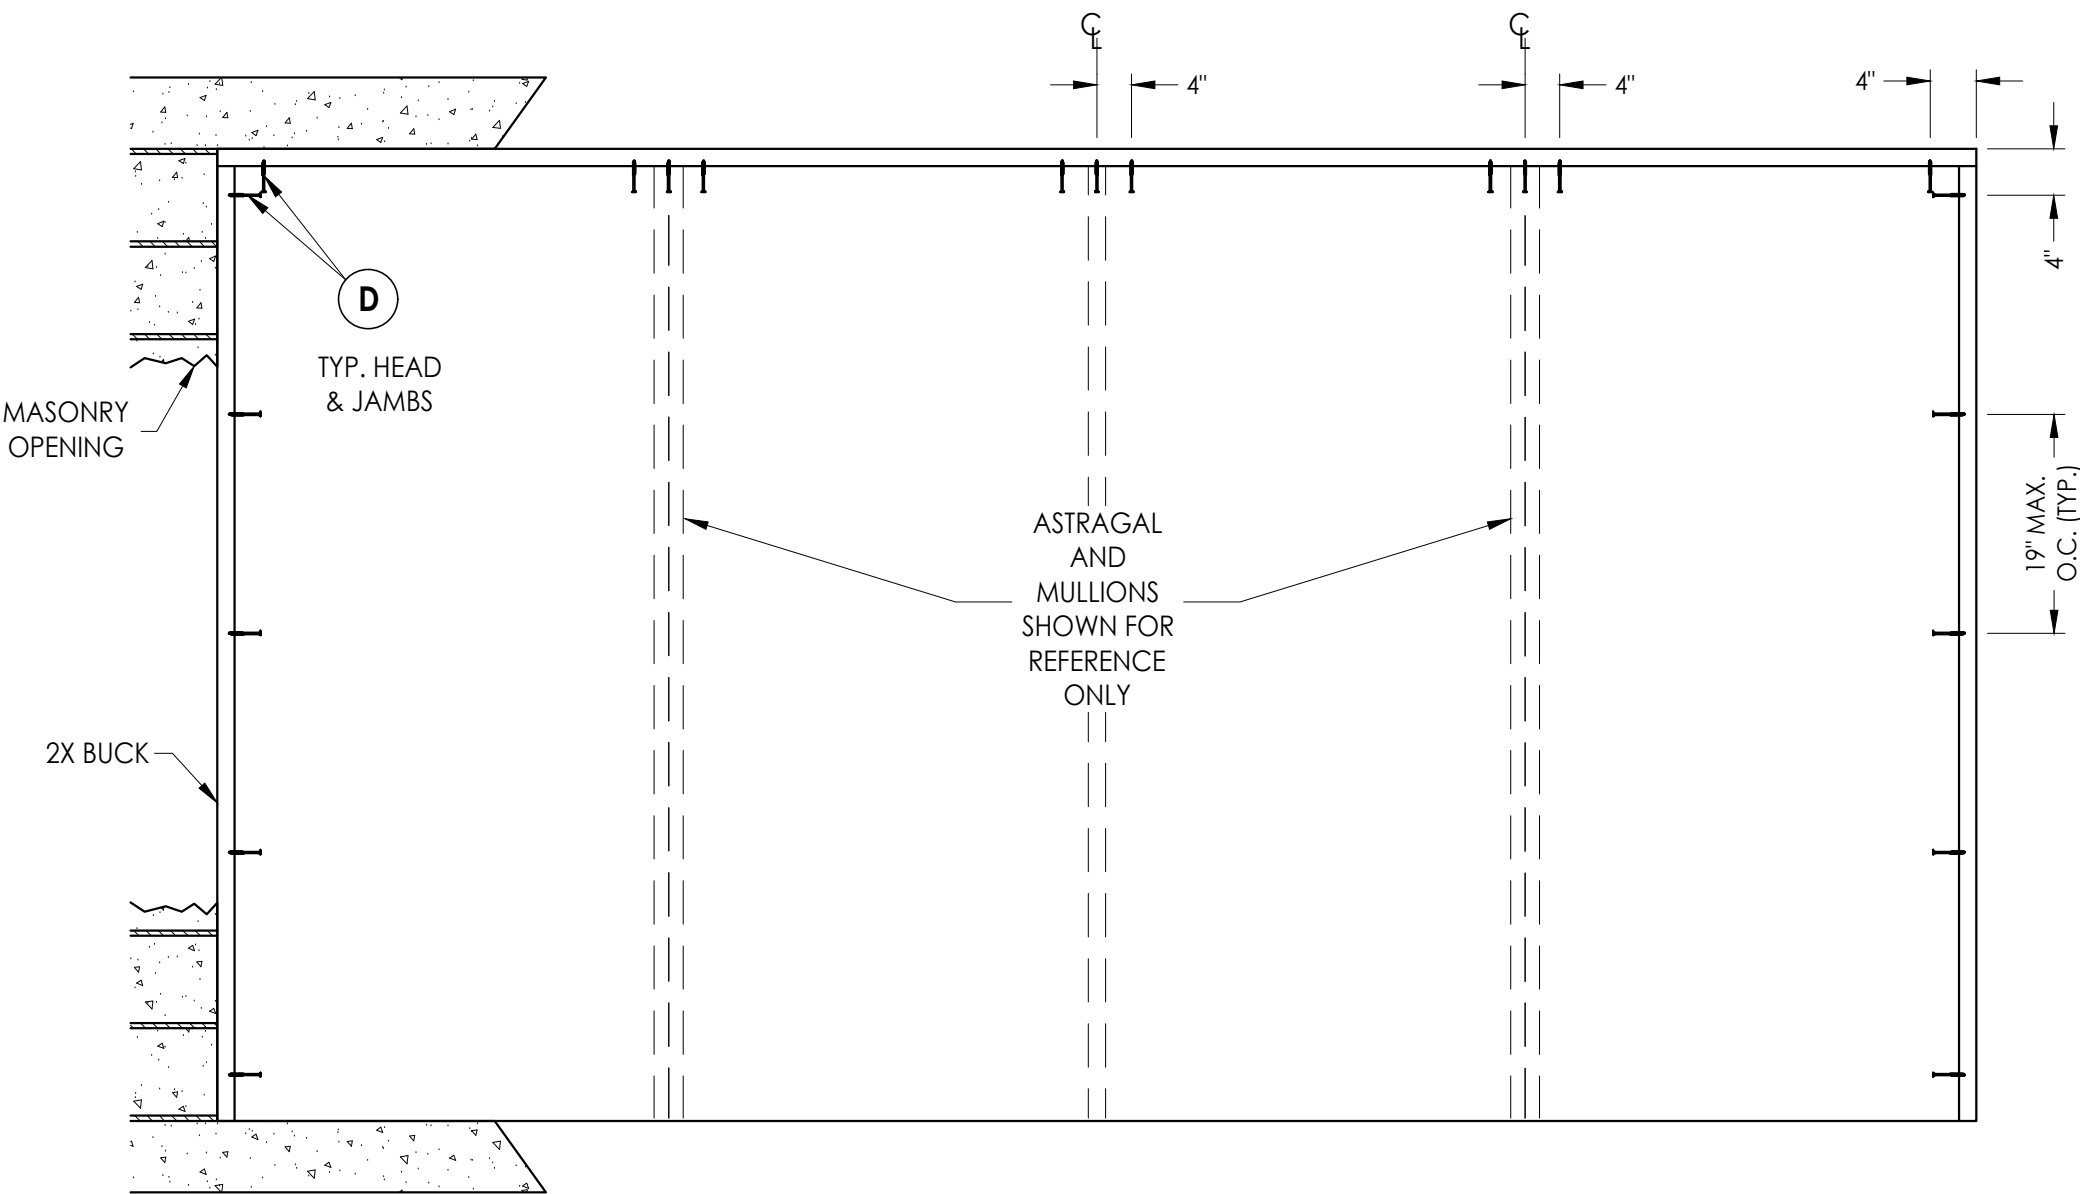

BUCK ANCHORING

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
BUCK ANCHORING

5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
4	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
2	7/25/17	UPDATE TO 6TH ED. (2017)	FBC	JK
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK
NO.	DATE			BY
REVISIONS				

DATE: 02/15/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-15215.5

SHEET 7 OF 11


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

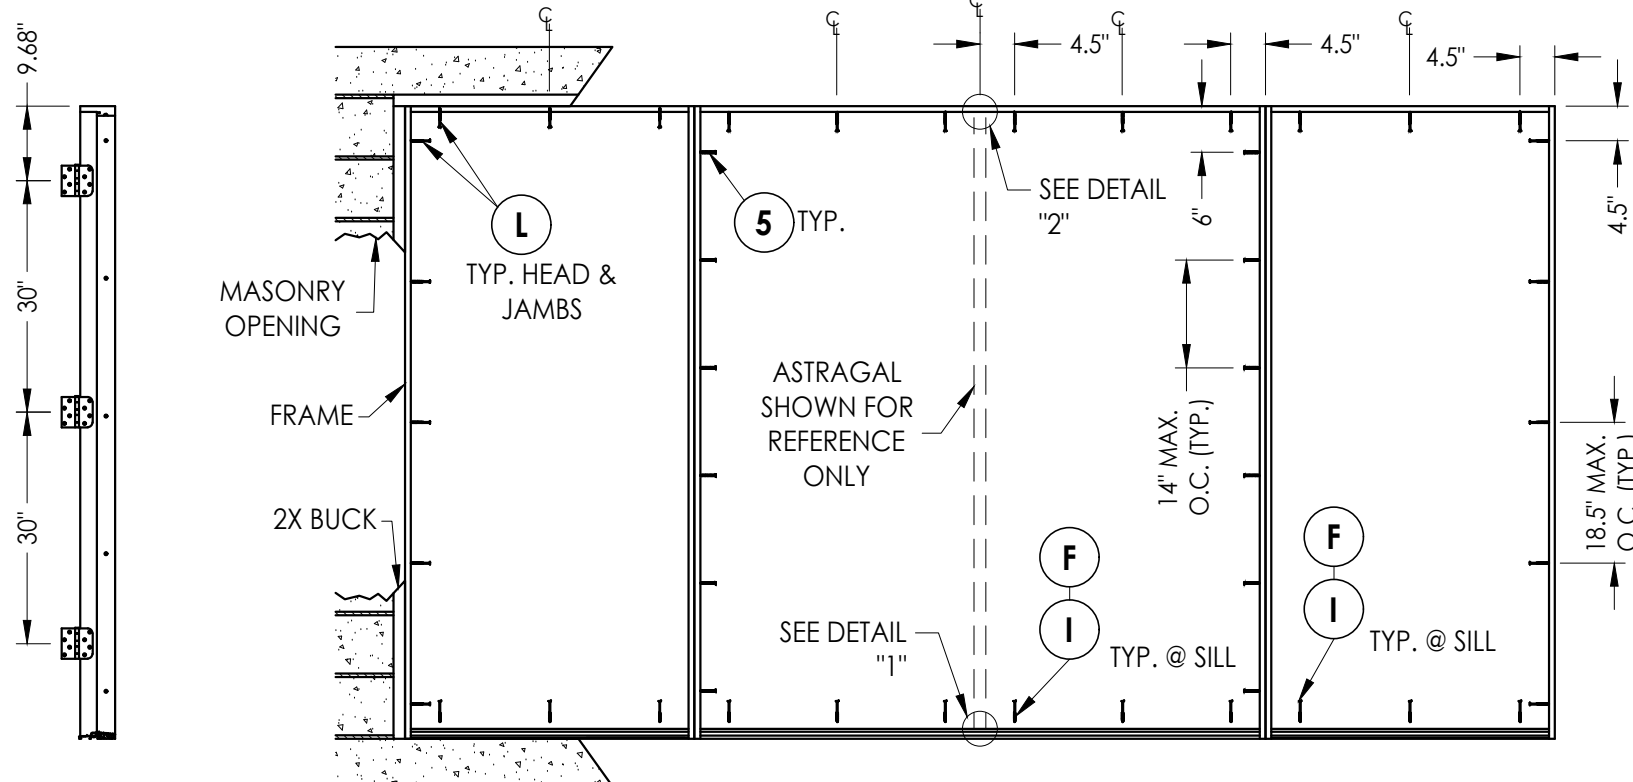

HINGE JAMB


FRAME ANCHORING
Masonry 2X buck construction

ASTRAGAL STRIKE JAMB

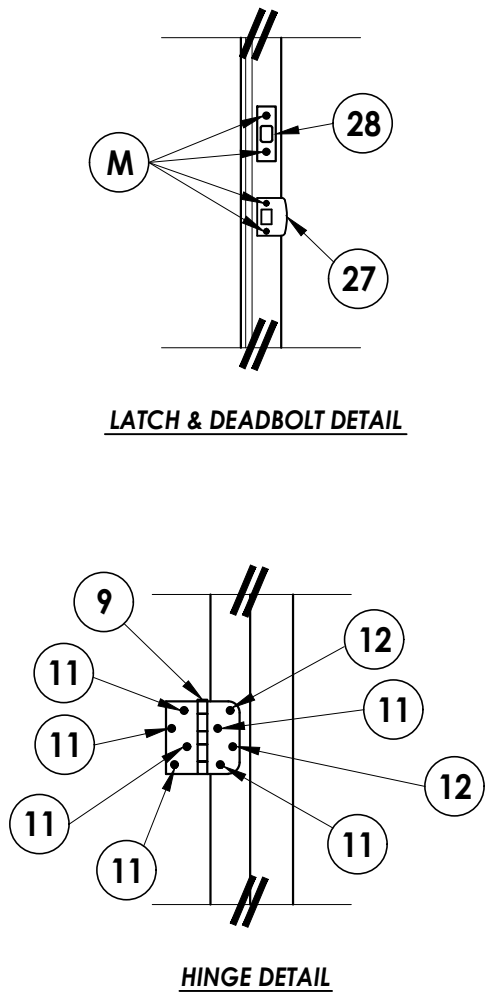


LATCH & DEADBOLT DETAIL


HINGE DETAIL

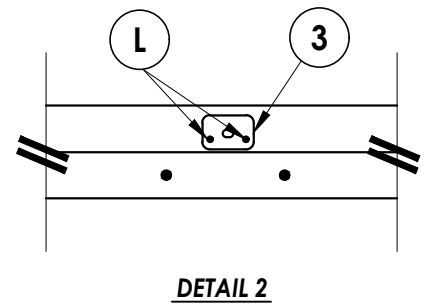

DETAIL 2

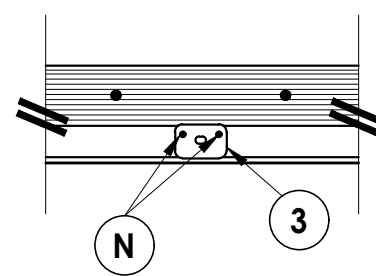

DETAIL 1
Inswing configuration

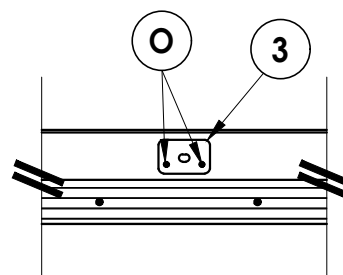

DETAIL 1
Outswing configuration

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON [®]	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON [®]	1/4"	1-1/4"	1"	4"
ITW TAPCON [®]	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING 2X BUCK
MASONRY CONSTRUCTION

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15215.5
SHEET 8 OF 11

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

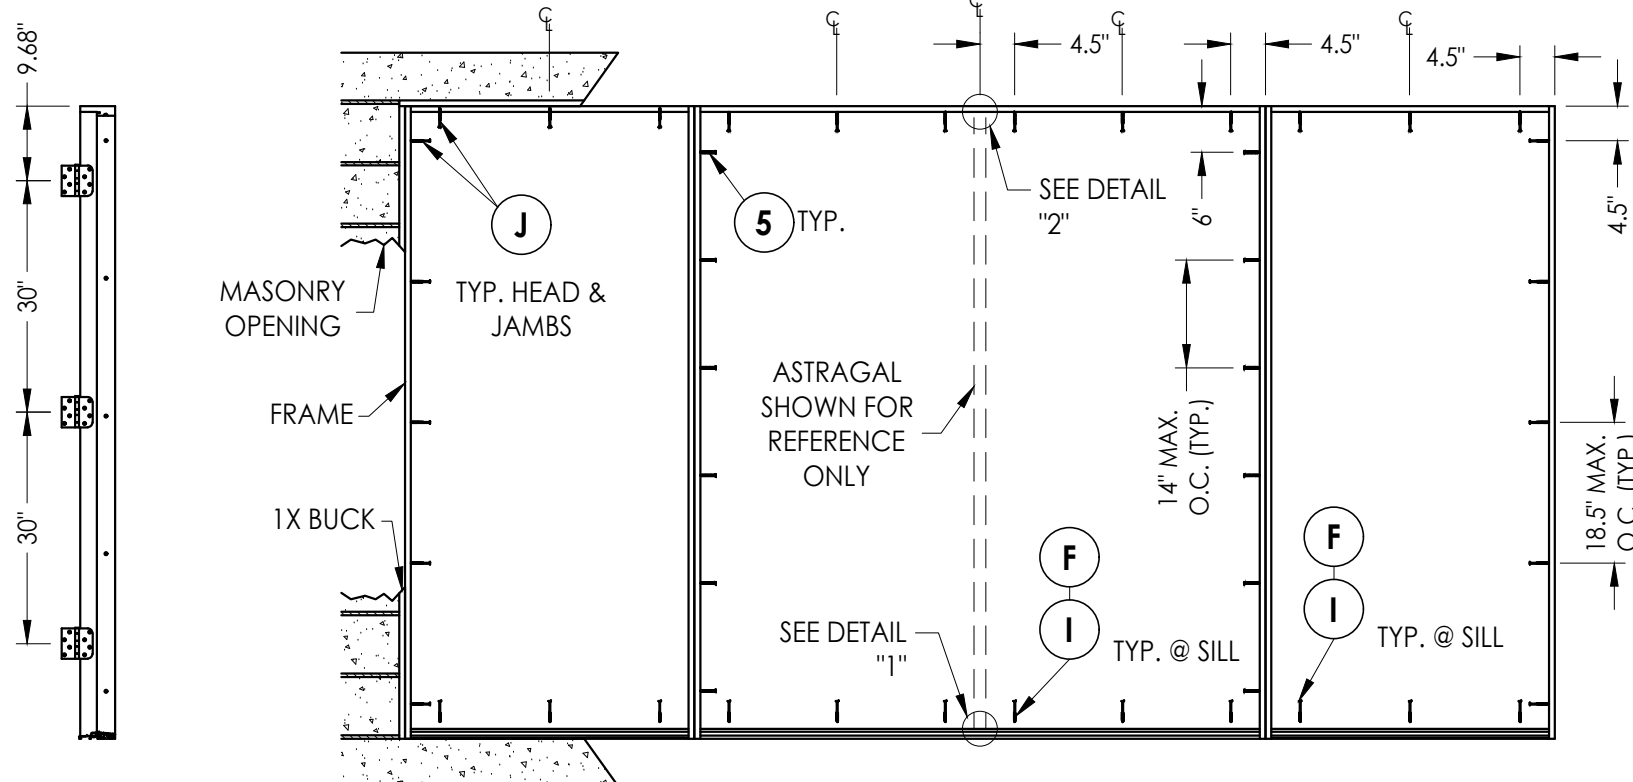


HINGE JAMB

FRAME ANCHORING
Masonry 1X buck construction


ASTRAGAL STRIKE JAMB

LATCH & DEADBOLT DETAIL


HINGE DETAIL

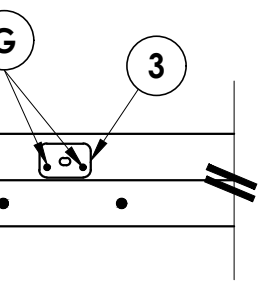

DETAIL 2

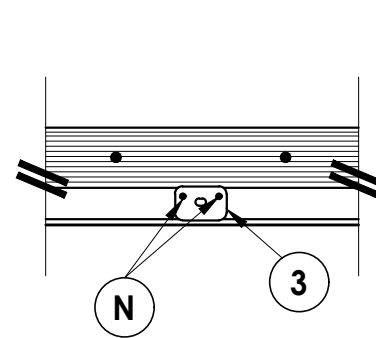

DETAIL 1
Inswing configuration

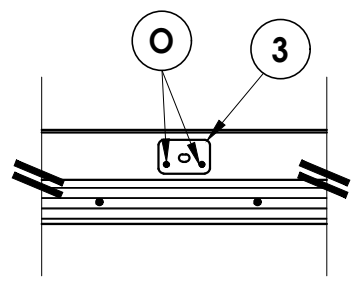

DETAIL 1
Outswing configuration

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813




PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING 1X BUCK
MASONRY CONSTRUCTION



NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/15/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	8/05/20	UPDATE TO 7TH ED. (2020) FBC DAC
2	7/25/17	UPDATE TO 6TH ED. (2017) FBC JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC JK

DATE: 02/15/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-15215.5
SHEET 9 OF 11

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

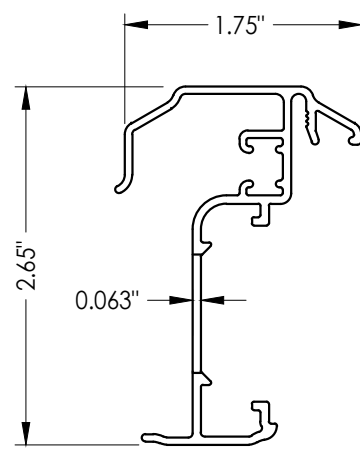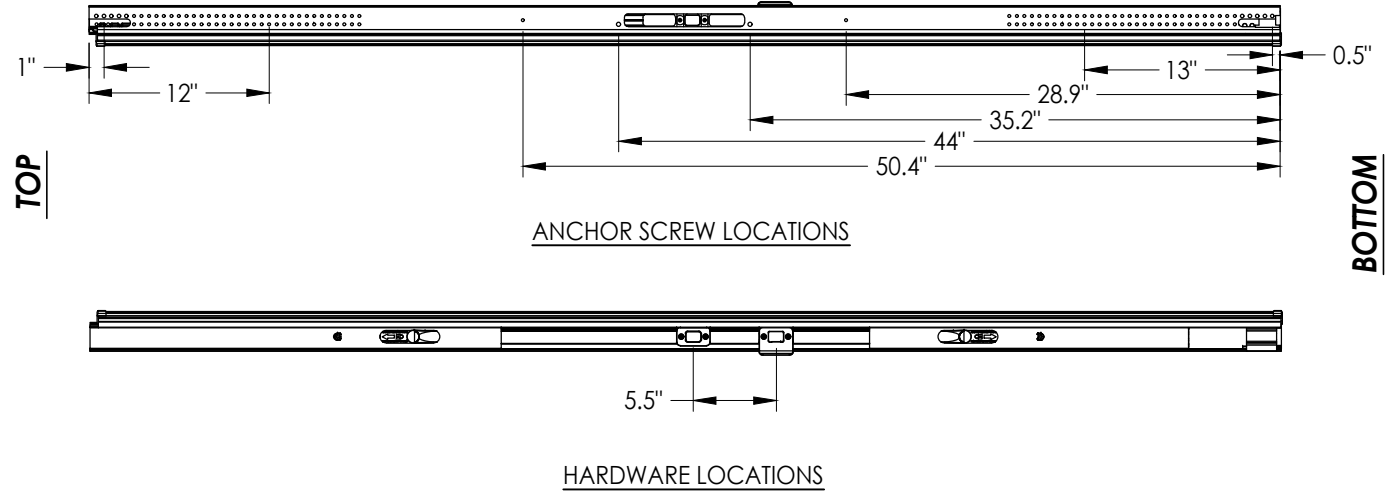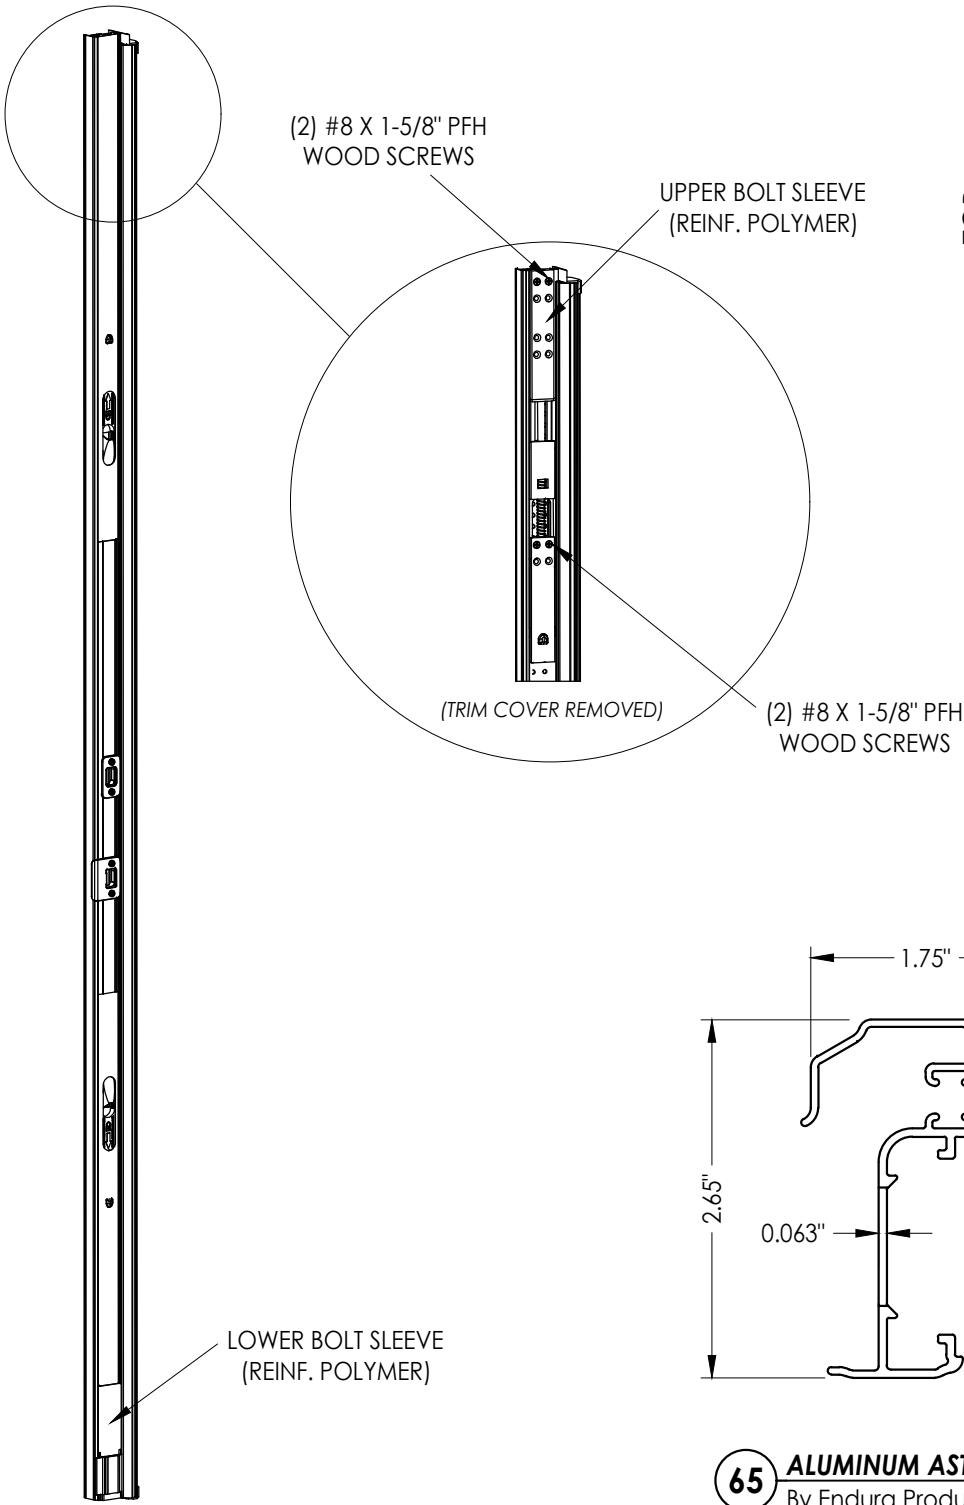

65 ALUMINUM ASTRAGAL
By Endura Products

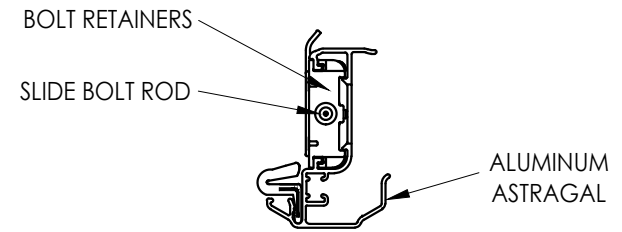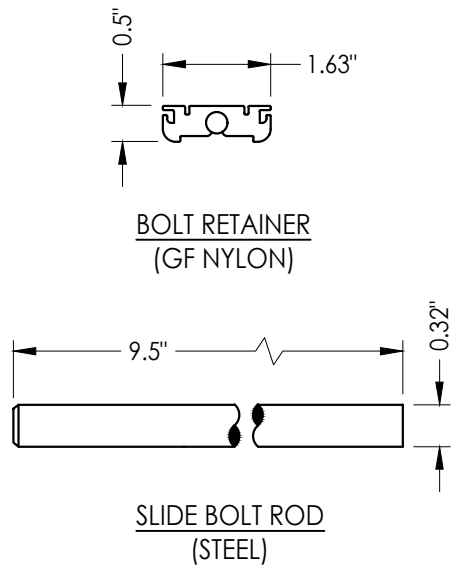

ALUMINUM ASTRAGAL ASSEMBLY

ULTIMATE HURRICANE ASTRAGAL

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		PRODUCT: PLASTPRO INC. FIBERGLASS DOOR		PART OR ASSEMBLY: ENDURA ASTRAGAL DETAILS	
5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS	
4	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC	
2	7/25/17	UPDATE TO 6TH ED. (2017)	FBC	JK	
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK	
NO.	DATE	REVISIONS			
DATE: 02/15/12					
SCALE: N.T.S.					
DWG. BY: JK					
CHK. BY: LFS					
DRAWING NO.: FL-15215.5					
SHEET 10 OF 11					


© 2012 R.W. BUILDING CONSULTANTS INC.

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-15215 R8\FL-15215.1-10.dwg

BILL OF MATERIALS					
ITEM	DESCRIPTION	MATERIAL	ITEM	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD	20	FINGER JOINTED PINE FRAME, HEAD & HINGE JAMBS	WOOD
B	2X BUCK SG >= 0.55	WOOD	22	#8 X 2" PFH WOOD SCREW	STEEL
C	1/4" MAX. SHIM SPACE	-	27	LATCH STRIKE PLATE	STEEL
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL	28	DEADBOLT STRIKE PLATE	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE	29	SIDELITE SPACER	PVC
			30	WEATHER-STOP 3647 HOLM INDUSTRIES	VINYL
F	1/4" X 2-3/4" PFH ITW CONCRETE SCREW	STEEL	31	OUTSWING BUMP THRESHOLD	ALUM. / WOOD
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL	33	INSWING ADJUSTABLE THRESHOLD BY ENDURA	ALUM. / WOOD
I	1/4" X 2-1/4" PFH ITW CONCRETE SCREW	STEEL	34	INSWING ADJUSTABLE ALUMINUM THRESHOLD BY DLP	ALUM. / WOOD
J	1/4" X 3-3/4" PFH ITW CONCRETE SCREW	STEEL	35	SHOE MOULD 5/8" X 3/8"	WOOD
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL	38	GLAZING SPACER	ALUM.
M	#9 X 2-1/4" PFH WOOD SCREW	STEEL	39	GLAZING BEAD	PVC
N	3/16" X 3-1/2" PFH ITW CONCRETE SCREW	STEEL	40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
O	3/16" X 1-1/2" PFH ITW CONCRETE SCREW	STEEL	41	DOOR SKIN (MIN. 0.075" THICK)	FIBERGLASS
1	#10 X 2-1/2" PFH SMS	STEEL	42	TOP RAIL	CELLULAR PVC
2	#8 X 3" PSH SMS	STEEL	43	LATCH & HINGE STILE	CELLULAR PVC
3	FLUSH BOLT STRIKE PLATE	STEEL	44	LOCK REINFORCEMENT	WOOD
5	#10 X 2" PFH SCREW	STEEL	45	BOTTOM RAIL	CELLULAR PVC
6	SEALANT	SILICONE	46	POLYURETHANE FOAM	POLYURETHANE
7	Q-LON 650 WEATHERSTRIP SCHLEGEL	FOAM	47	CONTINUOUS LATCH & HINGE STILE REINFORCEMENT	WOOD
9	4" X 4" BUTT HINGE	STEEL	49	GLAZING COMPOUND DOW 995	SILICONE
10	NOT USED	-	50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
11	#9 X 3/4" PFH WOOD SCREW	STEEL	65	ASTRAGAL (ENDURA)	ALUMINUM
12	#9 X 2" PFH WOOD SCREW	STEEL			
17	KWIKSET KEYED ENTRY - SIGNATURE SERIES	STEEL			
18	KWIKSET DEADBOLT - SIGNATURE SERIES (780)	STEEL			


CORROSION RESISTANCE - SALTWATER ENVIRONMENT
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

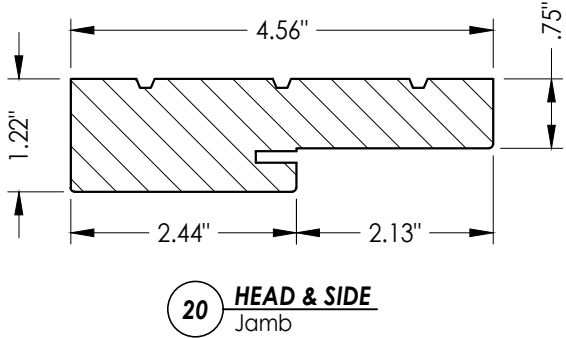


20 HEAD & SIDE
Jamb

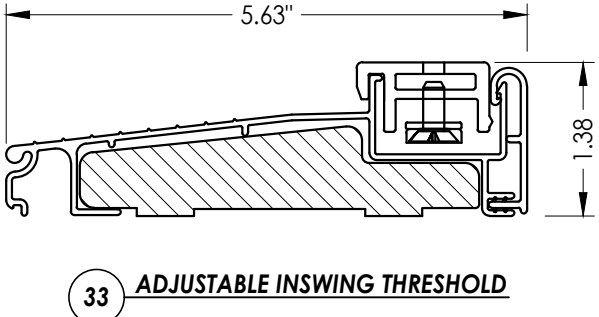


33 ADJUSTABLE INSWING THRESHOLD

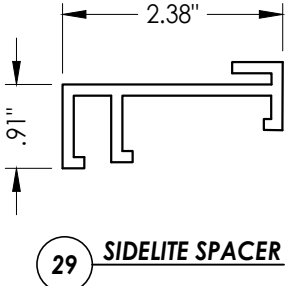


29 SIDELITE SPACER

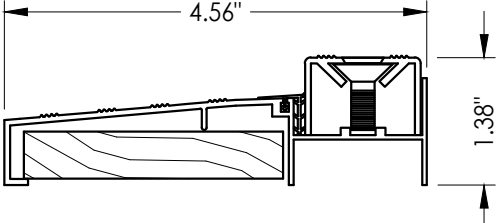

34 ADJUSTABLE INSWING THRESHOLD

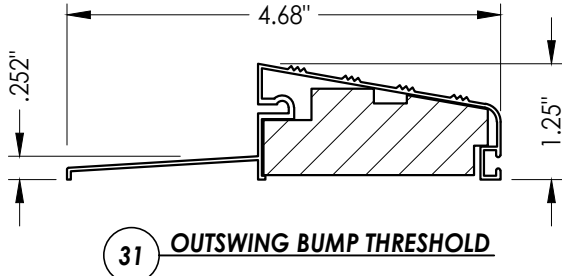

31 OUTSWING BUMP THRESHOLD

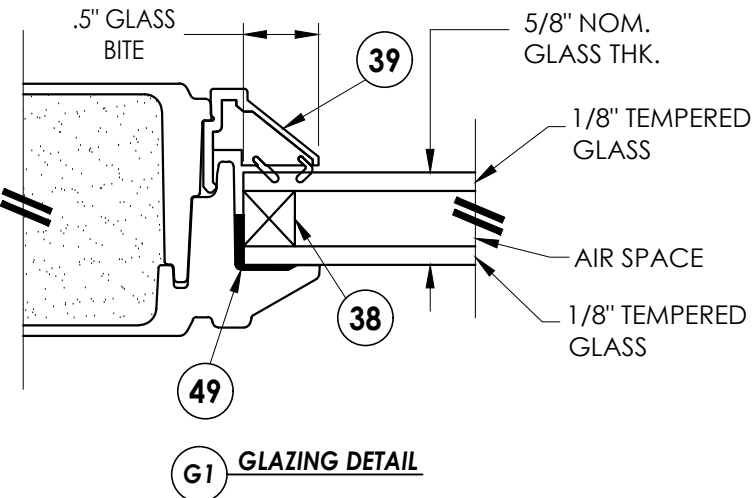

G1 GLAZING DETAIL

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
BILL OF MATERIALS, GLAZING
DETAIL & COMPONENTS

5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
4	8/15/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
3	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
2	7/25/17	UPDATE TO 6TH ED. (2017)	FBC	JK
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK
	NO.	DATE		BY

REVISIONS

DATE: 02/15/12

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.: FL-15215.5

SHEET 11 OF 11

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2012 R.W. BUILDING CONSULTANTS INC.