

PLY GEM WINDOWS - PRO SERIES CLASSIC / 1500 SERIES

TRANSOM & SIDELITE (NON-IMPACT)

- NOTES:
- THIS INSTALLATION HAS BEEN EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE OUTSIDE THE HVHZ, AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES DO NOT EXCEED THE DESIGN PRESSURE RATINGS HEREIN.
 - WHEN USED IN AREAS REQUIRING IMPACT PROTECTION, THIS PRODUCT REQUIRES THE USE OF APPROVED IMPACT PROTECTIVE DEVICES (SHUTTERS).
 - ANCHOR TYPE, SIZE, SPACING, EMBEDMENT, AND EDGE DISTANCE SHALL BE AS SPECIFIED IN THESE DRAWINGS. USE APPROPRIATE ANCHORAGE FROM TABLE I ACCORDING TO SUBSTRATE TYPE. A MINIMUM CENTER-TO-CENTER SPACING OF 3" SHALL BE MAINTAINED BETWEEN ALL INSTALLATION FASTENERS IN ANY DIRECTION. IF PRODUCT IS INSTALLED WITHIN 3000 FEET OF A SALTWATER COASTLINE, THE ANCHORAGE MUST BE REVIEWED FOR COMPLIANCE WITH FBC SECTION 17II, SEE EVALUATION REPORT FOR THIS APPROVAL FOR DETAILS.
 - ANCHOR EMBEDMENT TO SUBSTRATE SHALL BE BEYOND WALL DRESSING OR STUCCO. FOR MASONRY OPENINGS WITH WOOD BUCKS LESS THAN 1-1/2" THICK, EMBEDMENT SHALL BE BEYOND WOOD BUCKS, IF USED, AND INTO MASONRY SUBSTRATE. WOOD BUCKS WITH MASONRY ARE OPTIONAL.
 - WOOD, METAL, OR MASONRY OPENINGS, BUCKS, AND BUCK FASTENERS, BY OTHERS, SHALL BE PROPERLY DESIGNED AND INSTALLED BY OTHERS TO TRANSFER SUPERIMPOSED LOADS TO THE STRUCTURE. ADEQUACY OF THE STRUCTURE TO RECEIVED THESE LOADS SHALL BE VERIFIED BY THE CONTRACTOR OR AUTHORITY HAVING JURISDICTION (AHJ).
 - IT IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD OR AS APPROVED BY THE AHJ TO SELECT PLY GEM PRODUCTS TO MEET ALL APPLICABLE LOCAL LAWS, BUILDING CODES, ORDINANCES, OR OTHER SAFETY REQUIREMENTS FOR EACH INSTALLATION.
 - SHIMS ARE REQUIRED WHERE GAPS OF GREATER THAN 1/16" EXIST BETWEEN OPENING AND FRAME. MAX. SHIM STACK IS 1/4". SHIMS SHALL BE LOAD-BEARING AND CAPABLE OF TRANSFERRING LOADS TO THE SUBSTRATE.
 - SEALING AND FLASHING STRATEGIES FOR OVERALL WATER INFILTRATION RESISTANCE OF THE INSTALLED PRODUCT SHALL BE THE RESPONSIBILITY OF OTHERS USING ASTM E 2112 AND IS NOT ADDRESSED BY THIS DOCUMENT.
 - INSTALLED GLAZING SHALL COMPLY WITH ASTM E 1300.
 - ALL FASTENERS PENETRATING INTO PRESSURE TREATED WOOD SHALL BE CAPABLE OF PREVENTING CORROSION DUE TO REACTION WITH PRESSURE TREATMENT CHEMICALS. ANY DISSIMILAR MATERIALS THAT COME INTO CONTACT SHALL BE PROTECTED TO PREVENT REACTIONS IN ACCORDANCE WITH CODE REQUIREMENTS.
 - A WIND LOAD DURATION FACTOR Cd = 1.6 WAS USED FOR THE ANALYSIS OF WOOD SCREWS ONLY.
 - PRODUCTS SHALL BE CONSTRUCTED AS SPECIFIED IN TEST REPORTS NATIONAL CERTIFIED TESTING LABORATORIES I10-21569-I, I10-21906-I AND I10-21568-I.
 - DESIGNATION "X" IS FOR OPERABLE PANEL AND "O" IS FOR FIXED PANEL.
 - USE A BACKER ROD ON ALL JOINTS >3/4" DEEP AND/OR WIDER THAN 1/4". FINISHED CAULK JOINT SHOULD BE A MINIMUM OF 3/8" DEEP.

SIZE CHART						
PRODUCT	OVERALL SIZE		PRODUCT RATING	MAX. DESIGN PRESSURE	GLAZING DETAIL	MISSILE IMPACT RATING
	WIDTH	HEIGHT				
TRANSOM	95-1/2"	38-1/4"	LC-PG55	+55/-55 PSF	1	NON-IMPACT
SIDELITE	50-1/8"	95-1/2"	LC-PG45	+45/-45 PSF	2	
	38-3/16"	95-1/2"	LC-PG60	+60/-60 PSF	2	

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATIONS & ANCHOR LAYOUTS
3	HORIZONTAL SECTIONS & GLAZING DETAIL

Lucas Turner
2026.09.25
13:43:52
-05'00'

TABLE I: INSTALLATION FASTENERS TABLE				
ID	SUBSTRATE TYPE	ANCHOR TYPE	MIN. EMBED.	MIN. EDGE DISTANCE
FIN INSTALLATION				
A	2X MIN. SPRUCE-PINE-FIR WOOD (G=0.42)	8D COMMON NAIL	2"	3/8"
B	2X MIN. SPRUCE-PINE-FIR WOOD (G=0.42)	#8 WOOD SCREW	1-1/2"	3/8"
C	16 GAUGE (0.060") STEEL 36 KSI MIN. OR 1/8" ALUM. 6063-T5 MIN.	#10-16 SELF-DRILLING SCREW (TEKS/DRIL-FLEX/KWIK-FLEX)	FULL, PLUS 3 THREADS MIN.	1/2"

*NOTE: ALL SCREWS SHALL HAVE MOD. TRUSS, PAN, OR HEX WASHER HEAD, 0.42" MIN. HEAD OR WASHER DIAMETER. ALL NAILS SHALL HAVE FULL ROUND HEAD (OR USE CAPS/WASHERS), 0.42" MIN. HEAD OR WASHER DIAMETER.




Part of the **Cemarsone Building Brands Family**

433 N. MAIN ST.,
PO BOX 559,
ROCKY MOUNT, VA 24151

PH: 540-484-6348
FX: 540-484-6683

TITLE: PRO CLASSIC/1500 SERIES TRANSOM & SIDELITE INSTALLATION & GENERAL NOTES			
NO.	REVISION DESCRIPTION	BY	DATE
A	UPDATED TITLEBLOCK	LMH	08.10.22
B	UPDATED TO CURRENT FBC.	LMH	08.17.26

DATE: 07.18.16	DWN BY: HFN	CHK BY:	SCALE: NTS
-------------------	----------------	---------	---------------

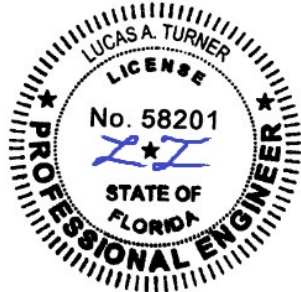


08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574

FL#: 15296


DWG #: PGW118

SHEET: 1 OF 3

TITLE: PRO CLASSIC/1500 SERIES TRANSOM & SIDELITE INSTALL & GENERAL NOTES, ELEVATION & ANCHOR LAYOUT				
NO.	REVISION DESCRIPTION	BY	DATE	
A	UPDATED TITLEBLOCK	LMH	08.10.22	
B	UPDATED TO CURRENT FBC.	LMH	08.17.26	
DATE:	DWN BY:	CHK BY:	SCALE:	
07.18.16	HFN		NTS	

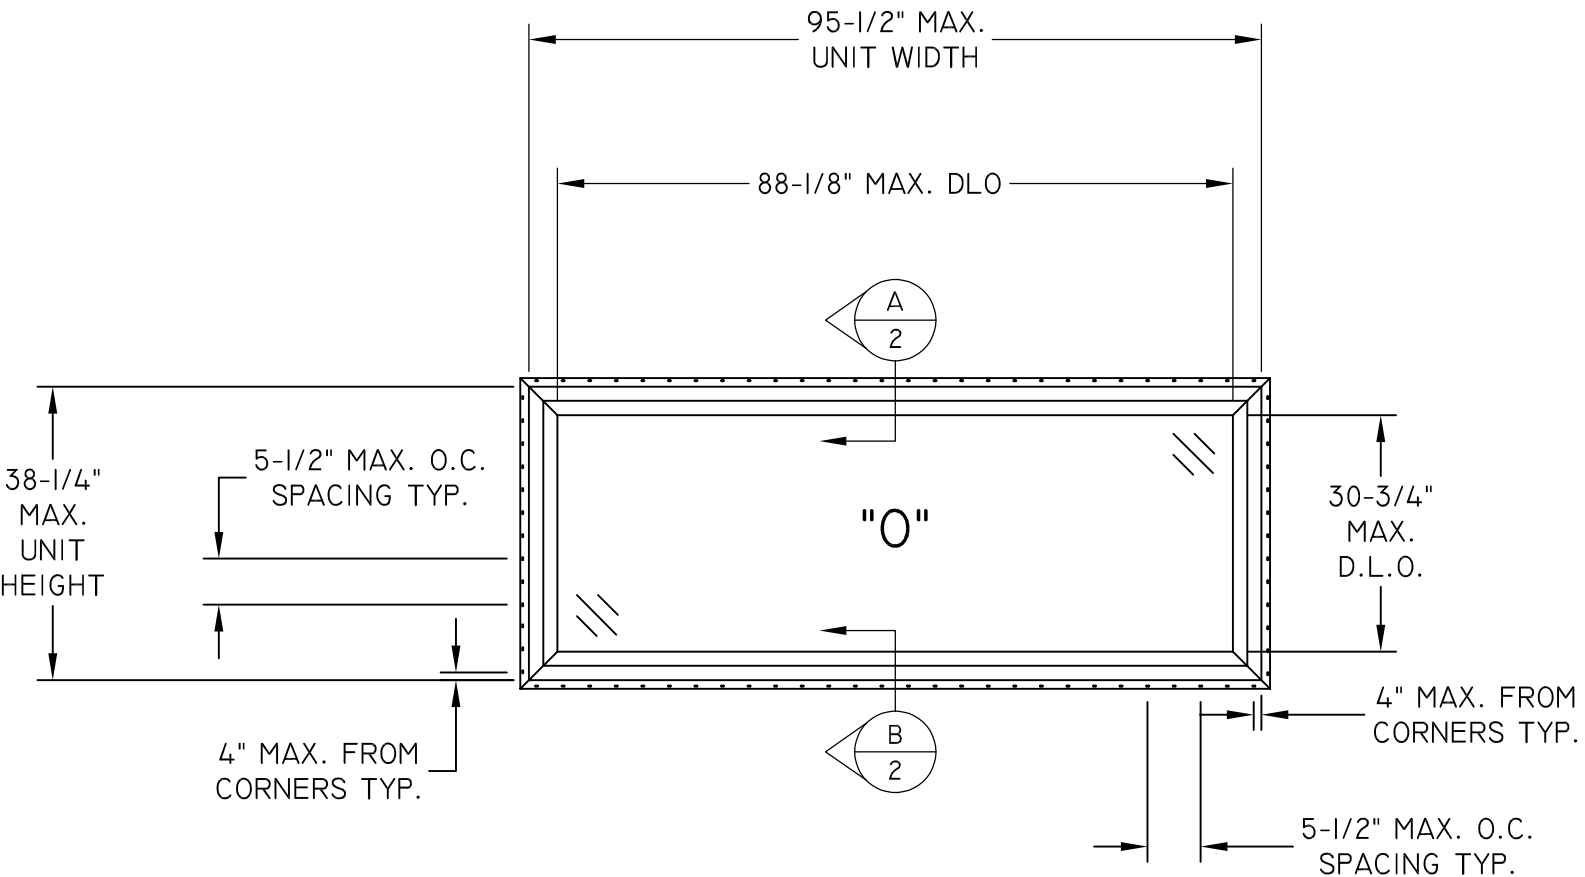

TYPICAL ELEVATION WITH FASTENER SPACING
TRANSOM

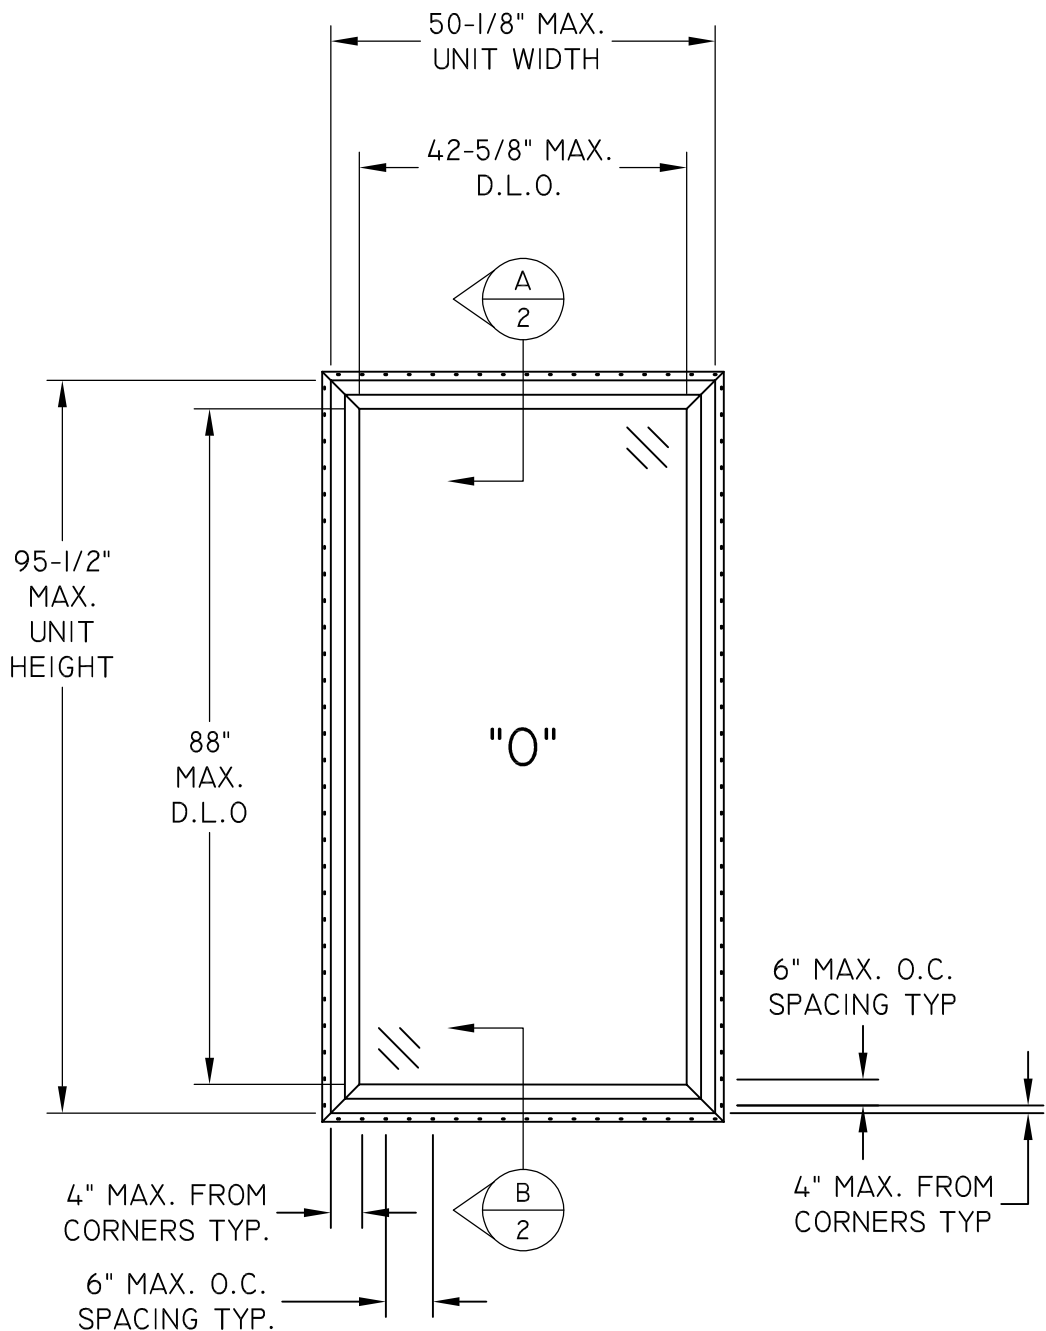

TYPICAL ELEVATION WITH FASTENER SPACING
SIDELITE

ANCHOR SPACING ABOVE APPLIES TO ALL SIDELITE
SIZES & DP RATINGS, SEE SHEET I SIZE CHART.




08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574


FL#: 15296

DWG #: PGWII8


SHEET: 2 OF 3

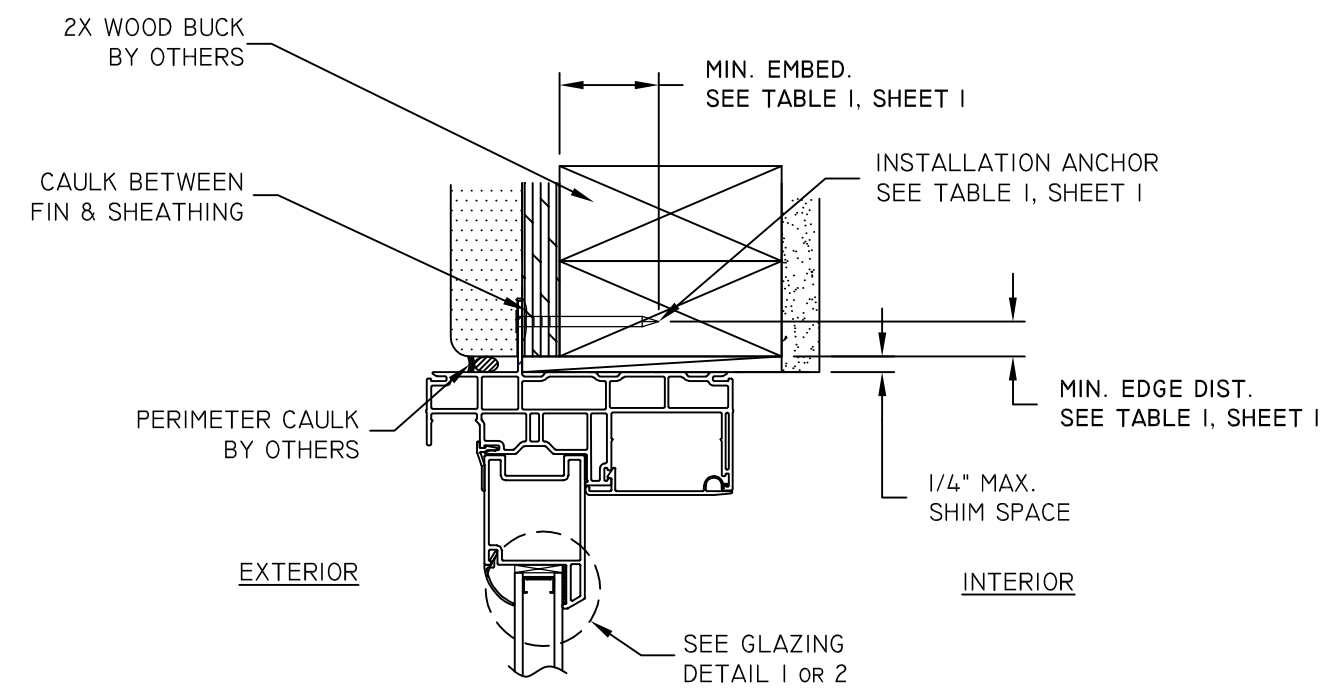


A
2
VERTICAL SECTION
2X WOOD FRAME - HEAD
SIDELITE/TRANSOM

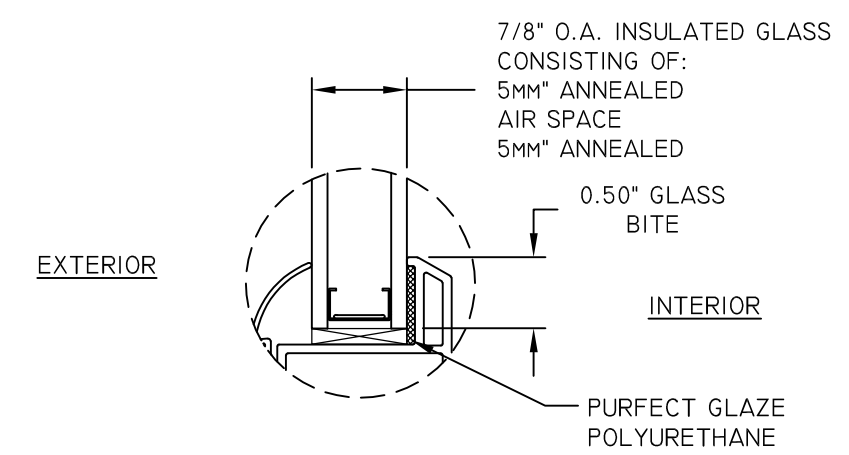

GLAZING DETAIL 1

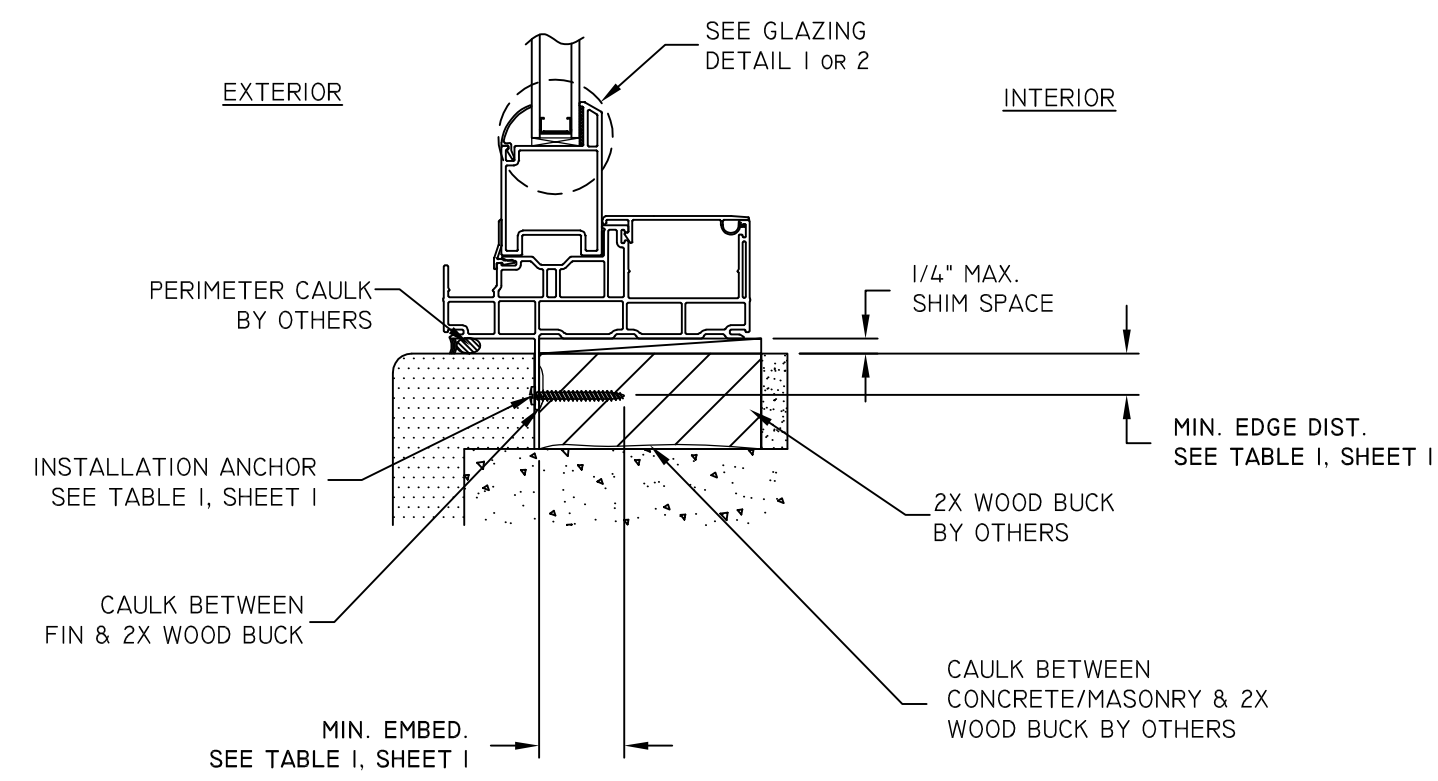


B
2
VERTICAL SECTION
2X WOOD BUCK - SILL
SIDELITE/TRANSOM

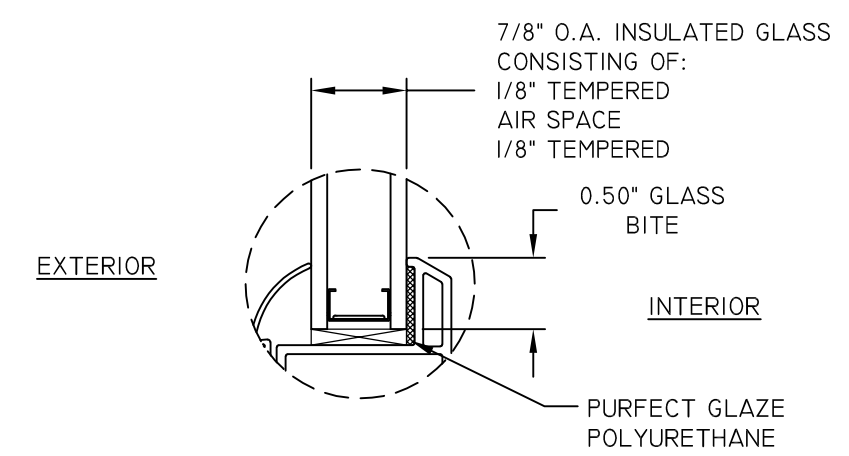

GLAZING DETAIL 2

TITLE: PRO CLASSIC/1500 SERIES TRANSOM & SIDELITE HORIZONTAL SECTIONS & GLAZING DETAIL	DATE	BY	REVISION DESCRIPTION		
	07.18.16	HFN			
	DWN BY:	LMH	UPDATED TITLEBLOCK		
	CHK BY:	LMH	UPDATED TO CURRENT FBC.		
	SCALE:	NTS			

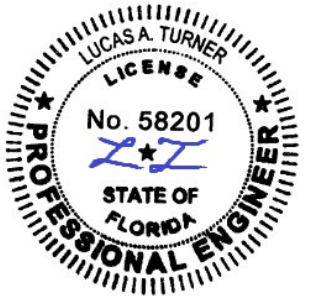

08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574

FL #: **15296**

DWG #: **PGW118**

SHEET: **3 OF 3**