

s:\projects\andersen windows\cc-20-0224 - code change - fbc 2020 (version 7)\code change\revisions\15497\dwg\awd178 a-series dh.dwg 9/12/2022 8:59 AM

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 3/8 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
5. **INSTALLATION CLIP:** FOR INSTALLATION INTO WOOD FRAMING USE TWO (2) #10 WOOD SCREWS PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
6. **INSTALLATION CLIP:** FOR INSTALLATION INTO METAL STUD OR APPROVED MULLION USE TWO (2) #10-16 GR. 5 SELF-TAPPING SCREW PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE A MINIMUM OF 3 THREADS PENETRATION BEYOND METAL FRAME SUBSTRATE.
7. **INSTALLATION CLIP:** FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE TWO (2) 3/16 INCH DIAMETER ITW TAPCONS OR ONE (1) 1/4" ITW TAPCON PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT. ANCHORS SHALL BE INSTALLED THROUGH CLIP SUCH THAT A MINIMUM 1 3/4" O.C. SPACING IS MAINTAINED.
8. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
9. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
10. FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
11. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
12. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

A. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.

C. GROUT-FILLED CMU- UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI AND GROUT CONFORMS TO ASTM C 476, MINIMUM GROUT COMPRESSIVE STRENGTH OF 2000 PSI.

D. HOLLOW BLOCK CMU - UNIT STRENGTH CONFORMS TO ASTM C-90 WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI.

E. STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM WALL THICKNESS OF 35.9 MIL (0.0359" or 20 GAUGE). MIN. 1/2" EDGE DISTANCE.

F. ALUMINUM - MINIMUM ALLOY 6063-T5. MINIMUM WALL THICKNESS OF 0.078". MIN. 1/2" EDGE DISTANCE.

ANDERSEN CORPORATION

A-SERIES DOUBLE HUNG WINDOW

WITH STORMWATCH PROTECTION

(HVHZ)(IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:

AAMA/WDMA/CSA 101/I.S.2/A440-11

ASTM E1886-13

ASTM E1996-14

TAS 201-94

TAS 202-94

TAS 203-94
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING, AND METAL FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: PINE
7. CLADDING MATERIAL: FIBREX ® AND FIBERGLASS
8. IN ACCORDANCE WITH THE FBC, WOOD COMPONENTS SHALL HAVE BEEN PRESERVATIVE TREATED OR SHALL BE OF A DURABLE SPECIES.
9. GLASS MEETS THE REQUIREMENTS OF ASTM E 1300 GLASS CHARTS. SEE SHEET 4 FOR GLAZING DETAILS.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATION & ANCHOR LAYOUTS
3	VERTICAL SECTIONS
4	HORIZONTAL SECTIONS & GLAZING OPTIONS
5	BILL OF MATERIALS & COMPONENTS
6	COMPONENTS

OVERALL SIZE		DESIGN PRESSURE	MISSILE IMPACT RATING
WIDTH	HEIGHT		
47 1/4"	95 1/4"	+70/- 70 PSF	LARGE & SMALL MISSILE IMPACT



ANDERSEN
WINDOWS & DOORS

100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096

PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
A-SERIES DOUBLE HUNG WINDOW
WITH STORMWATCH PROTECTION
(HVHZ)(IMPACT)

INSTALLATION & GENERAL NOTES



PREPARED BY:

BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004


PH: (954)399-8478
FAX: (954)744-4738

WEB: www.buildingdrops.com

REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2022.09.12 18:01:47 -0400

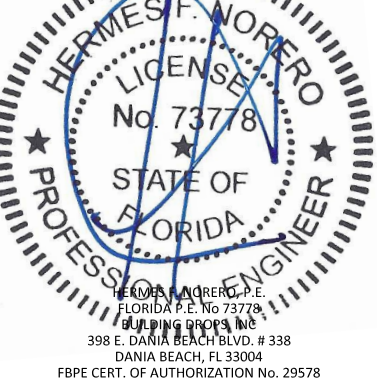

FL #:	FL15497
DATE:	09.30.17
DWG. BY: SM	CHK. BY: HFN
SCALE:	NTS
DWG. #:	AWD178
SHEET:	1



ANDERSEN
WINDOWS & DOORS

100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096

PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
A-SERIES DOUBLE HUNG WINDOW
WITH STORMWATCH PROTECTION
(HVHZ)(IMPACT)

ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY:
BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL #:
FL15497

DATE: **09.30.17**

DWG. BY:
SM

CHK. BY:
HFN


SCALE: **NTS**

DWG. #: **AWD178**


SHEET:

2

OF 6

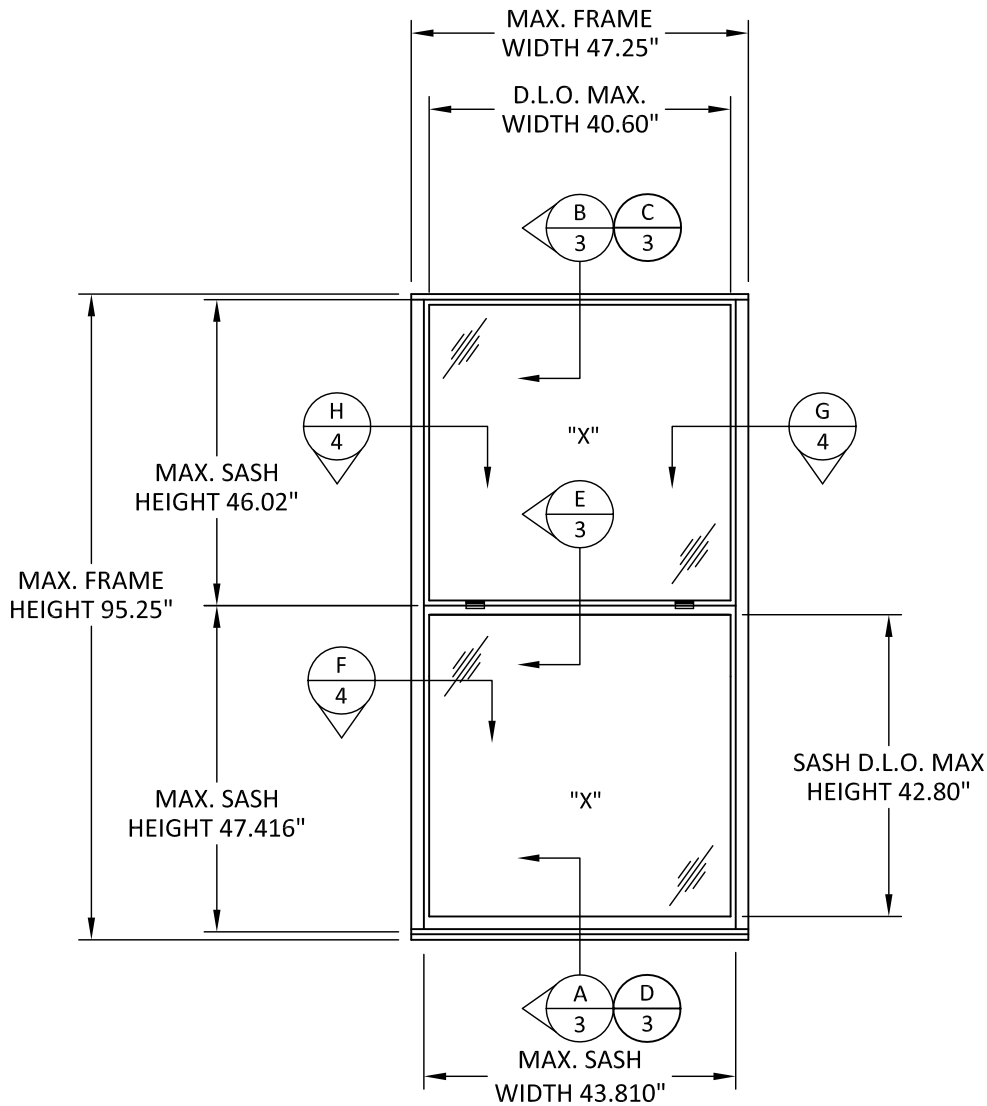


TYPICAL ELEVATION
EQUAL LITE

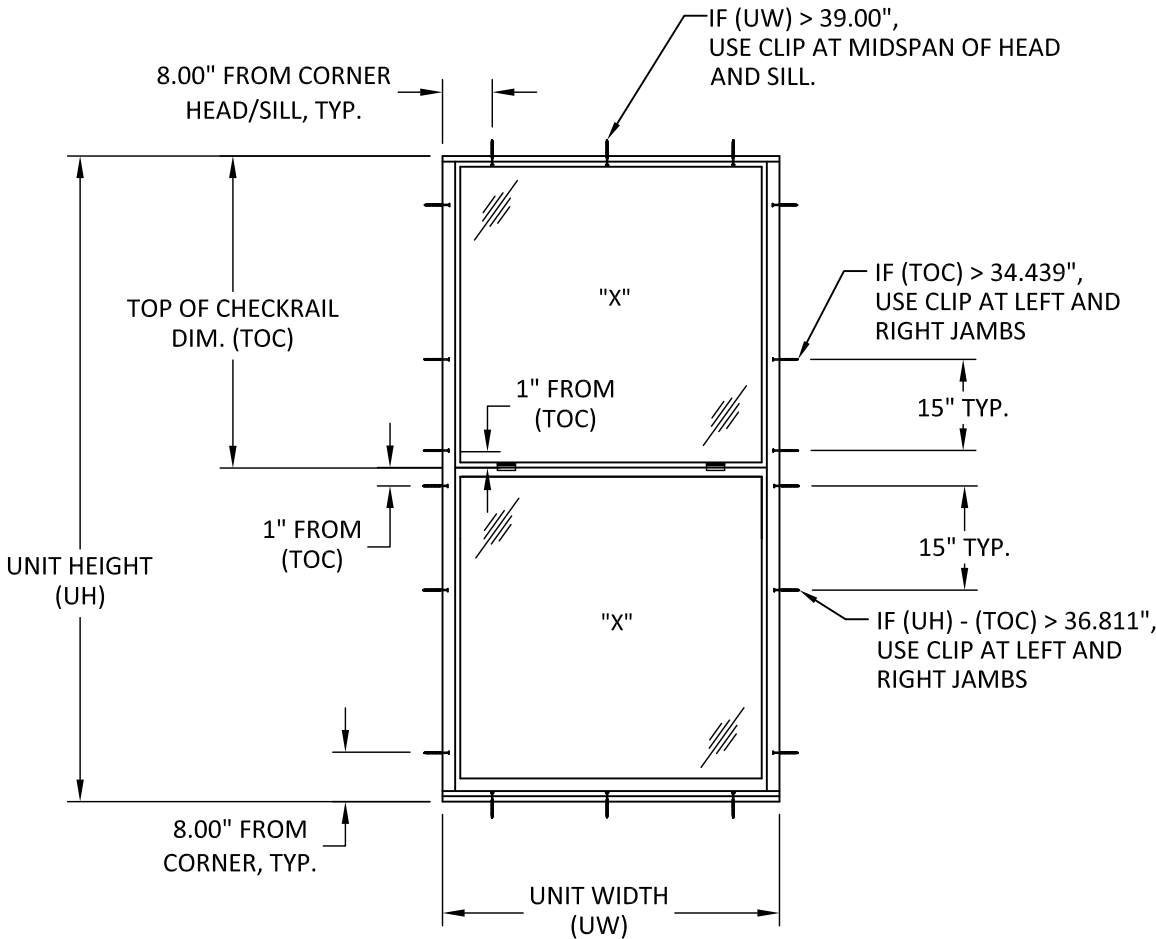

ANCHOR LAYOUT
INSTALLATION CLIPS

ANCHOR LEGEND
— INSTALLATION CLIP LOCATION.




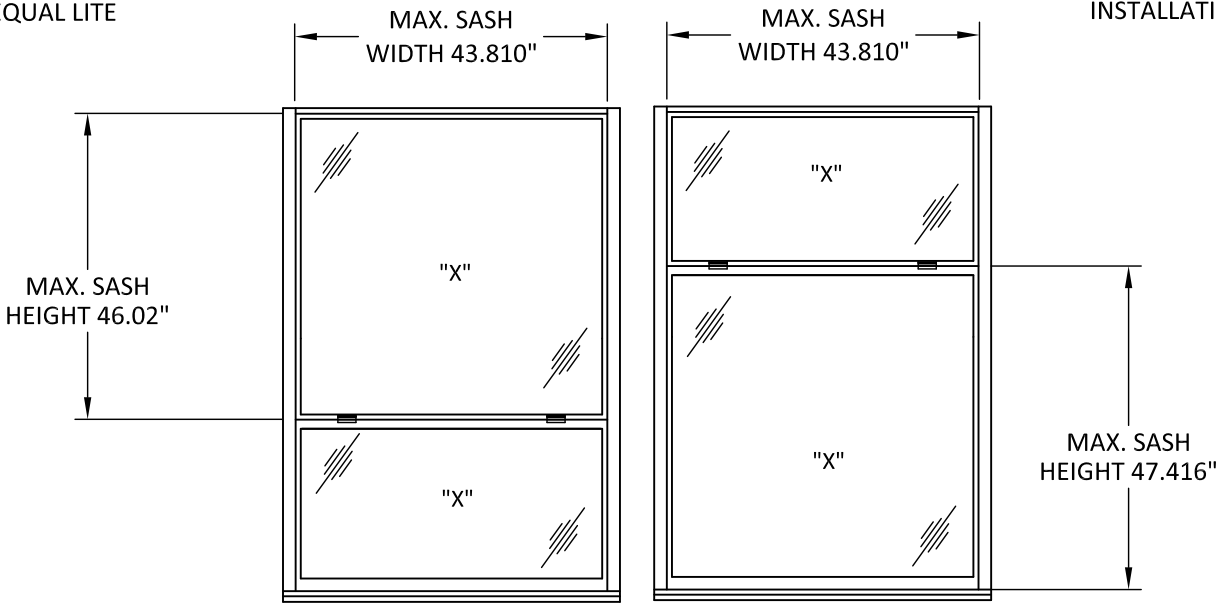


TYPICAL ELEVATION
UNEQUAL LITE

NOTE: COTTAGE AND REVERSE COTTAGE CONFIGURATIONS ARE QUALIFIED SUCH THAT MAXIMUM SASH DIMENSIONS DO NOT EXCEED THOSE SHOWN.

s:\projects\andersen windows\cc-20-0224 - code change - fbc 2020 (version 7) code change\revisions\115497\dwg\awd178 a-series dh.dwg

9/12/2022 8:59 AM

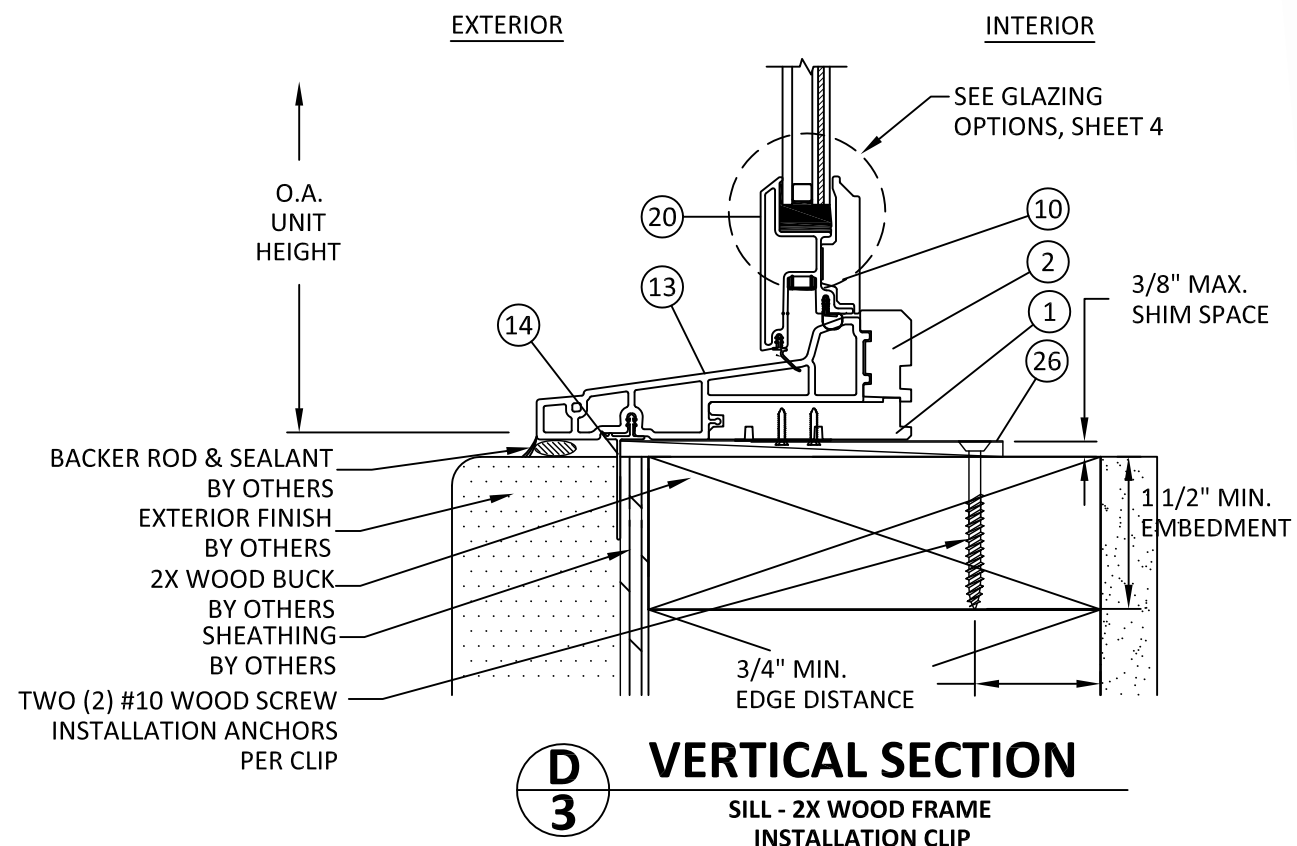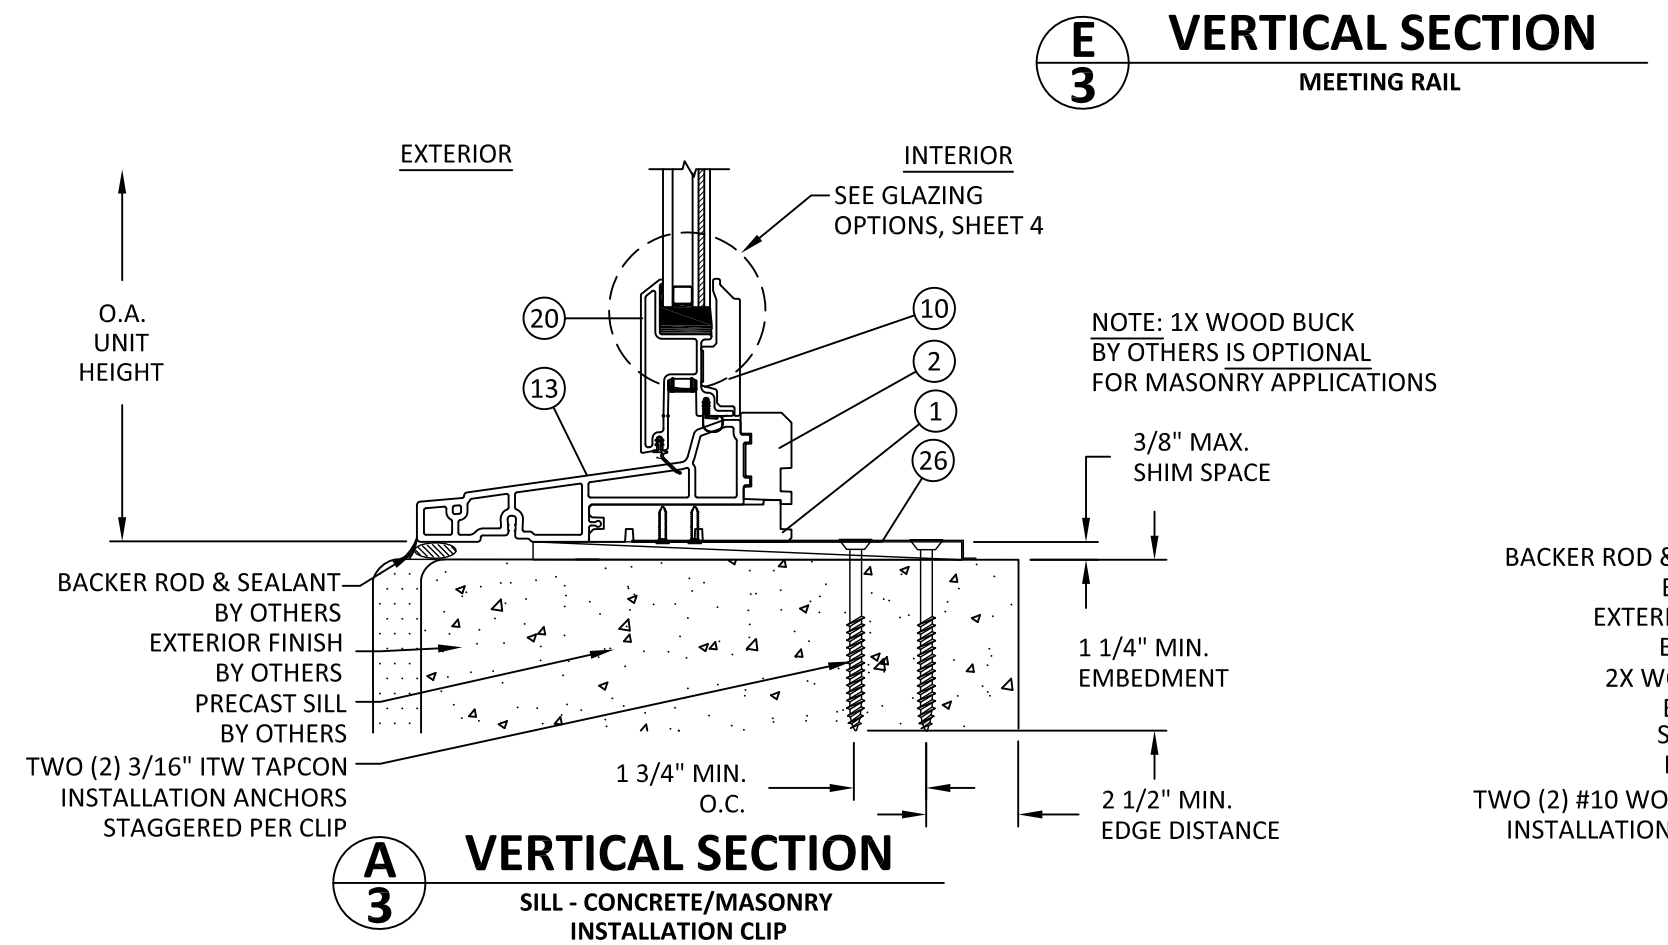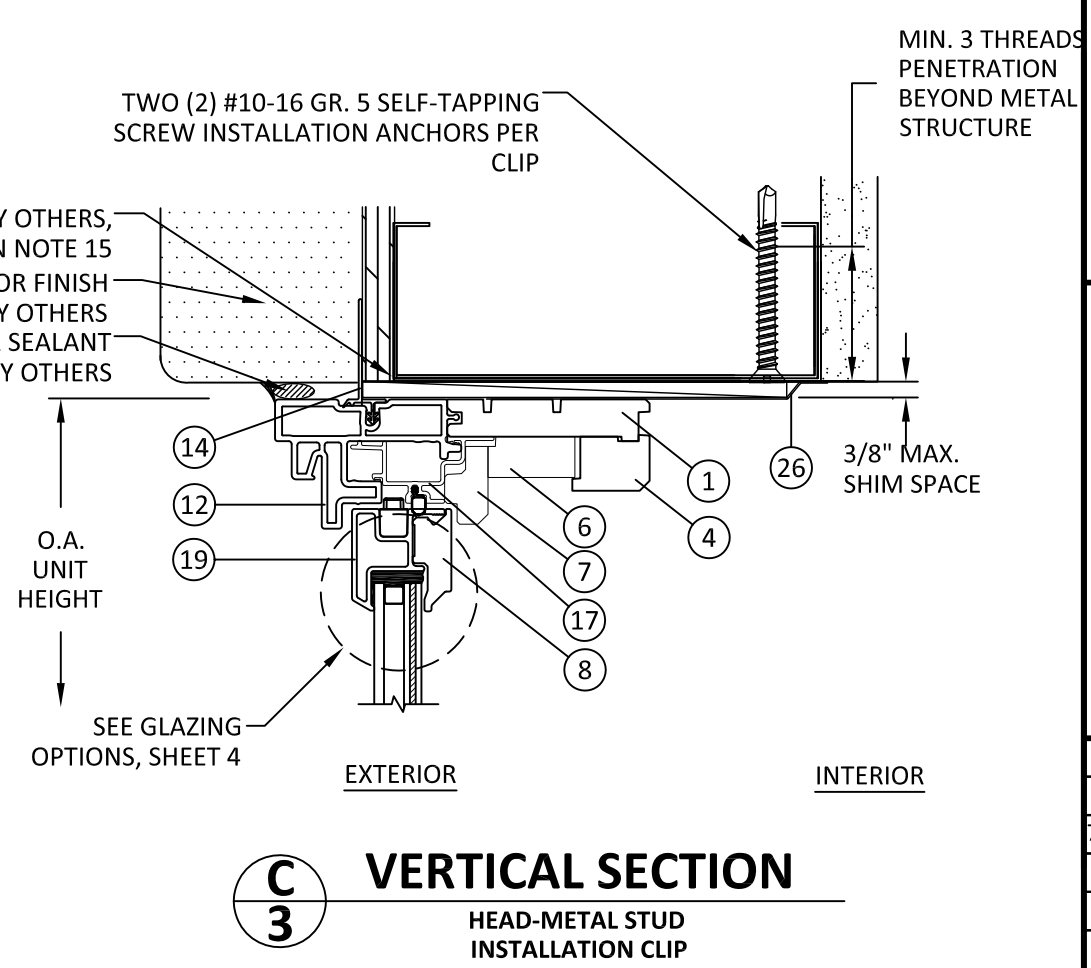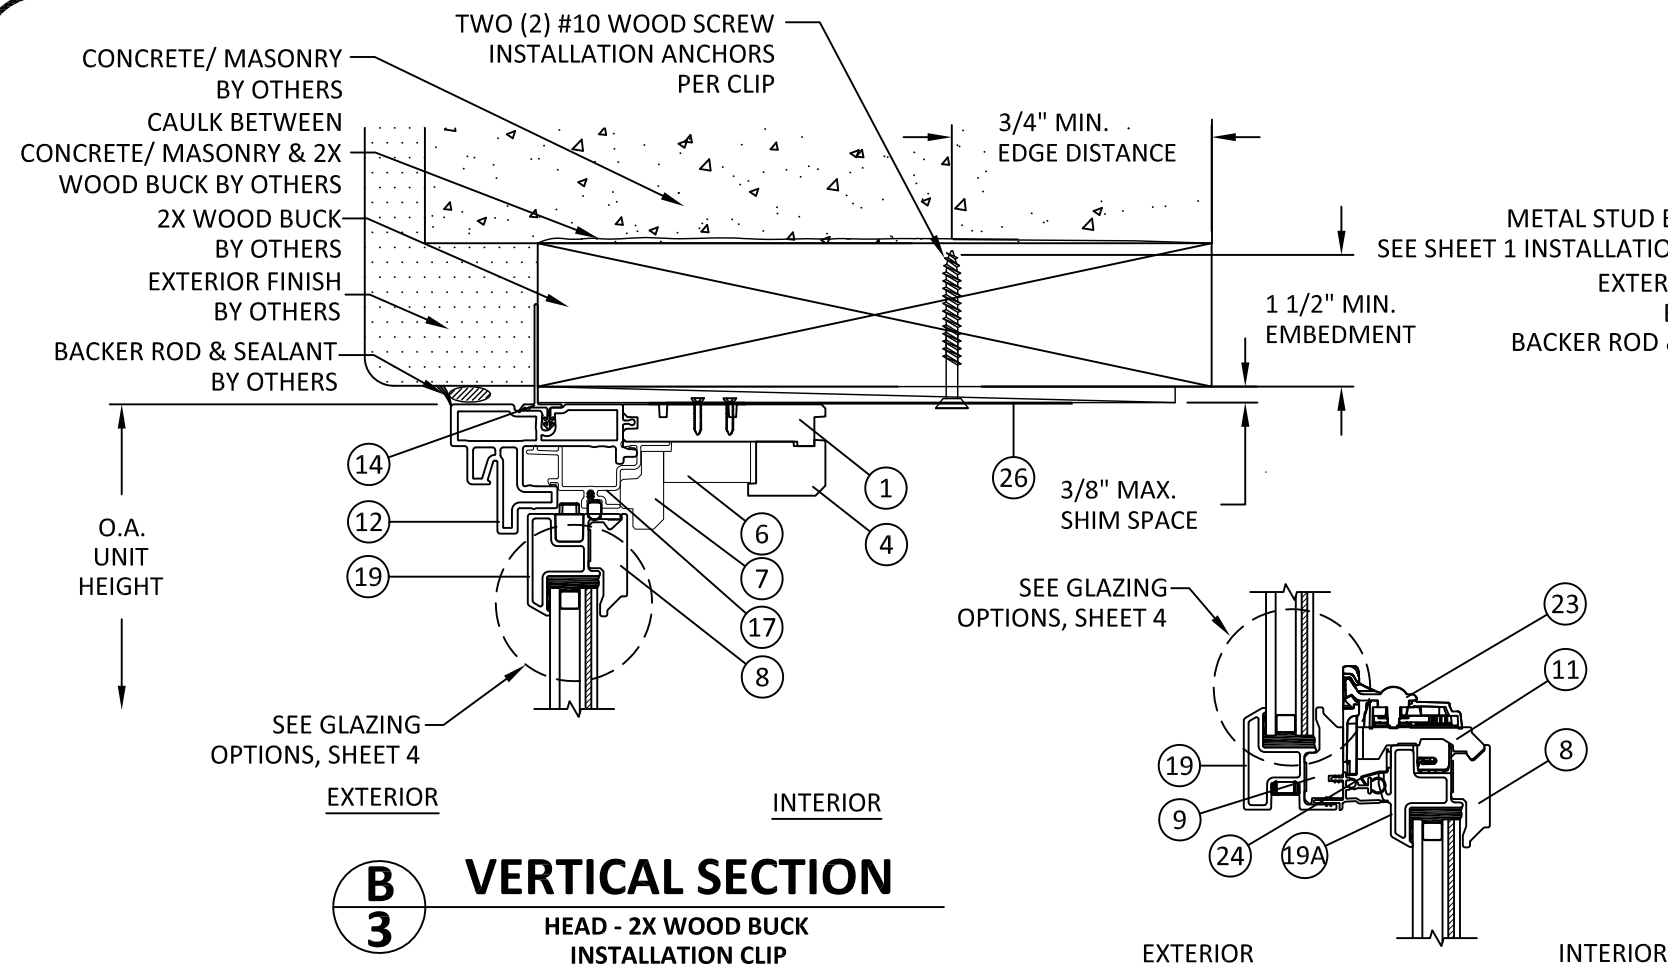

ANDERSEN
WINDOWS & DOORS

100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096

PH: (651) 264-5150 FX: (651) 264-5485


TITLE:
A-SERIES DOUBLE HUNG WINDOW
WITH STORMWATCH PROTECTION
(HVHZ)(IMPACT)
VERTICAL SECTIONS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

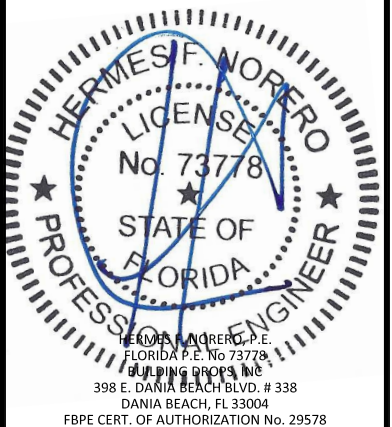

FL #:	FL15497
DATE:	09.30.17
DWG. BY:	SM
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD178
SHEET:	3



ANDERSEN
WINDOWS & DOORS

100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096

PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
A-SERIES DOUBLE HUNG WINDOW
WITH STORMWATCH PROTECTION
(HVHZ/IMPACT)
HORIZONTAL SECTIONS &
GLAZING OPTIONS


PREPARED BY:
BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

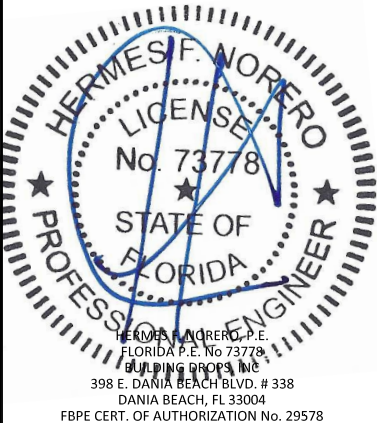


FL #:	FL15497
DATE:	09.30.17
DWG. BY:	SM
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD178
SHEET:	4

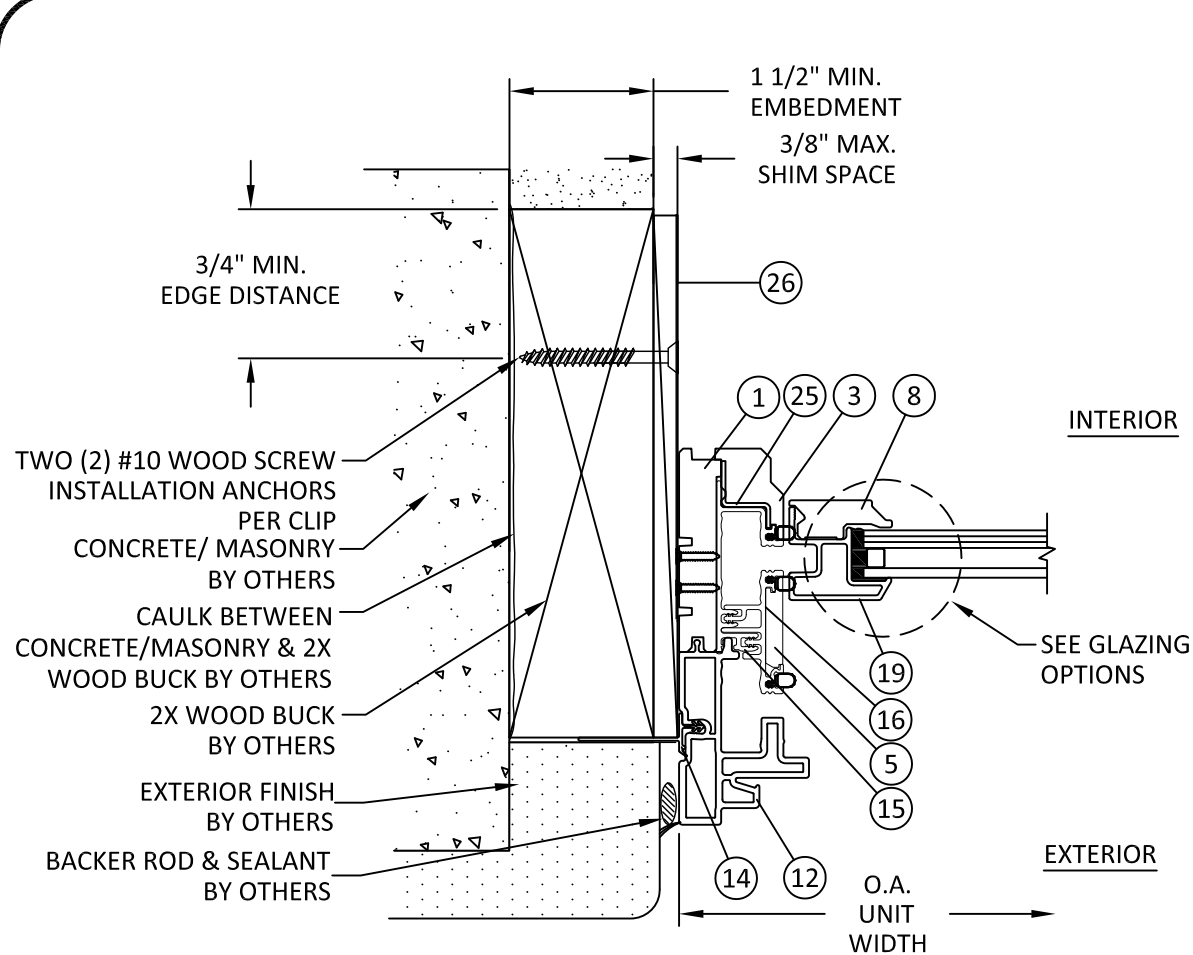


F HORIZONTAL SECTION

JAMB - 2X WOOD BUCK
INSTALLATION CLIP

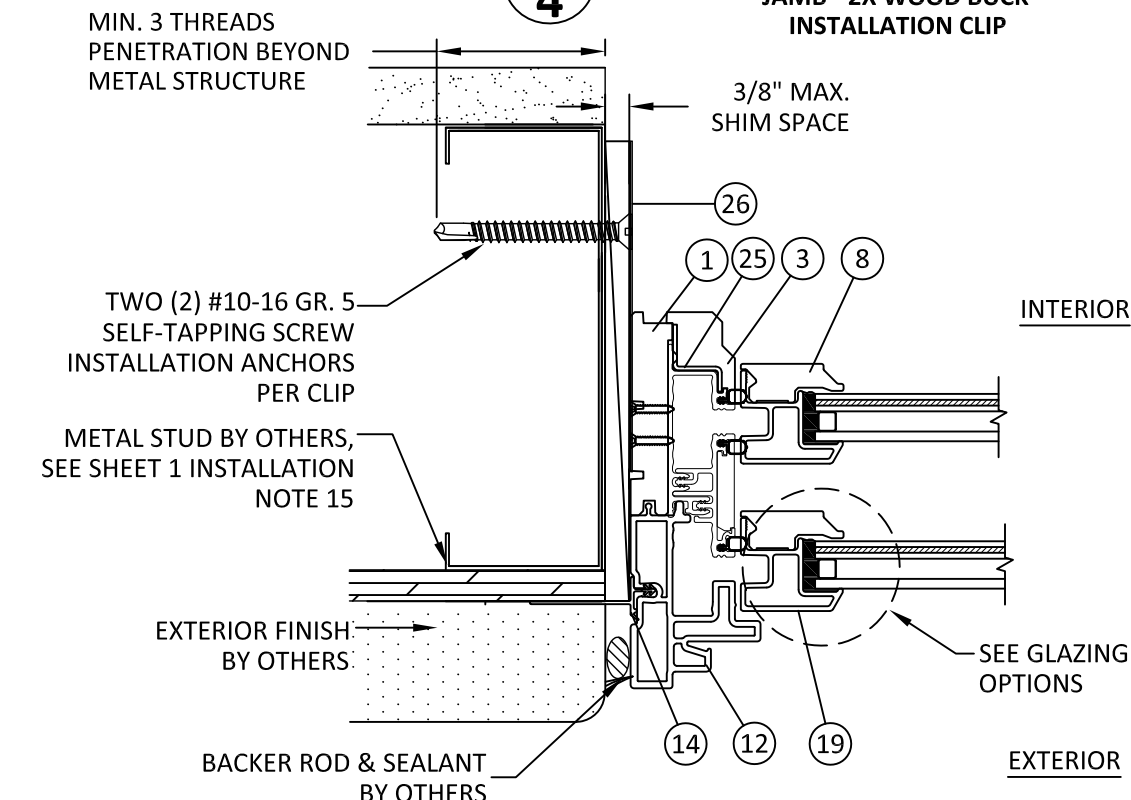


H HORIZONTAL SECTION

JAMB-METAL STUD
INSTALLATION CLIP

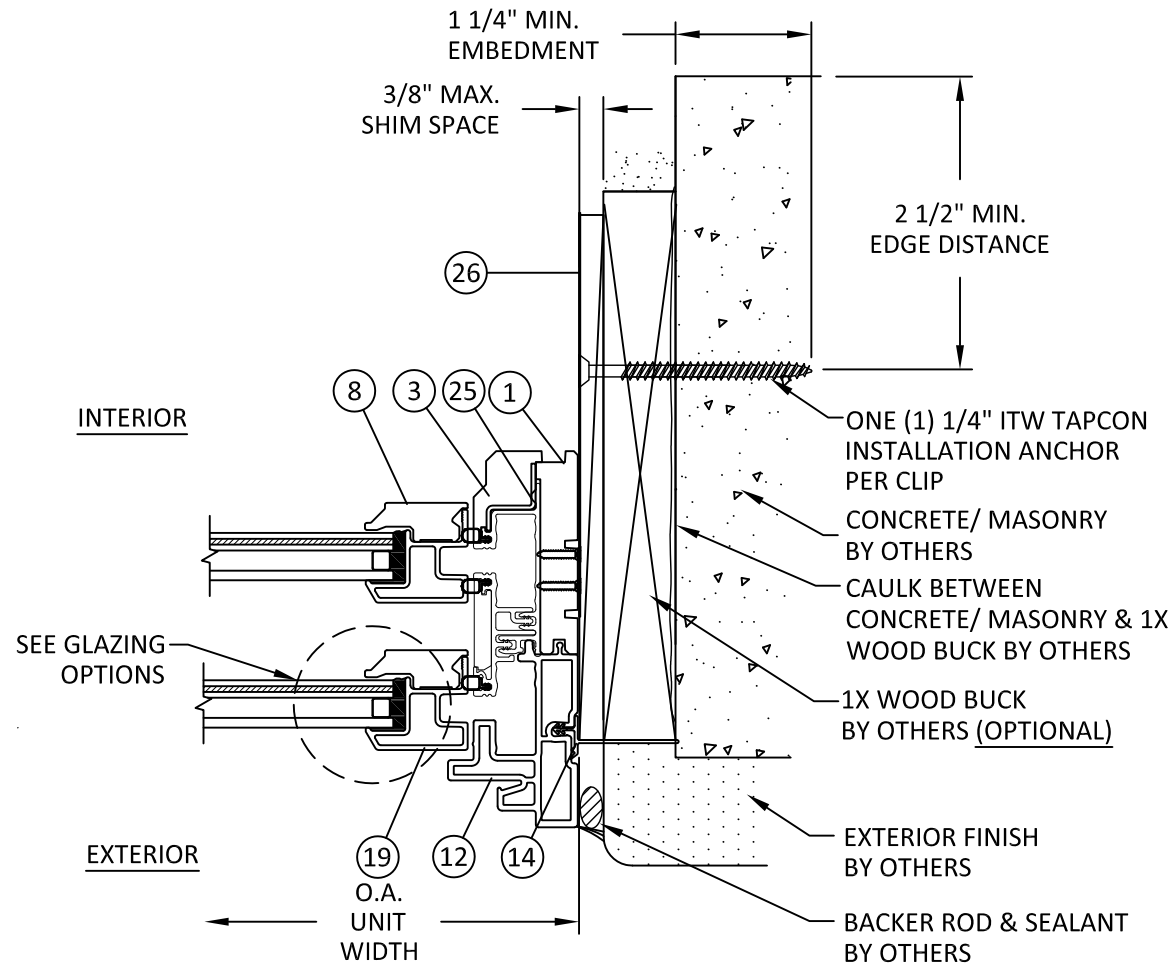

G HORIZONTAL SECTION

JAMB - CONCRETE/MASONRY
INSTALLATION CLIP

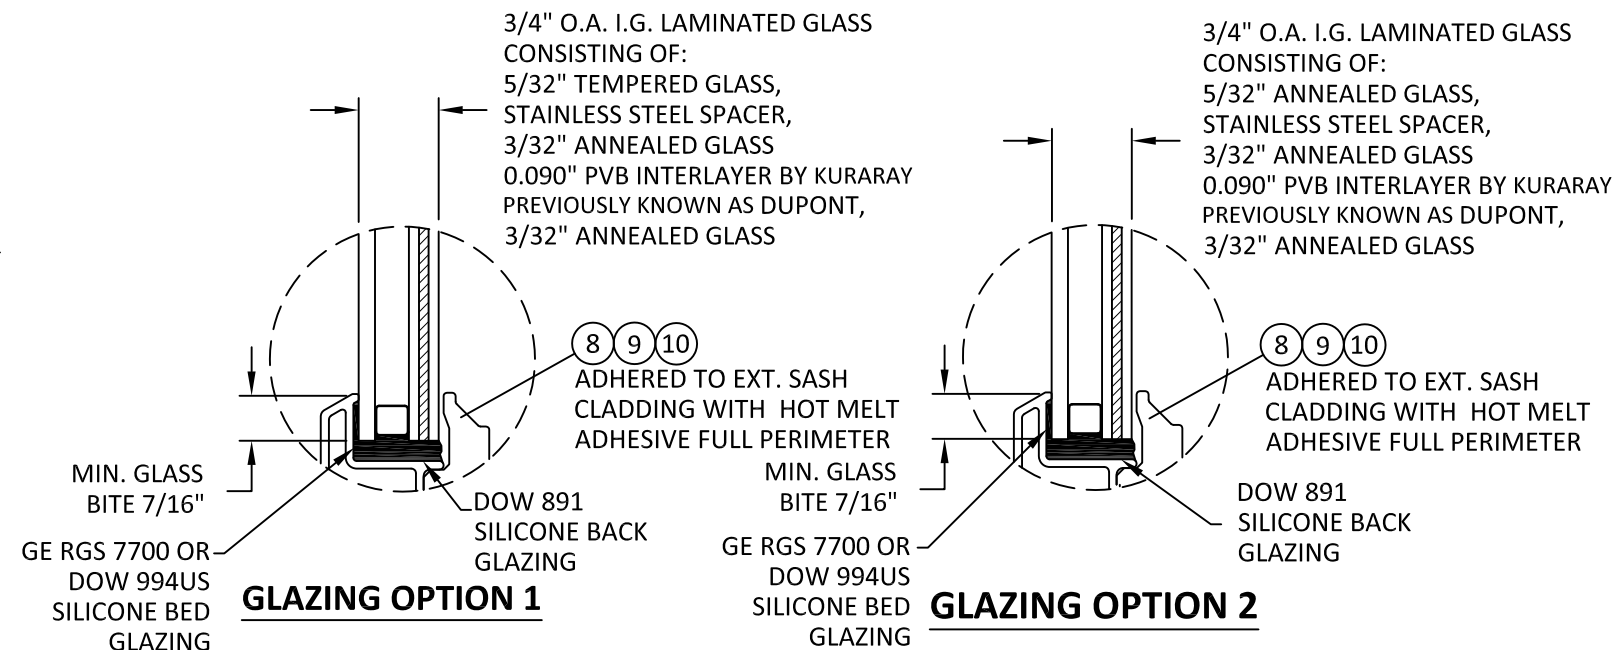


- NOTE:
- ALL GLAZING MEETS SAFETY GLAZING REQUIREMENTS AS PER CH 24 OF THE FBC.
 - SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN CHAPTER 24.
 - SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER CHAPTER 24.
 - D.L.O. MAY NOT EXCEED MAX DIMENSIONS SHOWN IN ELEVATIONS.

s:\projects\andersen windows\cc-20-0224 - code change - fbc 2020 (version 7) code change\revisions\115497\dwg\awd178 a-series dh.dwg 9/12/2022 8:59 AM


BILL OF MATERIALS			
ITEM #	DESCRIPTION	MATERIAL	MANUFACTURER
1	FRAME	WOOD	ANDERSEN
2	INTERIOR TRIM STOP, SILL	WOOD	ANDERSEN
3	INTERIOR TRIM STOP, JAMB	WOOD	ANDERSEN
4	INTERIOR TRIM STOP, HEAD	WOOD	ANDERSEN
5	INTERIOR CENTER JAMB TRIM	WOOD	ANDERSEN
6	FILLER BLOCK, HEAD	WOOD	ANDERSEN
7	PARTING STOP, HEAD	WOOD	ANDERSEN
8	SASH RAIL/STILE, INTERIOR	WOOD	ANDERSEN
9	UPPER SASH CHECKRAIL, INTERIOR	WOOD	ANDERSEN
10	LOWER SASH BOTTOM RAIL, INTERIOR	WOOD	ANDERSEN
11	LOWER SASH CHECKRAIL CAP, INTERIOR	WOOD	ANDERSEN
12	FRAME CLADDING, EXTERIOR	FIBREX [®]	ANDERSEN
13	SILL FRAME CLADDING, EXTERIOR	FIBREX [®]	ANDERSEN
14	NAILING FLANGE	RIGID PVC	ANDERSEN
15	SIDE JAMB LINER	RIGID PVC	ANDERSEN
16	BALANCE COVER	RIGID PVC	ANDERSEN
17	HEAD JAMB LINER	RIGID PVC	ANDERSEN
19	SASH RAIL/STILE, EXTERIOR	FIBERGLASS	ANDERSEN
19A	CHECKRAIL LOWER SASH	FIBERGLASS	ANDERSEN
20	LOWER SASH BOTTOM RAIL, EXTERIOR	FIBERGLASS	ANDERSEN
24	INTERLOCK, CHECKRAIL	304 SS	-
25	LOAD BRACKET, CHECKRAIL	GALV. STEEL	-
26	INSTALLATION CLIP	304 SS	-

NOTE: ALL WOOD COMPONENTS ARE PINE


7 PARTING STOP, HEAD WOOD

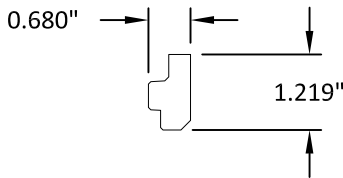


8 SASH RAIL/STILE, INT. WOOD

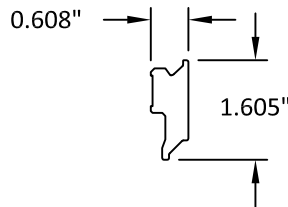


9 UPPER SASH CHECKRAIL, INT. WOOD

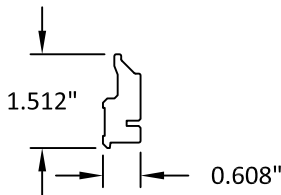


10 LOWER SASH BOTTOM RAIL, INT. WOOD

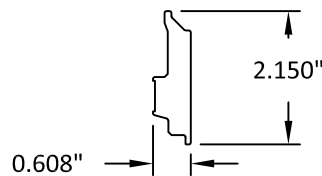


1 FRAME WOOD

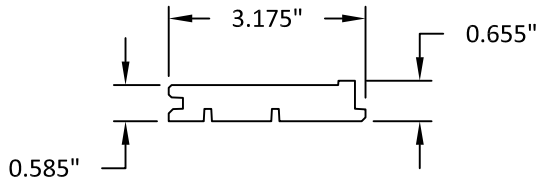


2 INTERIOR TRIM STOP, SILL WOOD

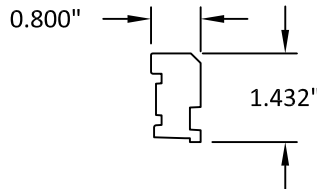


3 INTERIOR TRIM STOP, JAMB WOOD

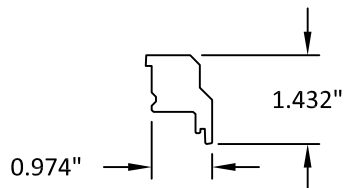


4 INTERIOR TRIM STOP, HEAD WOOD

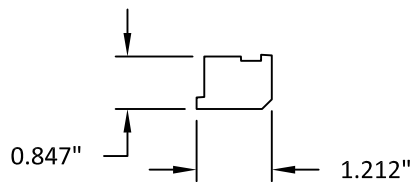

5 INTERIOR CENTER JAMB TRIM WOOD

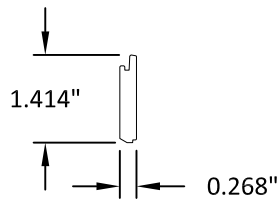

6 FILLER BLOCK, HEAD WOOD

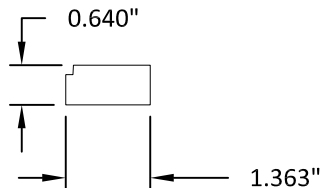

100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
A-SERIES DOUBLE HUNG WINDOW
WITH STORMWATCH PROTECTION
(HVHZ)/(IMPACT)

BILL OF MATERIALS & COMPONENTS

PREPARED BY:

BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004


PH: (954)399-8478
FAX: (954)744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

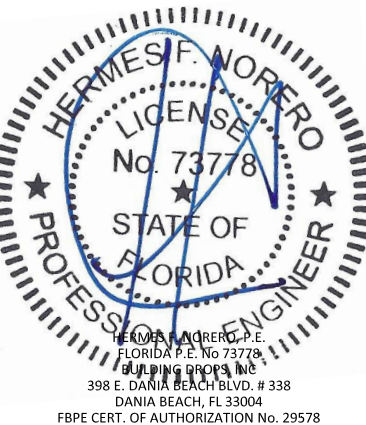


FL #:	FL15497
DATE:	09.30.17
DWG. BY:	SM
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD178
SHEET:	5

s:\projects\andersen windows\cc-20-0224 - code change - fbc 2020 (version 7) code change\revisions\115497.dwg a-series dh.dwg 9/12/2022 8:59 AM


11 LOW. SASH CHECKRAIL CAP, INT. WOOD

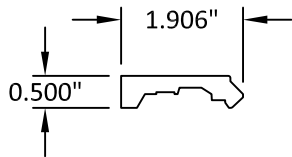


12 FRAME CLADDING, EXT. FIBREX

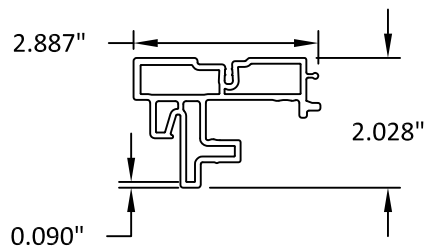


13 SILL FRAME CLADDING, EXT. FIBREX

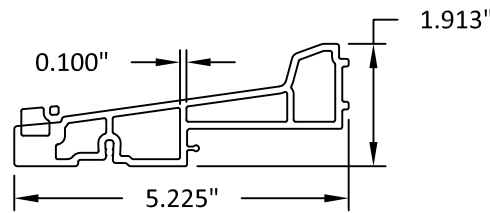


14 NAILING FLANGE RIGID PVC

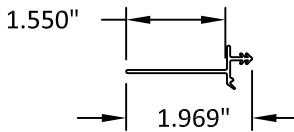


15 SIDE JAMB LINER RIGID PVC

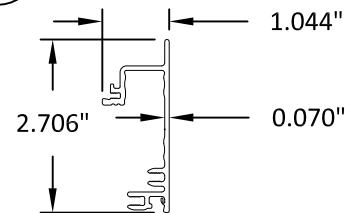


16 BALANCE COVER RIGID PVC

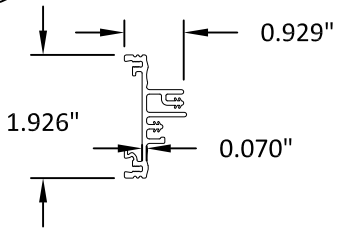


17 HEAD JAMB LINER RIGID PVC

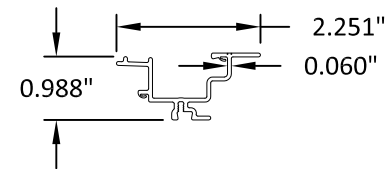


19 SASH RAIL/STILE, EXT. FIBERGLASS

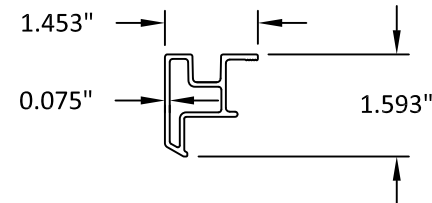


20 LOWER SASH BOTTOM RAIL, EXT. FIBERGLASS

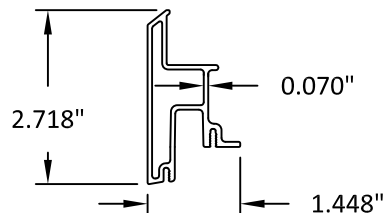


24 INTERLOCK, CHECKRAIL 304 SS

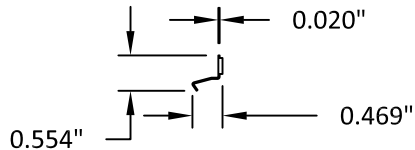

25 LOAD BRACKET CHECKRAIL GALV. STEEL (INTERLOCK)

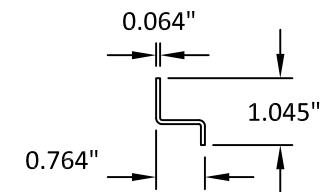

26 INSTALLATION CLIPS 304 SS

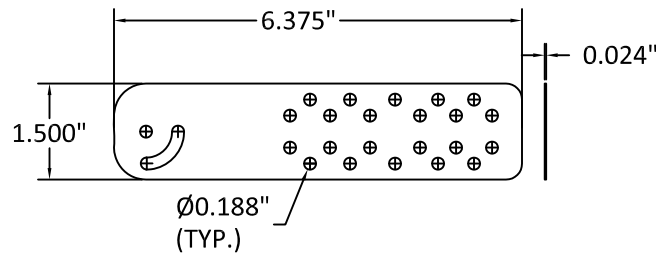

NOTE: INSTALLATION CLIPS SHALL BE ATTACHED TO WINDOW FRAME WITH TWO (2) #8 X 5/8" SCREWS




100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES DOUBLE HUNG WINDOW WITH STORMWATCH PROTECTION (HVHZ)/(IMPACT) COMPONENTS

PREPARED BY: BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
FL# CORRECTION	SM	1/3/18
7TH FBC CODE CHANGE	SR	3/18/20

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

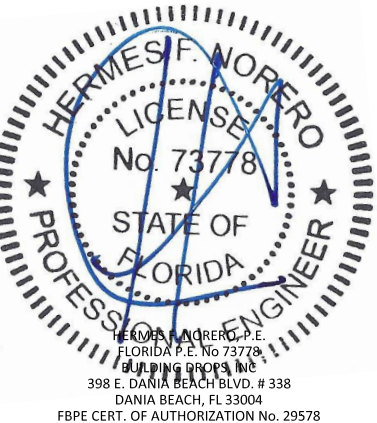

FL #:	FL15497
DATE:	09.30.17
DWG. BY:	SM
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD178
SHEET:	6