

c:\users\menggisun\building drops, inc\building drops landing - common\projects\andersen corporation\fbc-25-1131 - fl15553 a-series window revisions\dwgs\andersen a-series revision (june upload)\awd181.dwg 6/3/2026 6:59 PM

ANDERSEN CORPORATION

A-SERIES PICTURE & FIXED TRANSOM WINDOW WITH STORMWATCH PROTECTION (HVHZ)(IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **INCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - TAS 201-94
 - TAS 202-94
 - TAS 203-94
 - AAMA/WDMA/CSA 101/I.S.2/A440-17
 - ASTM E1886-19
 - ASTM E1996-20
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING, AND METAL FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS. IN HVHZ AREAS, ONE TIME PRODUCT APPROVAL TO BE OBTAINED FROM MIAMI-DADE RER OR AHJ.
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: PINE (MIN. S.G. = 0.40)
7. CLADDING MATERIAL: FIBERGLASS
8. IN ACCORDANCE WITH THE FBC, WOOD COMPONENTS SHALL HAVE BEEN PRESERVATIVE TREATED OR SHALL BE OF A DURABLE SPECIES.
9. GLASS MEETS THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 2 FOR GLAZING DETAILS.

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES
2	GLAZING DETAILS
3	ELEVATION & ANCHOR LAYOUTS
4	VERTICAL SECTIONS
5	VERTICAL SECTIONS
6	HORIZONTAL SECTIONS
7	INSTALLATION NOTES, ANCHOR DETAILS & ANCHOR SCHEDULE
8	BILL OF MATERIALS, ASSEMBLY NOTES & COMPONENTS

OVERALL SIZE		DESIGN PRESSURE	MIN. GLAZING OPTION	MISSILE IMPACT RATING
WIDTH	HEIGHT			
55 1/4"	55 1/4"	+70/- 70 PSF	OPTION 1 OR 2	LARGE & SMALL MISSILE IMPACT
71 1/4"	79 1/4"	+70/- 70 PSF	OPTION 3 OR 4	LARGE & SMALL MISSILE IMPACT
71 1/4"	95 1/4"	+65/- 65 PSF	OPTION 3	LARGE & SMALL MISSILE IMPACT
95 1/4"	71 1/4"	+65/- 65 PSF	OPTION 3	LARGE & SMALL MISSILE IMPACT



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM WINDOW WITH STORMWATCH PROTECTION (HVHZ)(IMPACT)
GENERAL NOTES


PREPARED BY: BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.06.03 11:34:00

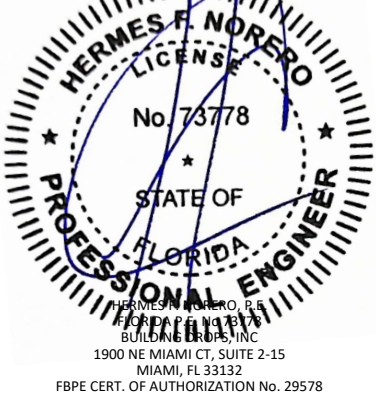

FL #:
FL15553

DATE: **12.05.24**


DWG. BY: **HJ** CHK. BY: **HFN**

SCALE: **NTS**

DWG. #: **AWD181**


SHEET:
1
OF 8

c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen a-series window revisions\dwgs\andersen a-series revision (june upload)\awd181.dwg 6/3/2026 6:59 PM

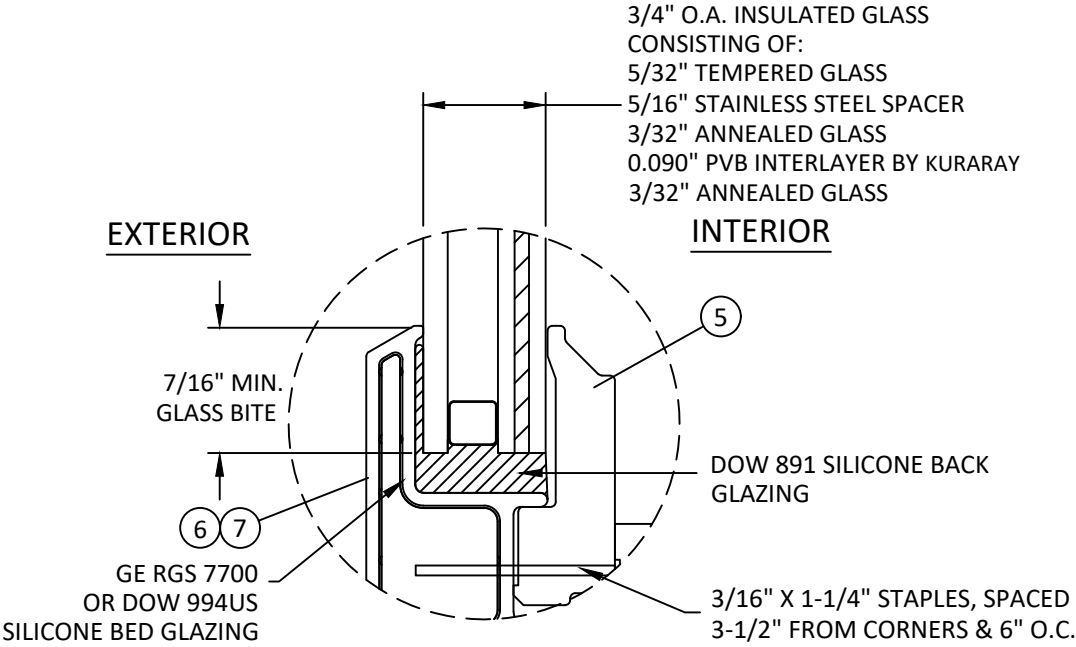

GLAZING DETAIL 1

FOR USE IN UNITS UP TO 21.2 SQ. FT.

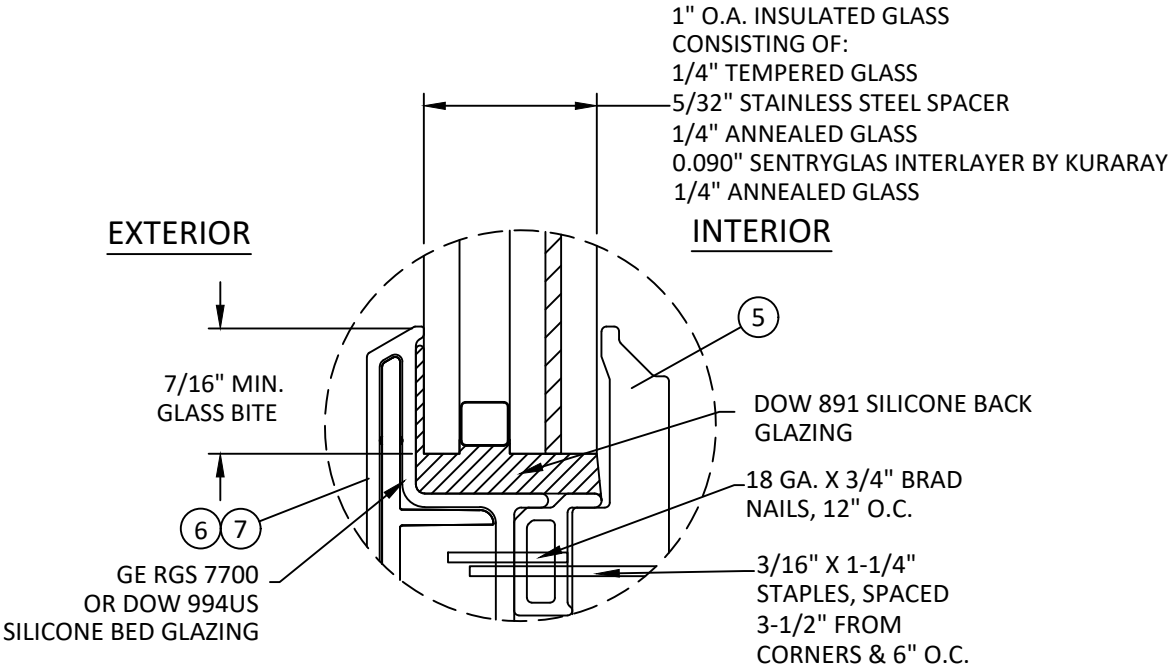


GLAZING DETAIL 3

FOR USE IN UNITS UP TO 47.1 SQ. FT.


GLAZING NOTES:

1. GLASS TYPE COMPLIES WITH ASTM E1300 AND THE FBC SAFETY GLAZING REQUIREMENTS. PER THE FBC TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
4. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN.

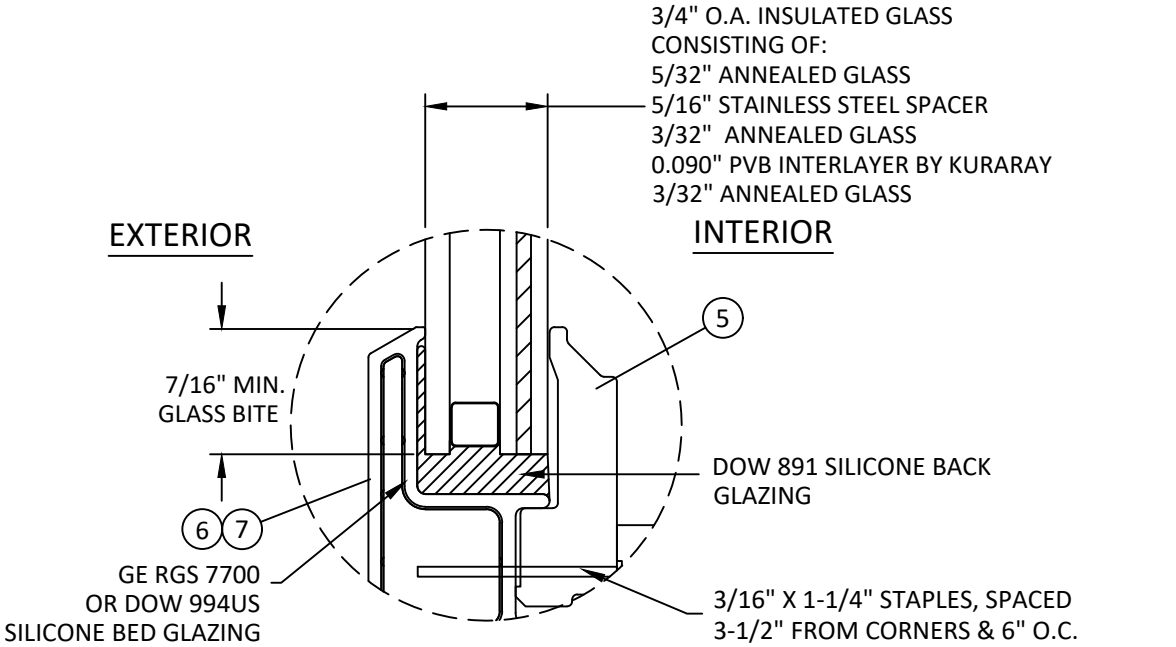

GLAZING DETAIL 2

FOR USE IN UNITS UP TO 21.2 SQ. FT.

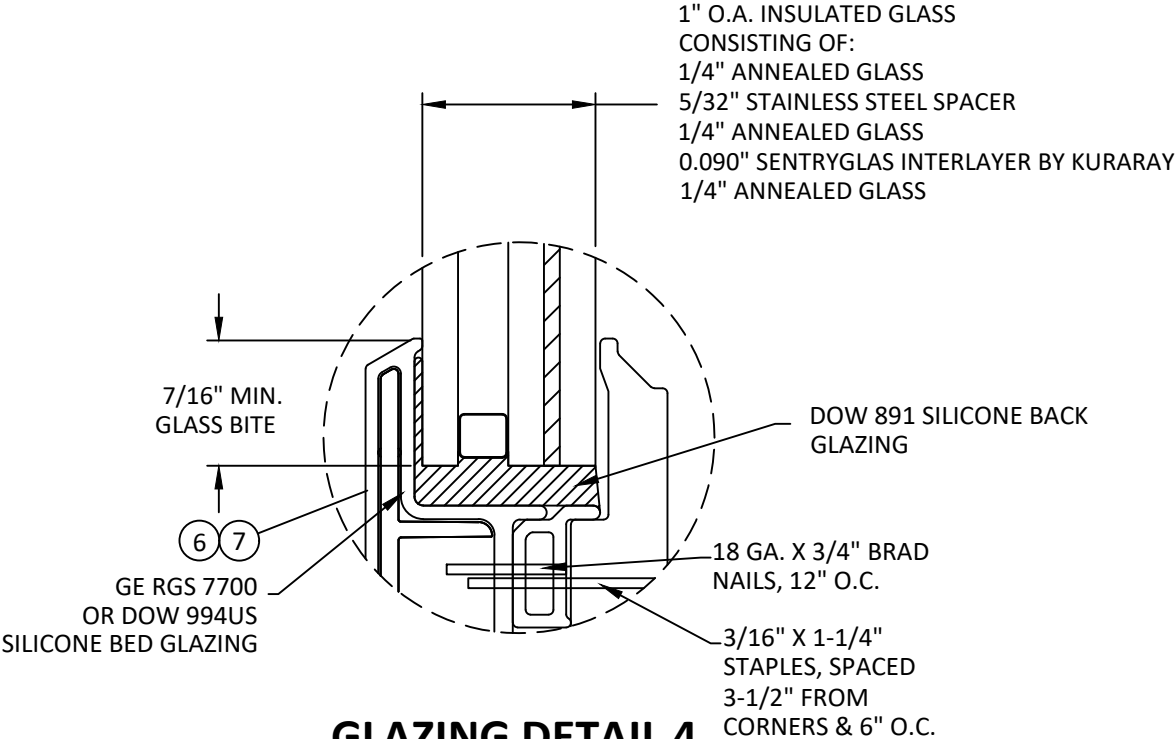

GLAZING DETAIL 4

FOR USE IN UNITS UP TO 39.2 SQ. FT.



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM
WINDOW WITH
STORMWATCH PROTECTION
(HVHZ)(IMPACT)

GLAZING DETAILS

PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com




REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT

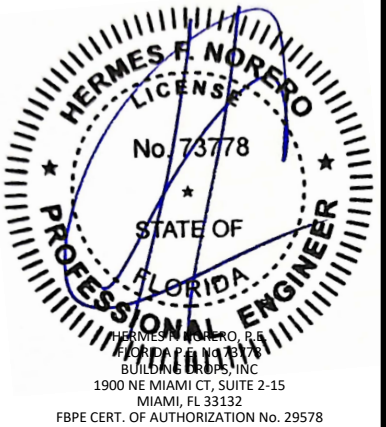


FL #:	FL15553
DATE:	12.05.24
DWG. BY:	HJ
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD181
SHEET:	2

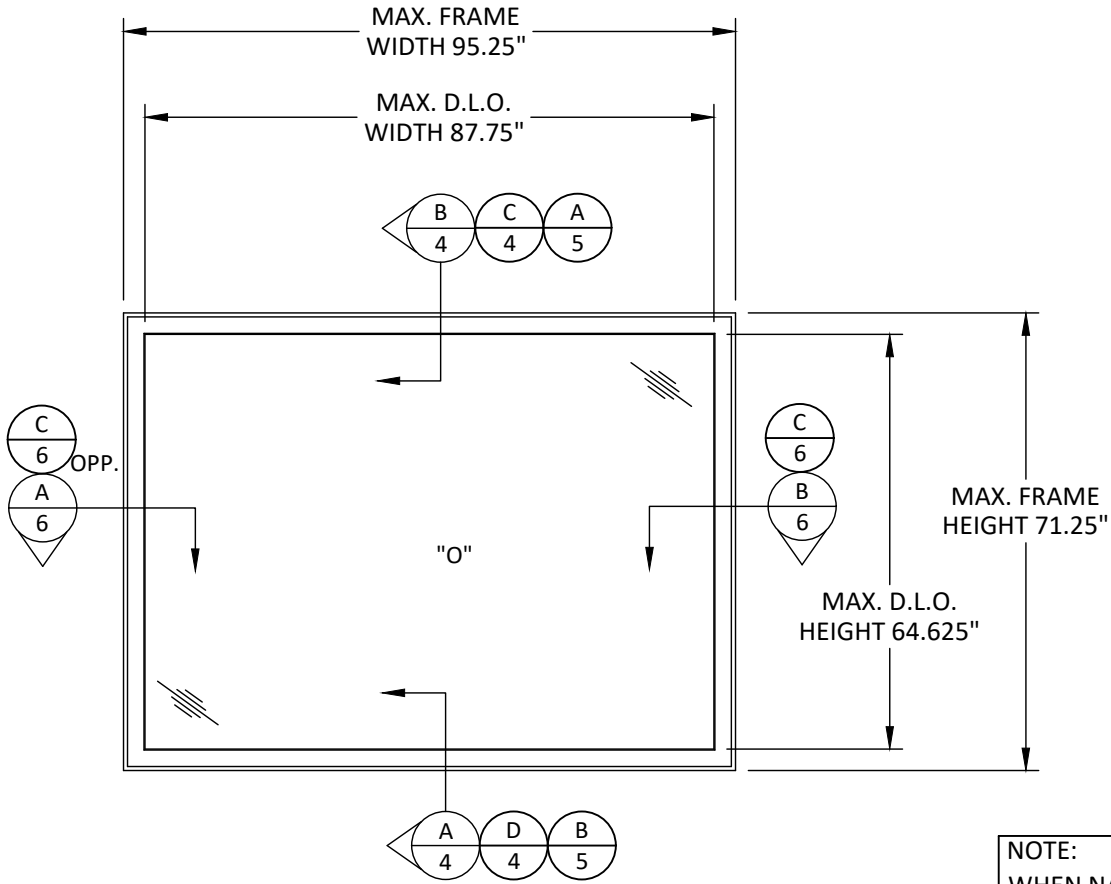


ELEVATION
FIXED WINDOW

NOTE:
WHEN NAILING FLANGE IS UTILIZED WITH INSTALLATION CLIPS, UNITS SHALL BE FASTENED THROUGH THE NAILING FLANGE AND INSTALLATION CLIP. FOR NAILING FLANGE ANCHOR LAYOUT FOLLOW MANUFACTURER'S INSTRUCTIONS

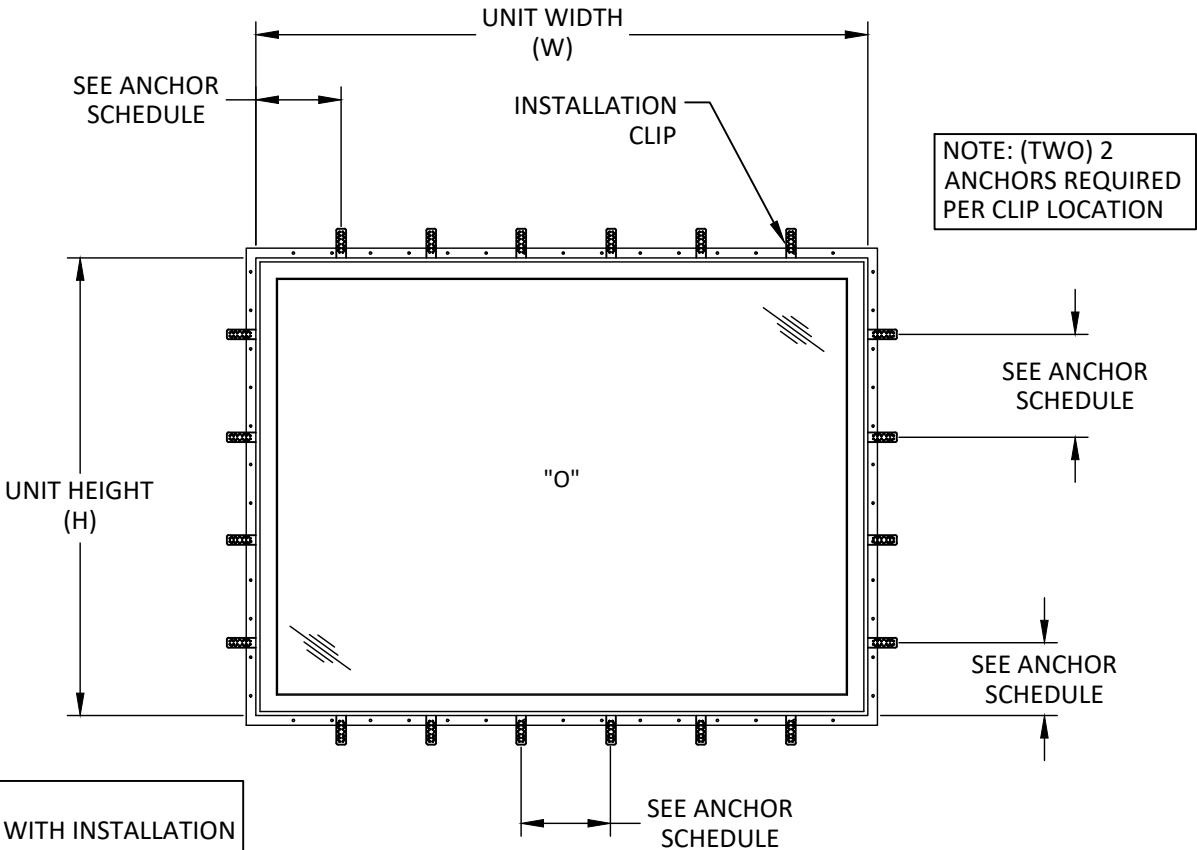

ANCHOR LAYOUT
INSTALLATION CLIP & NAILING FLANGE

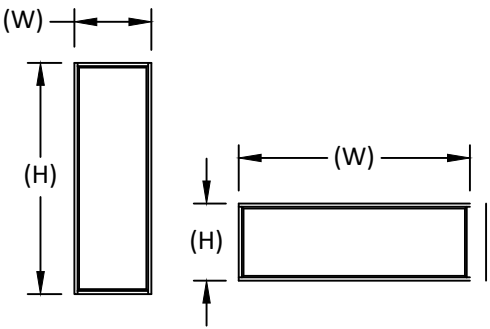


NOTE:
WINDOW WIDTH (W) AND HEIGHT (H) ARE INTERCHANGEABLE FOR ALL SIZES SHOWN HEREIN NOT TO EXCEED MAXIMUM TESTED SQUARE FOOT AREA. ANCHOR SPACING SHALL NOT EXCEED THOSE SHOWN FOR LONG OR SHORT LEG OF UNIT.

INSTALLATION CLIP ANCHOR SCHEDULE HEAD/JAMBS/SILL	
LEG LENGTH (L)	QUANTITY OF CLIPS
L > 79.25"	6
71.25" < L ≤ 79.25"	5
63.25" < L ≤ 71.25"	4
51.25" < L ≤ 63.25"	3
35.25" < L ≤ 51.25"	2
L ≤ 35.25"	1

ANCHOR SCHEDULE NOTES:

- 1) INSTALLATION CLIPS SHALL BE LOCATED 12" FROM CORNERS AND EQUALLY SPACED THEREAFTER.
- 2) IF ONE INSTALLATION CLIP IS SPECIFIED, THE CLIP SHALL BE LOCATED AT MIDSPAN OF FRAME MEMBER.

ANCHOR LEGEND	
	INSTALLATION CLIP
	THROUGH FRAME ANCHOR
	NAILING FLANGE ANCHOR LOCATION

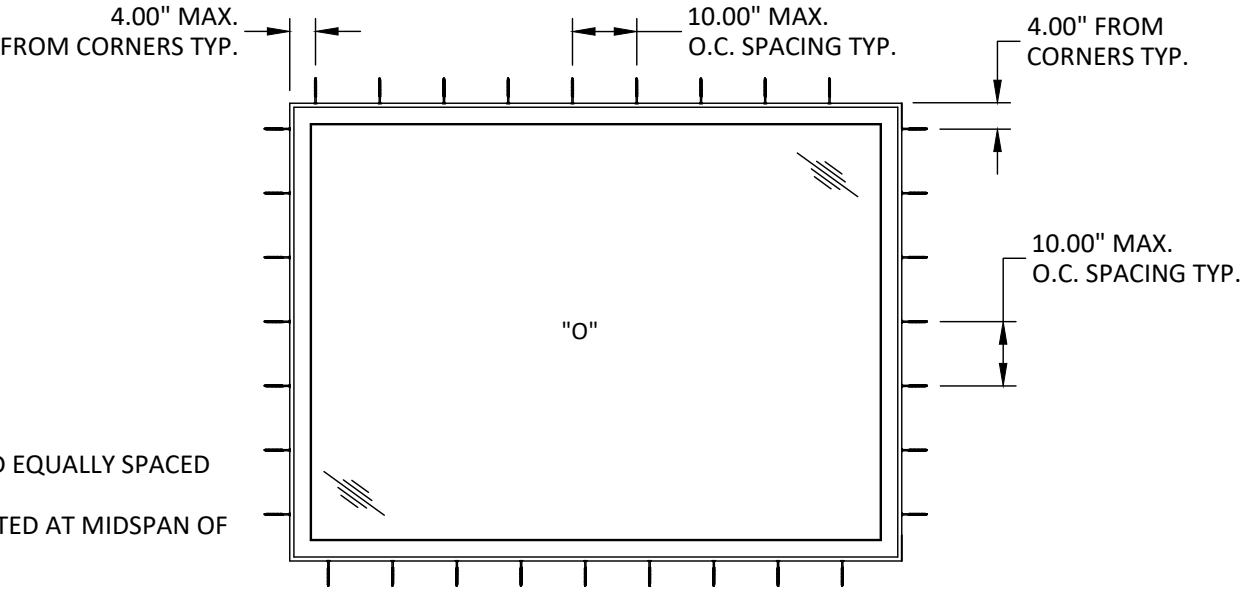

ANCHOR LAYOUT
THROUGH FRAME



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM
WINDOW WITH
STORMWATCH PROTECTION
(HVHZ)(IMPACT)

ELEVATION & ANCHOR LAYOUTS

PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com




REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

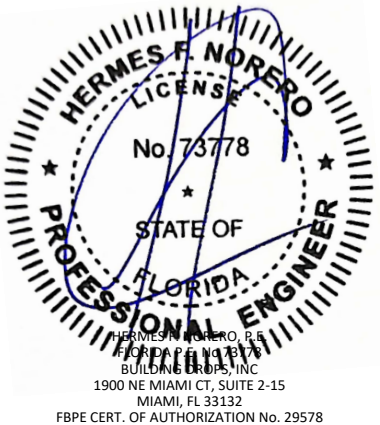


FL #:	FL15553
DATE:	12.05.24
DWG. BY:	HJ
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD181
SHEET:	3


c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen a-series window revisions\dwgs\andersen a-series revision (june upload)\awd181.dwg
6/3/2026 6:59 PM

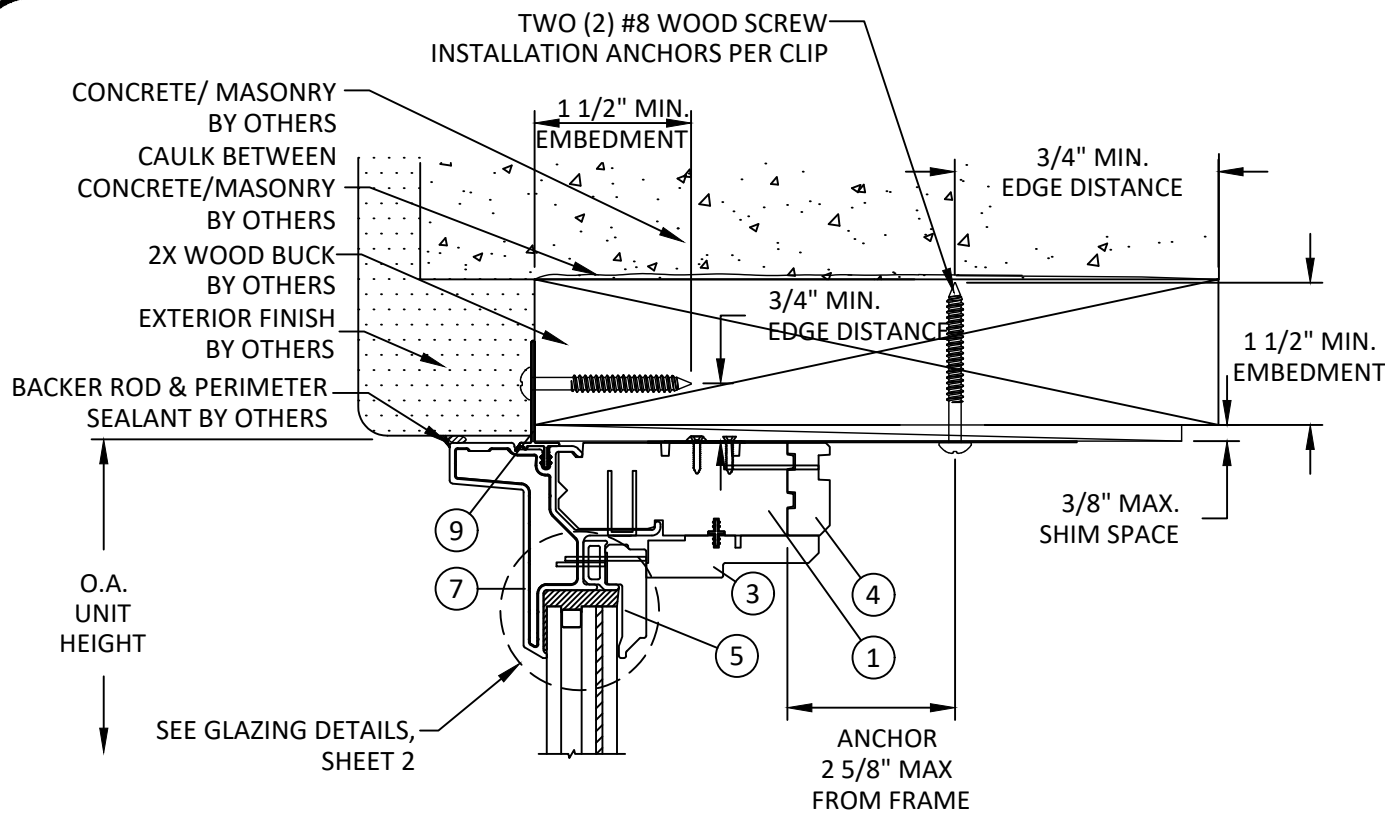


B
4
VERTICAL SECTION
HEAD - 2X WOOD BUCK
ATF AND APW

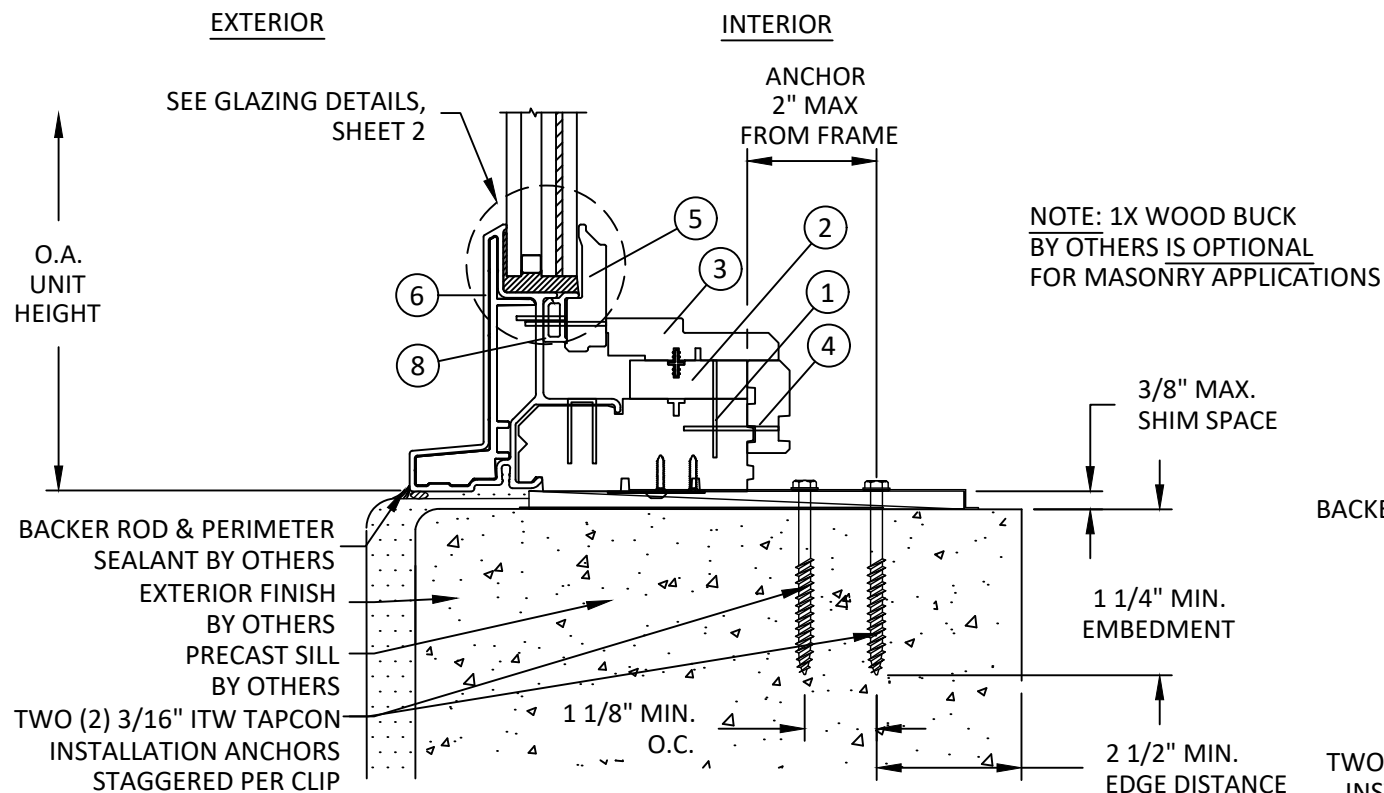

A
4
VERTICAL SECTION
SILL - CONCRETE/MASONRY
APW

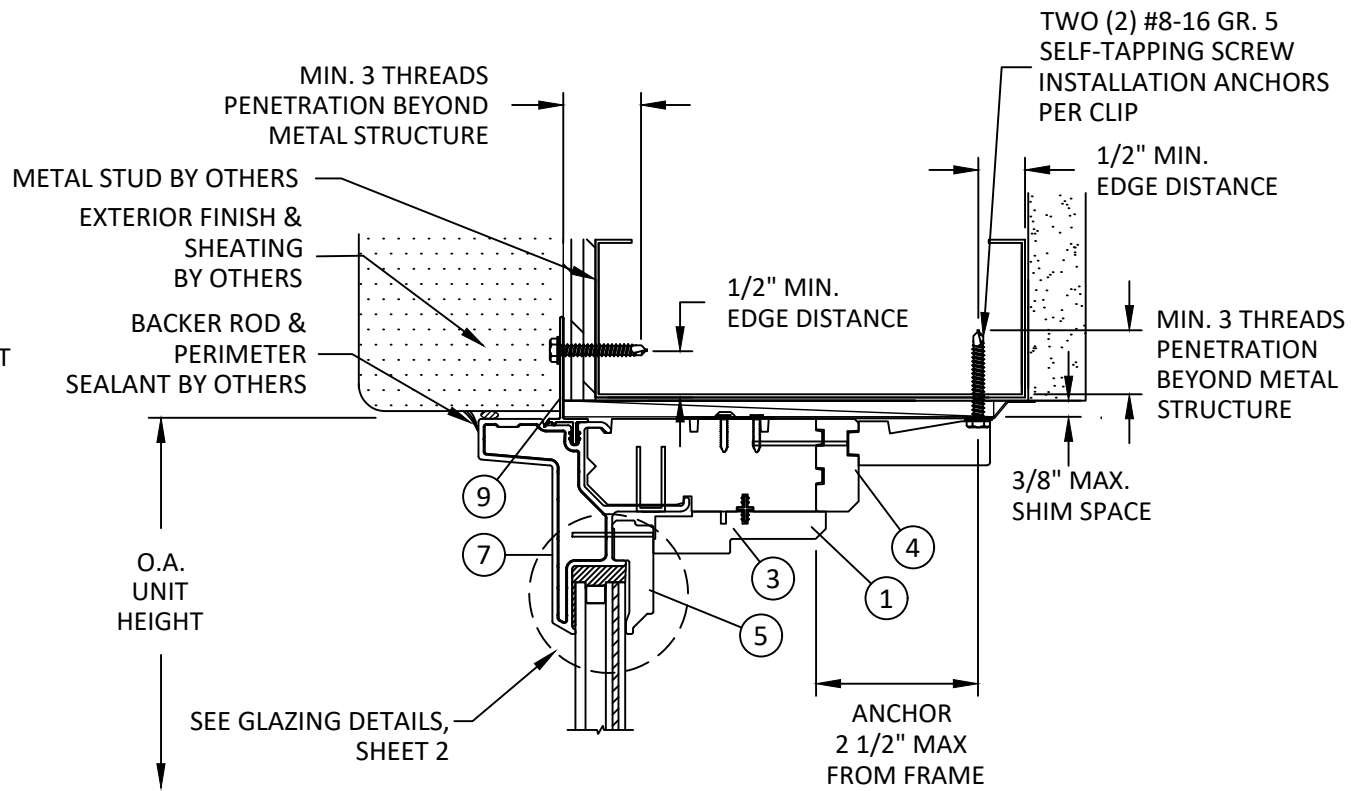

C
4
VERTICAL SECTION
HEAD-METAL STUD
ATF AND APW

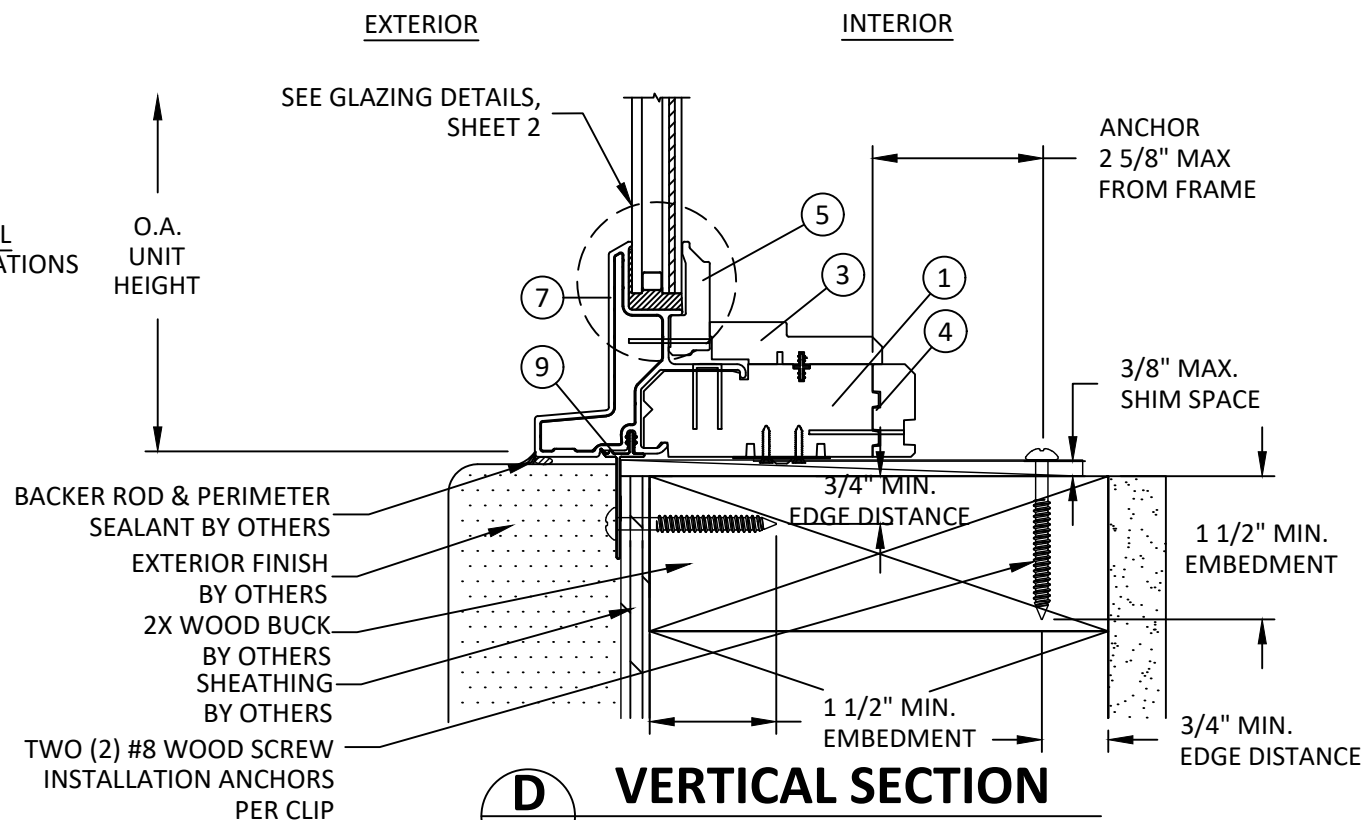

D
4
VERTICAL SECTION
SILL - 2X WOOD FRAME
ATF



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308


TITLE: A-SERIES PICTURE & FIXED TRANSOM
WINDOW WITH
STORMWATCH PROTECTION
(HVHZ)(IMPACT)
VERTICAL SECTIONS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT

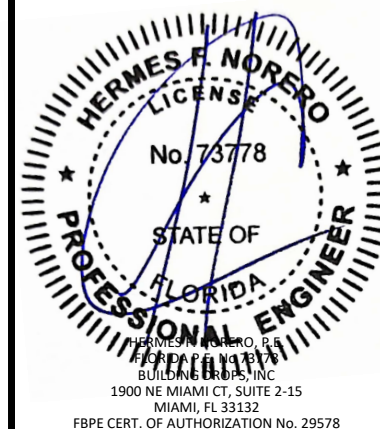


FL #:	FL15553
DATE:	12.05.24
DWG. BY:	HJ
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD181
SHEET:	4


c:\users\mengqisun\building drops, inc\building drops landing - common\projects\andersen a-series window revisions\dwgs\andersen a-series revision (june upload)\awd181.dwg 6/3/2026 6:59 PM

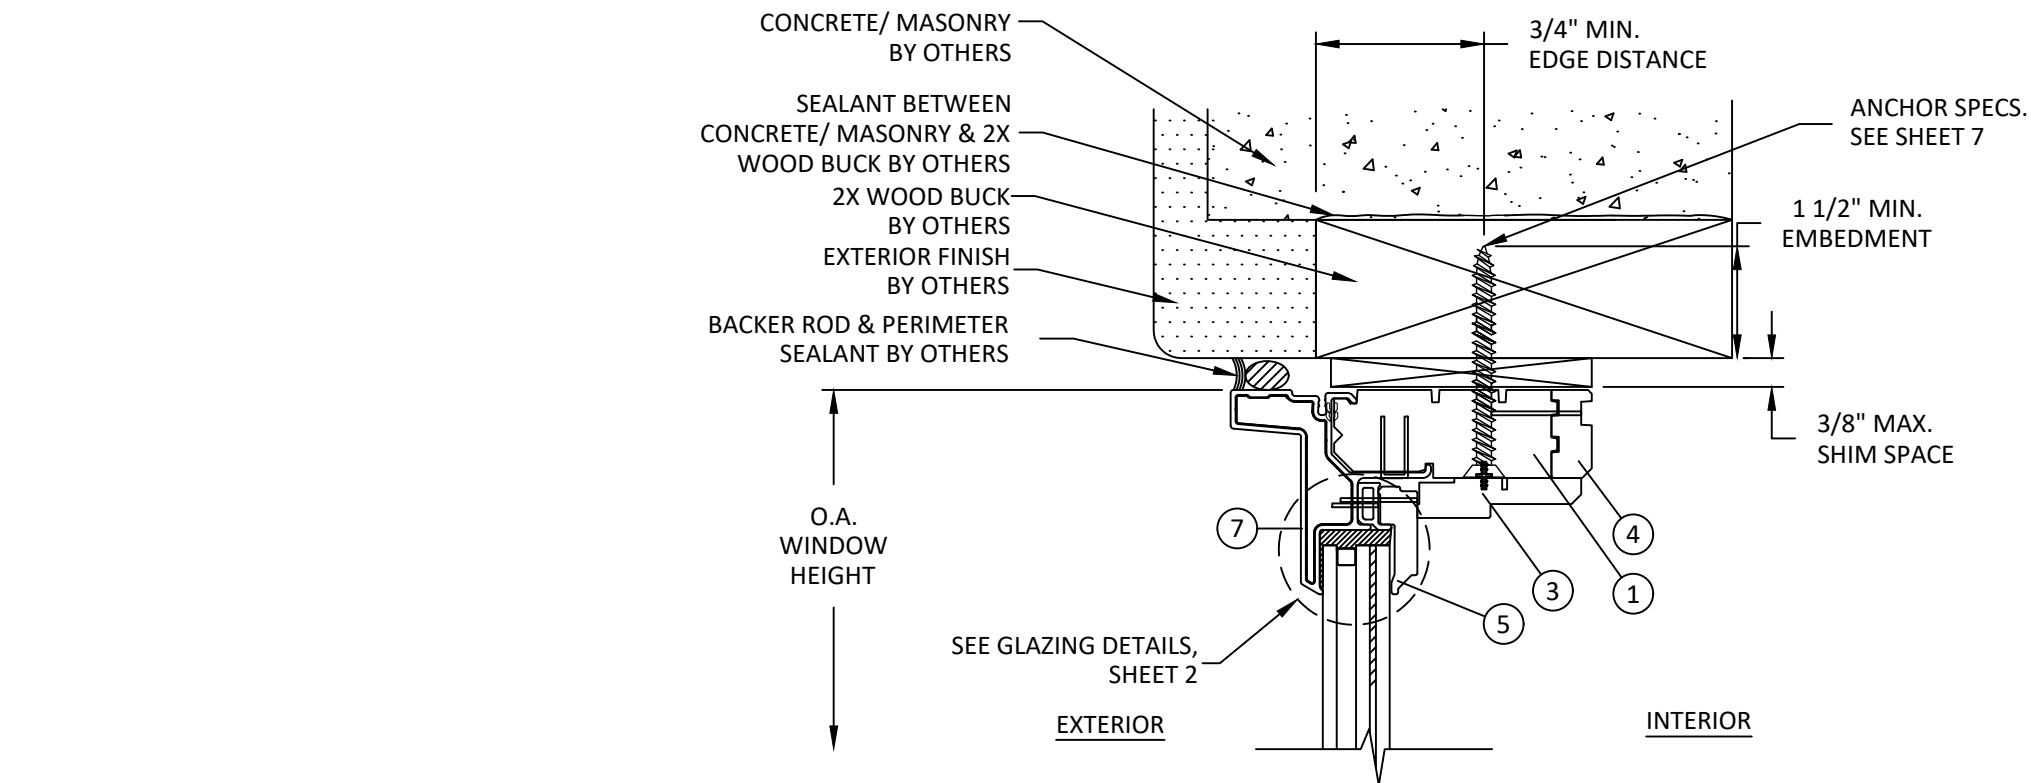

A
5 **VERTICAL SECTION**
HEAD - 2X WOOD BUCK
ATF AND APW

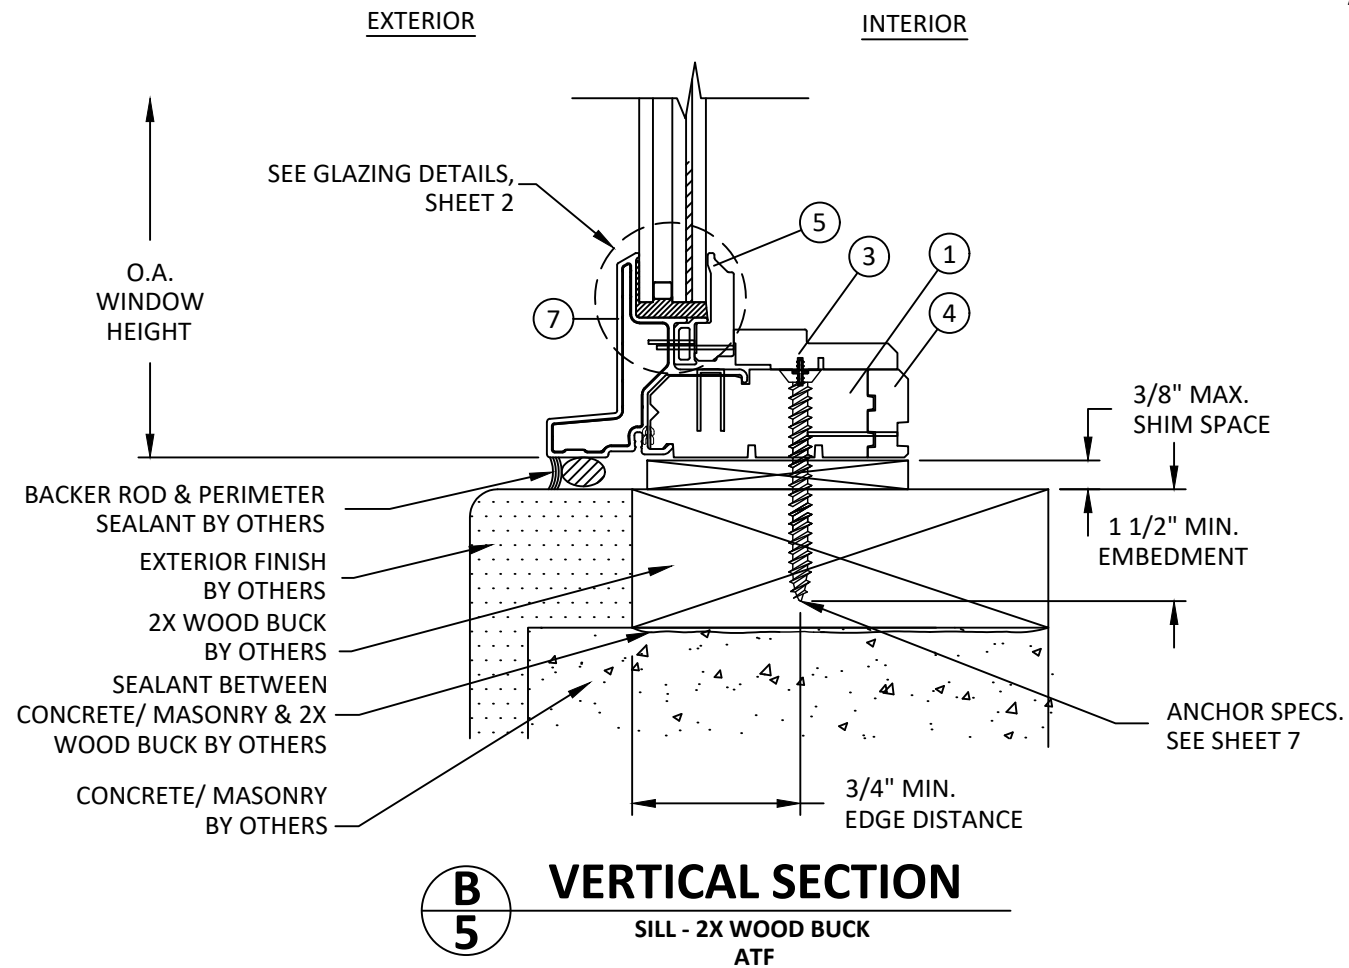

B
5 **VERTICAL SECTION**
SILL - 2X WOOD BUCK
ATF

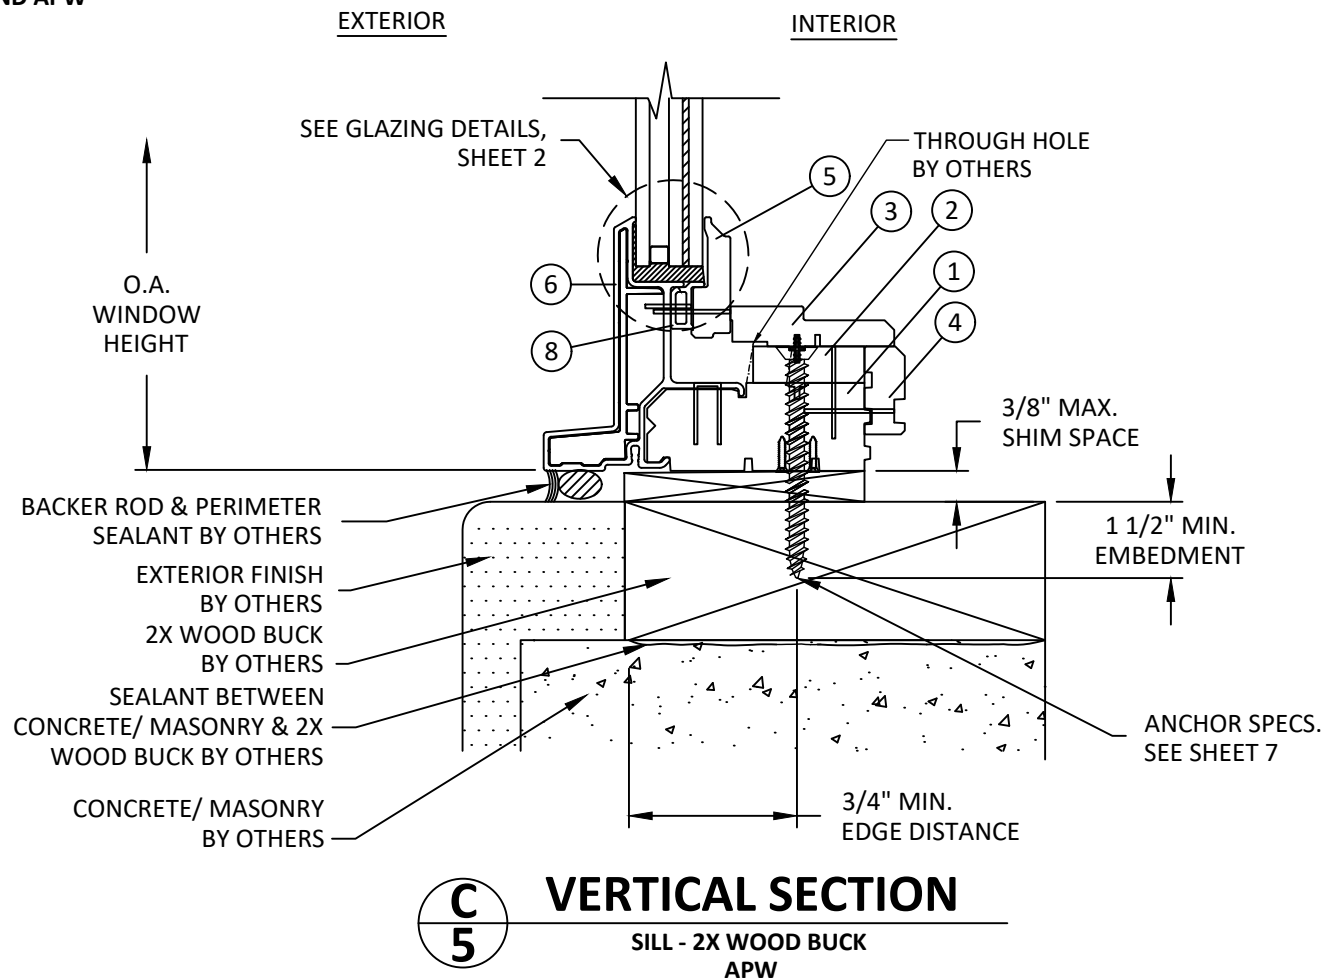

C
5 **VERTICAL SECTION**
SILL - 2X WOOD BUCK
APW



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308


TITLE: A-SERIES PICTURE & FIXED TRANSOM
WINDOW WITH
STORMWATCH PROTECTION
(HVHZ)(IMPACT)
VERTICAL SECTIONS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

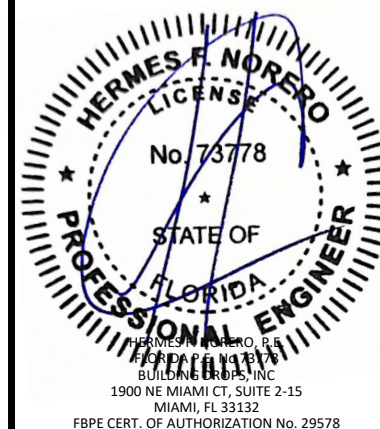

FL #:

FL15553

DATE: **12.05.24**

DWG. BY: **HJ** CHK. BY: **HFN**

SCALE: **NTS**


DWG. #: **AWD181**

SHEET:

5


OF 8

c:\users\mengqisun\building drops, inc\building drops landing - common\projects\andersen a-series window revisions\dwg\andersen a-series revision (june upload)\awd181.dwg
6/3/2026 6:59 PM

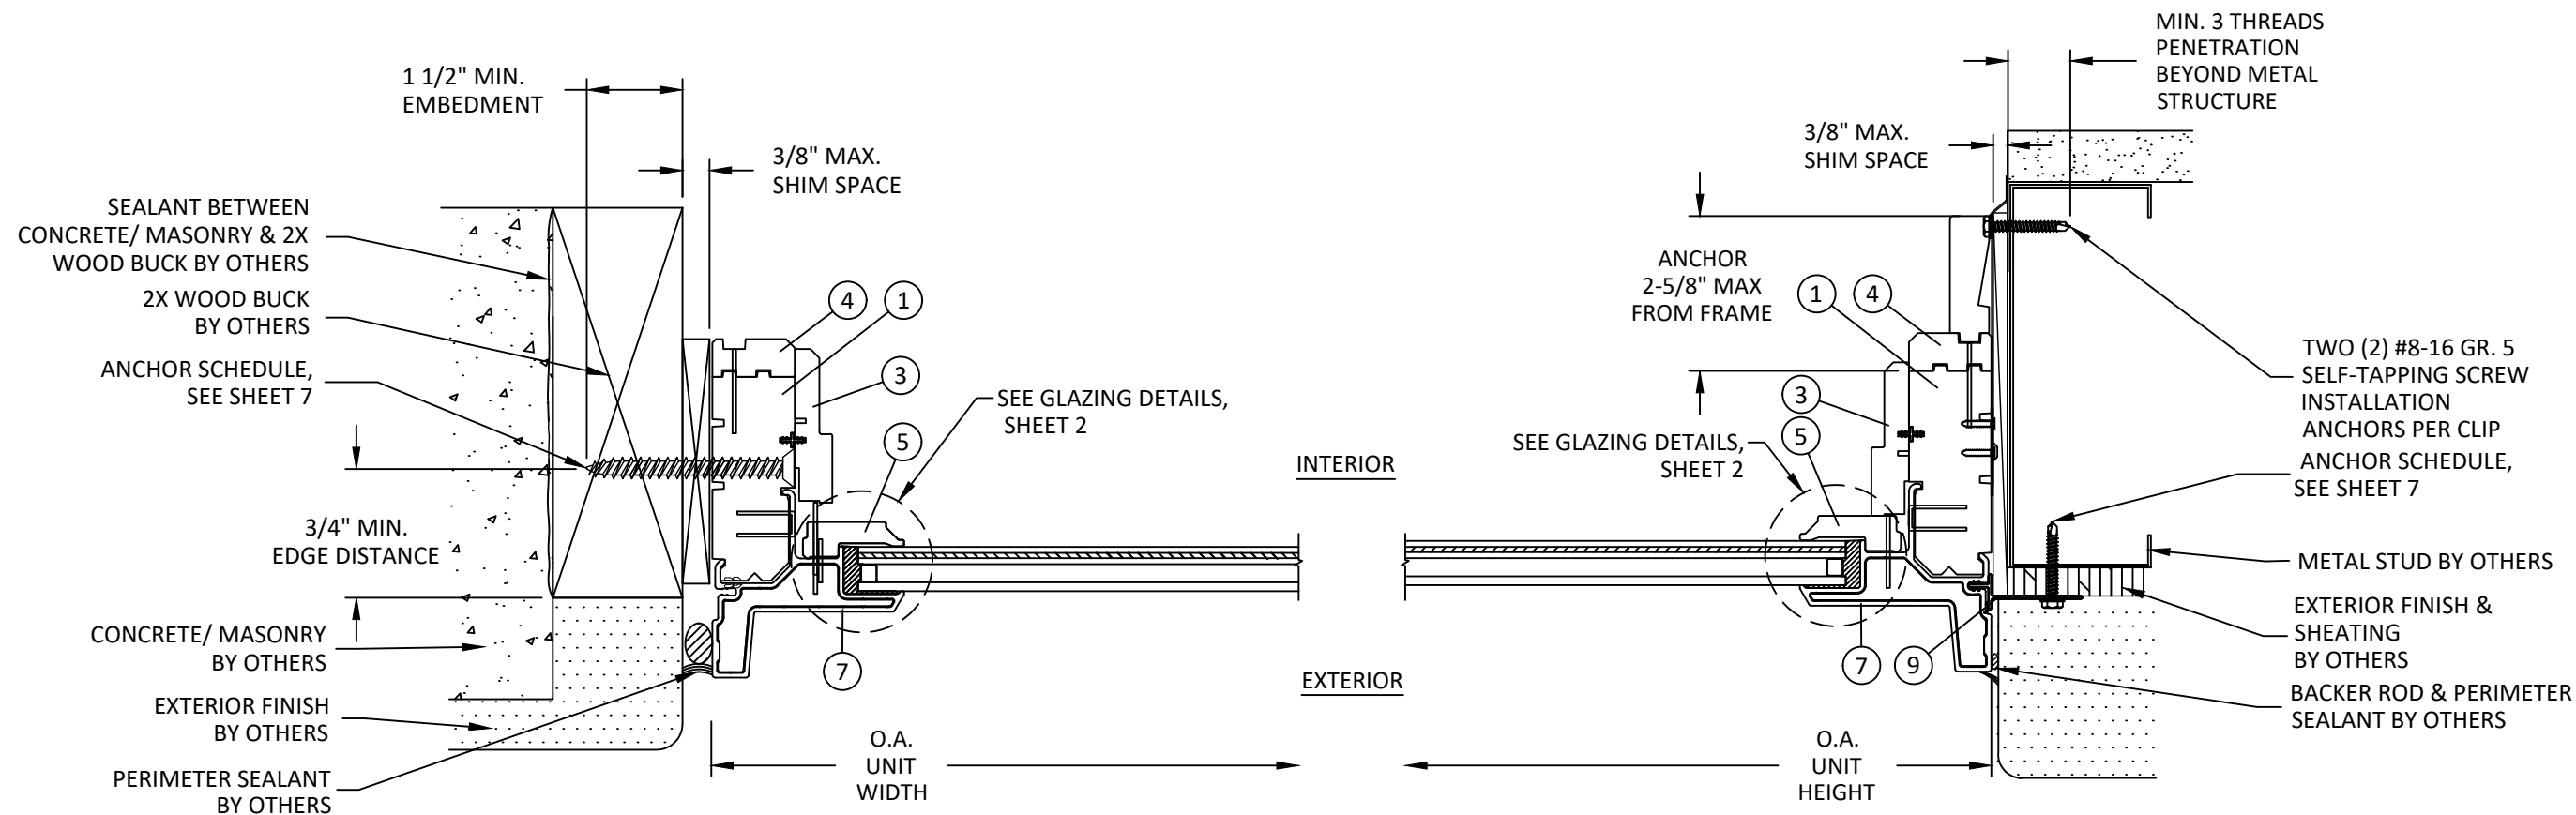

A
6 **HORIZONTAL SECTION**
JAMB - 2X WOOD BUCK
ATF AND APW

B
6 **HORIZONTAL SECTION**
JAMB - METAL STUD
ATF AND APW

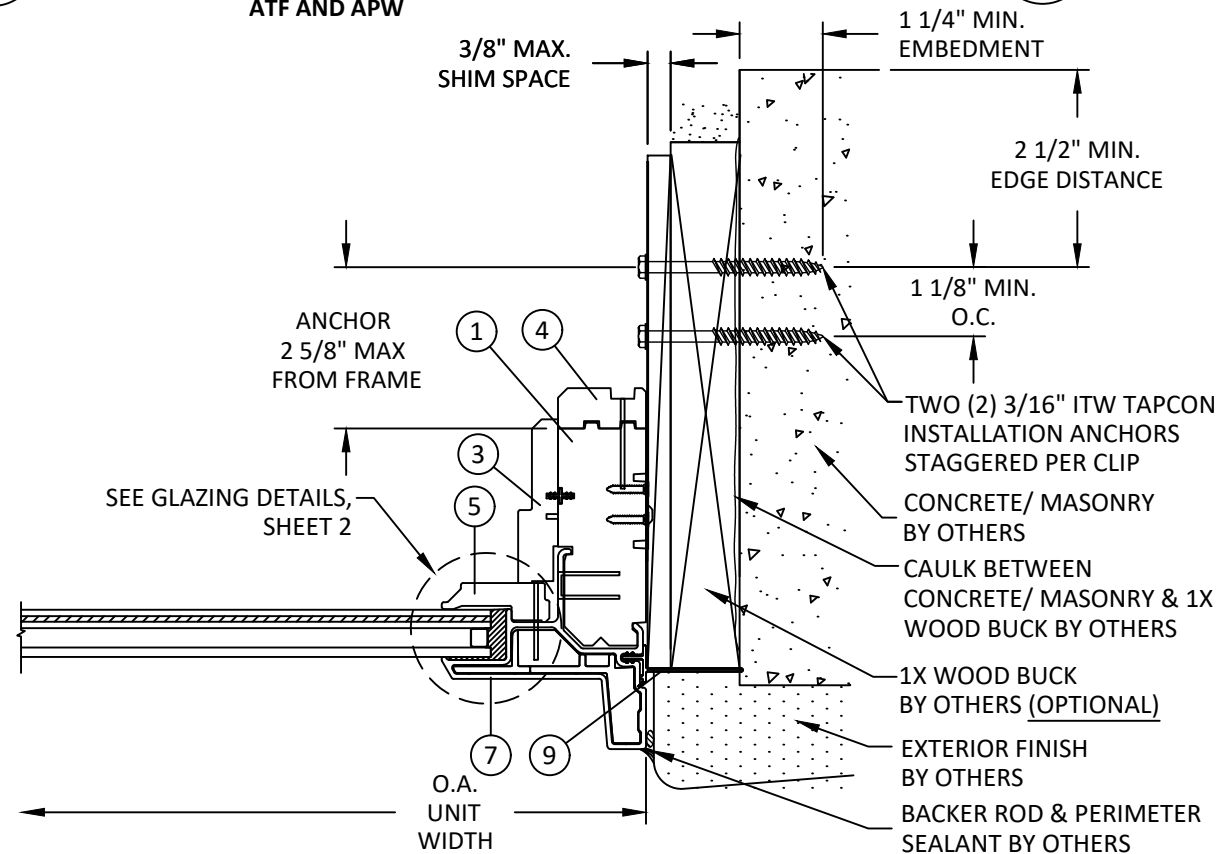

C
6 **HORIZONTAL SECTION**
JAMB - CONCRETE/MASONRY
ATF AND APW



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM
WINDOW WITH
STORMWATCH PROTECTION
(HVHZ)(IMPACT)

HORIZONTAL SECTIONS

PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

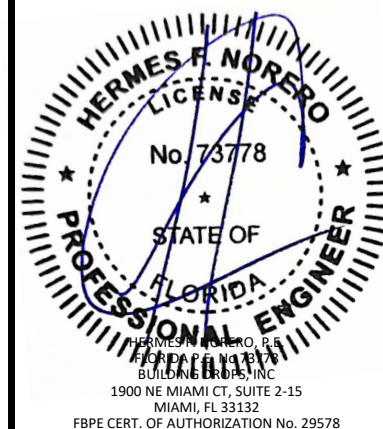

FL #:

FL15553

DATE: **12.05.24**

DWG. BY:
HJ

CHK. BY:
HFN


SCALE: **NTS**

DWG. #: **AWD181**

SHEET:

6


OF 8

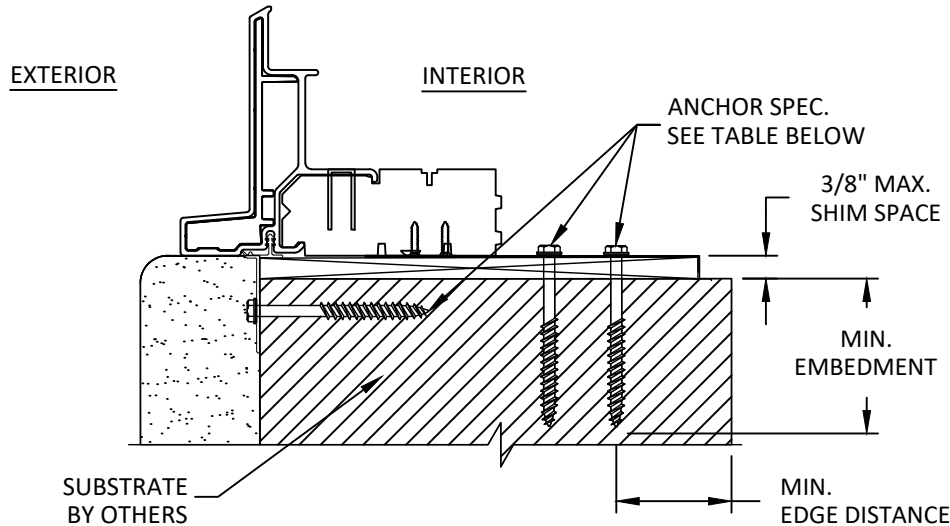

A
7 **VERTICAL SECTION**
CLIP & NAILING FLANGE INSTALLATION (SILL)

NOTE: APW SILL SHOWN. APW HEAD AND JAMB, ATF HEAD, SILL AND JAMB SIMILAR

TWO (2) ANCHORS REQUIRED PER INSTALLATION CLIPS LOCATION

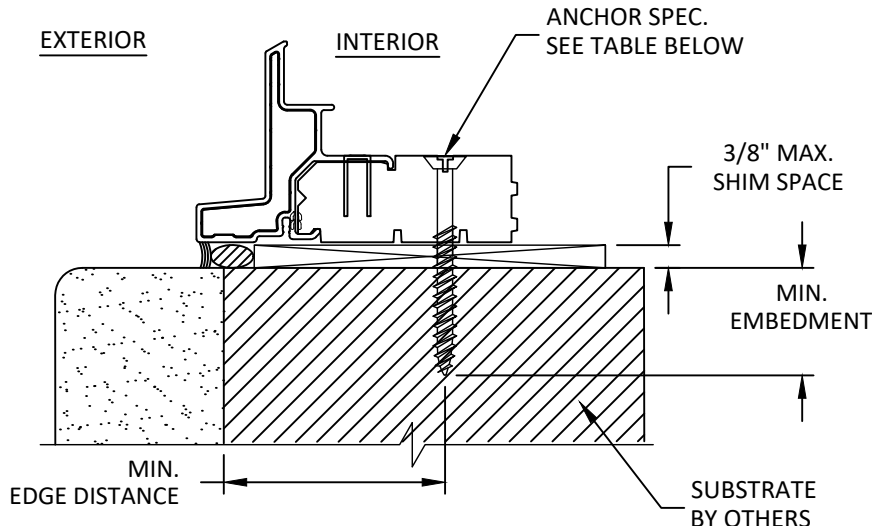

B
7 **VERTICAL SECTION**
THROUGH FRAME INSTALLATION (SILL)

NOTE: ATF SILL SHOWN. ATF HEAD AND JAMB, APW HEAD AND JAMB SIMILAR

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN. UNLESS SPECIFIED ON SHEETS 3 & 7.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF $\pm 1/2$ INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 3/8 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR TYPE	MIN. EMBEDMENT	MIN. EDGE DISTANCE
CLIP INSTALLATION	WOOD: MIN. SG = 0.55	#8 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE Steel, MIN. Fy = 33KSI, 1/8" MIN. ALUMINUM, (6063-T5)	#8-16 GR. 5 SELF-TAPPING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.50"
	CONCRETE: f'c=3000PSI	3/16" ITW TAPCON FLAT HEAD	1.25"	2.50"
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	3/16" ITW TAPCON FLAT HEAD	1.25"	2.50"
THROUGH FRAME INSTALLATION	WOOD: MIN. SG = 0.55	#10 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE Steel, MIN. Fy = 33KSI, 1/8" MIN. ALUMINUM, (6063-T5)	#10-24 GR. 5 SELF-TAPPING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.50"
	CONCRETE: f'c=3000PSI	3/16" ITW TAPCON FLAT HEAD	1.00"	1.50"
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	3/16" ITW TAPCON FLAT HEAD	1.00"	2.00"



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM WINDOW WITH STORMWATCH PROTECTION (HVHZ)(IMPACT)

INSTALLATION NOTES & ANCHOR DETAILS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132

PH: (954) 399-8478


FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

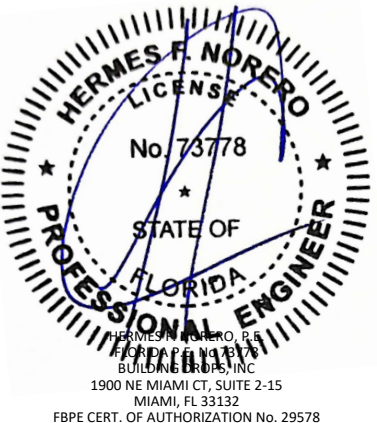

FL #:

FL15553

DATE: **12.05.24**

DWG. BY: **HJ** CHK. BY: **HFN**

SCALE: **NTS**

DWG. #: **AWD181**

SHEET:


7

c:\users\menggisun\building drops, inc\building drops, inc\projects\anderson corporation\lbc-25-1131 - fl15553 a-series window revisions\dwgs\anderson a-series revision (june upload)\awd181.dwg 6/3/2026 6:59 PM


BILL OF MATERIALS			
ITEM #	DESCRIPTION	MATERIAL	MANUFACTURER
1	FRAME	WOOD	ANDERSEN
2	SILL FILLER BLOCK - APW	WOOD	ANDERSEN
3	TRIM STOP	WOOD	ANDERSEN
4	INSIDE TRIM STOP	WOOD	ANDERSEN
5	GLAZING STOP	WOOD	ANDERSEN
6	FRAME CLADDING - APW SILL	FIBERGLASS	ANDERSEN
7	FRAME CLADDING - APW/ATF	FIBERGLASS	ANDERSEN
8	GLASS SPACER - 1" GLAZING	RIGID PVC	ANDERSEN
9	NAILING FLANGE	RIGID PVC	ANDERSEN
10	INSTALLATION CLIP	304 SS	ANDERSEN

NOTE: ALL WOOD COMPONENTS ARE PONDEROSA PINE (MIN. S.G. = 0.40)


1 FRAME WOOD

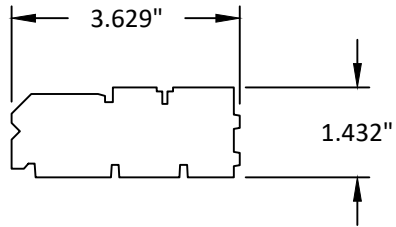


2 SILL FILLER BLOCK - APW WOOD

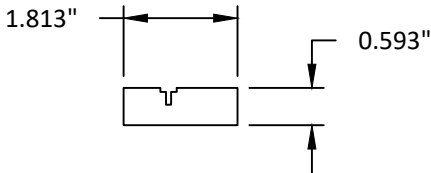


3 TRIM STOP WOOD

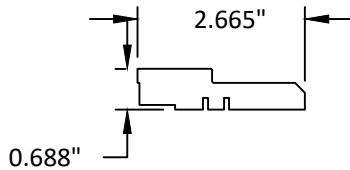


4 INSIDE TRIM STOP WOOD

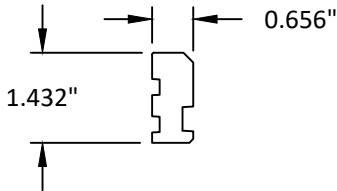


5 GLAZING STOP WOOD

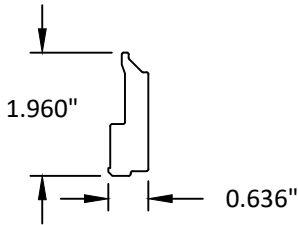


6 FRAME CLADDING - APW SILL FIBERGLASS

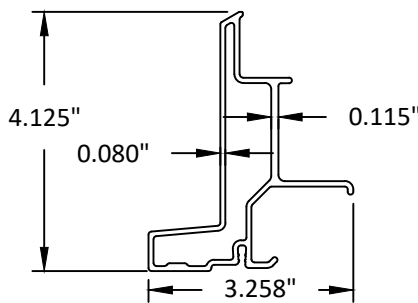


7 FRAME CLADDING - APW/ATF FIBERGLASS

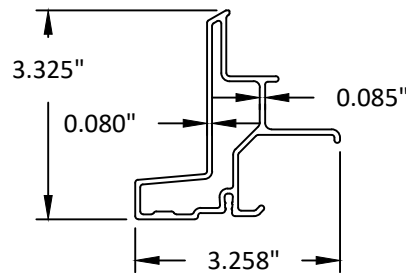


8 GLASS SPACER - 1" GLAZING RIGID PVC

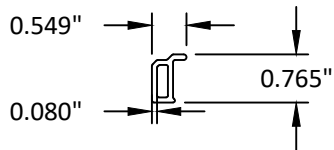

9 NAILING FLANGE RIGID PVC

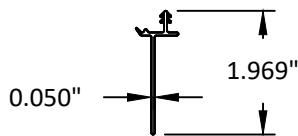

10 INSTALLATION CLIP 304 SS

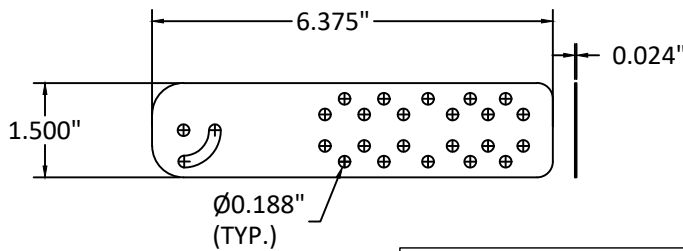

NOTE: INSTALLATION CLIPS SHALL BE ATTACHED TO WINDOW FRAME WITH TWO (2) #8 X 5/8" SCREWS

ASSEMBLY NOTES:

- 1) INSIDE GLASS STOPS SHALL BE SECURED WITH 3/16" X 1-1/4" STAPLES 3-1/2" FROM END OF PART AND 6" O.C. THEREAFTER.
- 2) FRAME MEMBERS SNAP-FITS INTO FRAME CLADDING AND IS FASTENED WITH 7/16" X 1" STAPLES 3" FROM CORNERS AND 10" O.C. THEREAFTER.
- 3) TRIM STOPS SHALL BE SECURED WITH VINYL SPLINE.
- 4) INSIDE STOPS SHALL BE SECURED WITH 7/16" X 1-1/2" STAPLES 1-1/2" FROM END OF PART AND 8" O.C. THEREAFTER.



100 FOURTH AVE NORTH
BAYPORT, MN 55003
PH: (651) 264-5308

TITLE: A-SERIES PICTURE & FIXED TRANSOM WINDOW WITH STORMWATCH PROTECTION (HVHZ)(IMPACT)

BILL OF MATERIALS, ASSEMBLY NOTES & COMPONENTS

PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15

MIAMI, FL 33132

PH: (954) 399-8478

FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
7TH FBC CODE CHANGE	SR	3.18.20
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT



FL #:	FL15553
DATE:	12.05.24
DWG. BY:	HJ
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD181
SHEET:	8