

ANDERSEN CORPORATION

A-SERIES PICTURE & FIXED TRANSOM PG UPGRADE WINDOW (NON-HVHZ) (NON-IMPACT)

GENERAL NOTES:

- THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:
 - AAMA/WDMA/CSA 101/1.S.2/A440-17
- ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING, AND METAL FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
- THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT IN NON-HVHZ AREAS.
- APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
- WINDOW FRAME MATERIAL: PINE (MIN. S.G. = 0.40)
- CLADDING MATERIAL: FIBERGLASS
- IN ACCORDANCE WITH CHAPTER 23 OF THE CURRENT FBC, WOOD COMPONENTS SHALL HAVE BEEN PRESERVATIVE TREATED OR SHALL BE OF A DURABLE SPECIES.
- GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 1 FOR GLAZING DETAIL.

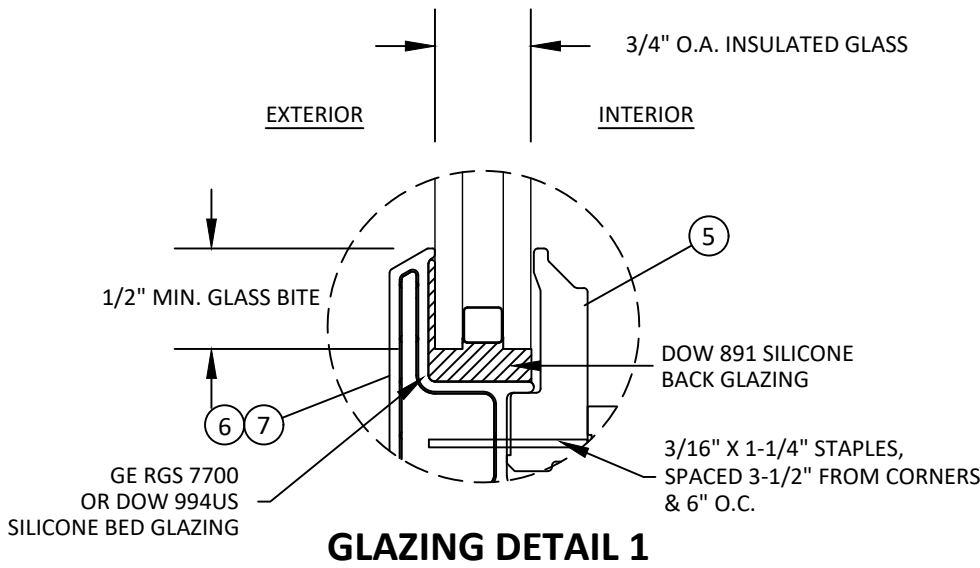


TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	GENERAL NOTES & GLAZING DETAIL
2	ELEVATION & ANCHOR LAYOUTS
3	VERTICAL SECTIONS
4	VERTICAL SECTIONS
5	HORIZONTAL SECTIONS
6	INSTALLATION NOTES & ANCHOR DETAILS
7	BILL OF MATERIALS, ASSEMBLY NOTES & COMPONENTS

DESIGN PRESSURE RATING (PSF)				
CONFIGURATION	WIDTH (IN.)	HEIGHT (IN.)	DESIGN PRESSURE	MISSILE IMPACT RATING
"O"	71-1/4"	95-1/4"	+/-70 PSF	NON-IMPACT
	95-1/4"	71-1/4"		

GLAZING NOTES:

- GLAZING SHALL MEET SAFETY GLAZING REQUIREMENTS OF THE FBC.
- SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN CHAPTER 24.
- SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER CHAPTER 24.
- D.L.O. MAY NOT EXCEED MAX DIMENSIONS SHOWN ON ELEVATIONS.



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)

GENERAL NOTES
& GLAZING DETAIL

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15

MIAMI, FL 33132

PH: (954) 399-8478

FAX: (954) 744-4738


WEB: www.buildingdrops.com



REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2026.06.04 12:34:20 -0400'

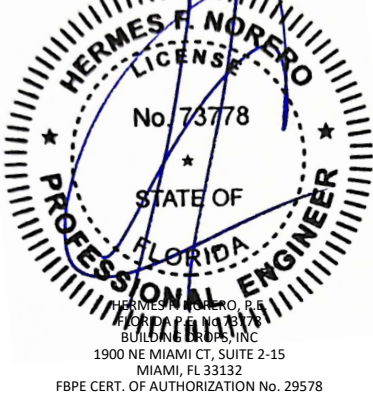

FL #: **FL15553**

DATE: **02.23.22**

DWG. BY:
SH

CHK. BY:
HFN


SCALE: **NTS**

DWG. #: **AWD300**

SHEET:

1


OF 7

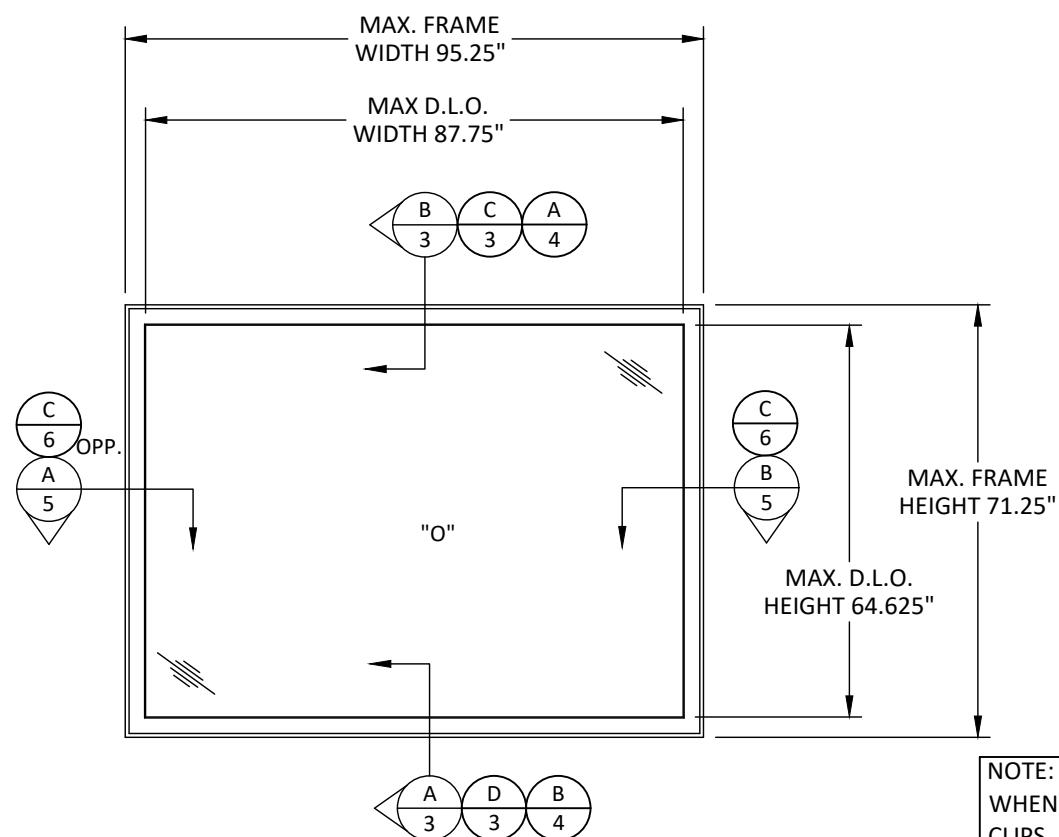

ELEVATION


FIXED WINDOW

NOTE: WHEN NAILING FLANGE IS UTILIZED WITH INSTALLATION CLIPS, UNITS SHALL BE FASTENED THROUGH THE NAILING FLANGE AND INSTALLATION CLIP. FOR NAILING FLANGE ANCHOR LAYOUT FOLLOW MANUFACTURER'S INSTRUCTIONS

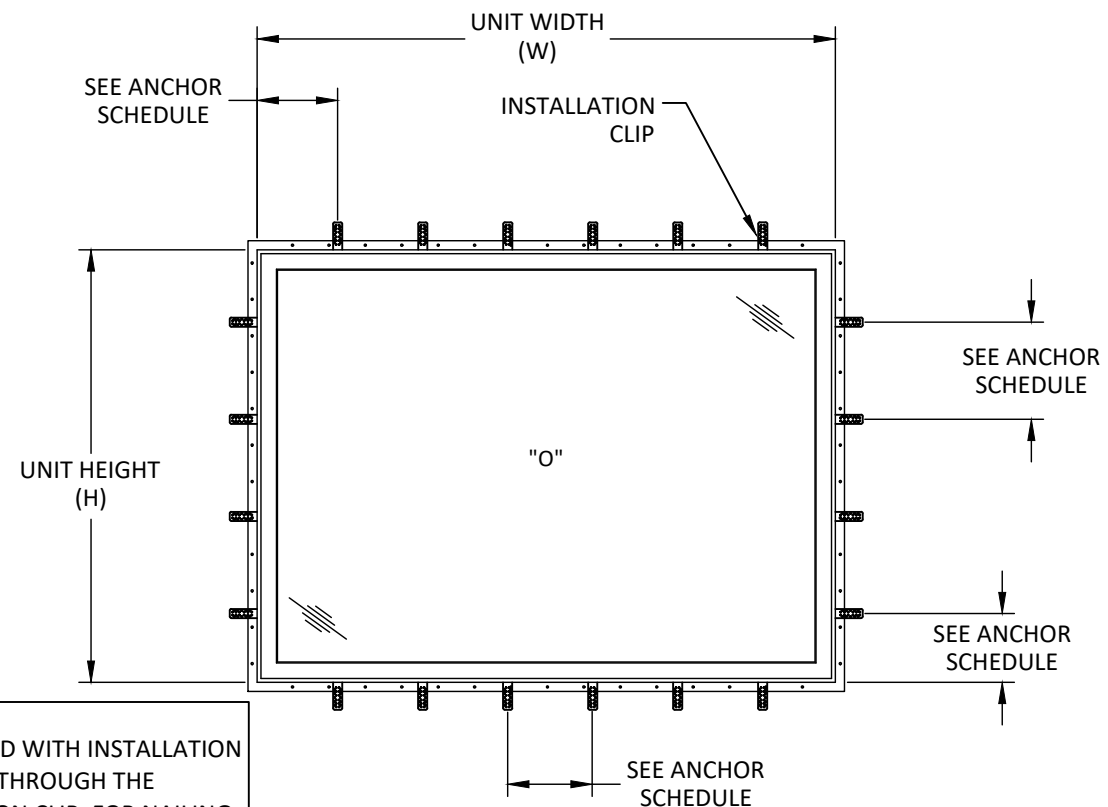

TYPICAL ANCHOR LAYOUT

INSTALLATION CLIP & NAILING FLANGE

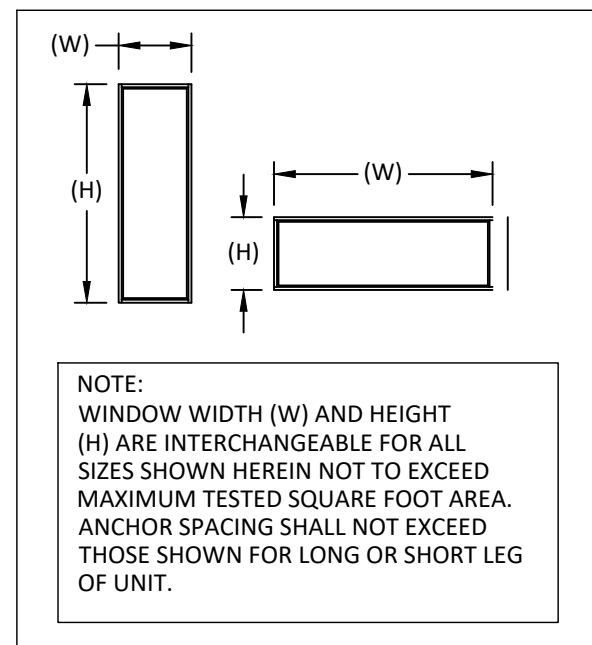


INSTALLATION CLIP ANCHOR SCHEDULE HEAD/JAMBS/SILL	
LEG LENGTH (L)	QUANTITY OF CLIPS
L > 79.25"	6
71.25" < L ≤ 79.25"	5
63.25" < L ≤ 71.25"	4
51.25" < L ≤ 63.25"	3
35.25" < L ≤ 51.25"	2
L ≤ 35.25"	1

ANCHOR SCHEDULE NOTES:

- 1) INSTALLATION CLIPS SHALL BE LOCATED 12" FROM CORNERS AND EQUALLY SPACED THEREAFTER.
- 2) IF ONE INSTALLATION CLIP IS SPECIFIED, THE CLIP SHALL BE LOCATED AT MIDSPAN OF FRAME MEMBER.

ANCHOR LEGEND	
	INSTALLATION CLIP
	THROUGH FRAME ANCHOR
	NAILING FLANGE ANCHOR LOCATION

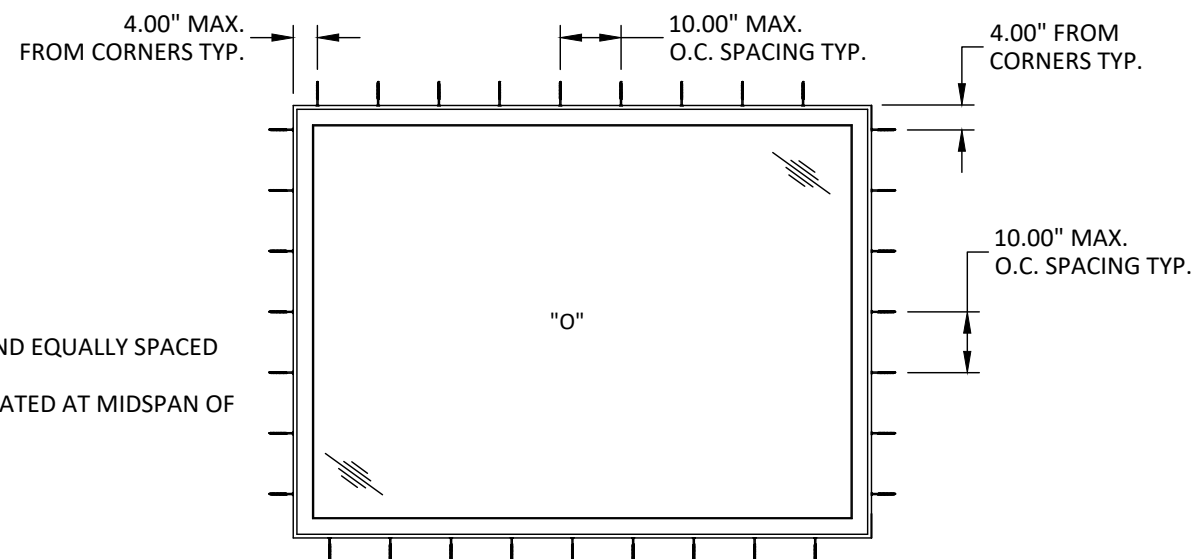

ANCHOR LAYOUT

THROUGH FRAME

ASSEMBLY NOTES:

- 1) INSIDE GLASS STOPS SHALL BE SECURED WITH 3/16" X 1-1/4" STAPLES 3-1/2" FROM END OF PART AND 6" O.C. THEREAFTER.
- 2) FRAME MEMBERS SNAP-FITS INTO FRAME CLADDING AND IS FASTENED WITH 7/16" X 1" STAPLES 3" FROM CORNERS AND 10" O.C. THEREAFTER.
- 3) TRIM STOPS SHALL BE SECURED WITH VINYL SPLINE.
- 4) INSIDE STOPS SHALL BE SECURED WITH 7/16" X 1-1/2" STAPLES 1-1/2" FROM END OF PART AND 8" O.C. THEREAFTER.



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)


ELEVATION & ANCHOR LAYOUTS

PREPARED BY:
BUILDING DROPS, INC.



REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

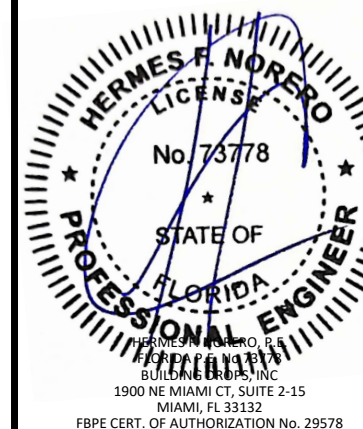

FL #: **FL15553**

DATE: 02.23.22

DWG. BY: SH	CHK. BY: HFN
-----------------------	------------------------

SCALE: NTS


DWG. #: **AWD300**

SHEET:


2

OF 7


c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen a-series window revisions\dwgs\andersen a-series revision (june upload)\awd300.dwg 6/3/2026 7:01 PM

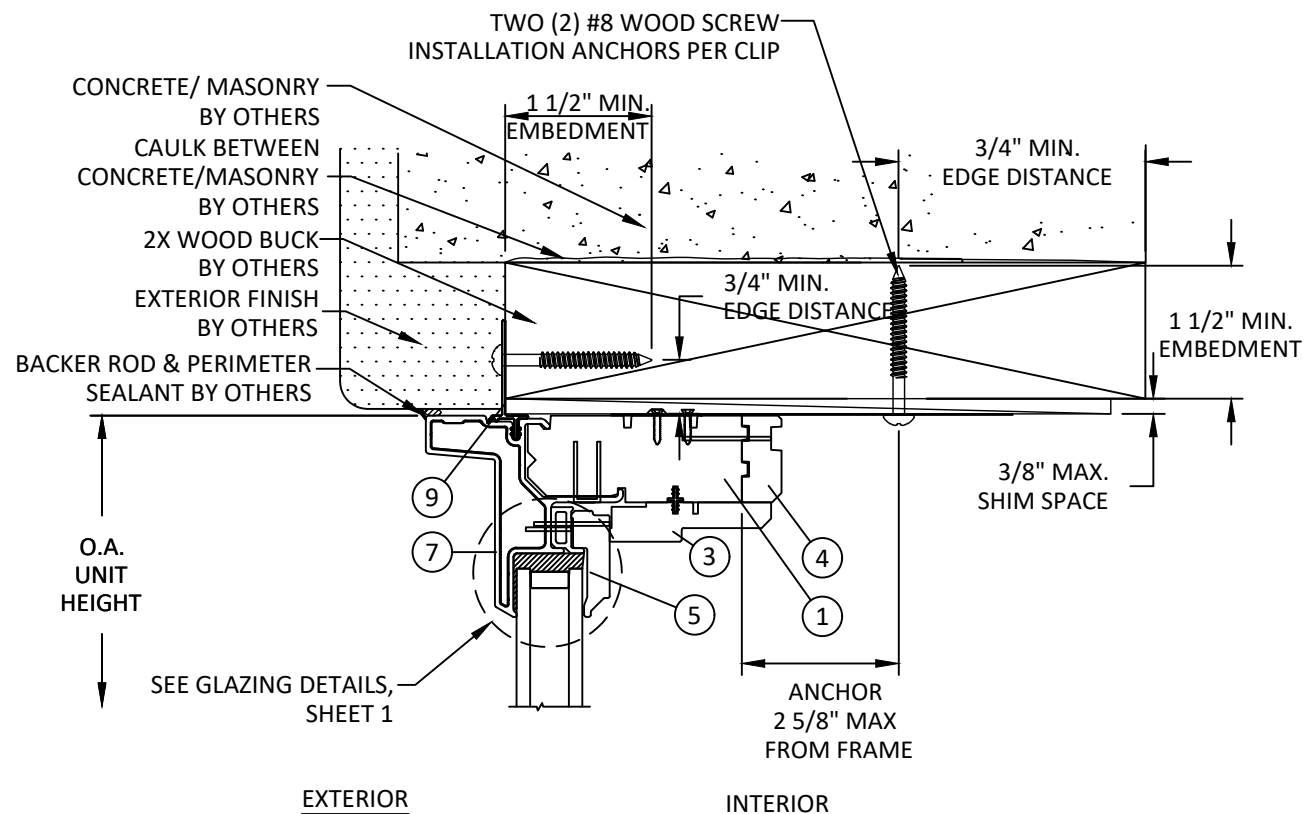


EXTERIOR INTERIOR
B
3 VERTICAL SECTION
HEAD - 2X WOOD BUCK
ATF AND APW

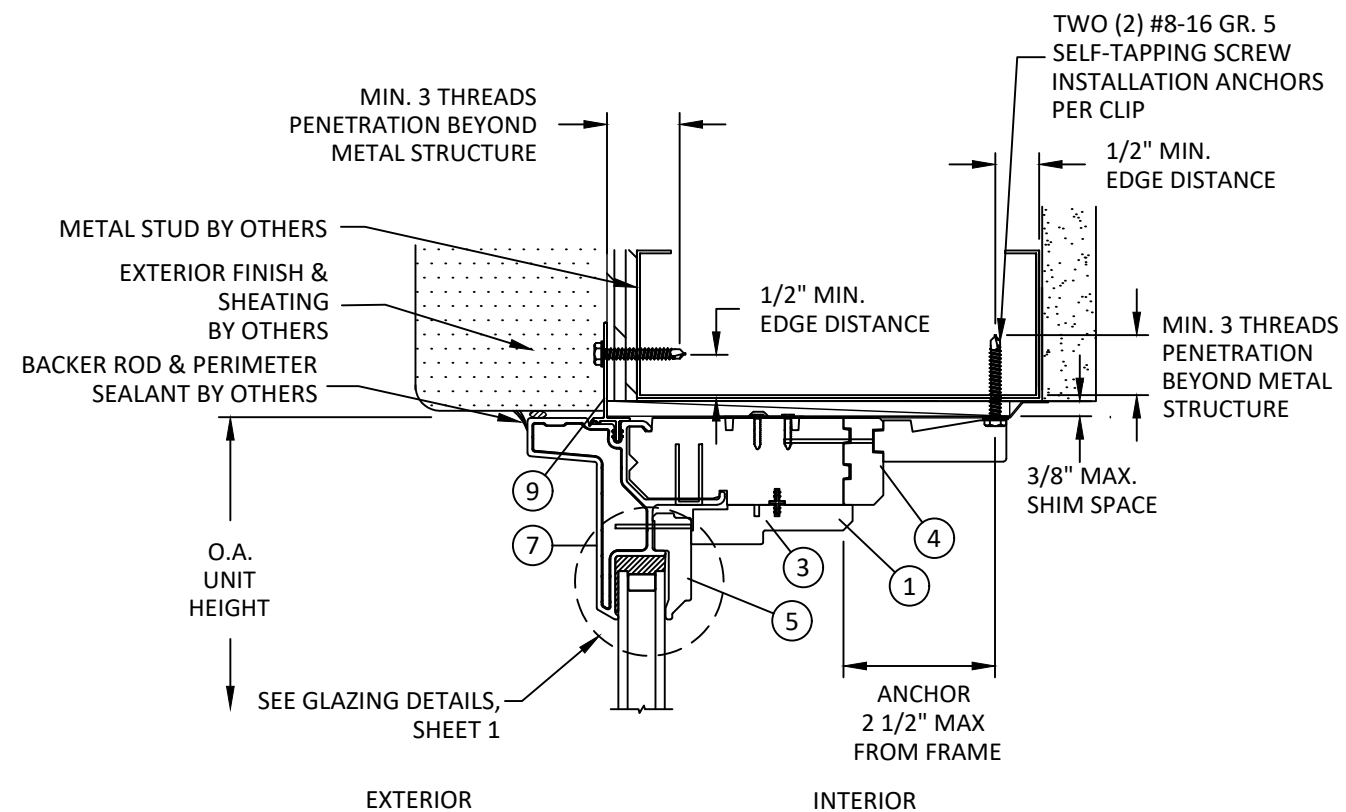

EXTERIOR INTERIOR
C
3 VERTICAL SECTION
HEAD - METAL STUD
ATF AND APW

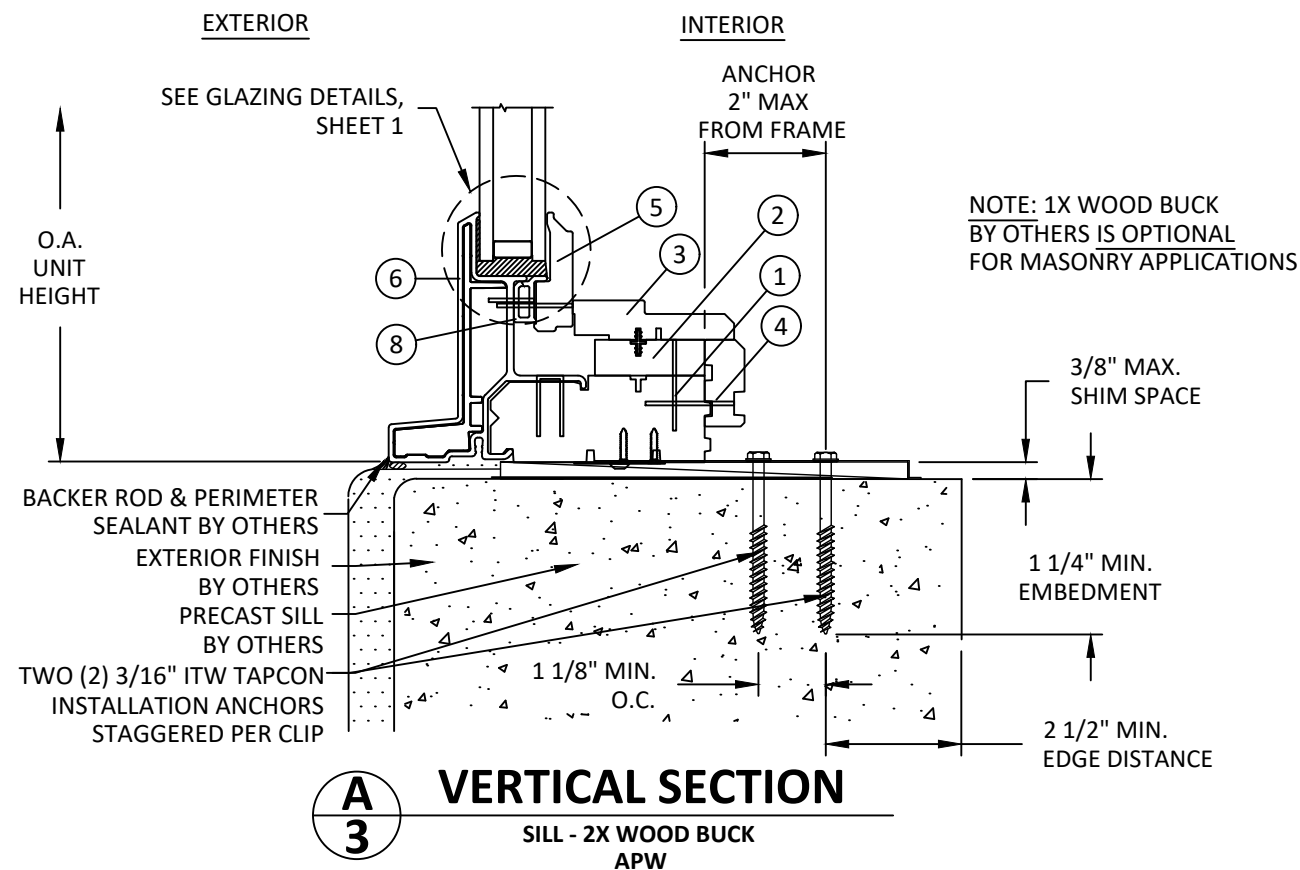

EXTERIOR INTERIOR
A
3 VERTICAL SECTION
SILL - 2X WOOD BUCK
APW

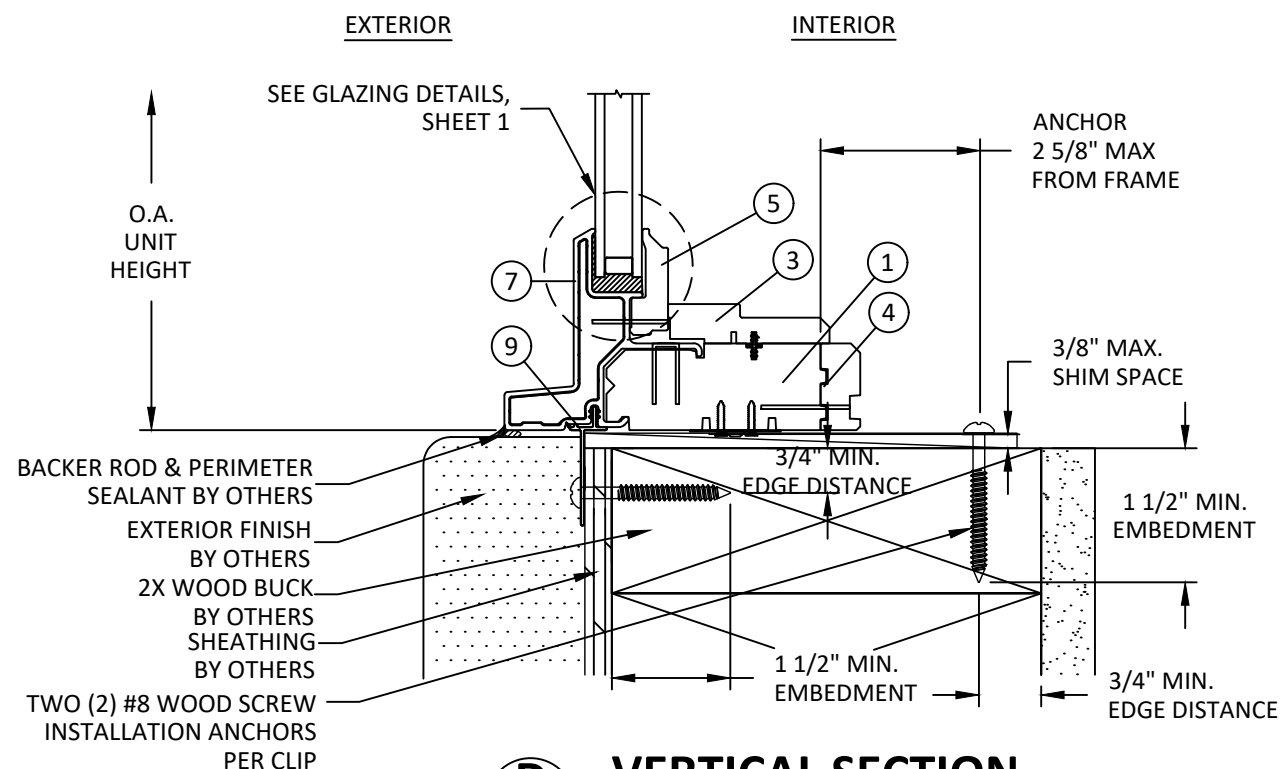

EXTERIOR INTERIOR
D
3 VERTICAL SECTION
SILL - 2X WOOD FRAME
ATF



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)

VERTICAL SECTIONS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

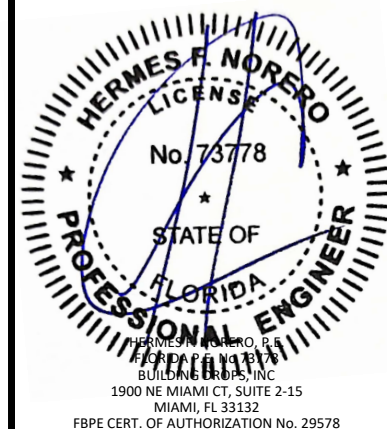

FL #:

FL15553

DATE: **02.23.22**

DWG. BY:
SH

CHK. BY:
HFN

SCALE: **NTS**


DWG. #: **AWD300**

SHEET:


3

OF 7


c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen a-series revision (june upload)\awd300.dwg
6/3/2026 7:01 PM
c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen a-series revision (june upload)\awd300.dwg

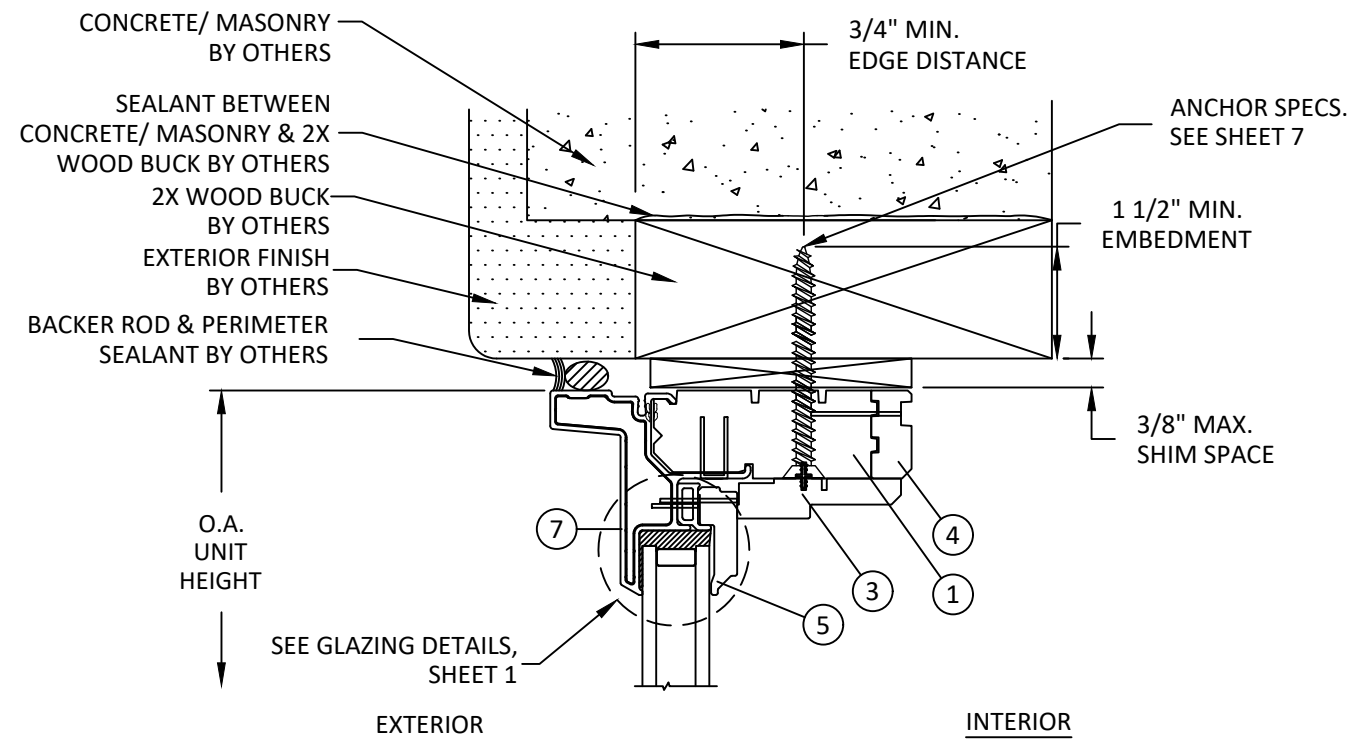

A
4 **VERTICAL SECTION**
HEAD - 2X WOOD BUCK
ATF AND APW

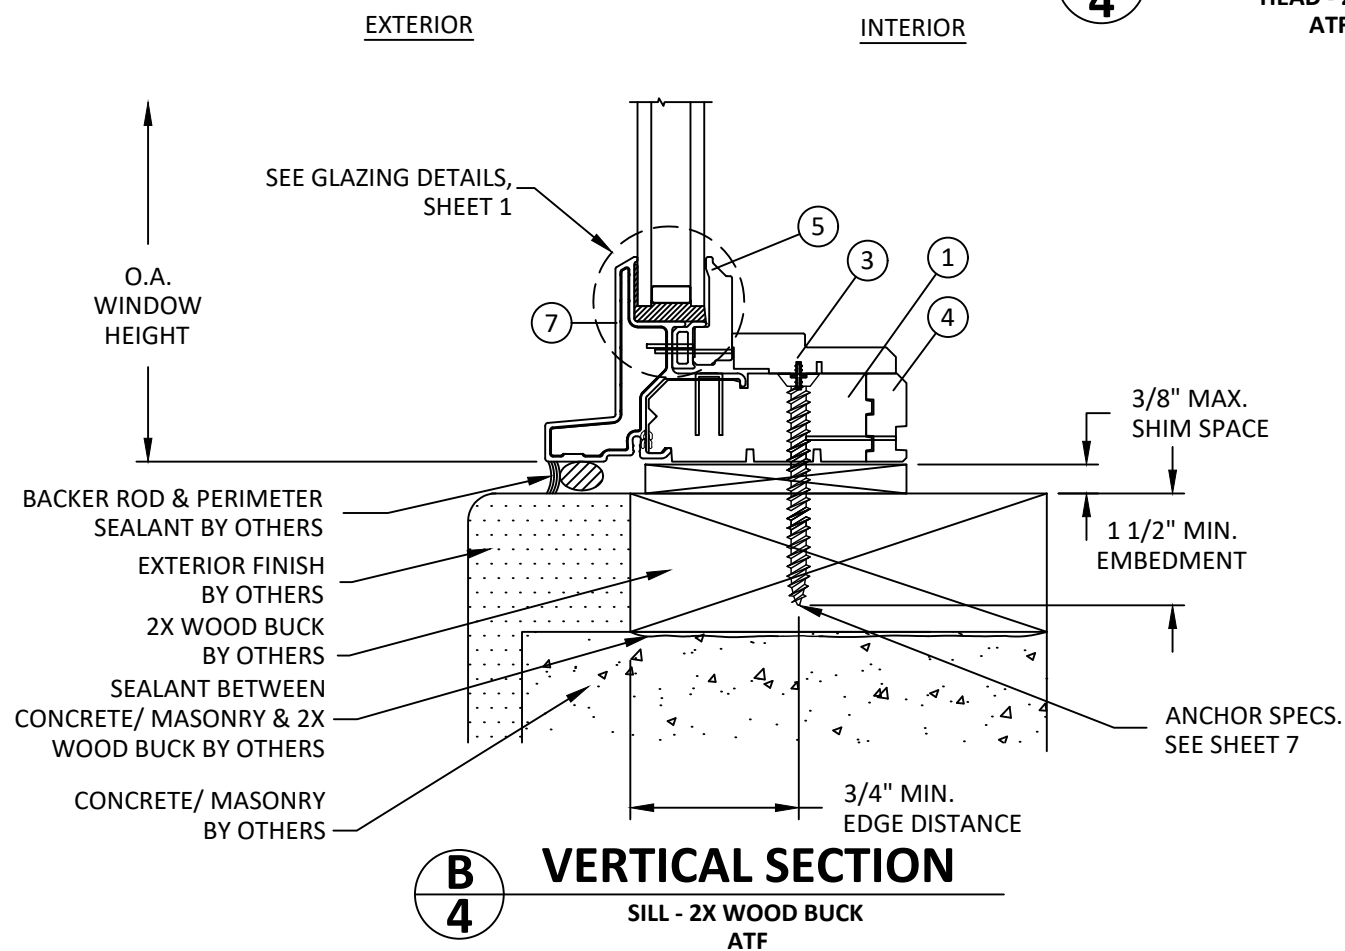

B
4 **VERTICAL SECTION**
SILL - 2X WOOD BUCK
ATF

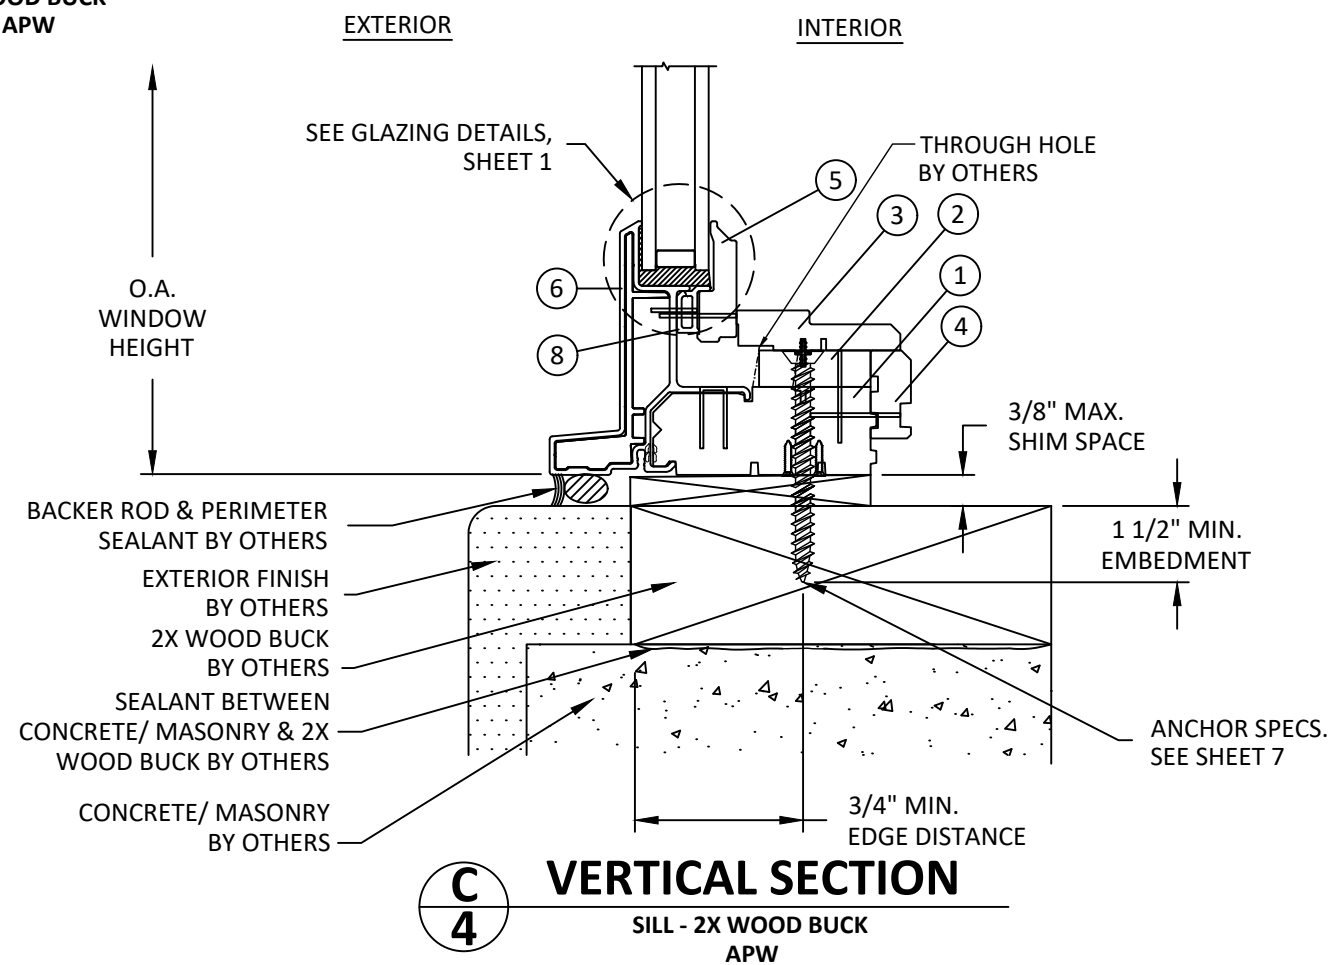

C
4 **VERTICAL SECTION**
SILL - 2X WOOD BUCK
APW



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSCOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)

VERTICAL SECTIONS

PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT



FL #:

FL15553

DATE: **02.23.22**

DWG. BY:
SH

CHK. BY:
HFN

SCALE: **NTS**


DWG. #: **AWD300**

SHEET:


4

OF 7

c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen corporation\tbc-25-1131 - fl15553 a-series window revisions\dwg\andersen a-series revision (june upload)\awd300.dwg
6/3/2026 7:01 PM

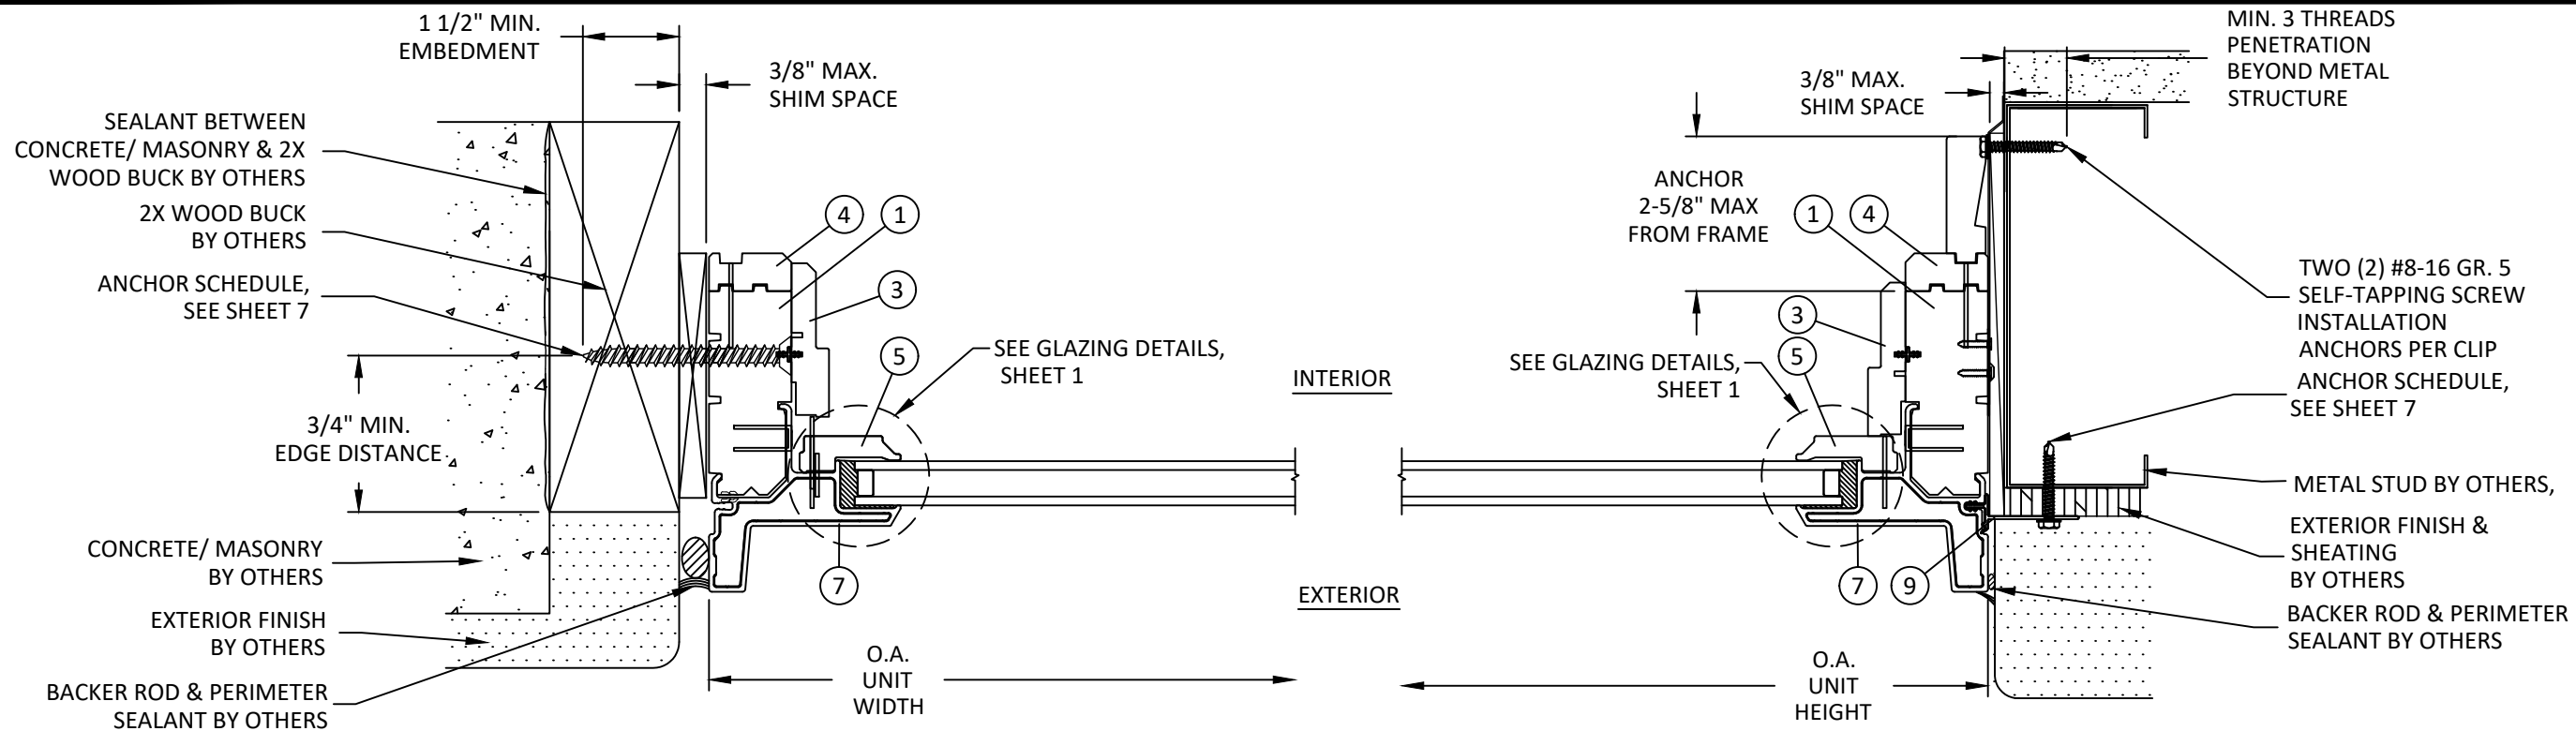

A
5 **HORIZONTAL SECTION**
JAMB - 2X WOOD BUCK APW

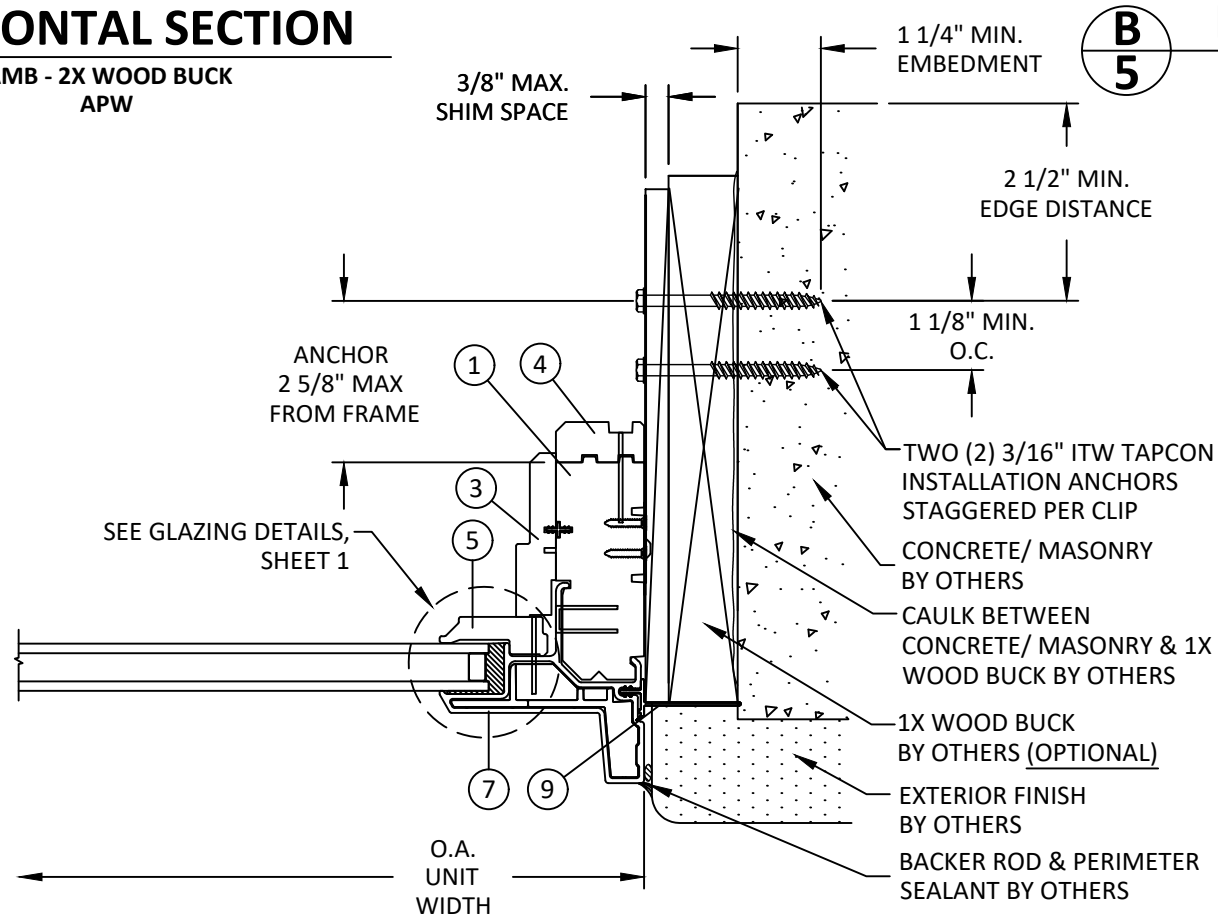

B
5 **HORIZONTAL SECTION**
JAMB - CONCRETE/MASONRY APW

C
5 **HORIZONTAL SECTION**
JAMB - CONCRETE/MASONRY ATF AND APW



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSCOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)

HORIZONTAL SECTIONS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com




REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

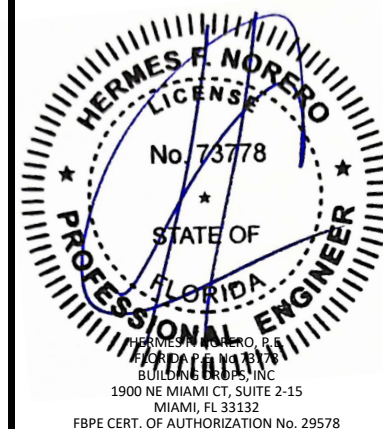

FL #:	FL15553
DATE:	02.23.22
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD300
SHEET:	5


c:\users\mengqisun\building drops, inc\building drops landing - common\projects\andersen corporation\fbc-25-1131 - fl15553 a-series window revisions\dwgs\andersen a-series revision (june upload)\awd300.dwg 6/3/2026 7:01 PM

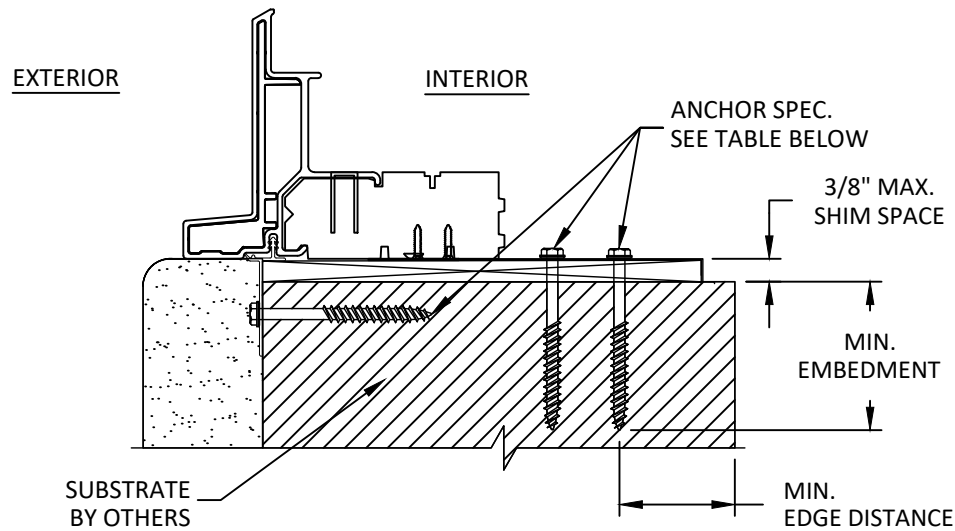

A
6 **VERTICAL SECTION**
CLIP & NAILING FLANGE INSTALLATION (SILL)

NOTE: 2 ANCHORS REQUIRED

NOTE: APW SILL SHOWN. APW HEAD AND JAMB, ATF HEAD, SILL AND JAMB SIMILAR

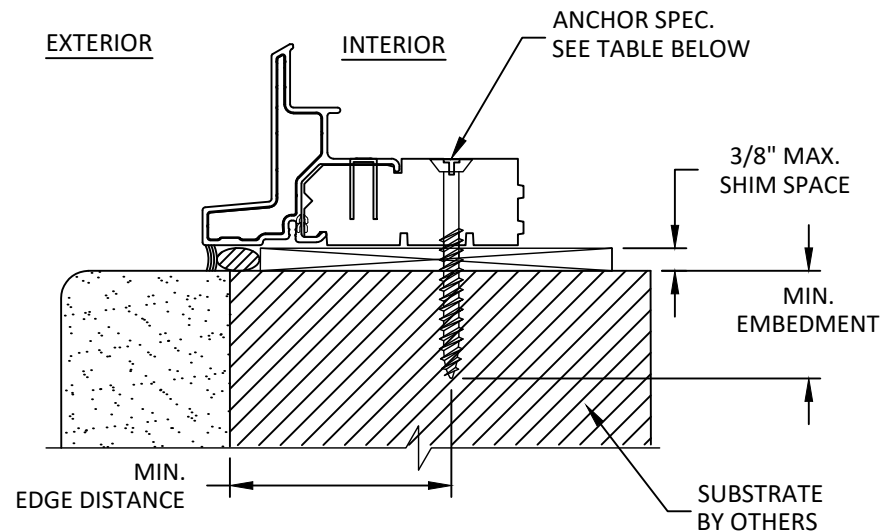

B
6 **VERTICAL SECTION**
THROUGH FRAME INSTALLATION (SILL)

NOTE: APW SILL SHOWN. APW HEAD AND JAMB, ATF HEAD, SILL AND JAMB SIMILAR

INSTALLATION NOTES:

- ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS SPECIFIED ON SHEETS 2 & 6.
- THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION OF THE MAXIMUM SIZE LISTED.
- INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF $\pm 1/2$ INCH THE DEPICTED LOCATION & SPACING IN THE ANCHOR LAYOUT DETAILS (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
- SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 3/8 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
- MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

ANCHOR SCHEDULE				
METHOD	SUBSTRATE	ANCHOR TYPE	MIN. EMBEDMENT	MIN. EDGE DISTANCE
CLIP INSTALLATION	WOOD: MIN. SG = 0.55	#8 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE Steel, MIN. Fy = 33KSI, 1/8" MIN. ALUMINUM, (6063-T5)	#8-16 GR. 5 SELF-TAPPING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.50"
	CONCRETE: f'c=3000PSI	3/16" ITW TAPCON FLAT HEAD	1.25"	2.50"
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	3/16" ITW TAPCON FLAT HEAD	1.25"	2.50"
THROUGH FRAME INSTALLATION	WOOD: MIN. SG = 0.55	#10 WOOD SCREW	1.50"	0.75"
	METAL: 18 GAUGE Steel, MIN. Fy = 33KSI, 1/8" MIN. ALUMINUM, (6063-T5)	#10-24 GR. 5 SELF-TAPPING SCREW	3 THREADS MIN PENETRATION BEYOND METAL	0.50"
	CONCRETE: f'c=3000PSI	3/16" ITW TAPCON FLAT HEAD	1.00"	1.50"
	MASONRY: CMU per ASTM C90 MIN. 2000 PSI	3/16" ITW TAPCON FLAT HEAD	1.00"	2.00"



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSON
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)
INSTALLATION NOTES
& ANCHOR DETAILS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT









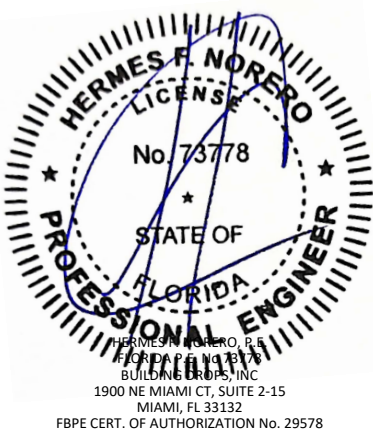


FL #:	FL15553
DATE:	02.23.22
DWG. BY:	CHK. BY:
SH	HFN
SCALE:	NTS
DWG. #:	AWD300
SHEET:	6

c:\users\mengisun\building drops, inc\building drops landing - common\projects\andersen corporation\fbc-25-1131 - fl15551 & fl15553 a-series window revisions\dwgs\andersen a-series revision (june upload)\awd300.dwg 6/3/2026 7:01 PM

BILL OF MATERIALS			
ITEM #	DESCRIPTION	MATERIAL	MANUFACTURER
1	FRAME	WOOD	ANDERSEN
2	SILL FILLER BLOCK - APW	WOOD	ANDERSEN
3	TRIM STOP	WOOD	ANDERSEN
4	INSIDE TRIM STOP	WOOD	ANDERSEN
5	GLAZING STOP	WOOD	ANDERSEN
6	FRAME CLADDING - APW SILL	FIBERGLASS	ANDERSEN
7	FRAME CLADDING - APW / ATF	FIBERGLASS	ANDERSEN
8	NAILING FLANGE	RIGID PVC	ANDERSEN
9	CLIP	304 SS	ANDERSEN

NOTE: ALL WOOD COMPONENTS ARE PONDEROSA PINE (MIN. S.G. = 0.40)

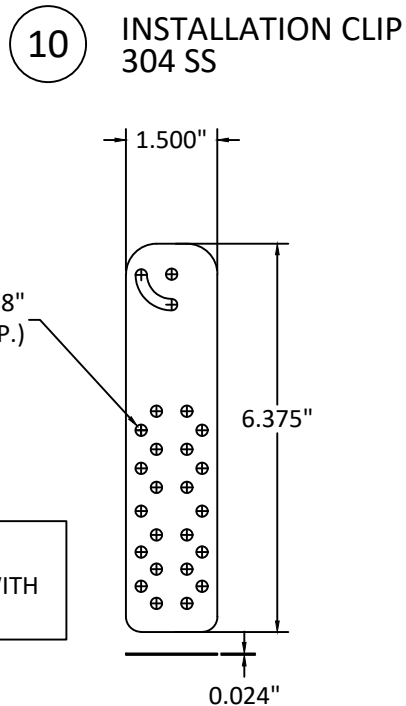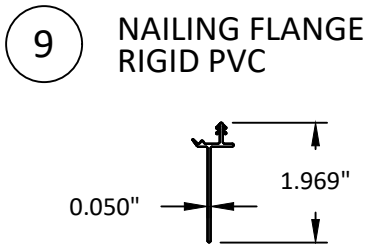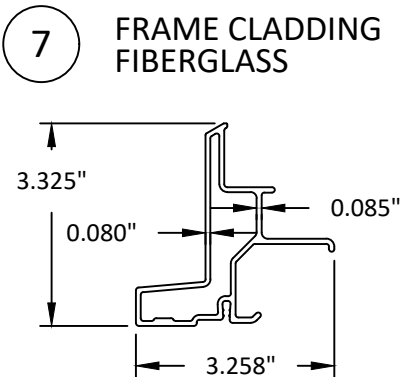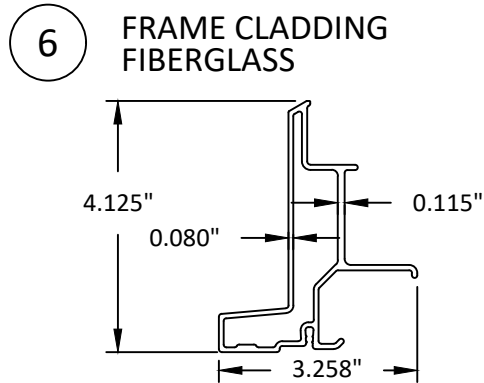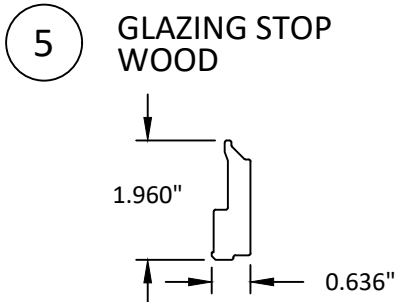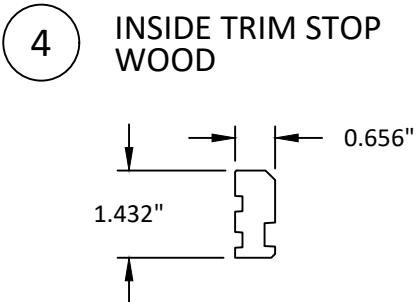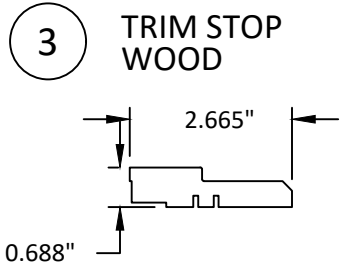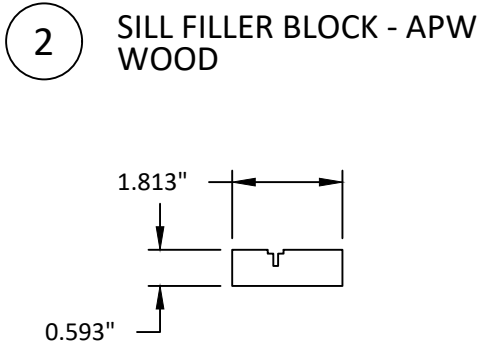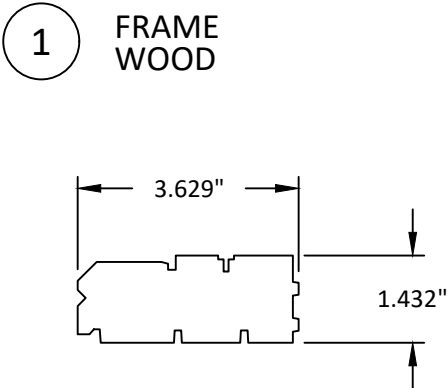

NOTE: INSTALLATION CLIPS SHALL BE ATTACHED TO WINDOW FRAME WITH TWO (2) #8 X 5/8" SCREWS

ASSEMBLY NOTES:

- 1) INSIDE GLASS STOPS SHALL BE SECURED WITH 3/16" X 1-1/4" STAPLES 3-1/2" FROM END OF PART AND 6" O.C. THEREAFTER.
- 2) FRAME MEMBERS SNAP-FITS INTO FRAME CLADDING AND IS FASTENED WITH 7/16" X 1" STAPLES 3" FROM CORNERS AND 10" O.C. THEREAFTER.
- 3) TRIM STOPS SHALL BE SECURED WITH VINYL SPLINE.
- 4) INSIDE STOPS SHALL BE SECURED WITH 7/16" X 1-1/2" STAPLES 1-1/2" FROM END OF PART AND 8" O.C. THEREAFTER.

ANDERSEN
WINDOWS & DOORS
100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: A-SERIES PICTURE & FIXED TRANSCOM
PG UPGRADE WINDOW
(NON-HVHZ)(NON-IMPACT)

BILL OF MATERIALS, ASSEMBLY
NOTES & COMPONENTS

PREPARED BY:
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
INSTALLATION REV.	HJ	5.29.26

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT

HERMES F. NORERO, P.E.
LICENSE No. 73778
STATE OF FLORIDA
PROFESSIONAL ENGINEER
HERMES F. NORERO, P.E.
BUILDING DROPS, INC.
1900 NE MIAMI CT, SUITE 2-15
MIAMI, FL 33132
FBPE CERT. OF AUTHORIZATION No. 29578

FL #:	FL15553
DATE:	02.23.22
DWG. BY:	SH
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD300
SHEET:	7

OF 7