




Series 3300-T
Sliding Glass Door
w/ Thermal Break Frame
"IMPACT"

GENERAL NOTES

1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
4. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
5. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
6. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
7. This product meets water infiltration requirements for "HVHZ".
8. Aluminum components, including fasteners, shall meet the requirements of FBC Section 2003.
9. Gaskets shall comply with FBC Section 2411.3.4.


TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures and general notes
2	Horizontal cross sections
3	Vertical cross sections
4	Buck anchoring
5	Frame anchoring
6	Components
7	Bill of materials, components and glazing details

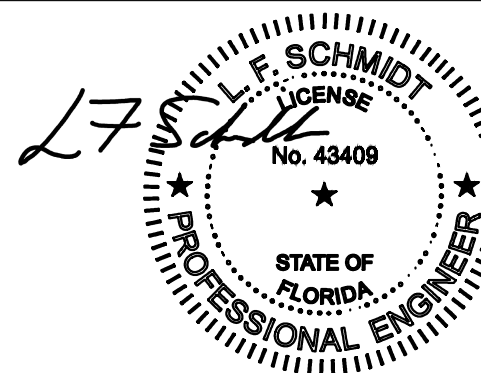

Digitally signed by
Lyndon F Schmidt
Date: 2026.07.06
14:23:04 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

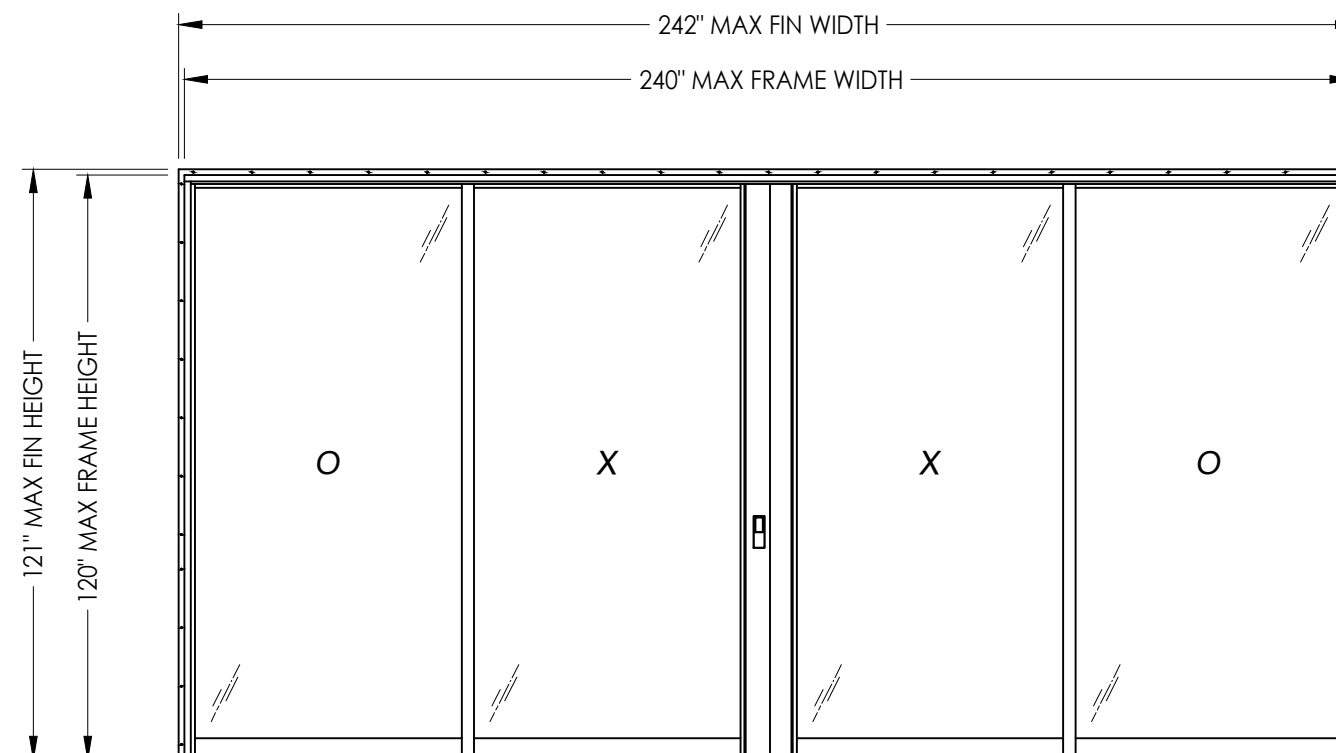

MAX PANEL DIMENSION	OVERALL D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
63.25" X 118.25"	54.75" X 112.75"	G1, G2	+40.0	-50.0
			+50.0*	-50.0

*Requires 3" sill pan.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^gW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33487
Phone No.: 813.659.9197
FBPE Registry No. 9813


PRODUCT: *FLEETWOOD*
Series 3300-T

PART OR ASSEMBLY: TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES


6	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS
5	7/12/23	UPDATE TO 8TH ED. (2023)	FBC	LFS
4	8/10/20	UPDATE TO 7TH ED. (2020)	FBC	DAC
NO.	DATE	BY		
REVISIONS				

DATE:	4/4/14
SCALE:	N.T.S.
DWG. BY:	JK
CHK. BY:	LFS
DRAWING NO.:	FL-15560.13
SHEET	1 OF 7

Z:\2023 FBC Drawings\Fleetwood Windows & Doors\FL-15560 R15 Sliding Patio Door\FL-15560.11-13.dwg

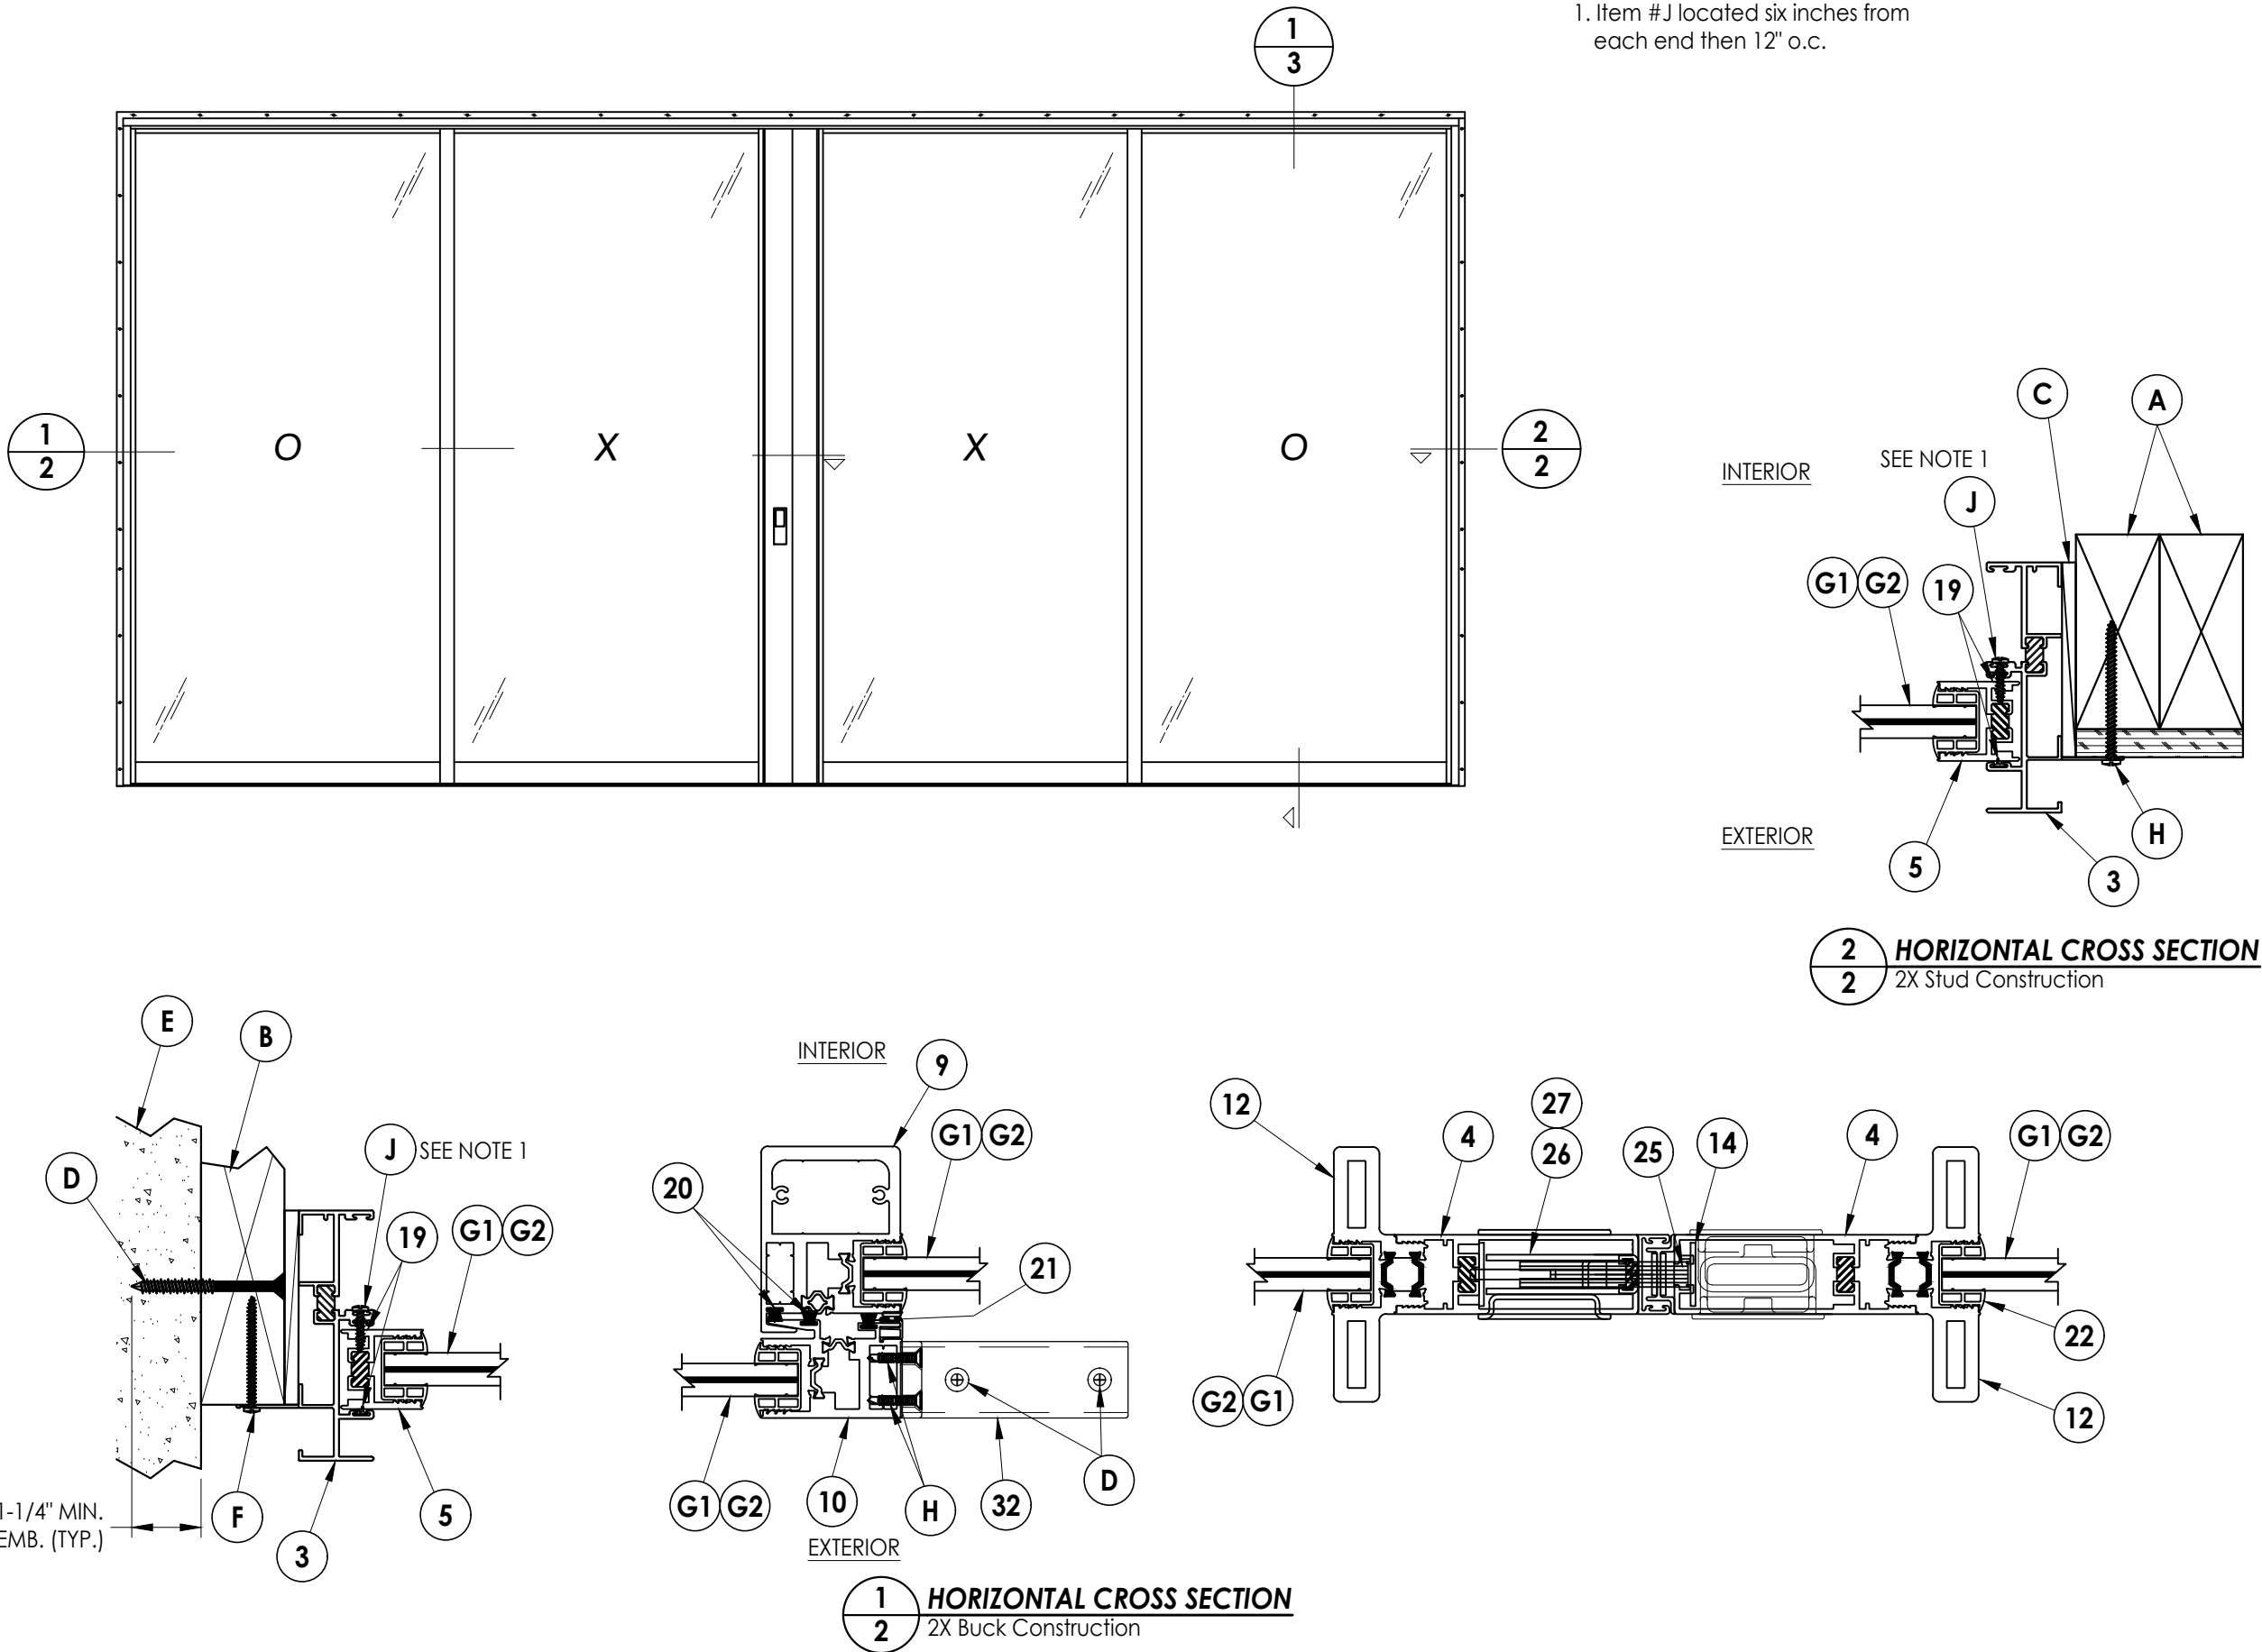

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		RWBUILDING CONSULTANTS, INC. P.O. Box 230, Vairico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: FLEETWOOD Series 3300-T		PART OR ASSEMBLY: HORIZONTAL CROSS SECTIONS	
		LFS	
	6	7/02/26	UPDATE TO 9TH ED. (2026) FBC
	5	7/12/23	UPDATE TO 8TH ED. (2023) FBC
	4	8/10/20	UPDATE TO 7TH ED. (2020) FBC
	NO.	DATE	BY
REVISIONS			
DATE: 4/4/14			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-15560.13			
SHEET 2 OF 7			

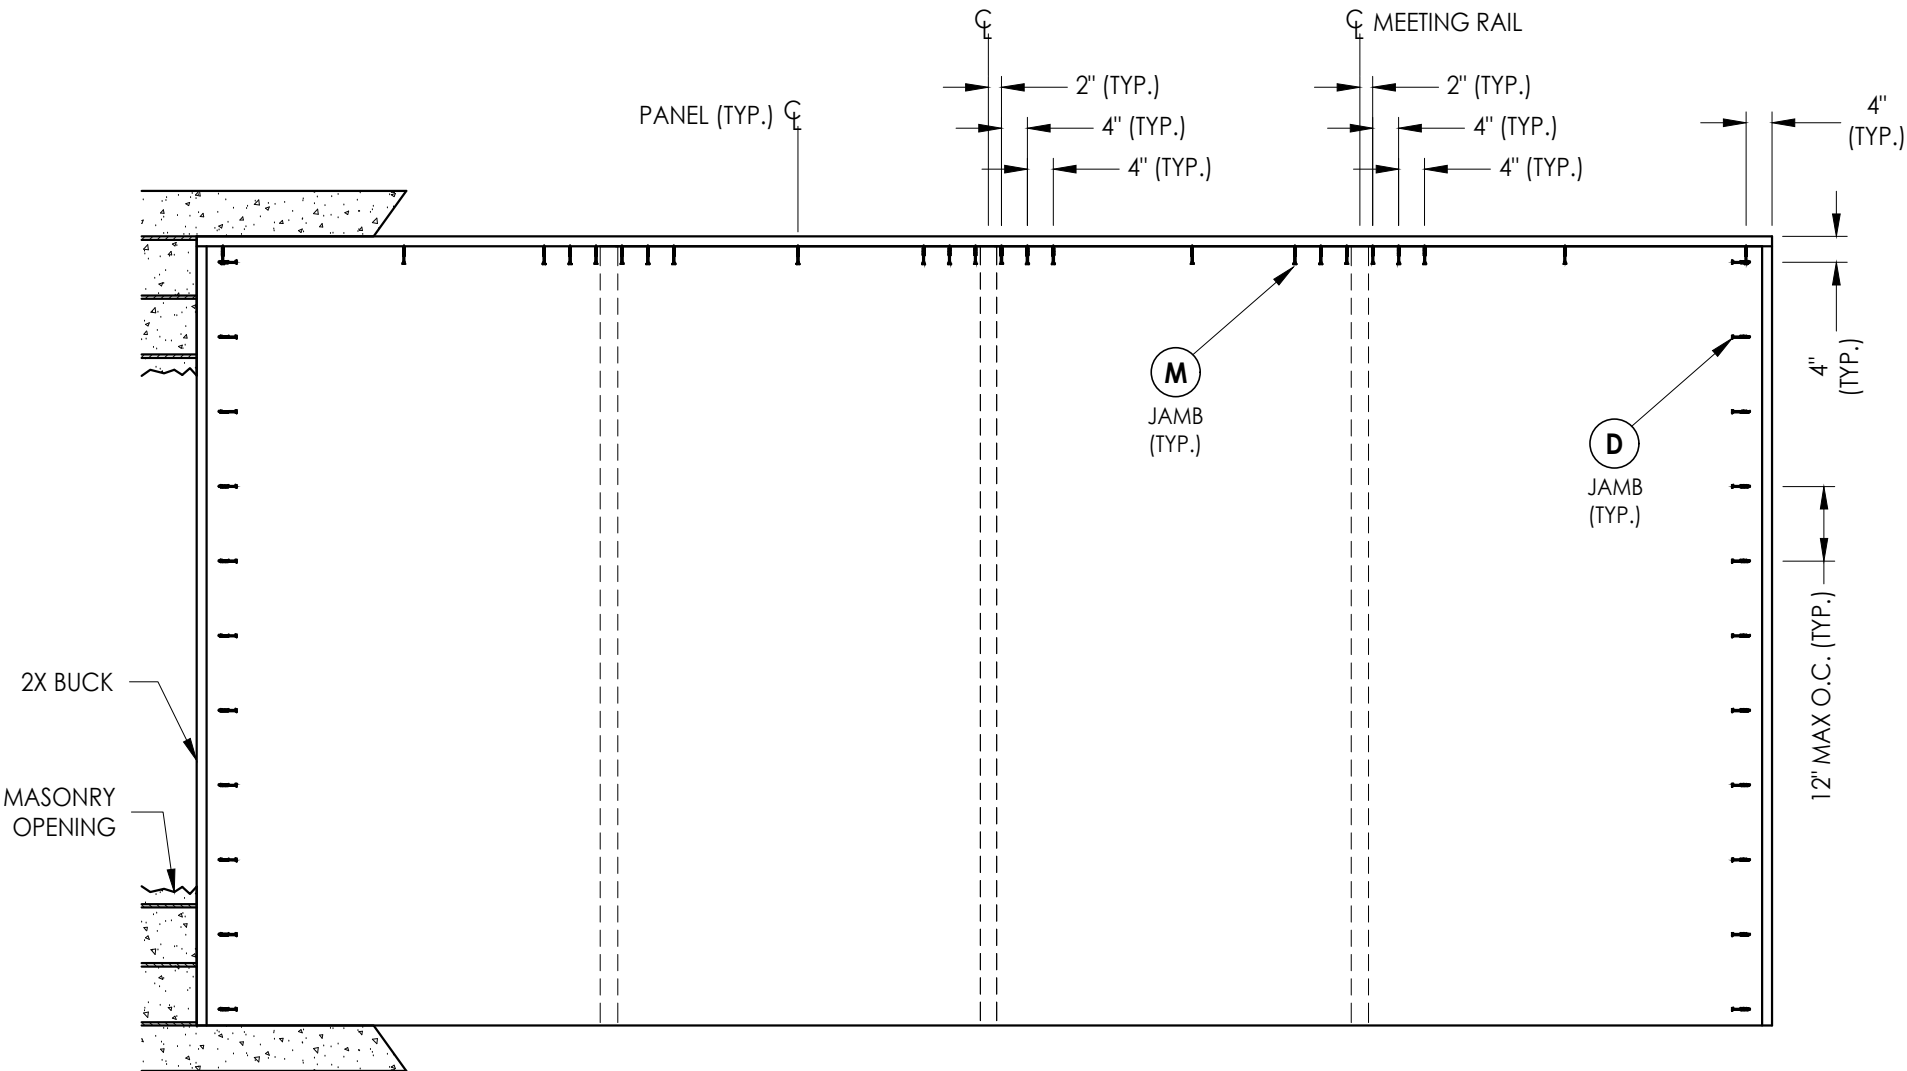

2X BUCK ANCHORING

Sliding Glass Door

CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
DeWALT ULTRACON [®]	1/4"	1-1/4" (Jambs) 1-3/4" (Head/Sill)	2-1/2"	2-1/2"

[illegible]

DATE: 4/4/14

SCALE: *N.T.S.*

DWG. BY: JK


CHK. BY: *LFS*

DRAWING NO.:
FL-15560.13

SHEET 4 OF 7

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

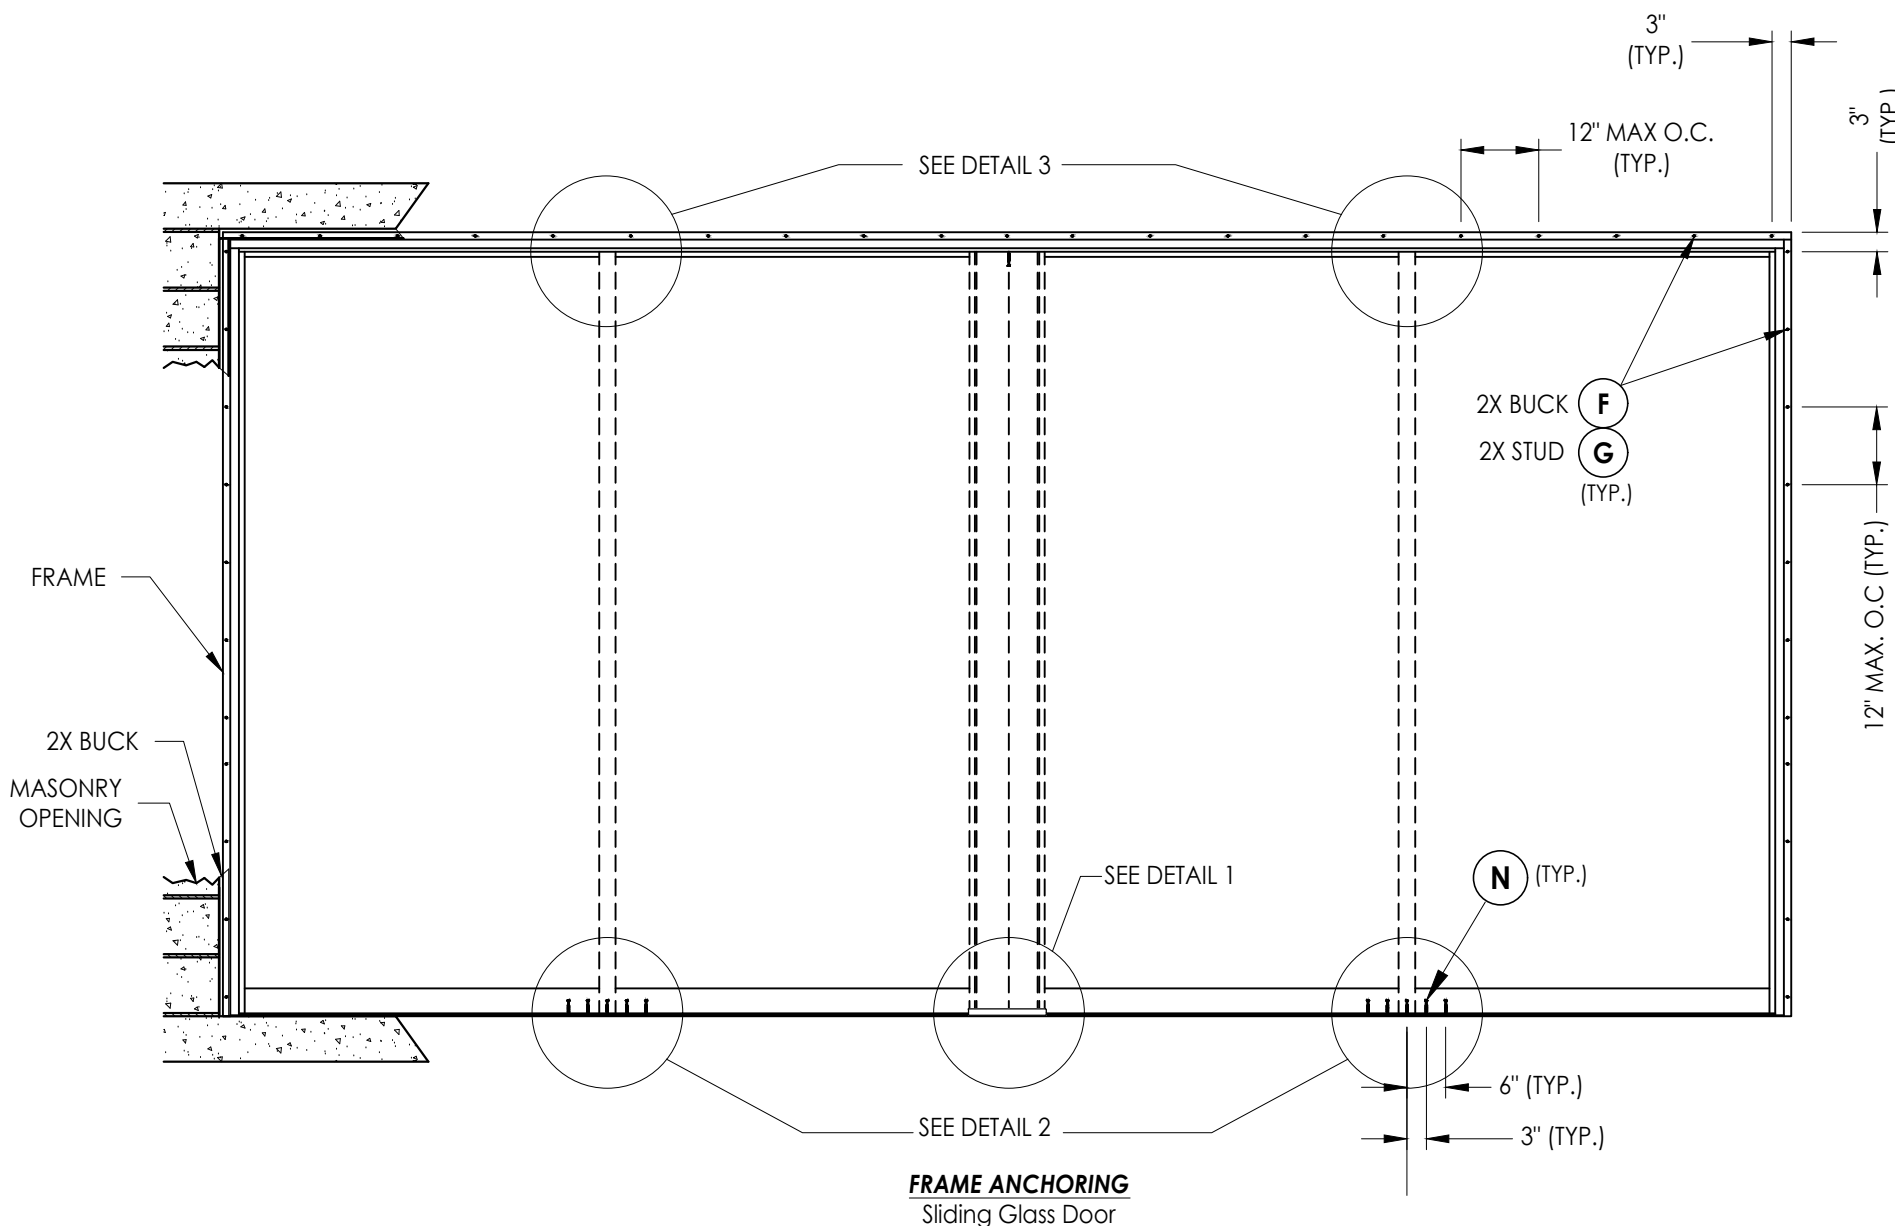




CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
DeWALT ULTRACON®	1/4"	1-1/4" (Jambs) 1-3/4" (Head/Sill)	2-1/2"	2-1/2"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

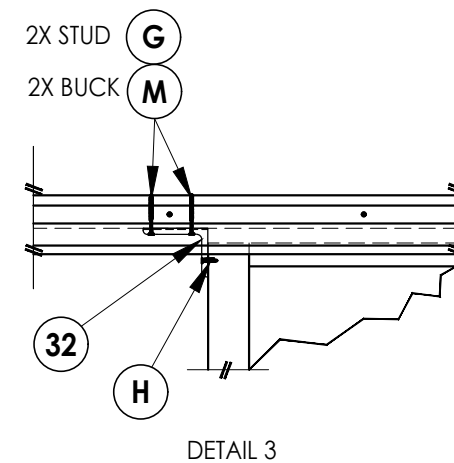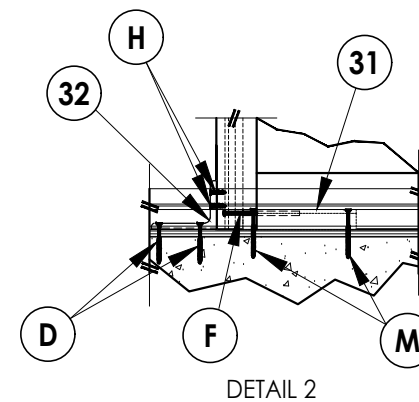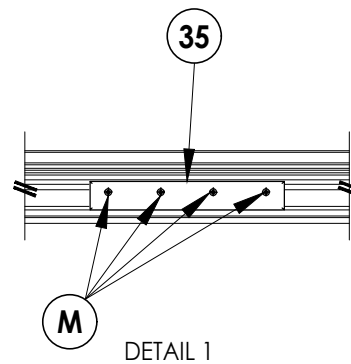[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

2014 R.W. BUILDING CONSULTANTS INC.

Technical drawing of a rectangular frame. The overall width is 1.35 inches and the overall height is 3.5 inches. A central square hole has a side length of 0.1 inches. The drawing shows a cross-section of the frame with a hatched central area.

Technical drawing of a mechanical part, likely a bracket or support. The drawing shows a side view with dimensions: 1.35 (width), 4 (height), and 0.1 (thickness). The part has a central rectangular feature with a hatched pattern, possibly indicating a different material or a specific manufacturing process. The drawing is labeled with '1.35', '4', and '0.1'.

Technical drawing of a mechanical part. The drawing shows a side view of a component with a total length of 4.5 inches, a thickness of 0.09 inches, and a total height of 2 inches. The part features a complex profile with multiple steps and a central section with diagonal hatching.

4.38"

1.43"

0.09"

30 (TYP.)

Technical drawing of a window frame cross-section. The drawing shows a complex profile with multiple chambers and a central seal. Dimensions are indicated: a width of 2.54 inches and a height of 1.76 inches. A small detail on the right shows a 1.43 inch dimension for a specific part of the frame.

Technical drawing of a rectangular box. The main view shows a length of 9.25" and a height of 1.13". A side view shows a width of 1".

Technical drawing of a metal bar. The bar is 12" long. It features a 1.13" wide slot and a 3.25" wide slot. The bar has a 1.76" wide flange on the right side.

Technical drawing of a Fixed Interlock Block. The top view shows a rectangular block with a width of 0.625" and a length of 1.1". A circular feature is centered on the top surface. The side view shows a block with a height of 0.25" and a length of 3.5". A circular feature is centered on the top surface. The block is labeled "FIXED INTERLOCK BLOCK" with a circular symbol containing the number "22".

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: FLEETWOOD

PART OR ASSEMBLY:

COMPONENTS

6	7/02/26	UPDATE TO 9TH ED.	(2026)	FBC	LFS
5	7/12/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS
4	8/10/20	UPDATE TO 7TH ED.	(2020)	FBC	DAC
NO.	DATE				BY
					REVISIONS

DATE: 4/4/14

SCALE: *N.T.S.*

DWG. BY: JK

CHK. BY: LFS

DRAWING NO.:
FL 15560 17

FL-15560.13
3 3

