




250 Staunton Turnpike, Parkersburg, WV 26104

5400/5400S/7700/8400/9900 Series Vinyl Fixed Window "NON-IMPACT"

GENERAL NOTES


1. This product has been evaluated and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product is required to be protected with an impact resistant covering that complies with FBC Sections 1609.1.2 & R301.2.1.2.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET#	DESCRIPTION
1	Typical elevations, design pressures and general notes
2	Horizontal cross sections
3	Buck & frame anchoring
4	Buck & frame anchoring
5	Glazing details
6	Bill of materials & components

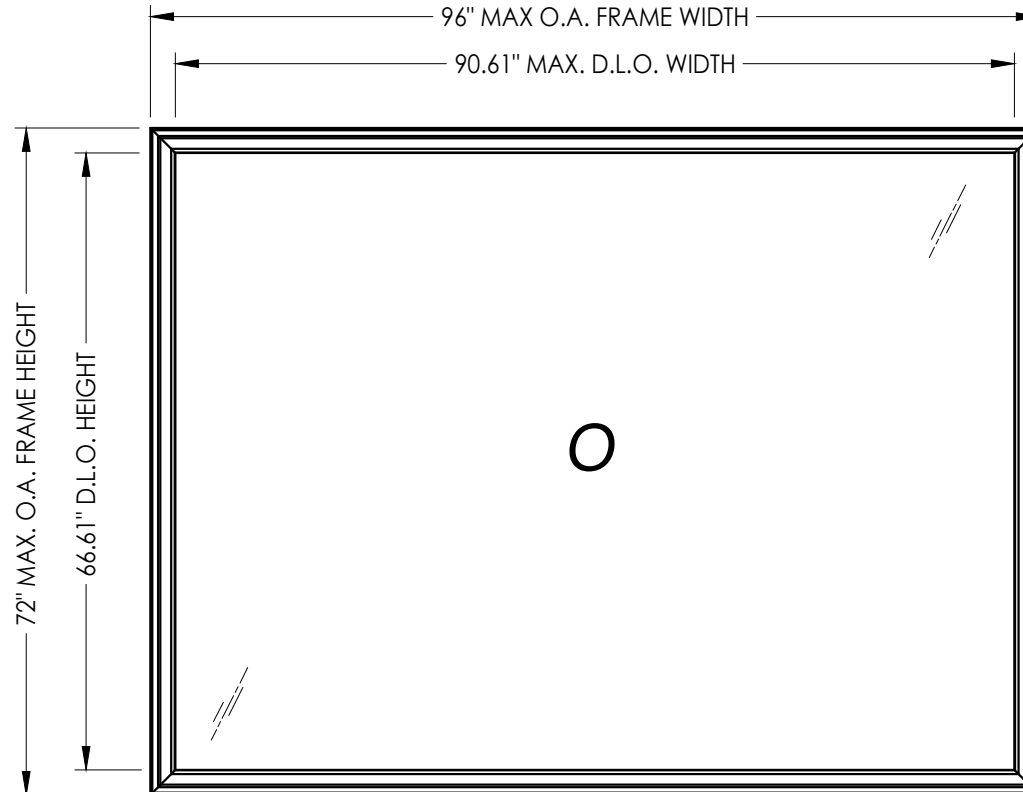

NOTE: HORIZONTAL OR VERTICAL ORIENTATION IS ALLOWED

MAX. FRAME DIMENSION	MAX. D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF)	
			POSITIVE	NEGATIVE
96.0" X 72.0"	90.61" X 66.61"	G1, G4	+50.0	-50.0
72.0" X 48.0"	66.61" X 42.61"	G2	+40.0	-40.0
		G5	+50.0	-50.0
60.0" X 48.0"	54.61" X 42.61"	G2, G5	+50.0	-50.0
86.0" X 56.0"	80.61" X 50.61"	G3, G6	+50.0	-50.0
76.0" X 64.0"	70.61" X 58.61"	G3, G6	+50.0	-50.0
74.0" X 63.0"	68.61" X 57.61"	G1, G4	+75.0	-75.0

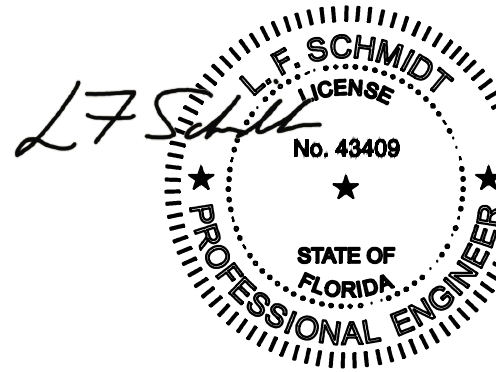

Digitally signed by
Lyndon F Schmidt
Date: 2026.07.27
08:55:58 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID ONLY FOR THE STATE OF FLORIDA

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

5400/5400S/7700/8400/9900
SERIES VINYL FIXED WINDOW
PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

DATE: 4/03/20

SCALE: N.T.S.

DWG. BY: TJ



CHK. BY: LFS

DRAWING NO.: FL-15816.13


SHEET 1 OF 6

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


REVISIONS

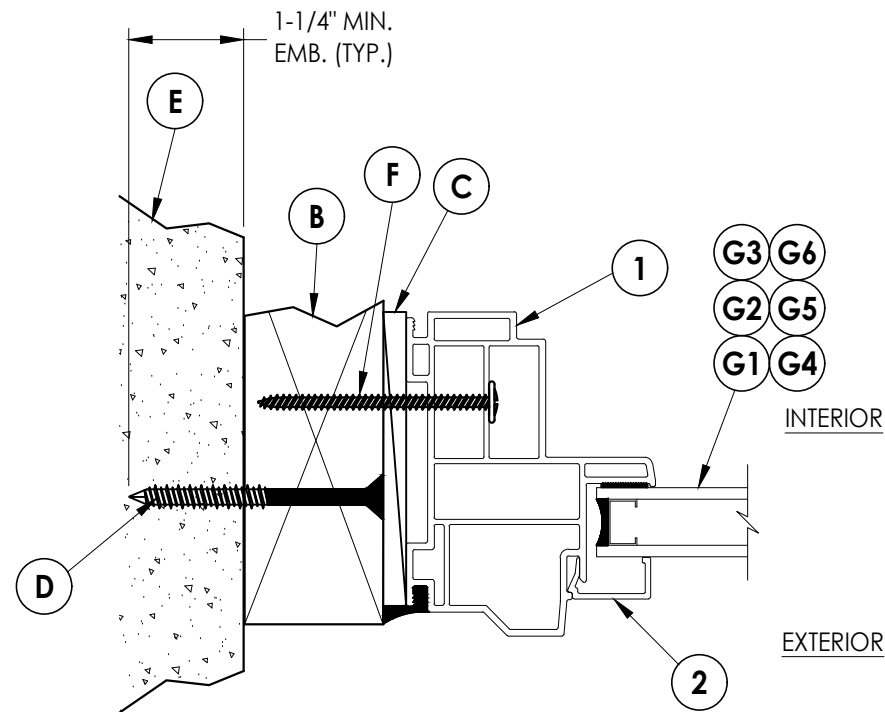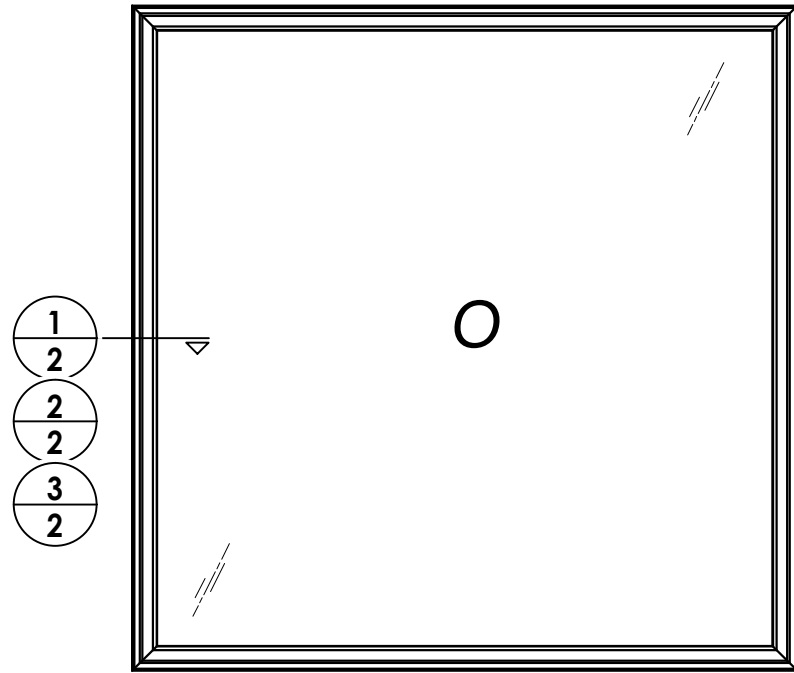

1 HORIZONTAL CROSS SECTION
2 Shown w/ 2X buck

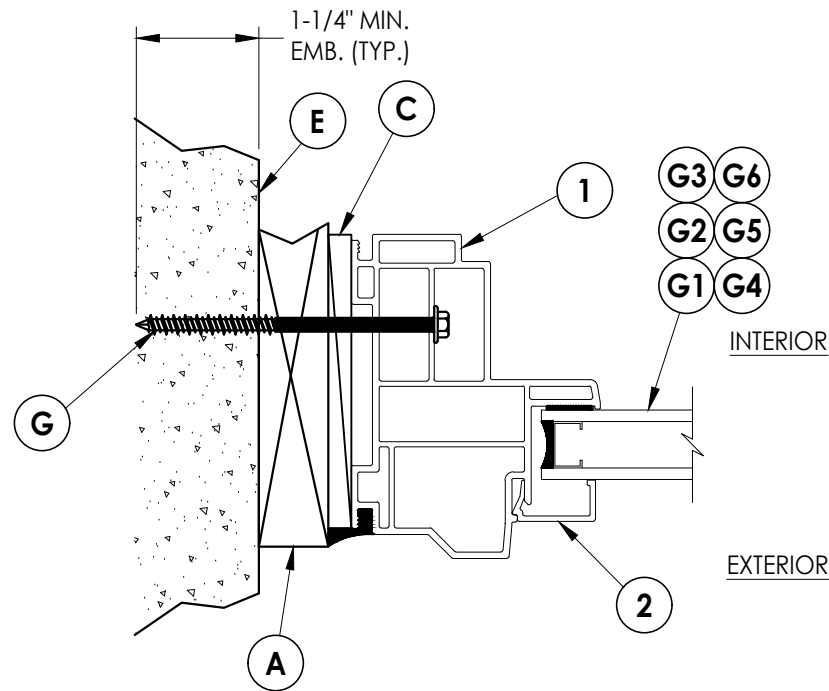


2 **HORIZONTAL CROSS SECTION**
2 Shown w/ 1X buck

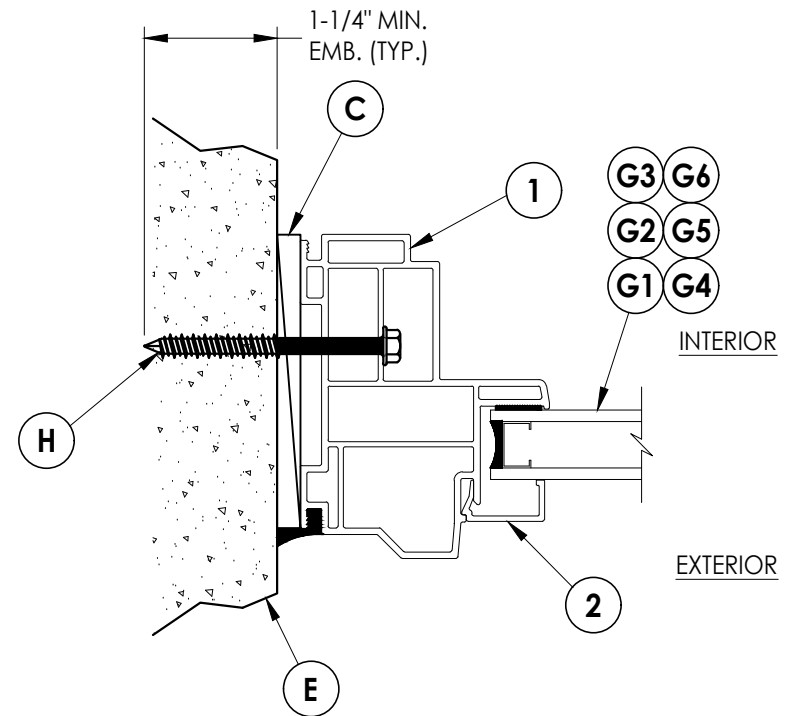


3 HORIZONTAL CROSS SECTION
2 Shown direct to masonry

DATE: 4/03/20		DRAWING NO.: FL-15816.13		CHK. BY: LFS		DWG. BY: TJ		SCALE: N.T.S.		PRODUCT: 5400/5400S/7700/8400/9900 SERIES VINYL FIXED WINDOW		Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409	
NO.		DATE		REVISIONS									
3		7/01/26		UPDATE TO 9TH ED. (2026)		FBC		LFS					
2		7/06/23		UPDATE TO 8TH ED. (2023)		FBC		LFS					
1		7/06/20		UPDATE TO 7TH ED. (2020)		FBC		LFS					
PART OR ASSEMBLY:				HORIZONTAL CROSS SECTIONS								 BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
SHEET 2		OF 6											

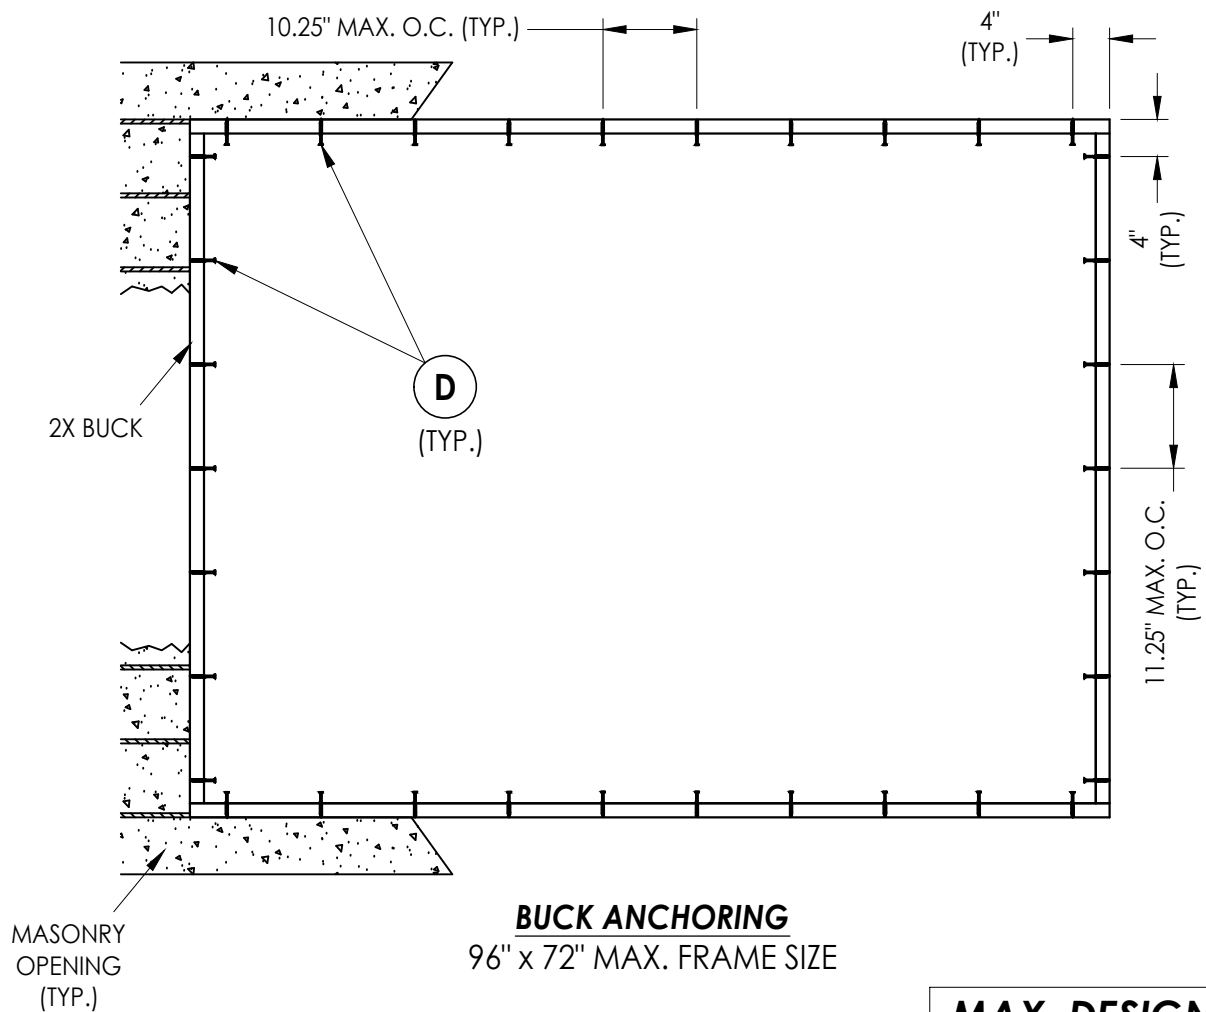

BUCK ANCHORING
96" x 72" MAX. FRAME SIZE

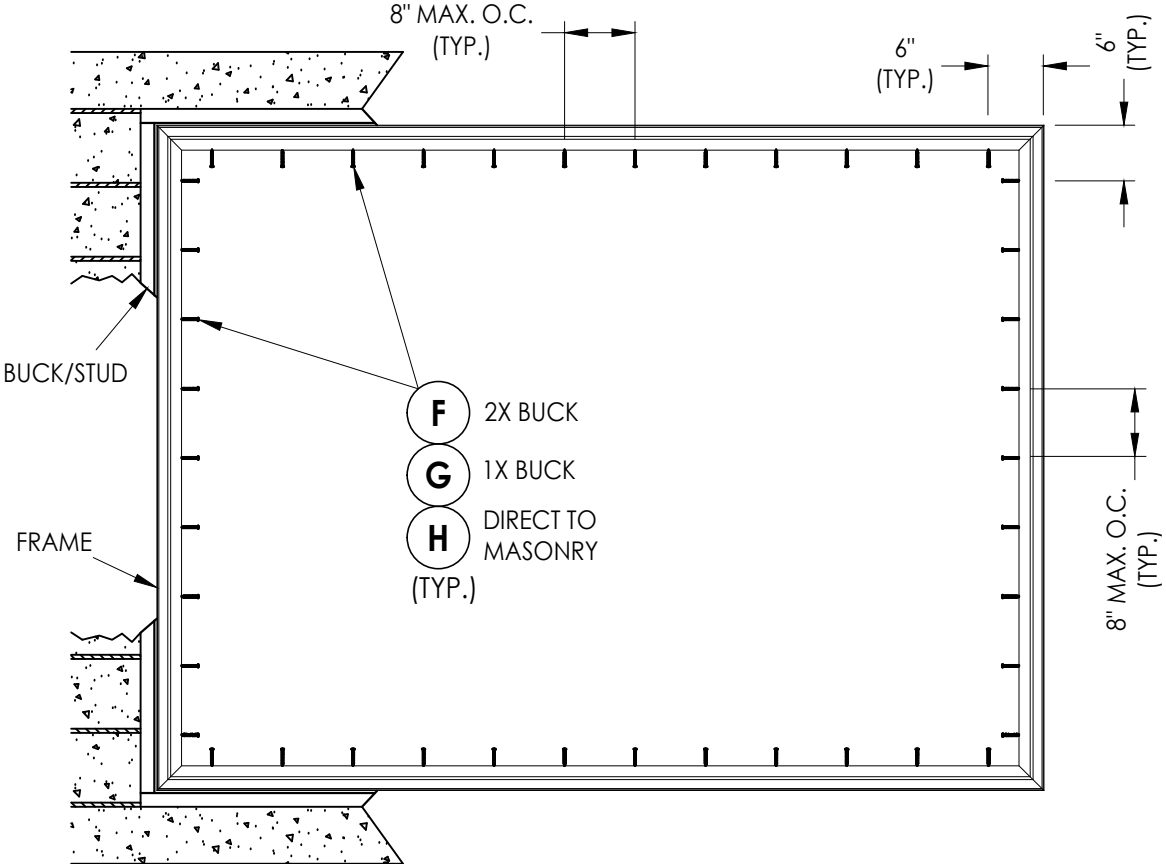

FRAME ANCHORING
96" x 72" MAX. FRAME SIZE

MAX. DESIGN PRESSURE = ± 50 PSF

CORROSION RESISTANCE - SALTWATER ENVIRONMENT

Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.


CONCRETE ANCHOR NOTES:

1. Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
2. Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
3. Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

1. Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

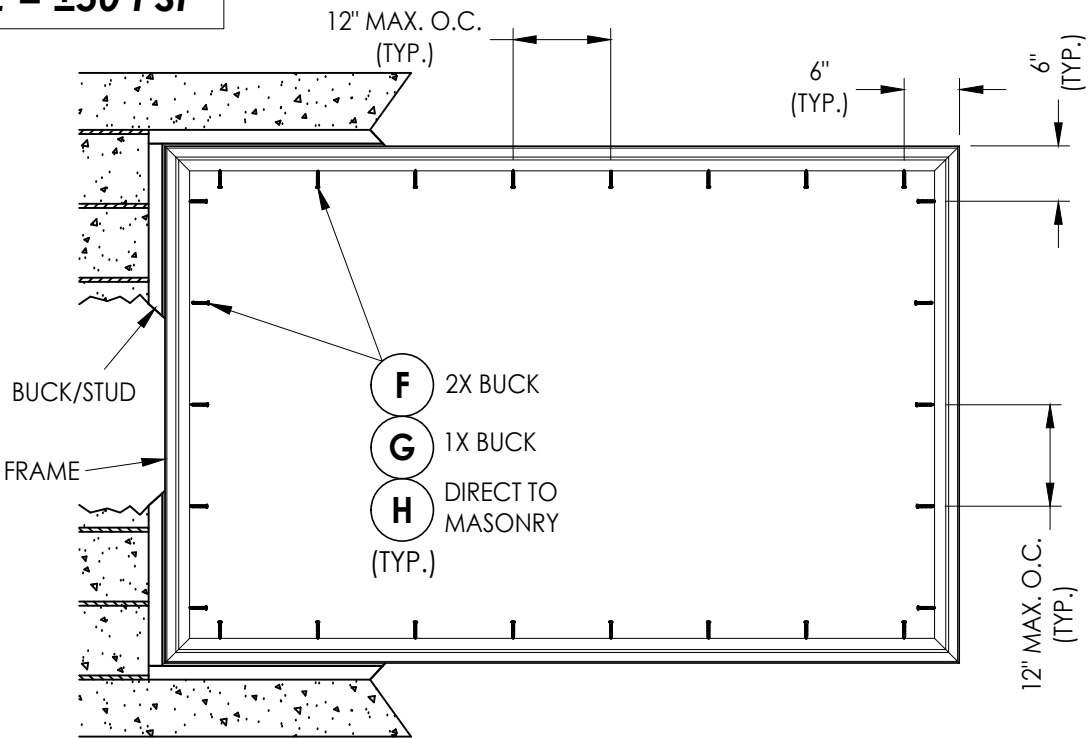



FRAME ANCHORING
86" x 56" & 76" x 64" MAX. FRAME SIZES

[illegible]

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Wincore Window Company\FL-15816 R13\FL-15816.13.dwg

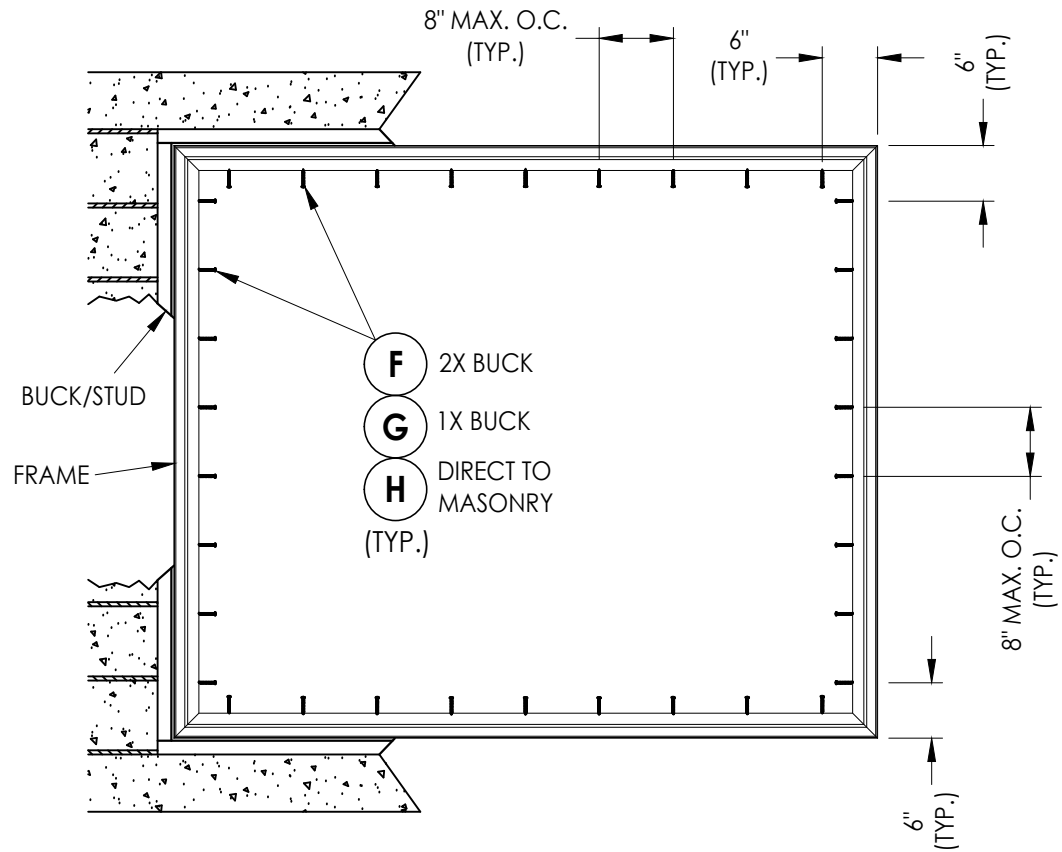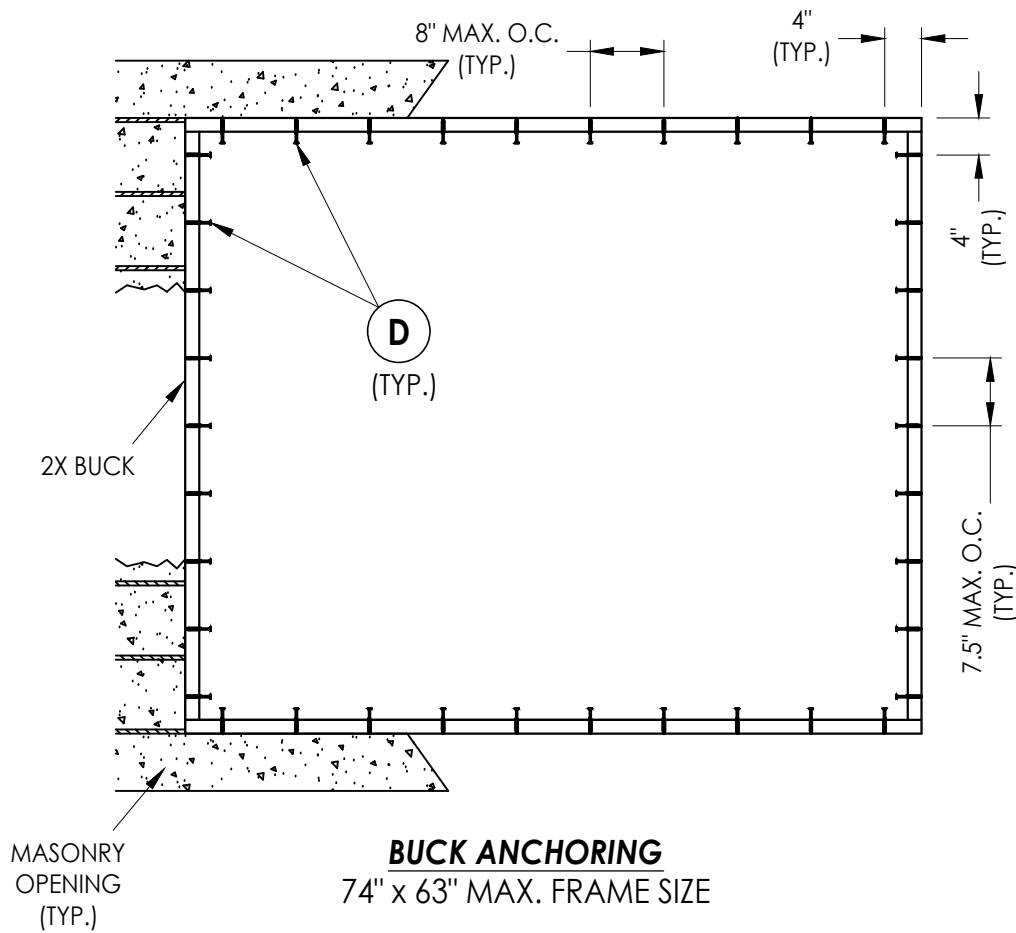

CORROSION RESISTANCE - SALTWATER ENVIRONMENT
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

MAX. DESIGN PRESSURE = ±75 PSF

- CONCRETE ANCHOR NOTES:**
- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
 - Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
 - Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"

- WOOD SCREW INSTALLATION NOTES:**
- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

5400/5400S/7700/8400/9900
SERIES VINYL FIXED WINDOW

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING

DATE: 4/03/20

SCALE: N.T.S.

DWG. BY: TJ

CHK. BY: LFS

DRAWING NO.: FL-15816.13

SHEET 4 OF 6


REVISIONS

NO.	DATE	BY
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC
2	7/06/23	UPDATE TO 8TH ED. (2023) FBC
1	7/06/20	UPDATE TO 7TH ED. (2020) FBC


© 2020 R.W. BUILDING CONSULTANTS INC.

Building Consultants, Inc.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Wincore Window Company\FL-15816 R13\FL-15816.13.dwg

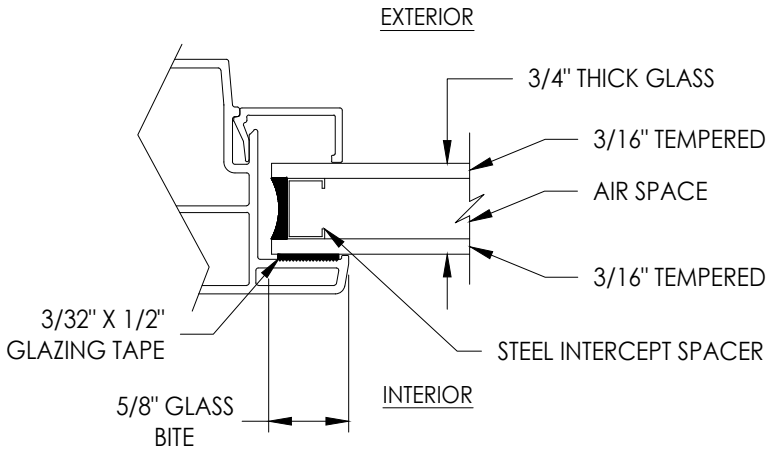


G1 GLAZING DETAIL

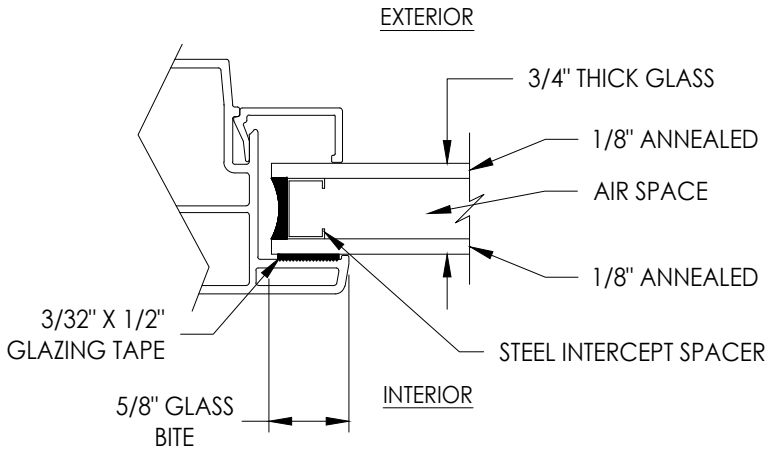


G2 GLAZING DETAIL

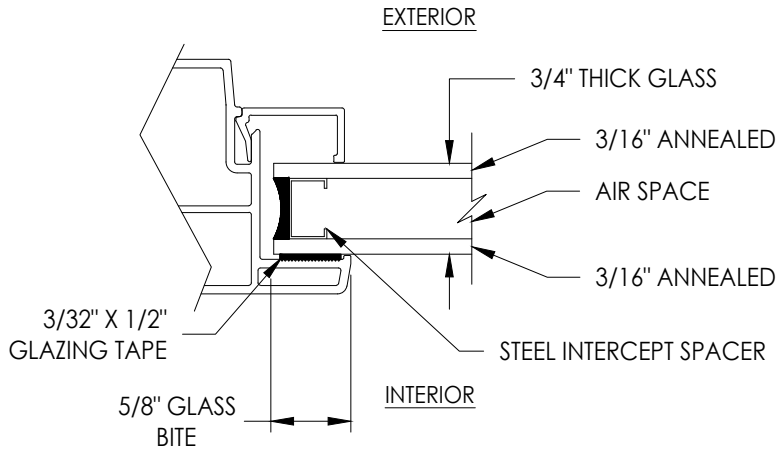


G3 GLAZING DETAIL

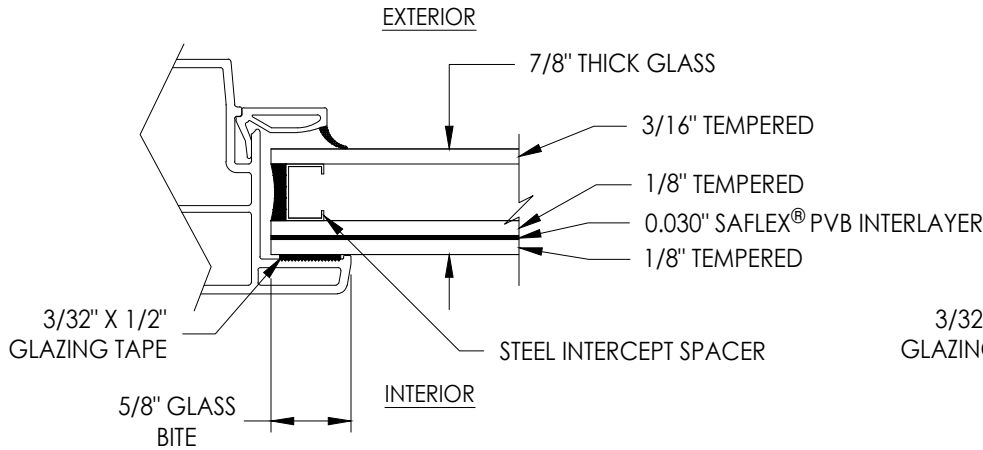

G4 GLAZING DETAIL

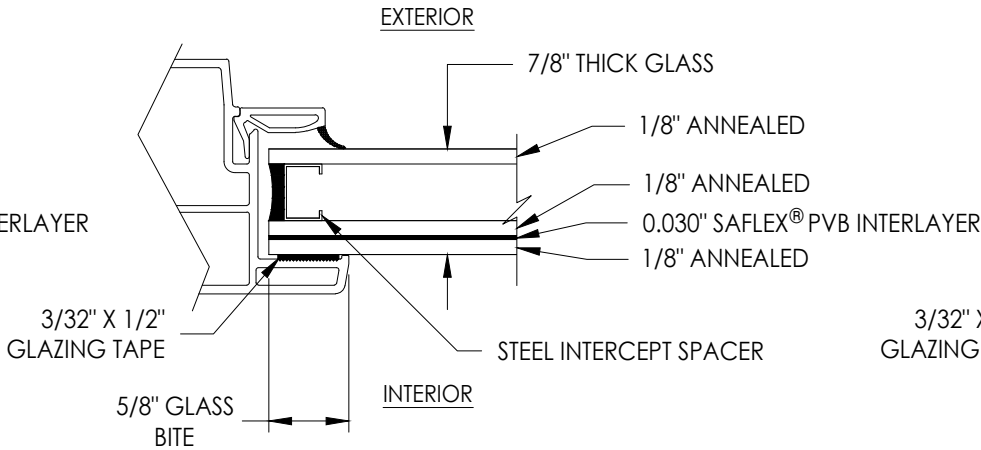

G5 GLAZING DETAIL

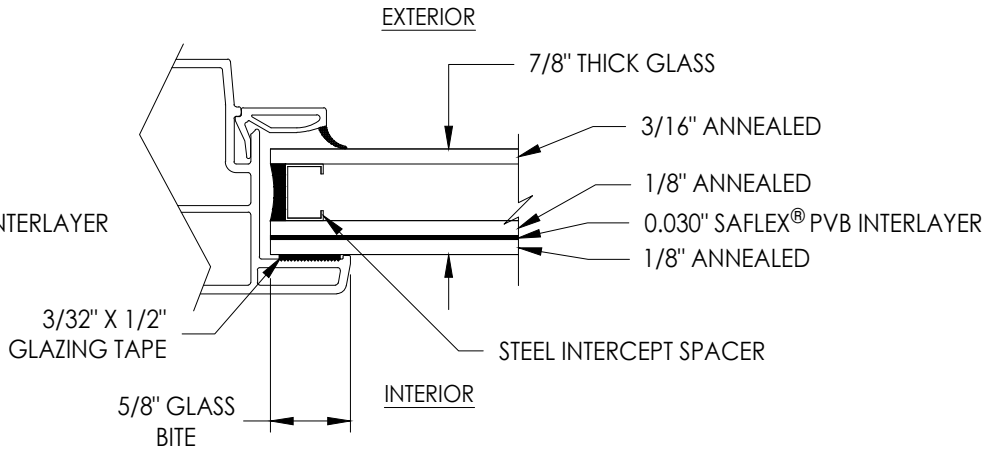

G6 GLAZING DETAIL

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.

P.O. Box 230, Valrico, FL 33595

Phone No.: 813.659.9197

FBPE Registry No. 9813

PRODUCT:

5400/5400S/7700/8400/9900
SERIES VINYL FIXED WINDOW

PART OR ASSEMBLY:

GLAZING DETAILS

NO.	DATE	REVISIONS
3	7/01/26	UPDATE TO 9TH ED. (2026) FBC LFS
2	7/06/23	UPDATE TO 8TH ED. (2023) FBC LFS
1	7/06/20	UPDATE TO 7TH ED. (2020) FBC LFS

DATE: 4/03/20

SCALE: N.T.S.

DWG. BY: TJ


CHK. BY: LFS

DRAWING NO.:
FL-15816.13


SHEET 5 OF 6

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.42)	WOOD
B	2X BUCK (SG >= 0.42)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	#10 X 2" MODIFIED TRUSS HEAD (7/16" Ø) SMS (1-5/16" MIN. EMBEDMENT)	STEEL
G	1/4" X 3-1/4" HWH DeWALT OR ITW CONCRETE SCREW	STEEL
H	1/4" X 2-3/4" HWH DeWALT OR ITW CONCRETE SCREW	STEEL
1	FRAME (PE7701B)*	PVC
2	3/4" GLAZING BEAD (BV56WH)*	PVC
3	7/8" GLAZING BEAD (BV62WH)*	PVC


* THE APPROVED WHITE RIGID PVC EXTERIOR EXTRUSIONS FOR WINDOWS ARE TO BE PRODUCED BY EXTRUDERS LICENSEES IN "AAMA CERTIFICATION PROGRAMS FOR RIGID PVC EXTRUSIONS".

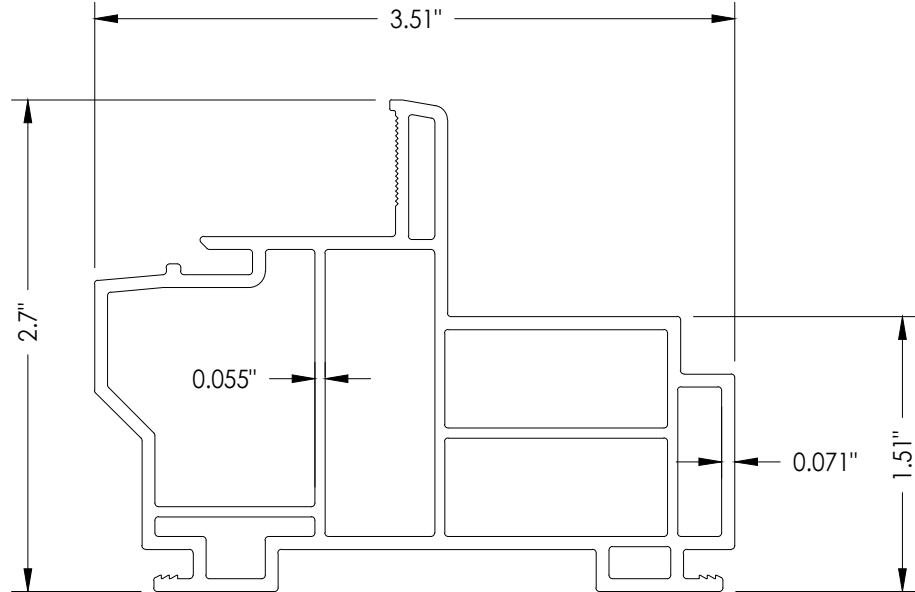


1 FRAME

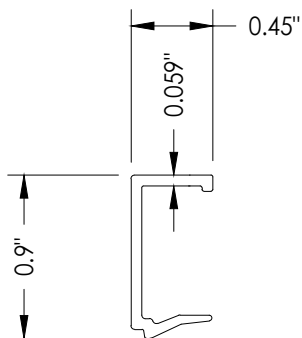

2 GLAZING BEAD

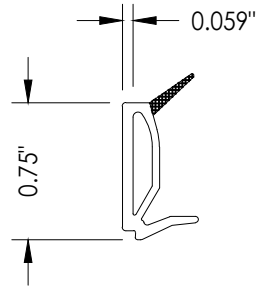

3 GLAZING BEAD

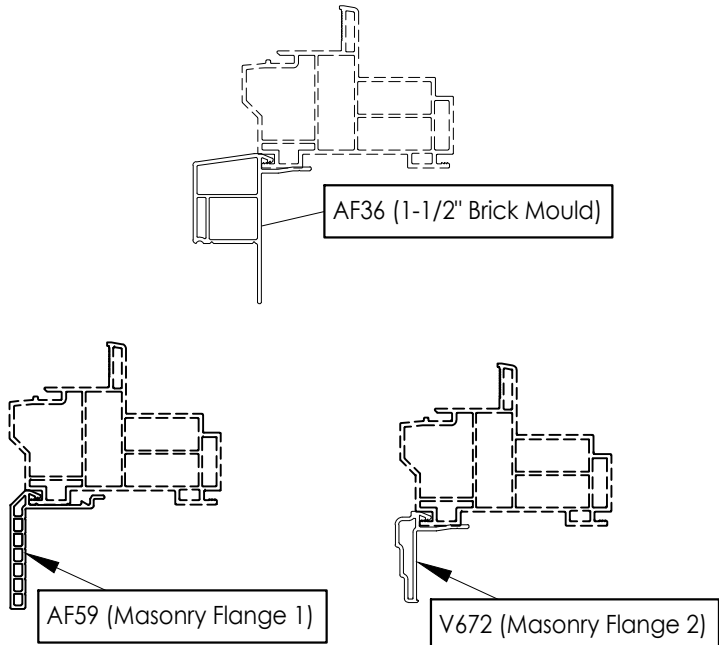

OPTIONAL COSMETIC FLANGES

[illegible]