

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INC. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
5. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION INTO 2X WOOD FRAME USE TWO (2) #8 WOOD SCREWS PER INSTALLATION CLIP OR ONE (1) #8 WOOD SCREW THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
6. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/ MASONRY, USE ONE (1) 3/16 INCH ITW TAPCON THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT OR ONE (1) OF THE FOLLOWING THROUGH EACH INSTALLATION CLIP:

6.1. 3/16 INCH DEWALT CRETE-FLEX SS4 THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT.

6.2. 1/4 INCH DEWALT AGGRE-GATOR THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 3/4 INCH MINIMUM EMBEDMENT.

6.3. 1/4 INCH HILTI KWIK-CONII THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 3/4 INCH MINIMUM EMBEDMENT.

6.4. 1/4 INCH POWERS TAPPER THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 3/4 INCH MINIMUM EMBEDMENT.

7. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION THROUGH METAL STUD USE TWO (2) #8 SELF-TAPPING SCREWS PER INSTALLATION CLIP OR ONE (1) #8 SELF TAPPING SCREW THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND METAL STRUCTURE.

8. NAILING FIN: FOR INSTALLATION THROUGH 2X WOOD FRAME USE ONE (1) #8 WOOD SCREW OR 8D COMMON NAIL PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.

9. NAILING FIN: FOR INSTALLATION THROUGH METAL STUD USE ONE (1) #8 SELF-TAPPING SCREW OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND METAL STRUCTURE.

10. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.

11. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.

12. FOR GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.

13. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.

14. INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

A. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.

C. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90. MIN. COMPRESSIVE STRENGTH OF 1500 PSI.

D. STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM WALL THICKNESS OF 33 MILS. (20 GAUGE)

E. ALUMINUM - 1/8" MINIMUM THICKNESS (6063-T5).
- ANDERSEN CORPORATION

100 SERIES SINGLE HUNG WINDOW

(NON-HVHZ)(NON-IMPACT)
- GENERAL NOTES:
1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:

AAMA/WDMA/CSA 101/I.S.2/A440-17

2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.

3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.

4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** TO PROTECT THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.

6. WINDOW FRAME MATERIAL: FIBREX

7. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 1 FOR GLAZING DETAILS.

8. DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:

X: OPERABLE SASH

O: FIXED SASH


9. CUSTOM SIZES AVAILABLE UPON REQUEST.
- | TABLE OF CONTENTS | |
|-------------------|---|
| SHEET | SHEET DESCRIPTION |
| 1 | GENERAL NOTES, INSTALLATION NOTES & GLAZING DETAILS |
| 2 | ELEVATIONS |
| 3 | ELEVATIONS & ANCHOR LAYOUTS |
| 4 | THROUGH FRAME/INSTALLATION CLIP ANCHOR LAYOUTS |
| 5 | VERTICAL SECTIONS |
| 6 | HORIZONTAL SECTIONS |
| 7 | ALTERNATE FRAME OPTIONS |
- | SIZE & CONFIGURATION | DESIGN PRESSURE | MISSILE IMPACT RATING |
|----------------------------------|-----------------|-----------------------|
| (O/X) 47 1/2" X 77 1/2" | +/- 30 PSF | NON-IMPACT |
| (O/X) 41 1/2" X 95" | +/- 30 PSF | NON-IMPACT |
| (O/X) 47 1/2" X 89 1/2" | +/- 30 PSF | NON-IMPACT |
| (O/O/X) 47 1/2" X 95 1/2" | +/- 30 PSF | NON-IMPACT |
| (O/X,O,O/X) 143 1/2" X 71 1/2" | +/- 30 PSF | NON-IMPACT |
| (O/X,O/X,O/X) 143 1/2" X 71 1/2" | +/- 30 PSF | NON-IMPACT |
| (O,O,O) 143 1/2" X 23 1/2" | +/- 30 PSF | NON-IMPACT |
- NOTE:
1. APPROVED "X" CONFIGURATIONS MAY ALSO BE "O" CONFIGURATIONS.
- GLAZING NOTES:
1. GLAZING SHALL COMPLY WITH ASTM E1300 AND FBC SAFETY GLAZING REQUIREMENTS.

2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN CHAPTER 24.


3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER CHAPTER 24.

4. D.L.O. MAY NOT EXCEED MAX DIMENSIONS SHOWN ON ELEVATIONS.
-
- GLAZING DETAIL 1
-
- GLAZING DETAIL 2
-
- 100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485
- TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)(NON-IMPACT)
- GENERAL, INSTALLATION NOTES
AND GLAZING DETAILS
- PREPARED BY:
- BUILDING DROPS, INC.
- 1900 NE MIAMI COURT, STE. 2-15
- MIAMI, FL 33132
- PH: (954) 399-8478
- FAX: (954) 744-4738
- WEB: www.buildingdrops.com
-
- | REMARKS | BY | DATE |
|---|----|----------|
| 2010 FBC CC + FG MULL TABLE | MS | 06.12.12 |
| MULL TABLE REMOVAL | LL | 07.02.19 |
| 8TH FBC CODE CHANGE | SH | 05.25.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT. | | |
- Digitally signed by Hermes F. Norero, P.E.
Reason: I am approving this document
Date: 2024.04.30 18:57:20 -0400
-
- | | |
|----------|------------|
| FL #: | FL15906 |
| DATE: | 06.12.2012 |
| DWG. BY: | CHK. BY: |
| MSS | HFN |
| SCALE: | NTS |
| DWG. #: | AWD029 |
| SHEET: | 1 OF 7 |


c:\users\sebastianherros\building drops - common\projects\andersen windows\fbc-24-0422 fbc submittal 100 series\dwgs\awd029.dwg 4/24/2024 5:03 PM

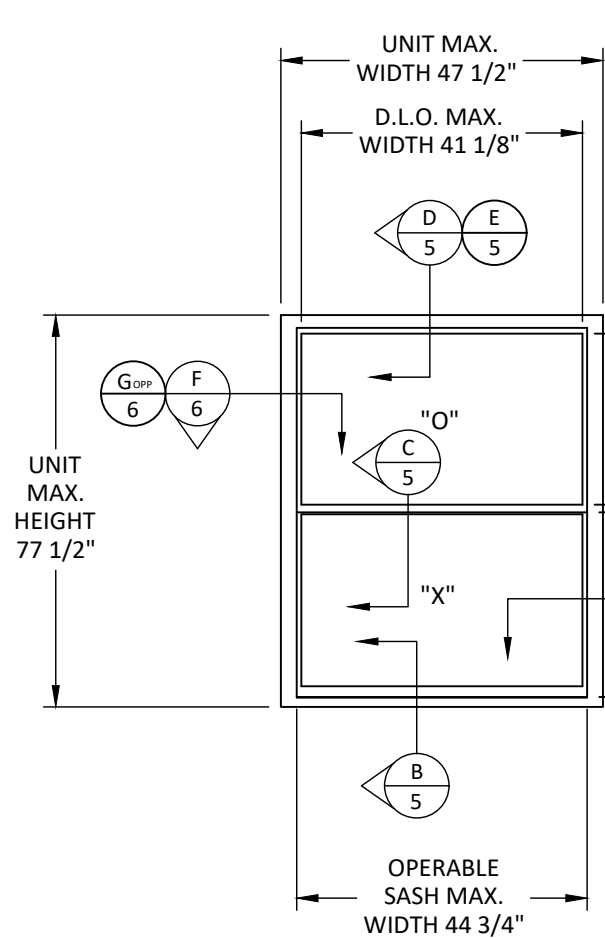


ELEVATION

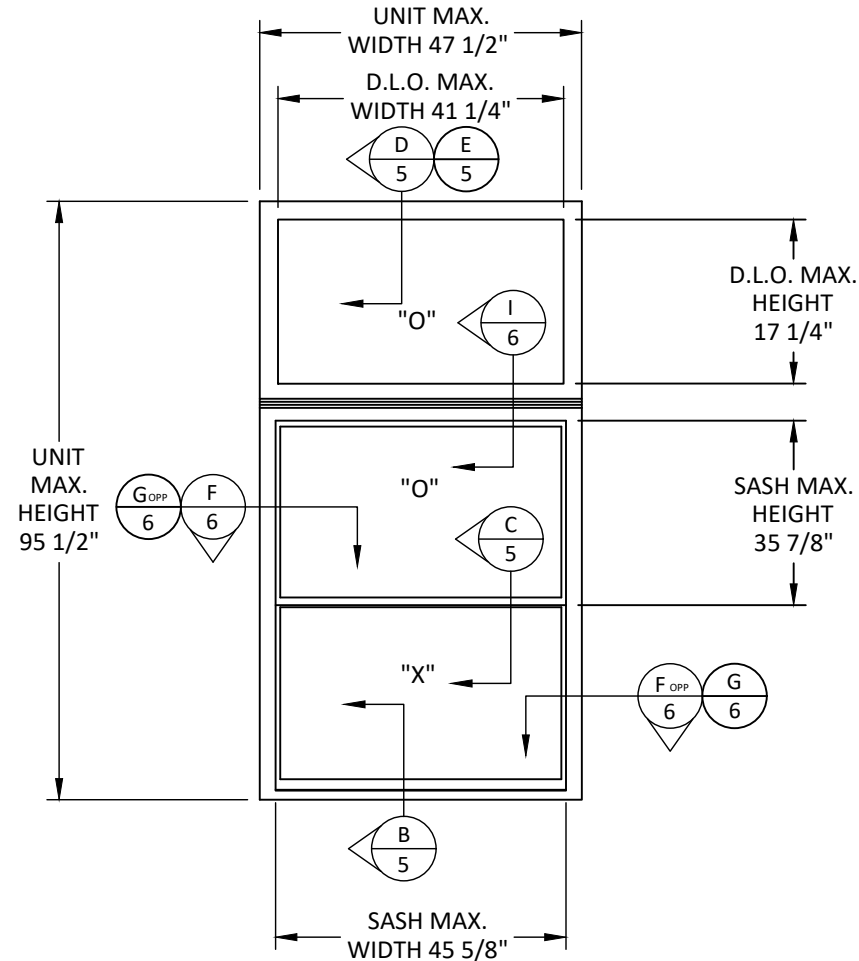


ELEVATION

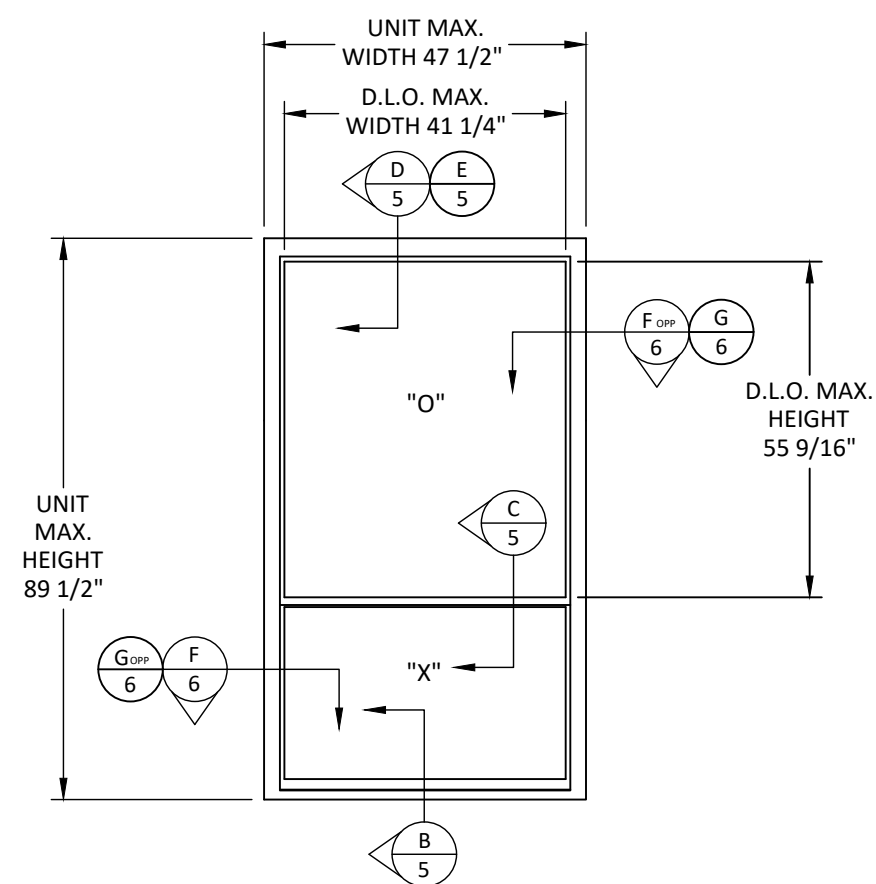

ELEVATION

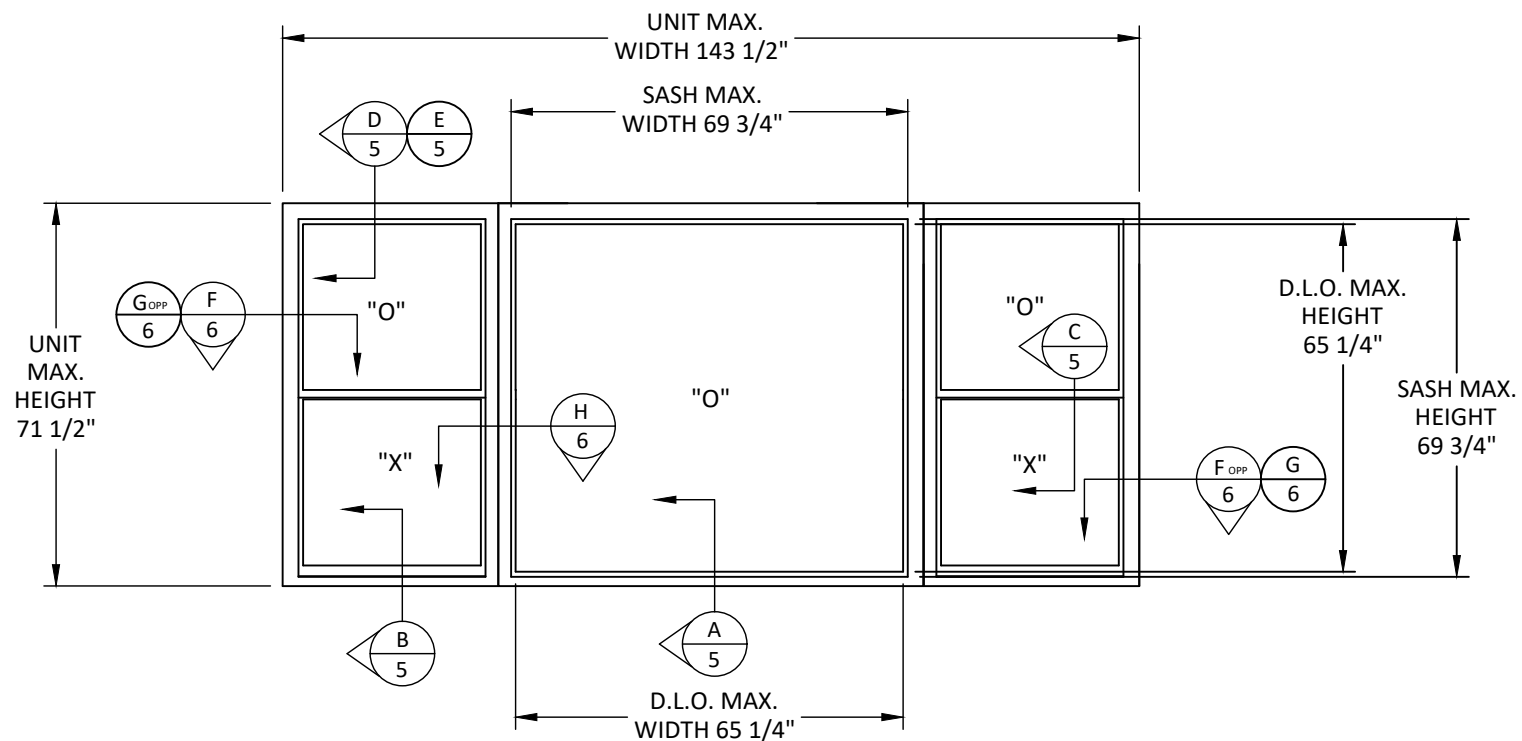

ELEVATION

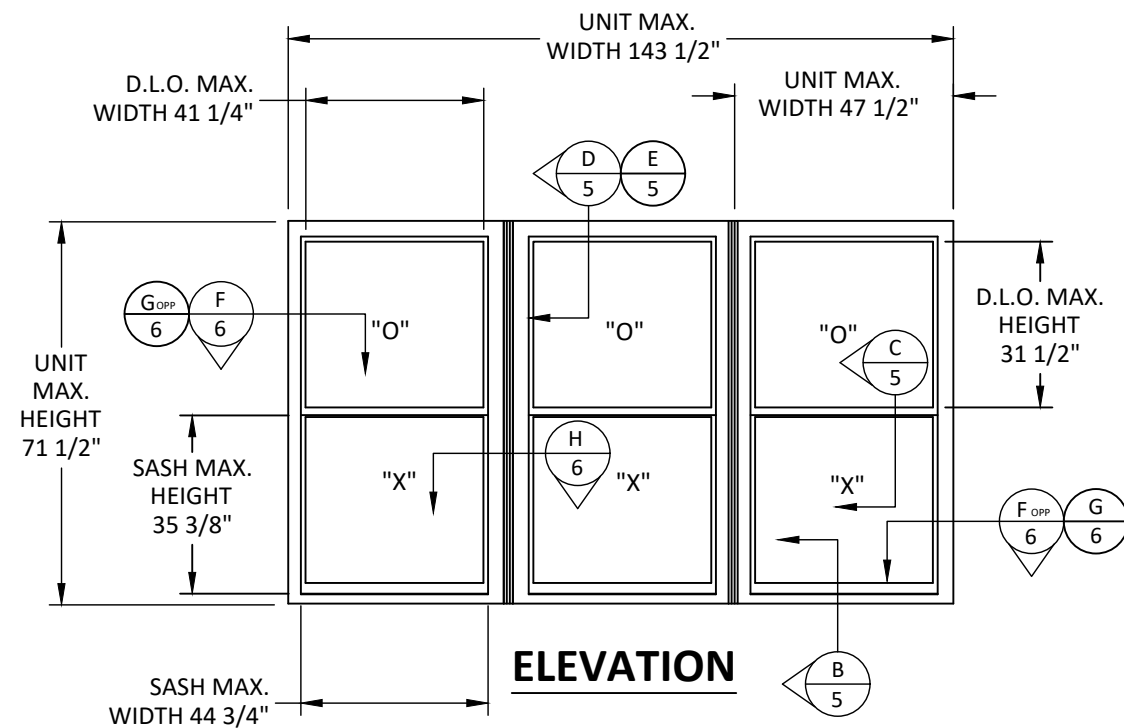

ELEVATION

NOTE: QUALIFIES TWIN UNITS OF EQUIVALENT OR LESSER PANEL DIMENSIONS



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)(NON-IMPACT)

ELEVATIONS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com




REMARKS	BY	DATE
2010 FBC CC + FG MULL TABLE	MS	06.12.12
MULL TABLE REMOVAL	LL	07.02.19
8TH FBC CODE CHANGE	SH	05.25.23
ALTERNATE FRAME ADDITIONS	SH	04.24.24

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

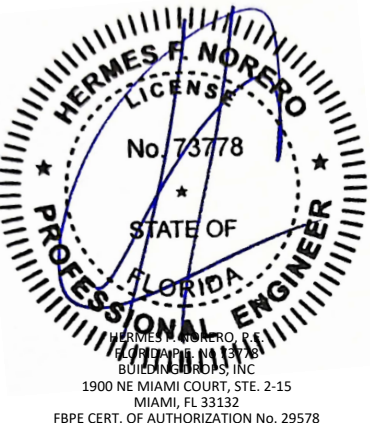


FL #:	FL15906
DATE:	06.12.2012
DWG. BY:	MSS
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD029
SHEET:	2

c:\users\sebastianhereros\building drops - common\projects\andersen windows\fbc-24-0422 - fbc submittal 100 series\dwgs\awd029.dwg 4/24/2024 5:03 PM

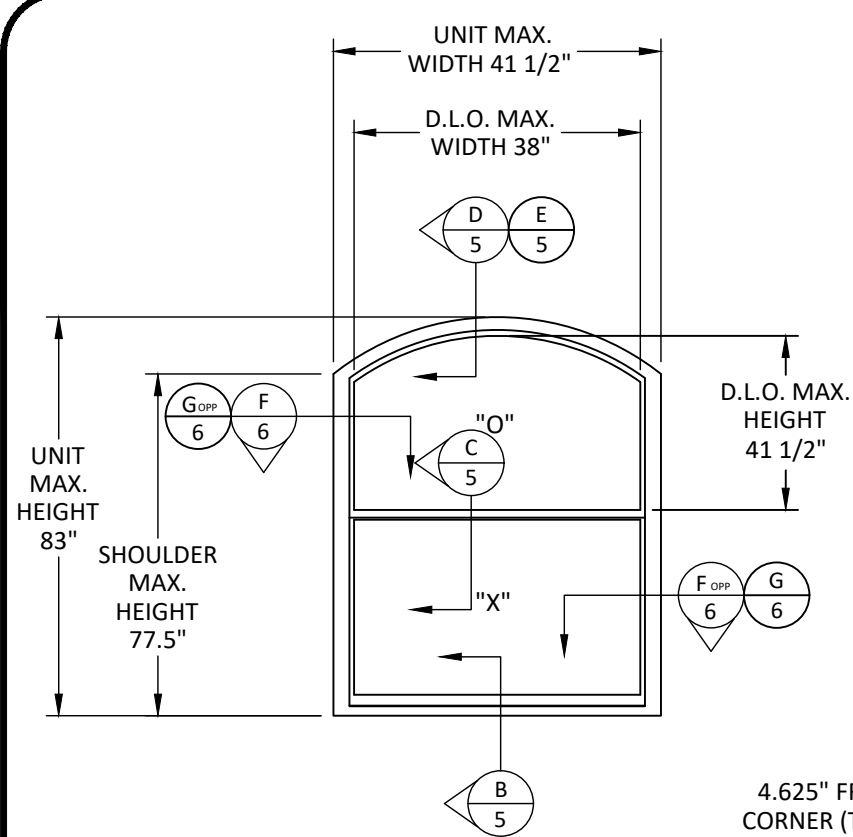


ELEVATION
ARCH TOP

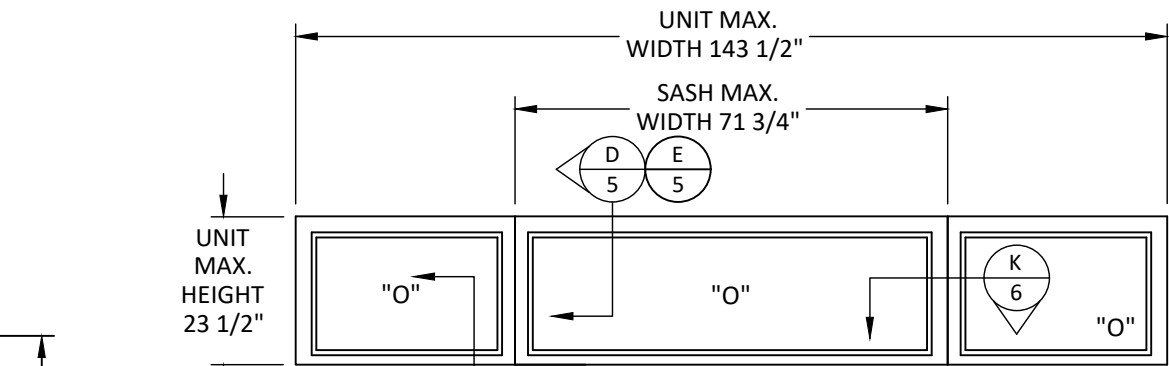


ELEVATION
TRANSOM

NOTE: QUALIFIES ALL TRANSOM CONFIGURATIONS
OF EQUAL OR LESSER FIXED PANEL DIMENSIONS

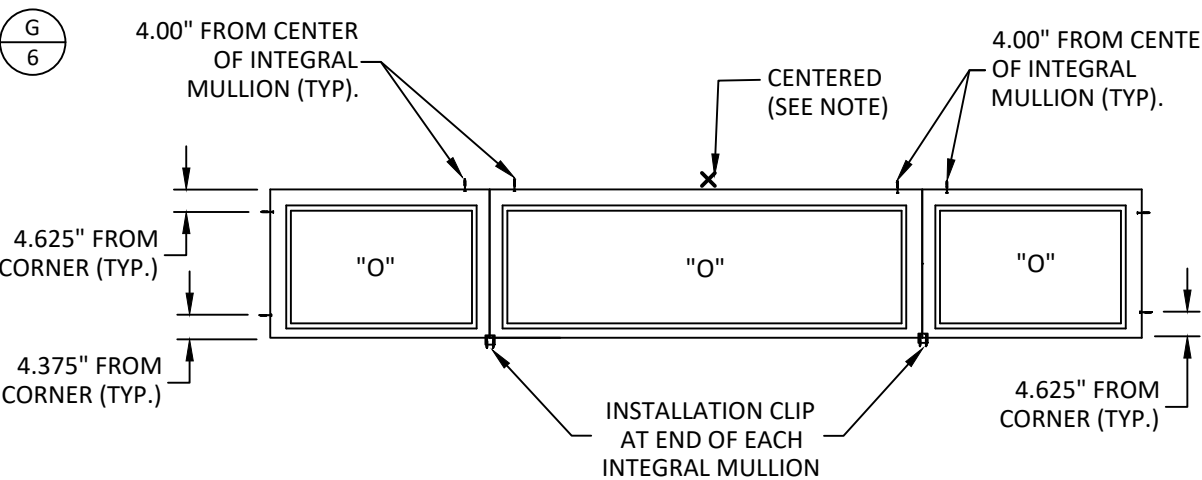

ANCHOR LAYOUT - NAIL FIN
APPLIES TO ALL CONFIGURATIONS

ANCHOR SCHEDULE								
INSTALLATION TYPE	QTY PER LOCATION	SUBSTRATE	ANCHOR TYPE	EMBEDMENT (IN.)	EDGE DISTANCE (IN.)	HEAD/SILL O.C. DISTANCE (IN.)	JAMB O.C. DISTANCE (IN.)	CORNER DISTANCE (IN.)
NAIL FIN	1	WOOD	#8 WOOD ANCHOR	1.50	0.75	3.50	3.50	3.50
NAIL FIN	1	WOOD	8D COMMON NAIL	1.50	0.75	3.50	3.50	3.50
NAIL FIN	1	METAL STUD	#8 SELF-TAPPING SCREW	3 THREADS	0.50	3.50	3.50	3.50

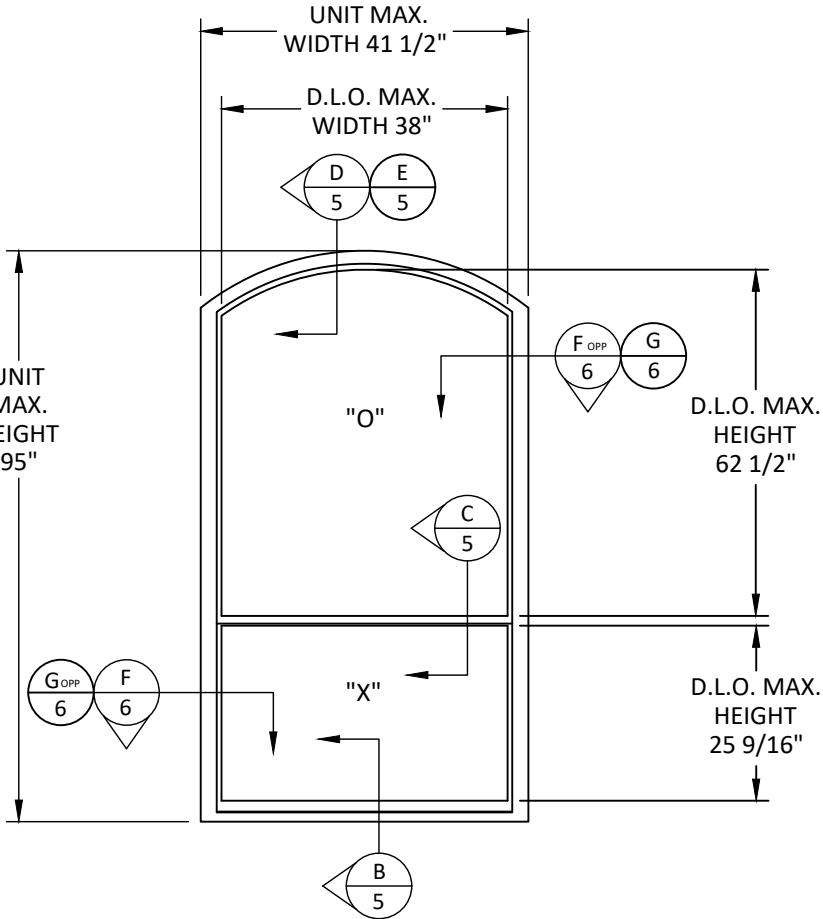

ELEVATION
ARCH TOP

NOTE:
1. ALL MULLED UNITS SHOWN ARE INTEGRAL MULLED UNITS.

ANCHOR LEGEND (X)	
✕	= INSTALLATION ANCHORS FOR CENTER UNITS WIDER THAN 47.5"
◇	= INSTALLATION CLIP AT MIDSPAN FOR UNITS WIDER THAN 120"



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)(NON-IMPACT)

ELEVATIONS & ANCHOR LAYOUTS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15

MIAMI, FL 33132

PH: (954) 399-8478

FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
2010 FBC CC + FG MULL TABLE	MS	06.12.12
MULL TABLE REMOVAL	LL	07.02.19
8TH FBC CODE CHANGE	SH	05.25.23
ALTERNATE FRAME ADDITIONS	SH	04.24.24

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.



FL #:

FL15906

DATE: 06.12.2012

DWG. BY: MSS
CHK. BY: HFN

SCALE: NTS




DWG. #: AWD029

SHEET:

3

OF 7

NOTE:
1. ALL MULLED UNITS SHOWN ARE INTEGRAL MULLED UNITS.

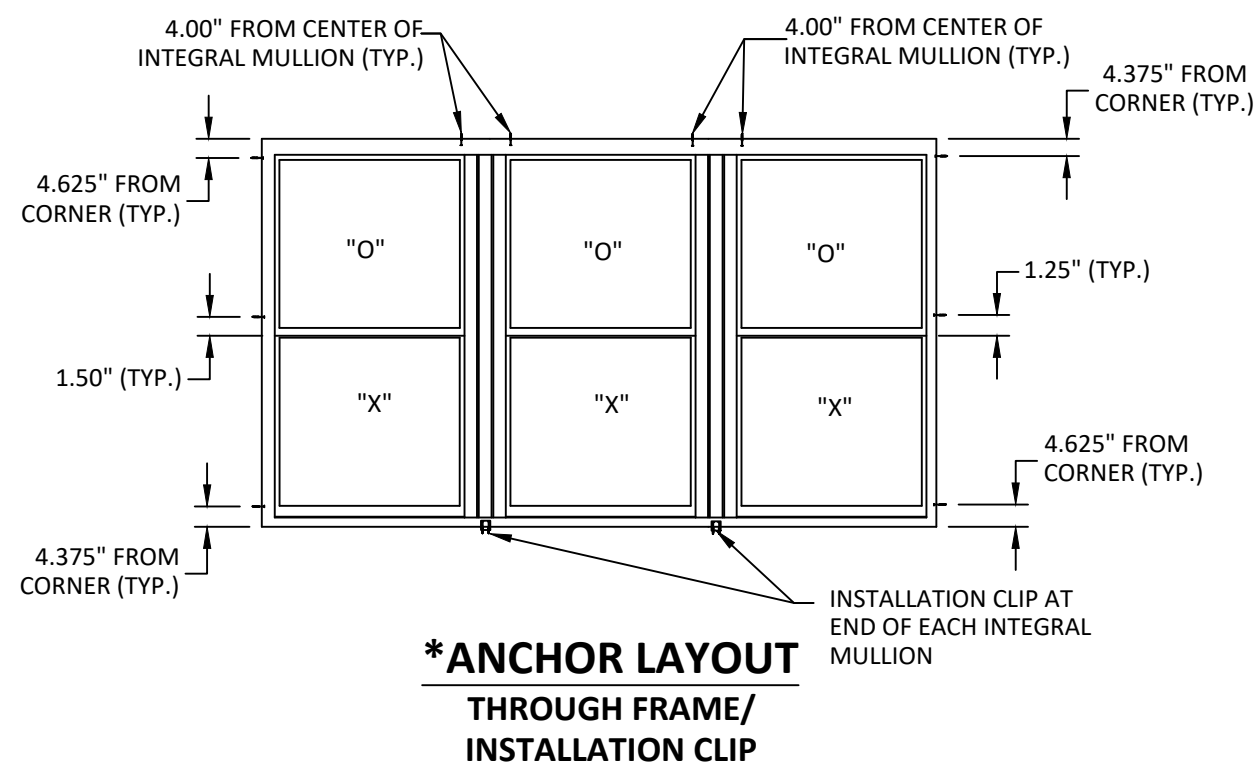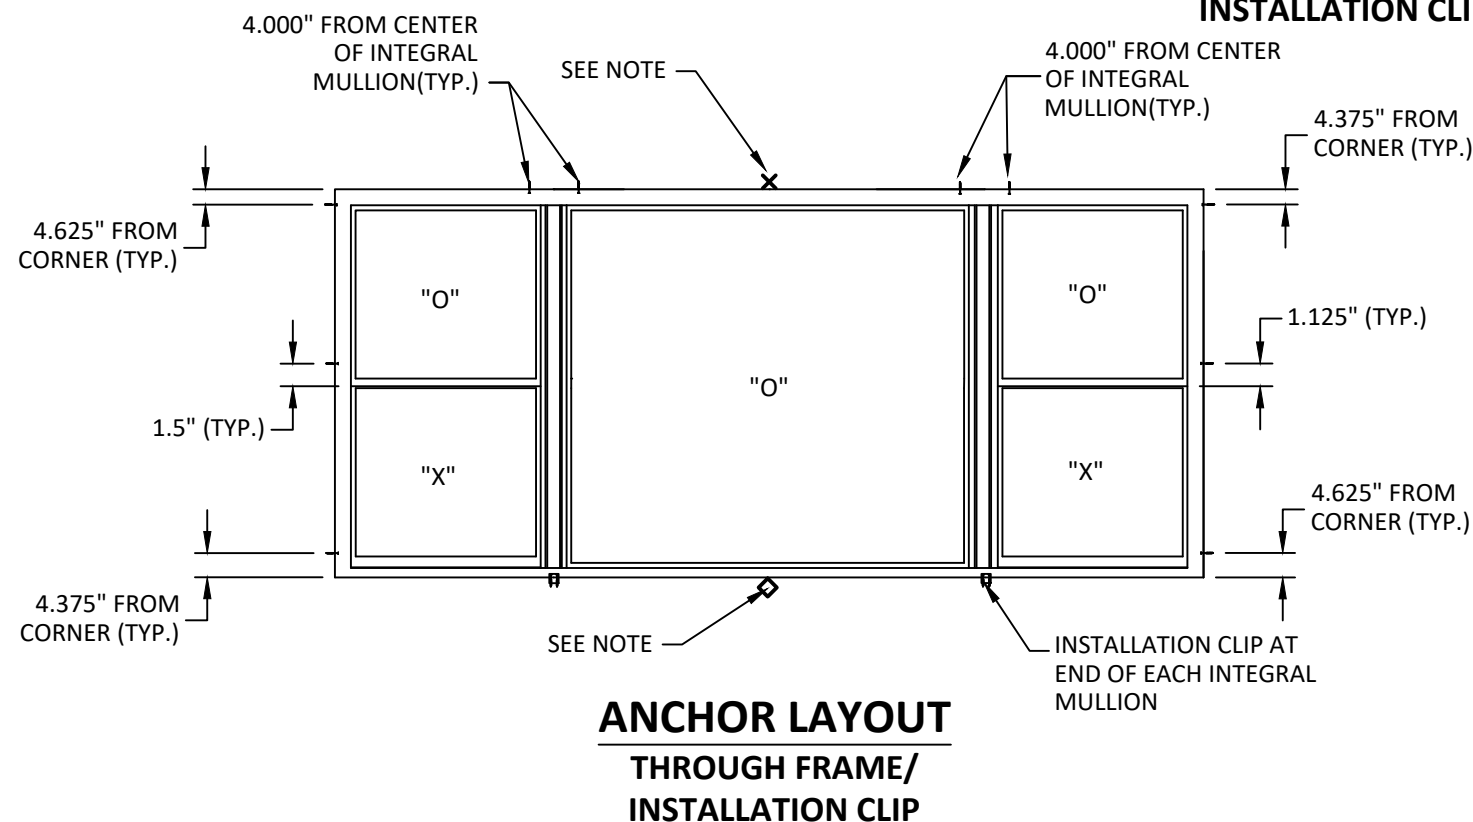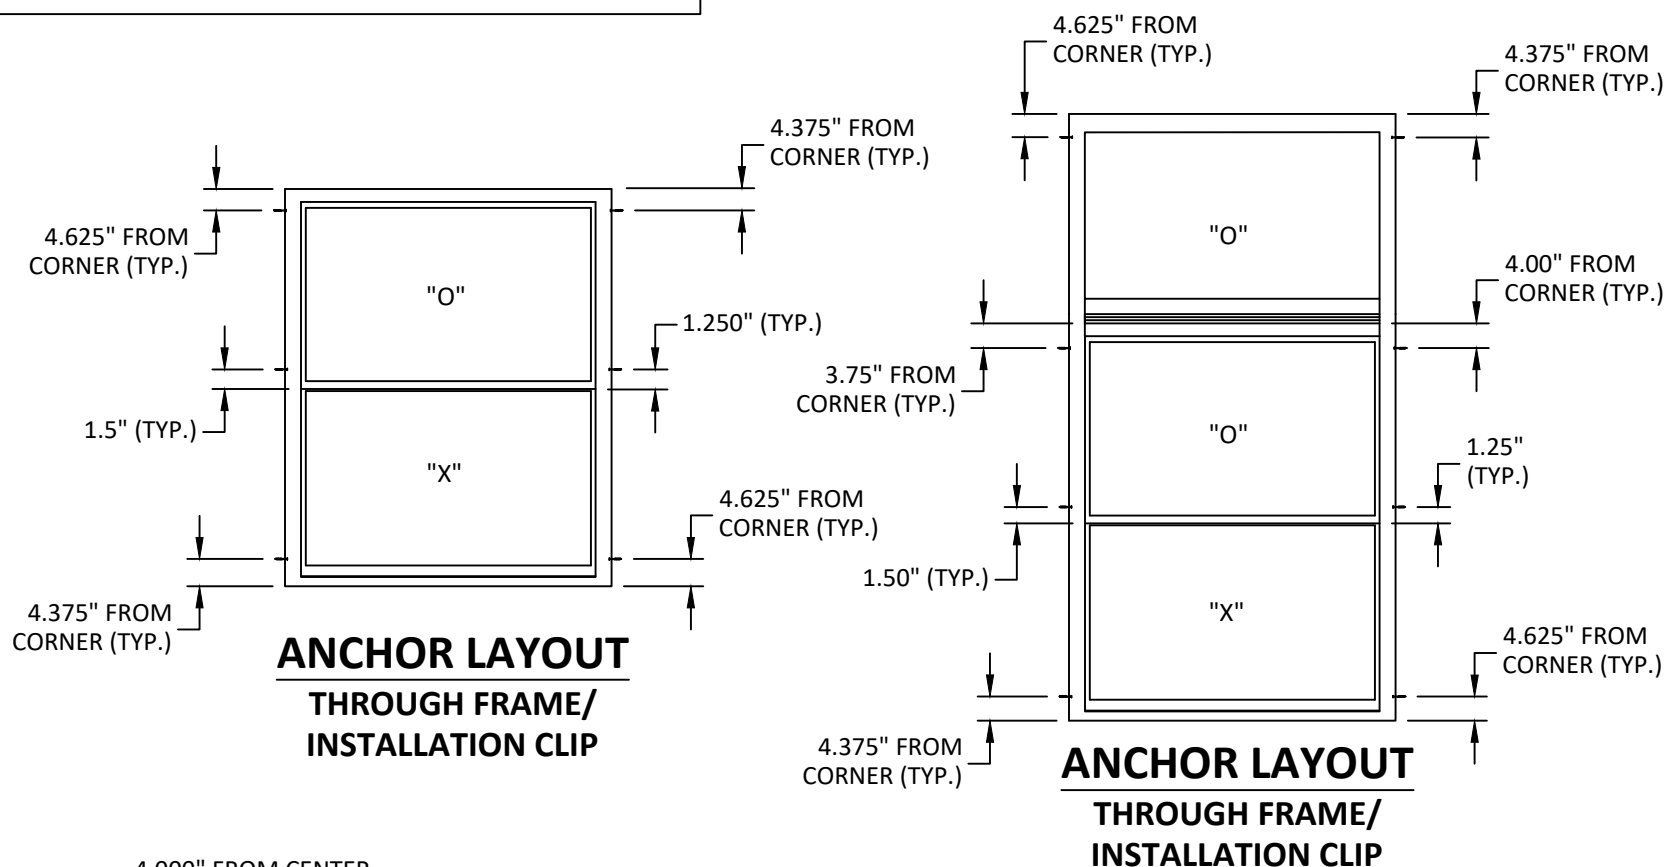

*NOTE: 1) APPLIES TO TWIN UNITS OF EQUIVALENT OR LESSER PANEL DIMENSIONS.
2) INSTALLATION CLIPS AT EACH END OF MULL ARE EXCLUDED FOR TWIN UNITS 47-1/2" & NARROWER.

ANCHOR LEGEND (X)	
X	= INSTALLATION ANCHORS AT MIDSPAN FOR CENTER UNITS WIDER THAN 47.5"
◇	= INSTALLATION CLIP AT MIDSPAN FOR UNITS WIDER THAN 120"



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)(NON-IMPACT)

THROUGH FRAME/INSTALLATION CLIP
ANCHOR LAYOUTS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132


PH: (954) 399-8478
FAX: (954) 744-4738

WEB: www.buildingdrops.com




REMARKS	BY	DATE
2010 FBC CC + FG MULL TABLE	MS	06.12.12
MULL TABLE REMOVAL	LL	07.02.19
8TH FBC CODE CHANGE	SH	05.25.23
ALTERNATE FRAME ADDITIONS	SH	04.24.24

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

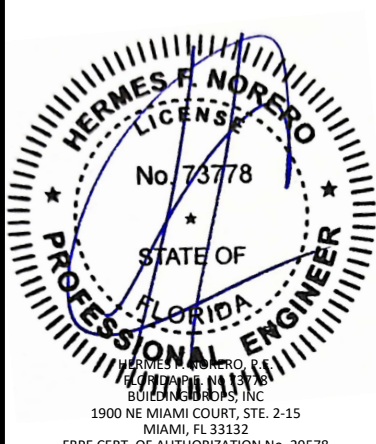


FL #:	FL15906
DATE:	06.12.2012
DWG. BY:	MSS
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD029
SHEET:	4


c:\users\sebastianhereros\building drops - common\projects\andersen windows\fbc-24-0422 fbc submittal 100 series\dwgs\awd029.dwg 4/24/2024 5:03 PM

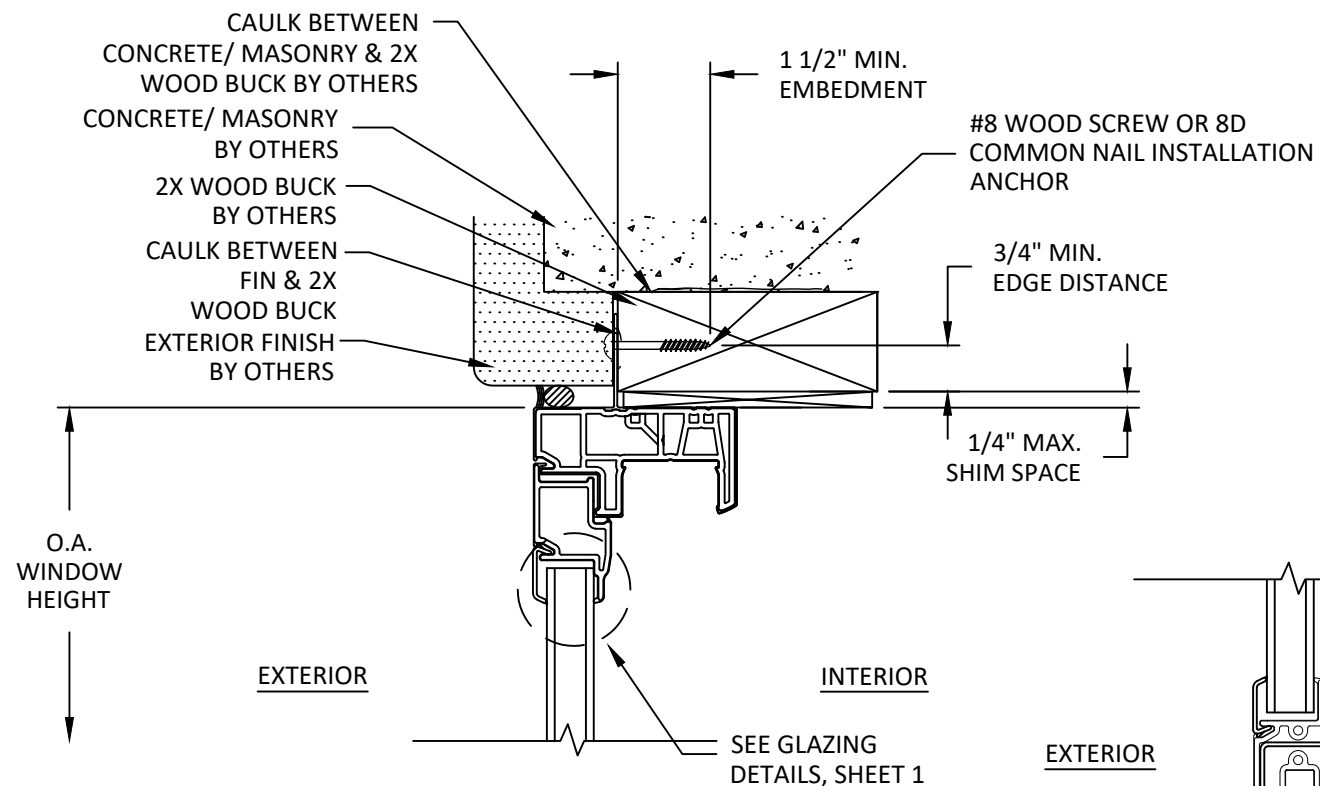


D
5 **VERTICAL SECTION**
HEAD - 2X WOOD FRAME
NAIL FIN

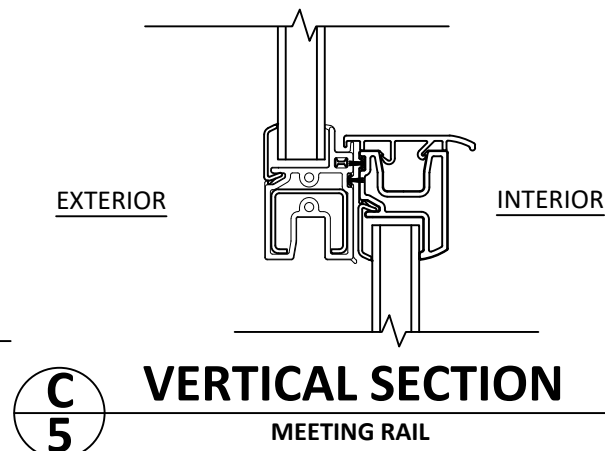


C
5 **VERTICAL SECTION**
MEETING RAIL

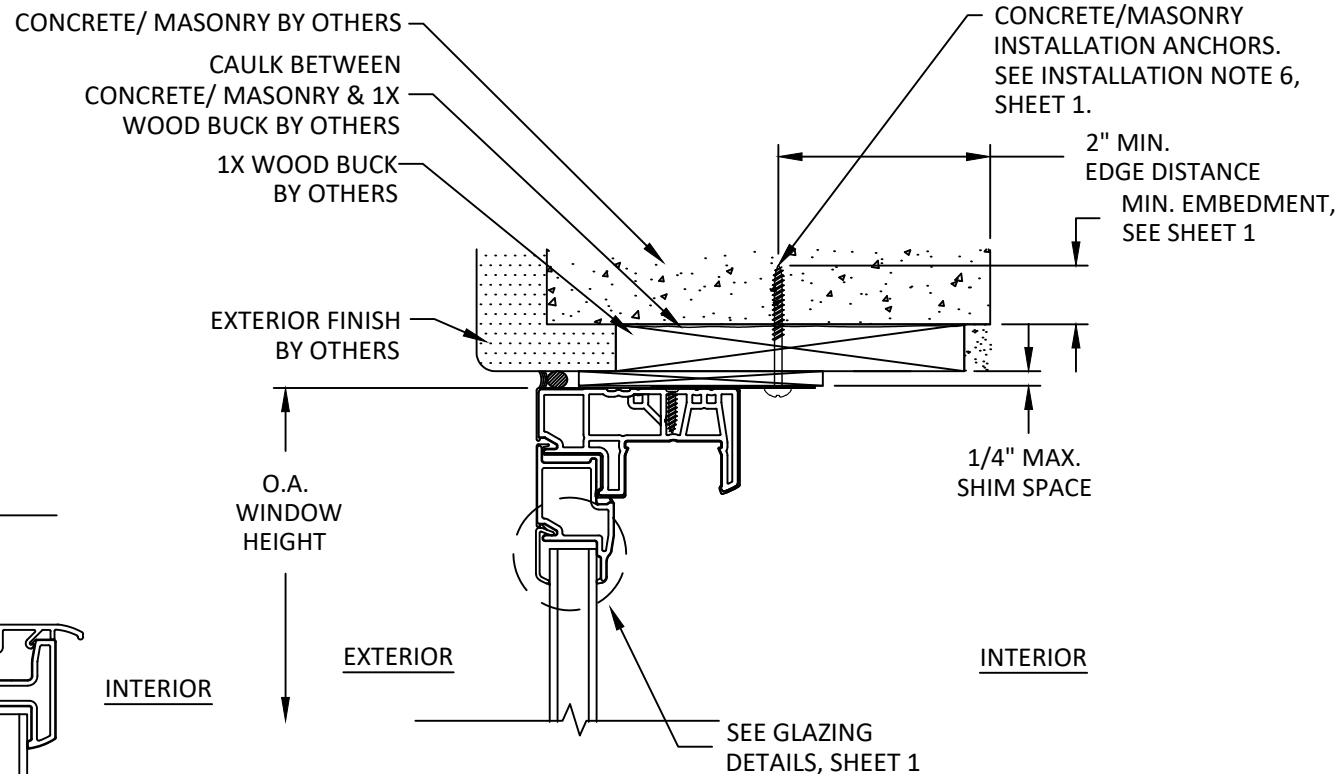

E
5 **VERTICAL SECTION**
HEAD - 1X WOOD/CONCRETE/MASONRY
INSTALLATION CLIP

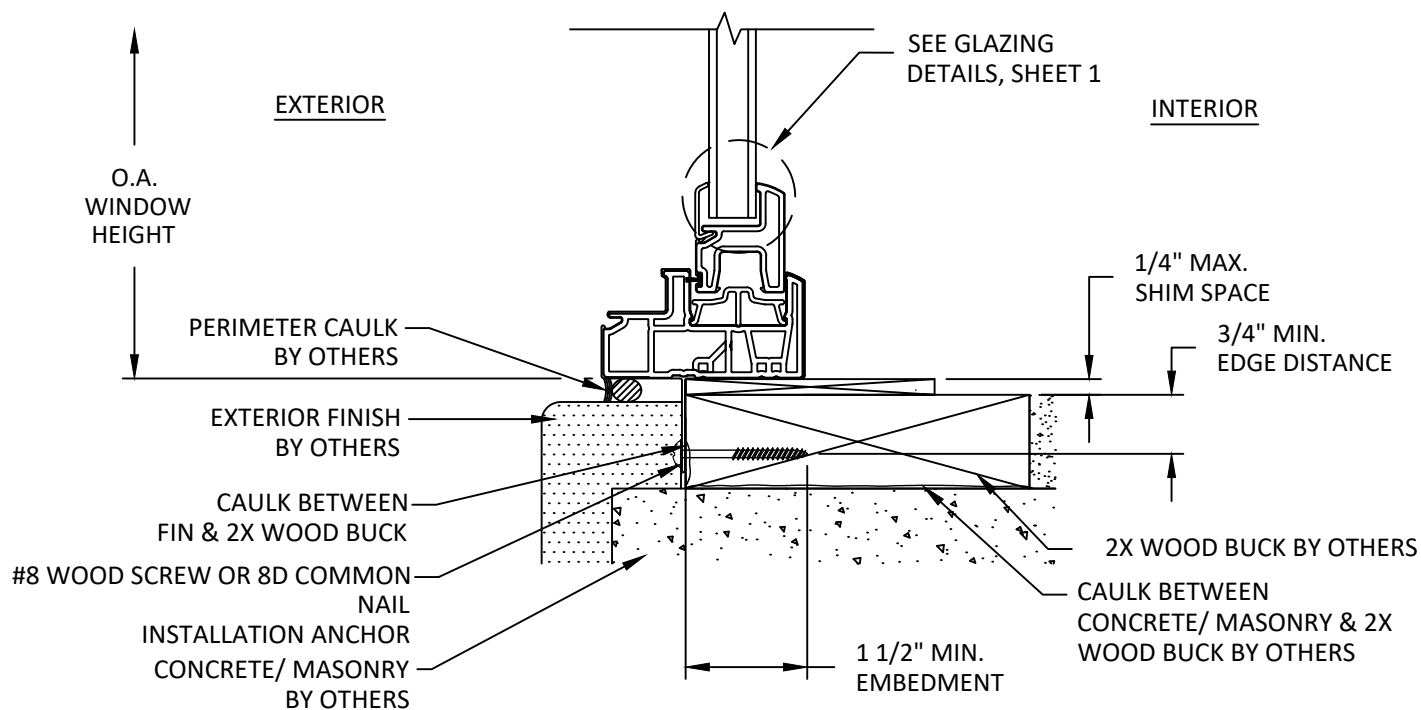

B
5 **VERTICAL SECTION**
SILL - 2X WOOD FRAME
NAIL FIN

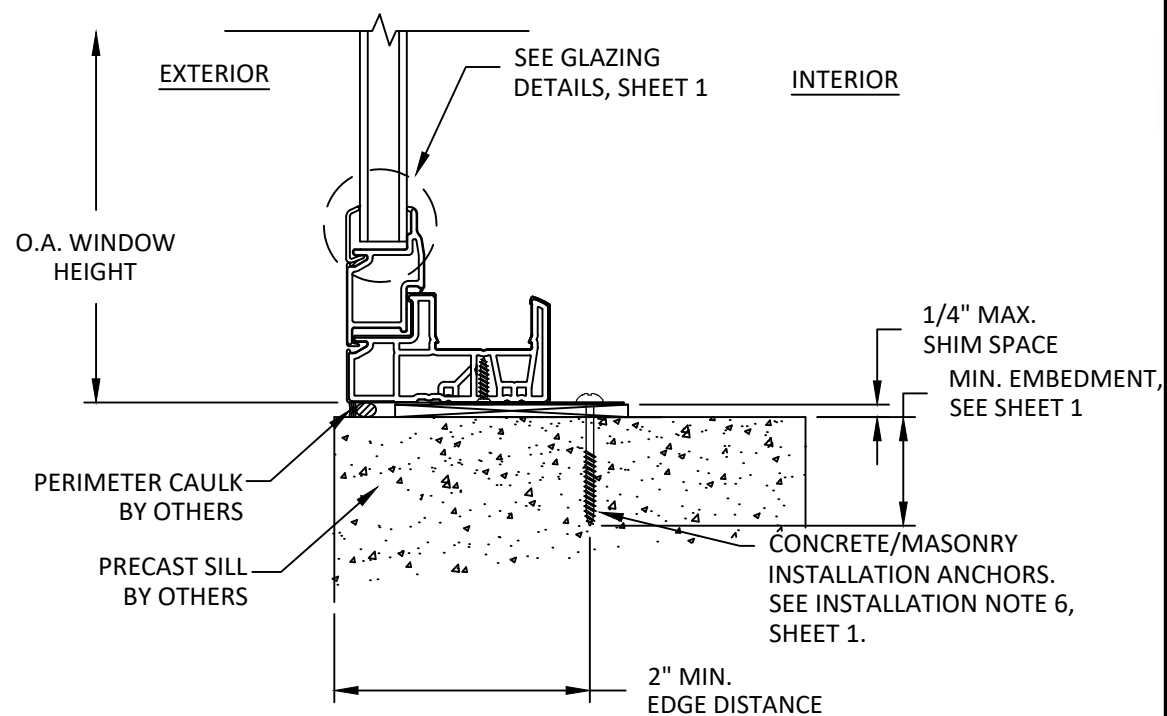

A
5 **VERTICAL SECTION**
SILL - CONCRETE/MASONRY
INSTALLATION CLIP



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)/(NON-IMPACT)

VERTICAL SECTIONS

PREPARED BY:

BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15

MIAMI, FL 33132

PH: (954) 399-8478


FAX: (954) 744-4738

WEB: www.buildingdrops.com



REMARKS	BY	DATE
2010 FBC CC + FG MULL TABLE	MS	06.12.12
MULL TABLE REMOVAL	LL	07.02.19
8TH FBC CODE CHANGE	SH	05.25.23
ALTERNATE FRAME ADDITIONS	SH	04.24.24

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

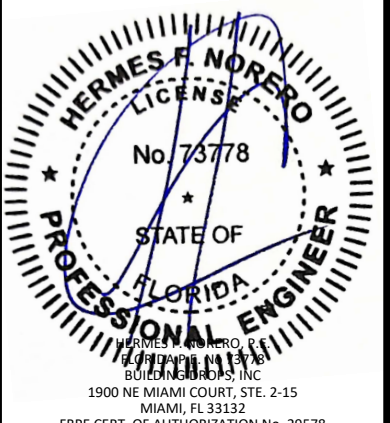


FL #:	FL15906
DATE:	06.12.2012
DWG. BY:	MSS
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD029
SHEET:	5

HORIZONTAL SECTIONS

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERAL IN NATURE AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED PROFESSIONAL ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.




DWG. BY: MSS	CHK. BY: HFN
------------------------	------------------------


DWG. #: AWD029

6


OF 7

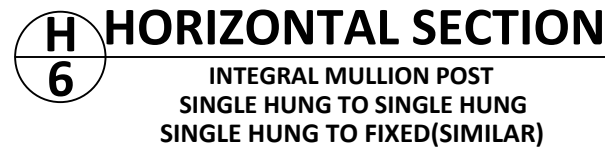


ALTERNATE FRAME OPTIONS

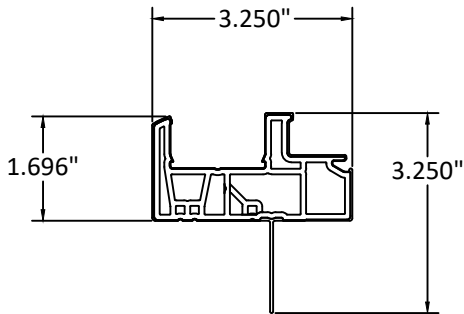


1-3/8" SETBACK FRAME

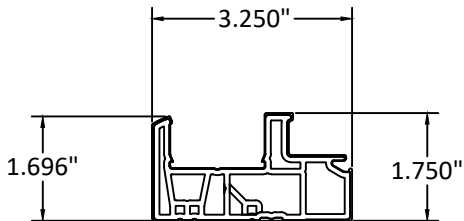



1-3/8" SETBACK FRAME
FLANGELESS

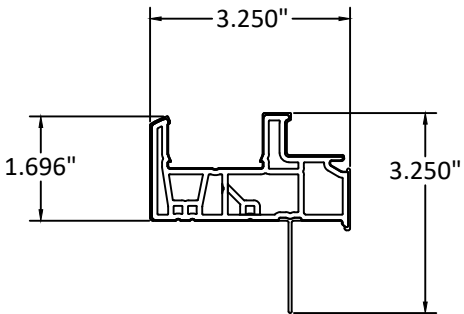

1" W/ STUCCO KEY FRAME

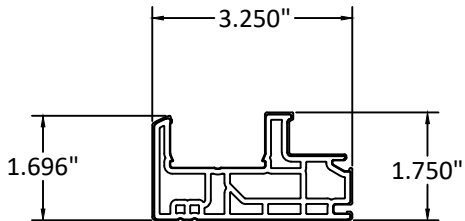

INSERT FRAME

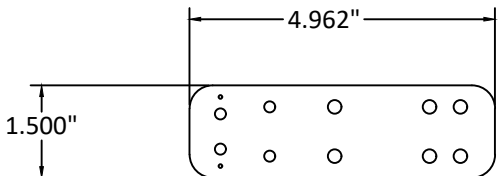

INSTALLATION CLIP



100 FOURTH AVE NORTH
BAYPORT, MN 55003-1096
PH: (651) 264-5150 FX: (651) 264-5485

TITLE:
100 SERIES SINGLE HUNG WINDOW
(NON-HVHZ)(NON-IMPACT)

ALTERNATE FRAME
OPTIONS


PREPARED BY:

BUILDING DROPS, INC.
1900 NE MIAMI COURT, STE. 2-15
MIAMI, FL 33132
PH: (954) 399-8478
FAX: (954) 744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
2010 FBC CC + FG MULL TABLE	MS	06.12.12
MULL TABLE REMOVAL	LL	07.02.19
8TH FBC CODE CHANGE	SH	05.25.23
ALTERNATE FRAME ADDITIONS	SH	04.24.24

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

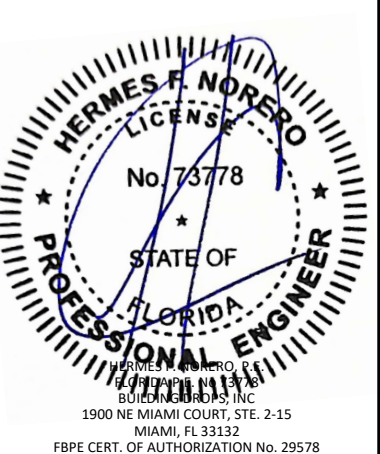

FL #:	FL15906
DATE:	06.12.2012
DWG. BY:	MSS
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	AWD029
SHEET:	7