

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN, UNLESS OTHERWISE STATED.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
5. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION INTO 2X WOOD FRAME USE TWO (2) #8 WOOD SCREWS PER INSTALLATION CLIP AND/OR ONE (1) #10 WOOD SCREW THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1-1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
6. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/ MASONRY, USE ONE (1) 3/16 INCH ITW TAPCON THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1-1/2 INCH MINIMUM EMBEDMENT AND/OR ONE (1) OF THE FOLLOWING THROUGH EACH INSTALLATION CLIP:

6.1. 1/4 INCH HILTI KWIK-CONII THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1-3/4 INCH MINIMUM EMBEDMENT.

6.2. 1/4 INCH POWERS TAPPER THROUGH INSTALLATION CLIP PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1-3/4 INCH MINIMUM EMBEDMENT.

6.3 ANCHORS AS LISTED IN NOTES 6.1 AND 6.2 SHALL BE INSTALLED WITH A MINIMUM EDGE DISTANCE OF 2-1/2 INCH. THE 3/16" TAPCON USED THROUGH THE FRAME MAY BE INSTALLED WITH A 2" EDGE DISTANCE.
7. THROUGH FRAME/INSTALLATION CLIP: FOR INSTALLATION THROUGH METAL STUD USE TWO (2) #8 SELF-TAPPING SCREWS PER INSTALLATION CLIP AND/OR ONE (1) #10 SELF TAPPING SCREW THROUGH FRAME PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND METAL STRUCTURE.
8. NAILING FIN: FOR INSTALLATION INTO 2X WOOD FRAME USE ONE (1) #8 WOOD SCREW OR 8D COMMON NAIL PER LOCATION OF SUFFICIENT LENGTH TO ACHIEVE 1-1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
9. NAILING FIN: FOR INSTALLATION THROUGH METAL STUD USE ONE (1) #8 SELF-TAPPING SCREW OF SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM PENETRATION BEYOND METAL STRUCTURE.
- 10.MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
- 11.INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
12. FOR GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- 13.INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- 14.INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

A. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.

C. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90. MIN. COMPRESSIVE STRENGTH OF 2000 PSI.

D. STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM WALL THICKNESS OF 33 MILS. (20 GUAGE)

E. ALUMINUM - 1/8" MINIMUM THICKNESS (6063-T5).

ANDERSEN CORPORATION

100 SERIES CASEMENT WINDOW

(NON-HVHZ)(NON-IMPACT)

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), **EXCLUDING** HVHZ, AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:

• AAMA/WDMA/CSA 101/I.S.2/A440-17

• AAMA 450-20
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.

3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

5. APPROVED IMPACT PROTECTIVE SYSTEM **IS REQUIRED** TO PROTECT THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: FIBREX®

7. GLASS SHALL MEET THE REQUIREMENTS OF ASTM E1300 GLASS CHARTS. SEE SHEET 2 FOR GLAZING DETAILS.

8. DESIGNATIONS "X" AND "O" STAND FOR THE FOLLOWING:

X: OPERABLE SASH

O: FIXED SASH

9. CUSTOM SIZES AVAILABLE UPON REQUEST.

| TABLE OF CONTENTS |                                     |
|-------------------|-------------------------------------|
| SHEET             | SHEET DESCRIPTION                   |
| 1                 | GENERAL NOTES & INSTALLATION NOTES  |
| 2                 | GLAZING DETAILS                     |
| 3                 | ELEVATIONS & NAIL-FIN ANCHOR LAYOUT |
| 4                 | THROUGH FRAME ANCHOR LAYOUTS        |
| 5                 | VERTICAL SECTIONS                   |
| 6                 | HORIZONTAL SECTIONS                 |
| 7                 | ALTERNATE FRAME OPTIONS             |

| SIZE & CONFIGURATION     | DESIGN PRESSURE | INSTALLATION              | MISSILE IMPACT RATING |
|--------------------------|-----------------|---------------------------|-----------------------|
| (X) 35 1/2" X 71 1/2"    | +40 / -45 PSF   | NAIL FIN OR THROUGH FRAME | NON-IMPACT            |
| (X) 17 1/2" X 27 3/8"    | +40 / -45 PSF   |                           |                       |
| (XOX) 71 1/2" X 53 1/2"  | +40 / -45 PSF   |                           |                       |
| (XX) 35 1/2" X 59 1/2"   | +40 / -45 PSF   |                           |                       |
| (XOX) 143 1/2" X 71 1/2" | +40 / -40 PSF   |                           |                       |
| (XX) 71 1/2" X 71 1/2"   | +40 / -45 PSF   |                           |                       |

NOTE:  
1. APPROVED "X" CONFIGURATIONS MAY ALSO BE "O" CONFIGURATIONS.



100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)(NON-IMPACT)

GENERAL NOTES & INSTALLATION NOTES

PREPARED BY:


BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954)399-8478  
FAX: (954)744-4738  
WEB: www.buildingdrops.com

BUILDING DROPS

| REMARKS                                                                                                                                                                                                                                                                                                     | BY | DATE     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----|----------|
| MULL TABLE REMOVAL                                                                                                                                                                                                                                                                                          | LL | 07.02.19 |
| 8TH FBC CODE CHANGE                                                                                                                                                                                                                                                                                         | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS                                                                                                                                                                                                                                                                                   | SH | 04.24.24 |
| TRIPLE IG REVISION                                                                                                                                                                                                                                                                                          | HJ | 12.02.25 |
| THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT. |    |          |

Digitally signed by Hermes F. Norero, P.E.  
Reason: I am approving this document  
Date: 2025.11.09 13:01:36 -0500

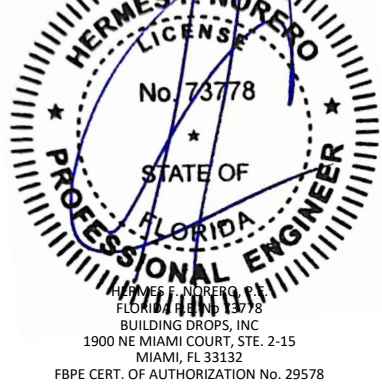

FL #:

FL15908

DATE:

07.27.2010

DWG. BY:

MSS

CHK. BY:

HFN

SCALE:

NTS

DWG. #:



AWD032

SHEET:

1

OF 7

c:\users\harley\appdata\local\temp\building drops landing - common\projects\andersen corporation\100 series windows - triple ig revisions\dwgs\awd032.dwg  
12/4/2025 12:28 PM

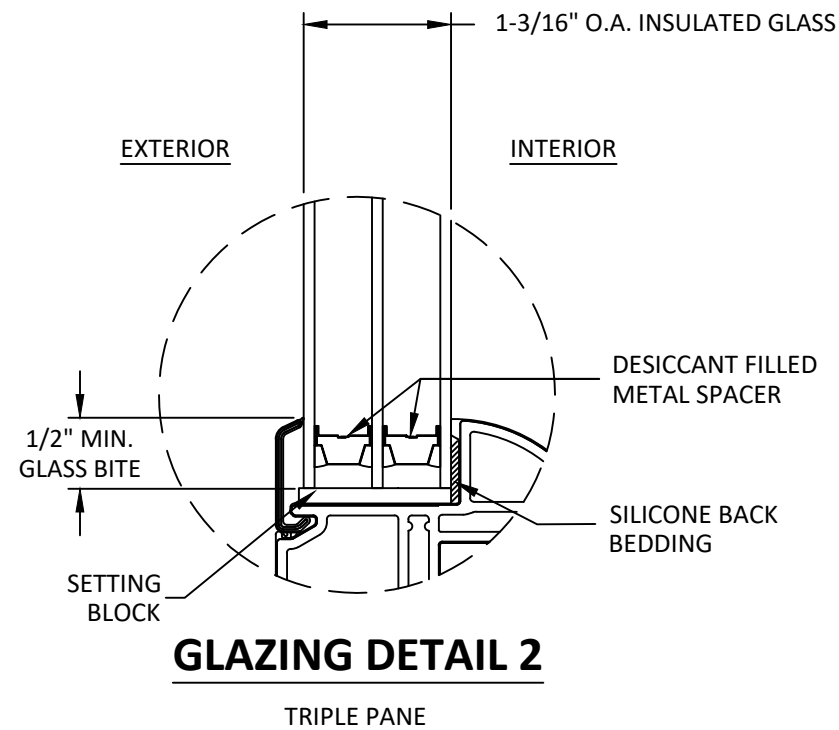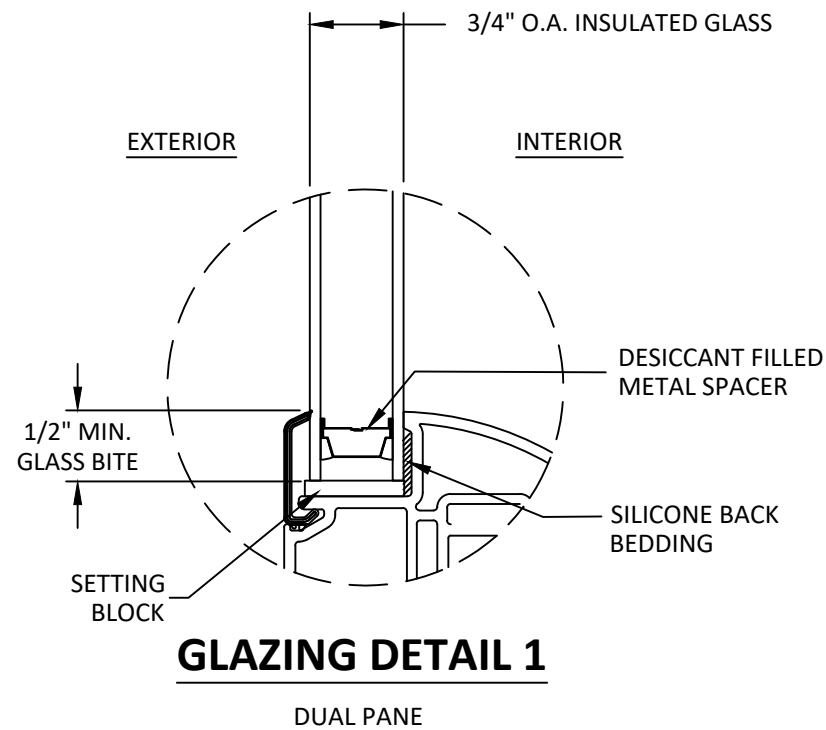

- GLAZING NOTES:
1. GLASS TYPE SHALL COMPLY WITH ASTM E1300 AND THE FBC SAFETY GLAZING REQUIREMENTS. PER THE FBC TEMPER AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
  2. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
  3. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
  4. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES SHOWN HEREIN.



ANDERSEN  
WINDOWS & DOORS

100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)

GLAZING DETAILS

PREPARED BY:

BUILDING DROPS, INC.  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 399-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com



| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.




|          |            |
|----------|------------|
| FL #:    | FL15908    |
| DATE:    | 07.27.2010 |
| DWG. BY: | CHK. BY:   |
| MSS      | HFN        |
| SCALE:   | NTS        |
| DWG. #:  | AWD032     |
| SHEET:   |            |


2

OF 7

c:\users\harley\my building d drops, inc.\building drops landing - common\projects\andersen corporation\fb-25-1206 - 100 series windows - triple ig revisions\dwgs\awd032.dwg  
12/4/2025 12:28 PM

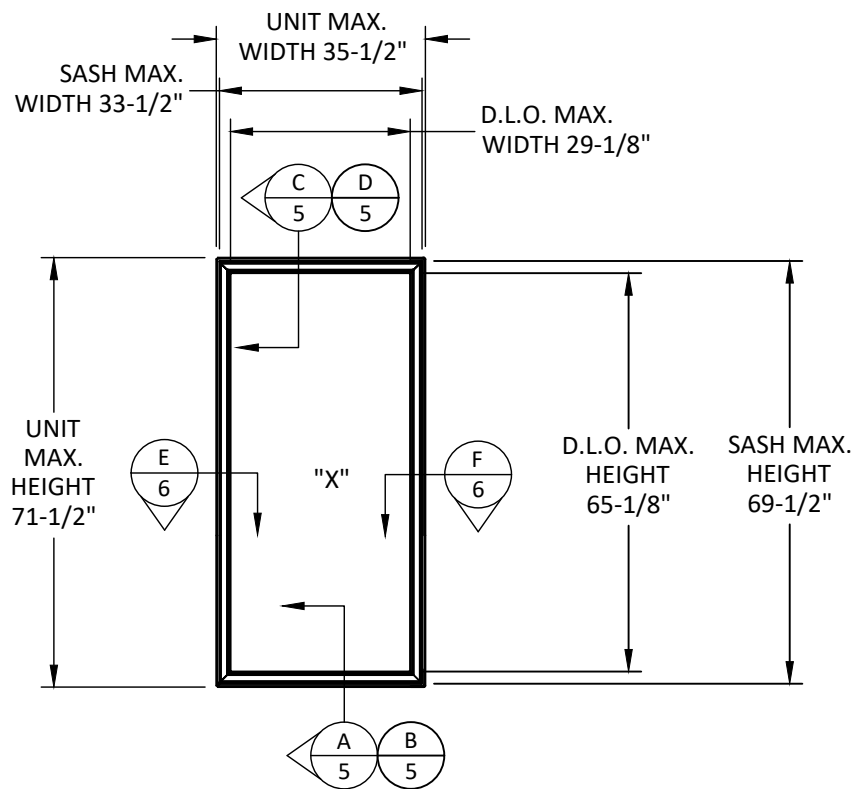


**ELEVATION**  
X

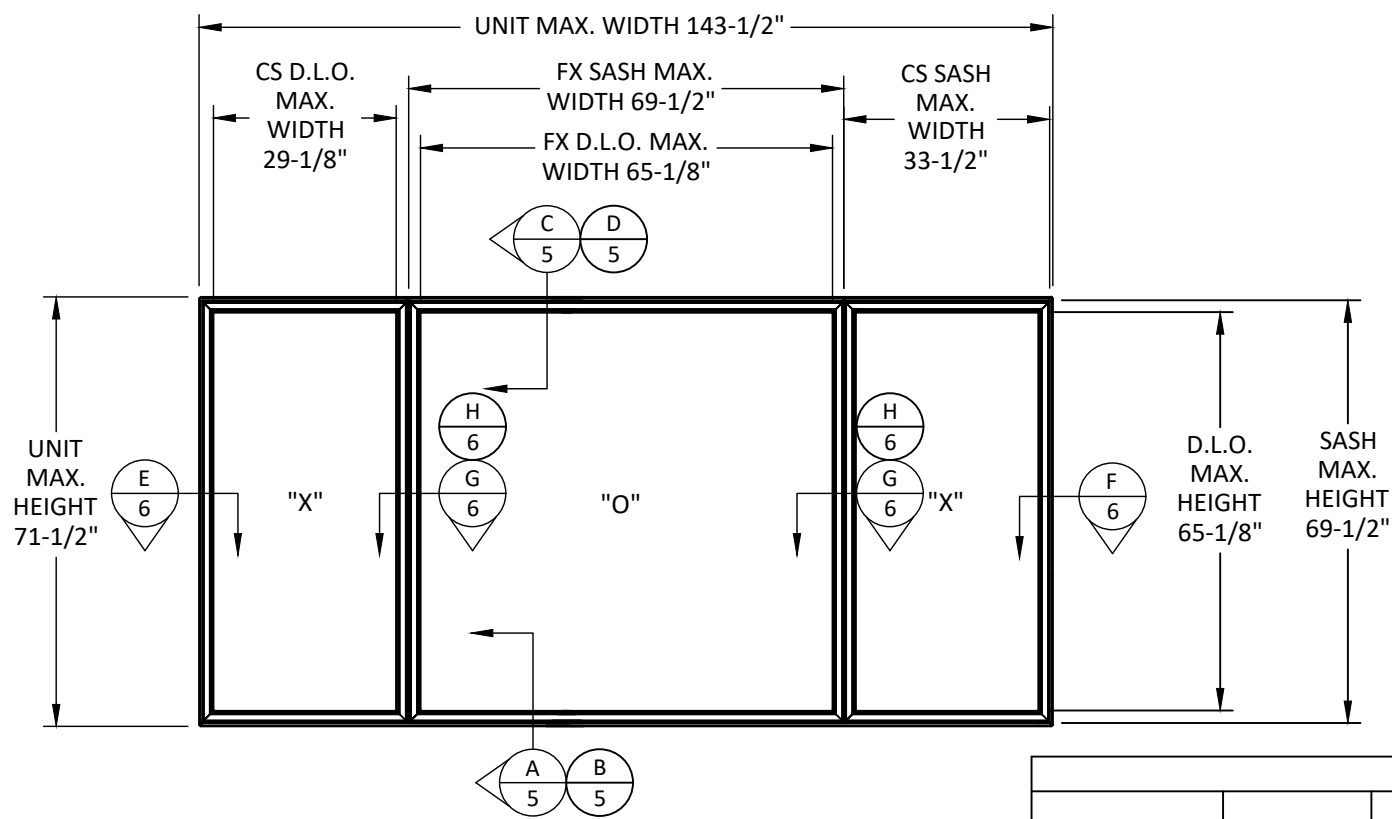


**ELEVATION**  
XOX

NOTE: APPROVED "X" CONFIGURATIONS MAY BE "O" CONFIGURATIONS

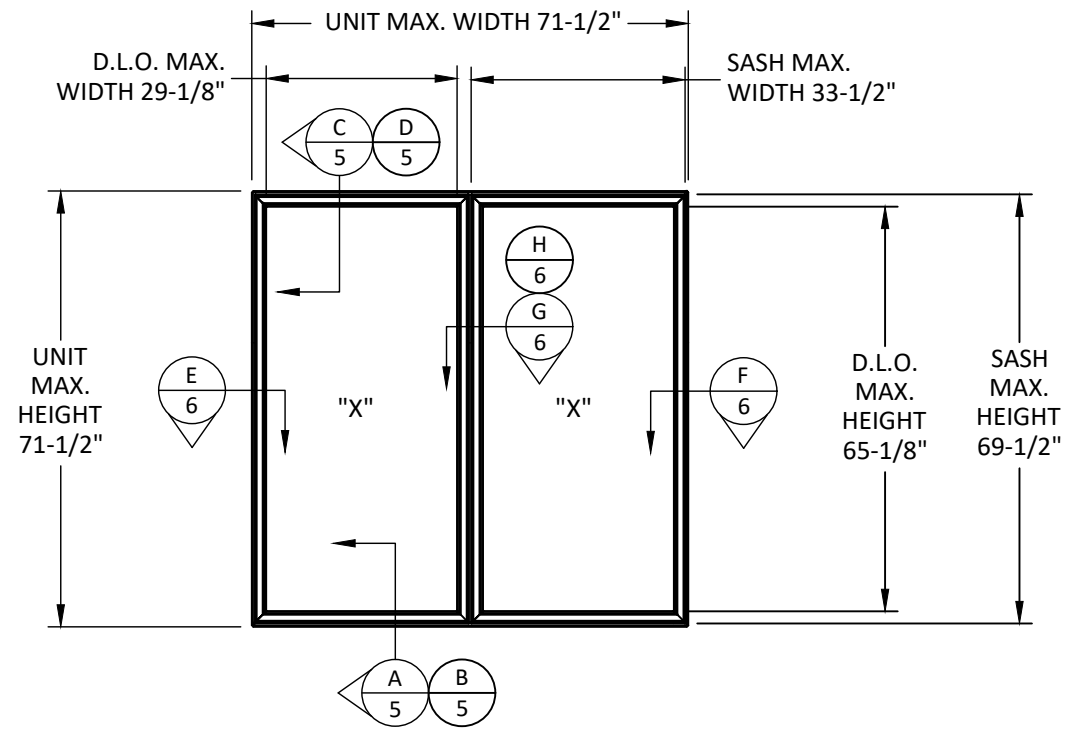

**ELEVATION**  
XX

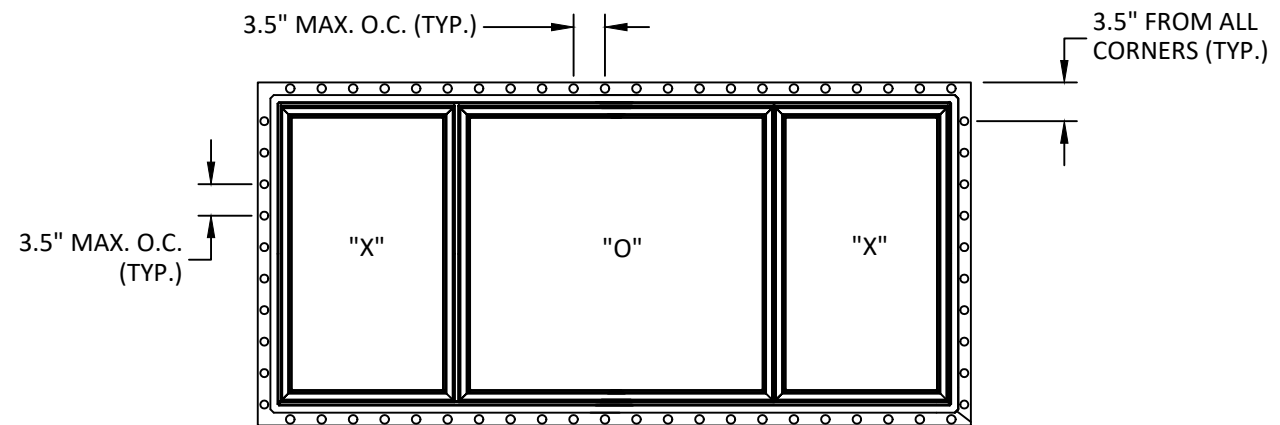

**ANCHOR LAYOUT - NAIL FIN  
APPLIES TO ALL  
CONFIGURATIONS**

| ANCHOR SCHEDULE   |                  |            |                       |                 |                     |                               |                          |                       |
|-------------------|------------------|------------|-----------------------|-----------------|---------------------|-------------------------------|--------------------------|-----------------------|
| INSTALLATION TYPE | QTY PER LOCATION | SUBSTRATE  | ANCHOR TYPE           | EMBEDMENT (IN.) | EDGE DISTANCE (IN.) | HEAD/SILL O.C. DISTANCE (IN.) | JAMB O.C. DISTANCE (IN.) | CORNER DISTANCE (IN.) |
| NAIL FIN          | 1                | WOOD       | #8 WOOD ANCHOR        | 1.50            | 0.75                | 3.50                          | 3.50                     | 3.50                  |
| NAIL FIN          | 1                | WOOD       | 8D COMMON NAIL        | 1.50            | 0.75                | 3.50                          | 3.50                     | 3.50                  |
| NAIL FIN          | 1                | METAL STUD | #8 SELF-TAPPING SCREW | 3 THREADS       | 0.50                | 3.50                          | 3.50                     | 3.50                  |



100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)


ELEVATIONS & NAIL-FIN  
ANCHOR LAYOUT

PREPARED BY:  
BUILDING DROPS, INC.  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 399-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com



| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

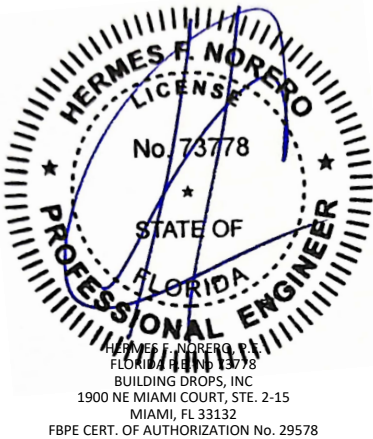

FL #:  
**FL15908**

DATE: **07.27.2010**

DWG. BY: **MSS** CHK. BY: **HFN**

SCALE: **NTS**


DWG. #: **AWD032**

SHEET:


**3**

OF 7


NOTE:  
1. ALL MULLED UNITS SHOWN ARE INTEGRAL MULLED UNITS.

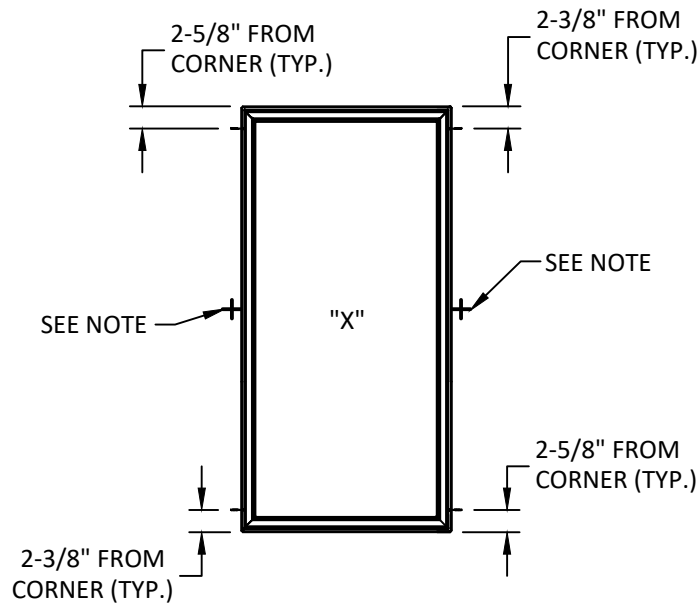

**ANCHOR LAYOUT  
THROUGH FRAME**  
"X" UNITS FOR SIZES UP TO 35-1/2" x 71-1/2"

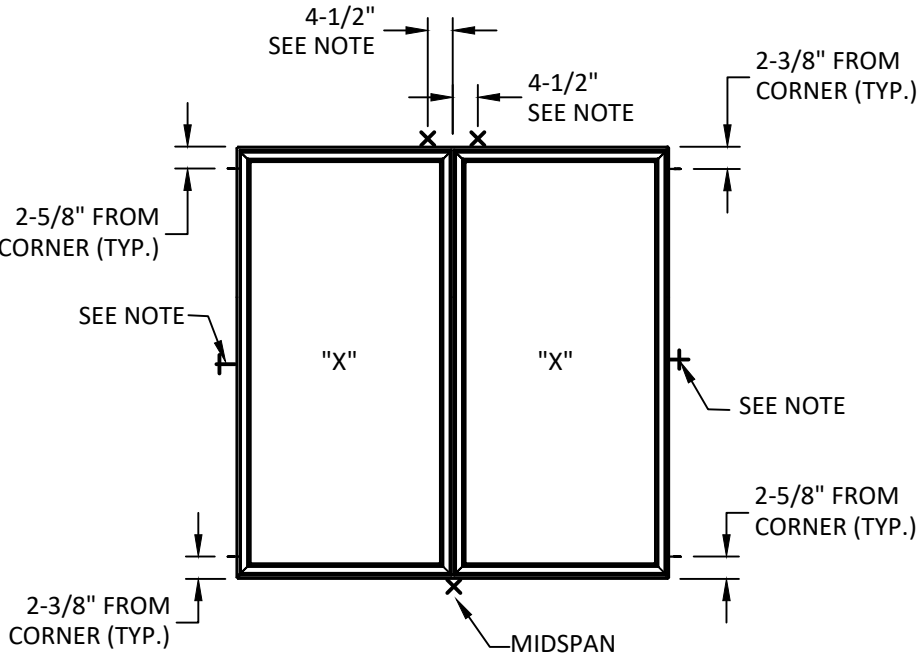

**ANCHOR LAYOUT  
THROUGH FRAME**  
"XX" UNITS FOR SIZES UP TO 71-1/2" x 71-1/2"

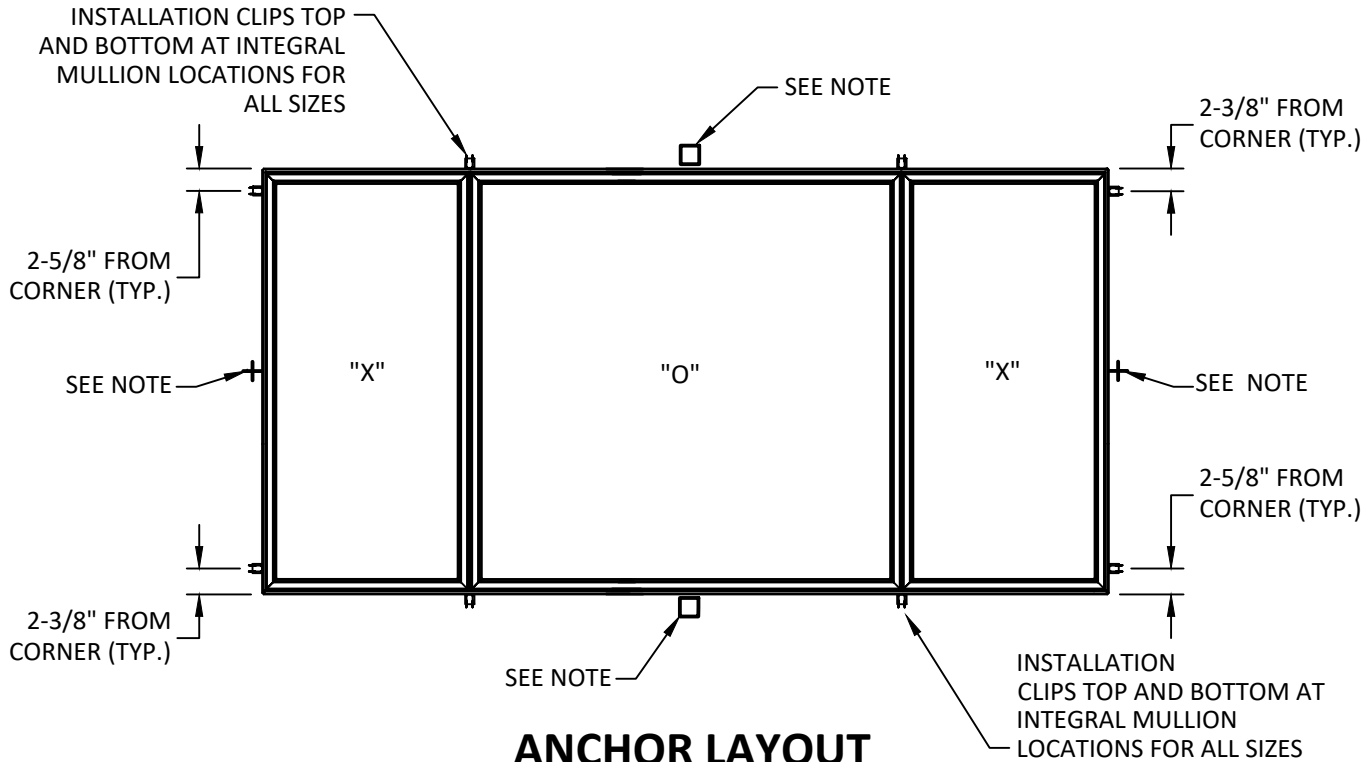

**ANCHOR LAYOUT  
THROUGH FRAME**  
"XOX" UNITS FOR SIZES UP TO 143-1/2" x 71-1/2"

| ANCHOR LEGEND (X) |                                                                   |
|-------------------|-------------------------------------------------------------------|
| ✕                 | = INSTALLATION ANCHORS FOR UNITS WIDER THAN 47-1/2"               |
| ◇                 | = INSTALLATION CLIP AT MIDSPAN FOR UNITS WIDER THAN 47-1/2"       |
| +                 | = INSTALLATION ANCHORS AT MIDSPAN AT HEIGHTS GREATER THAN 47-1/2. |
| □                 | = INSTALLATION CLIP FOR UNITS WIDER THAN 96".                     |




100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)  
THROUGH FRAME ANCHOR LAYOUTS

PREPARED BY:  
BUILDING DROPS, INC.  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 399-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com


| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

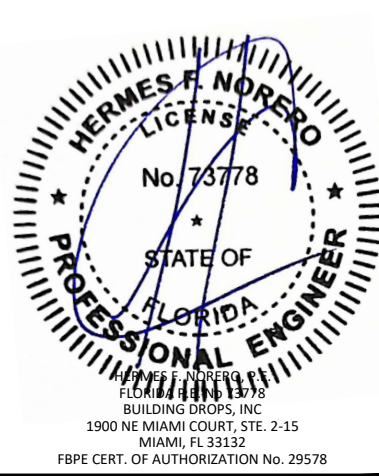


|          |            |
|----------|------------|
| FL #:    | FL15908    |
| DATE:    | 07.27.2010 |
| DWG. BY: | MSS        |
| CHK. BY: | HFN        |
| SCALE:   | NTS        |
| DWG. #:  | AWD032     |
| SHEET:   | 4          |

c:\users\harley\my\building drops, inc.\common\projects\andersen corporation\fb-25-1206 - 100 series windows - triple ig revisions\dwgs\awd032.dwg 12/4/2025 12:28 PM

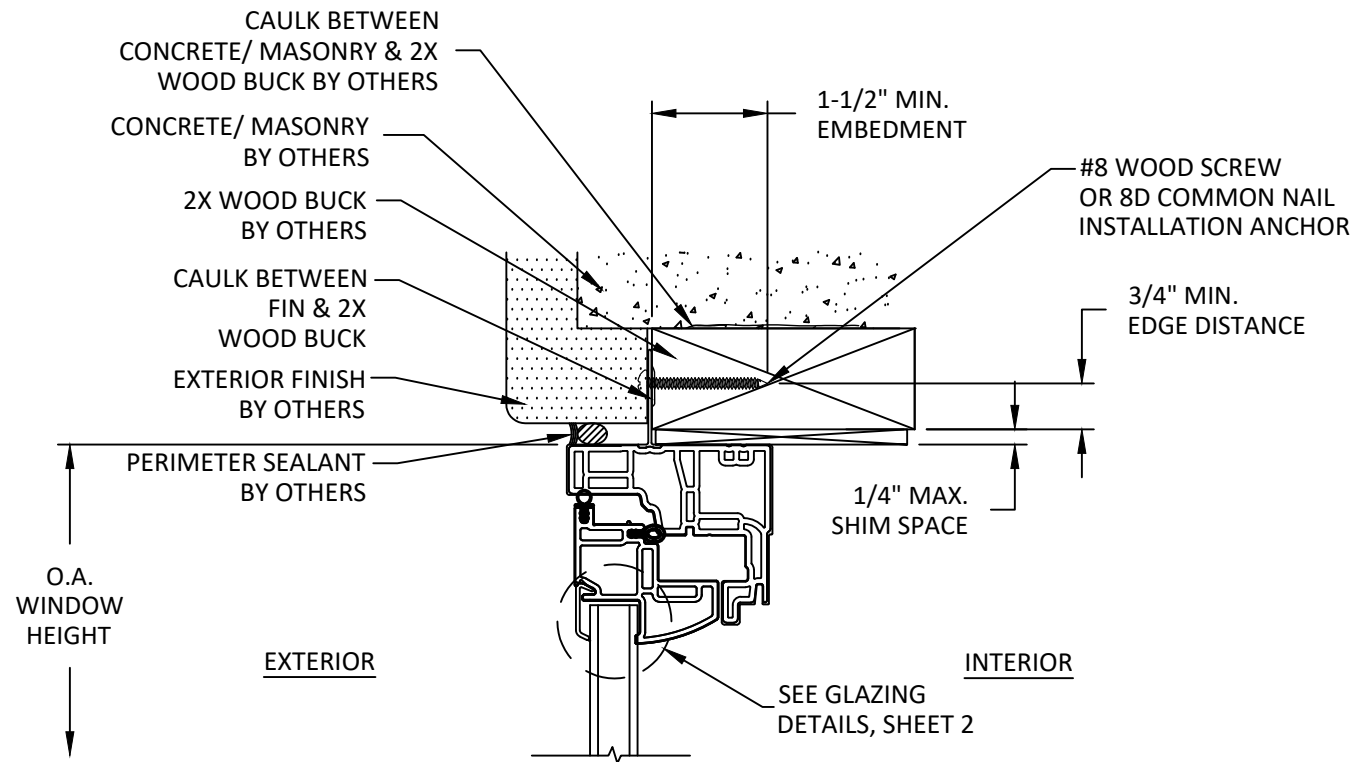


**C**  
**5** **VERTICAL SECTION**  
HEAD - 2X WOOD FRAME  
NAIL FIN


NOTE: DUAL PANE AND TRIPLE PANE ARE QUALIFIED FOR ALL DETAILS SHOWN. SEE SHEET 2 FOR GLAZING DETAILS.

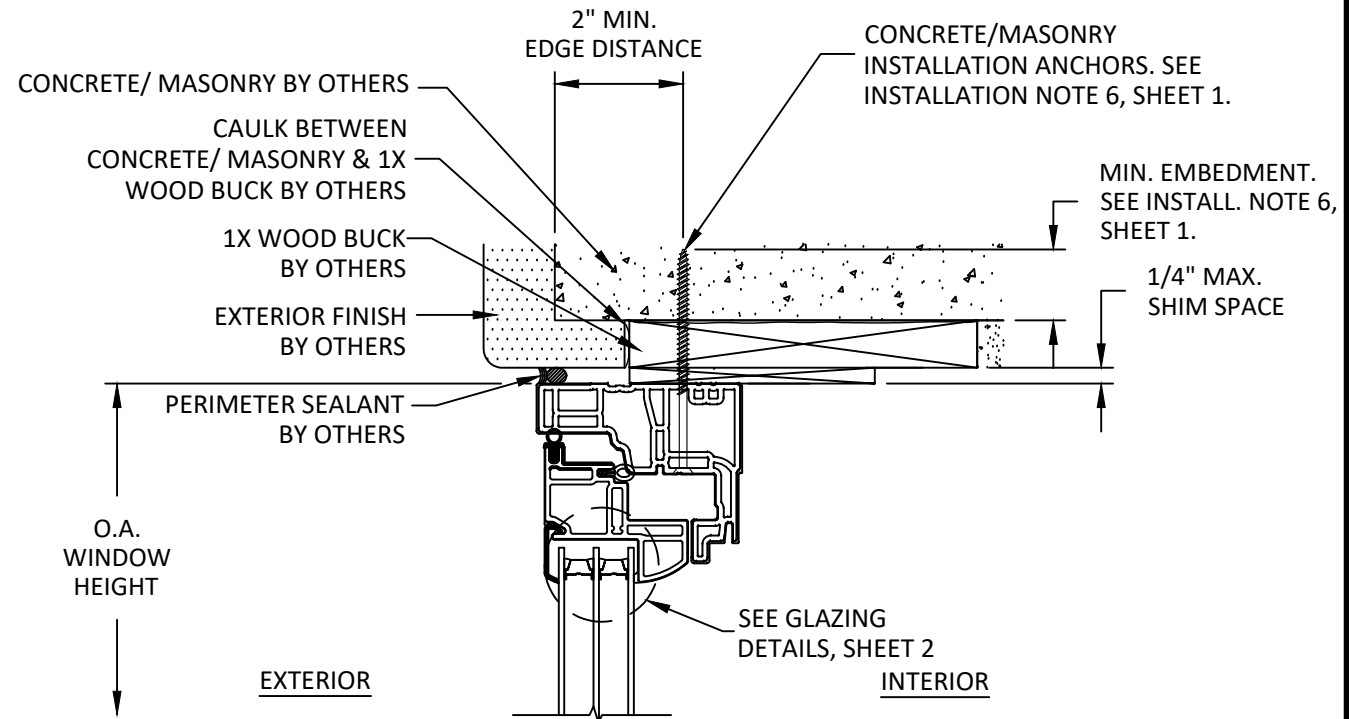

**D**  
**5** **VERTICAL SECTION**  
HEAD - 1X WOOD/CONCRETE/MASONRY  
THROUGH FRAME

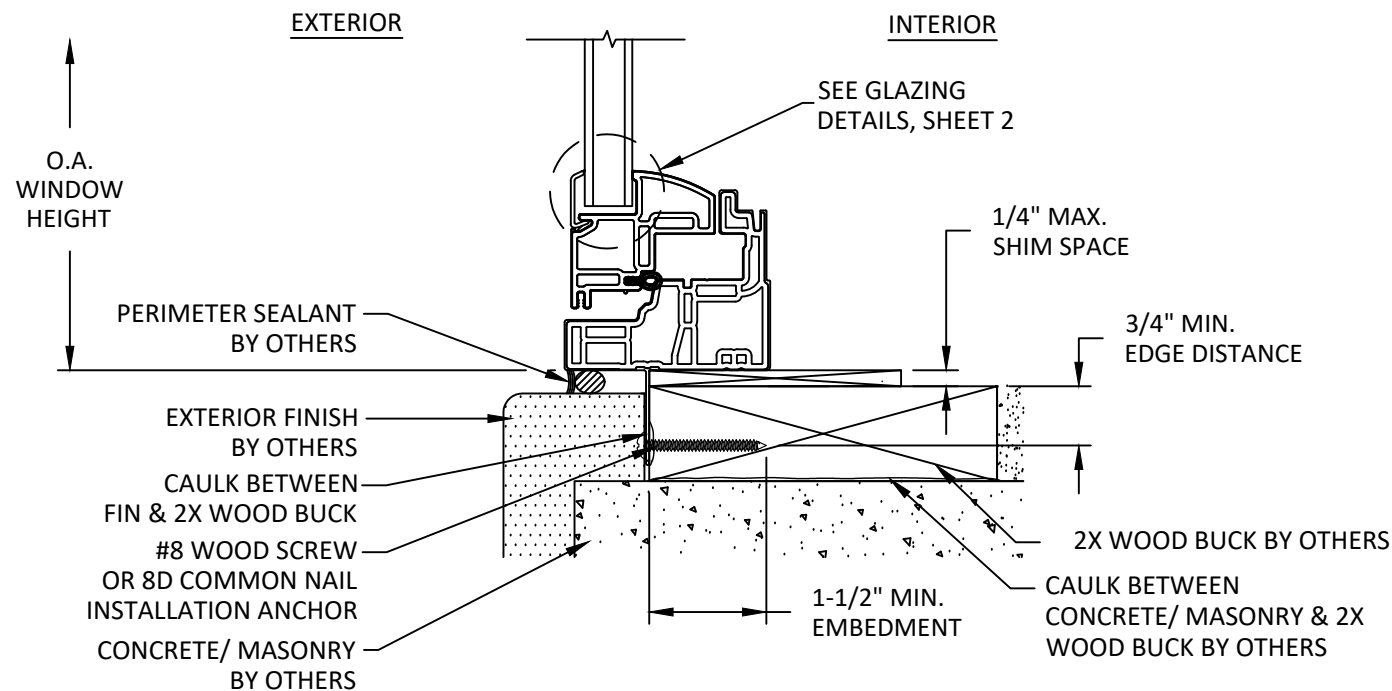

**B**  
**5** **VERTICAL SECTION**  
SILL - 2X WOOD BUCK  
NAIL FIN

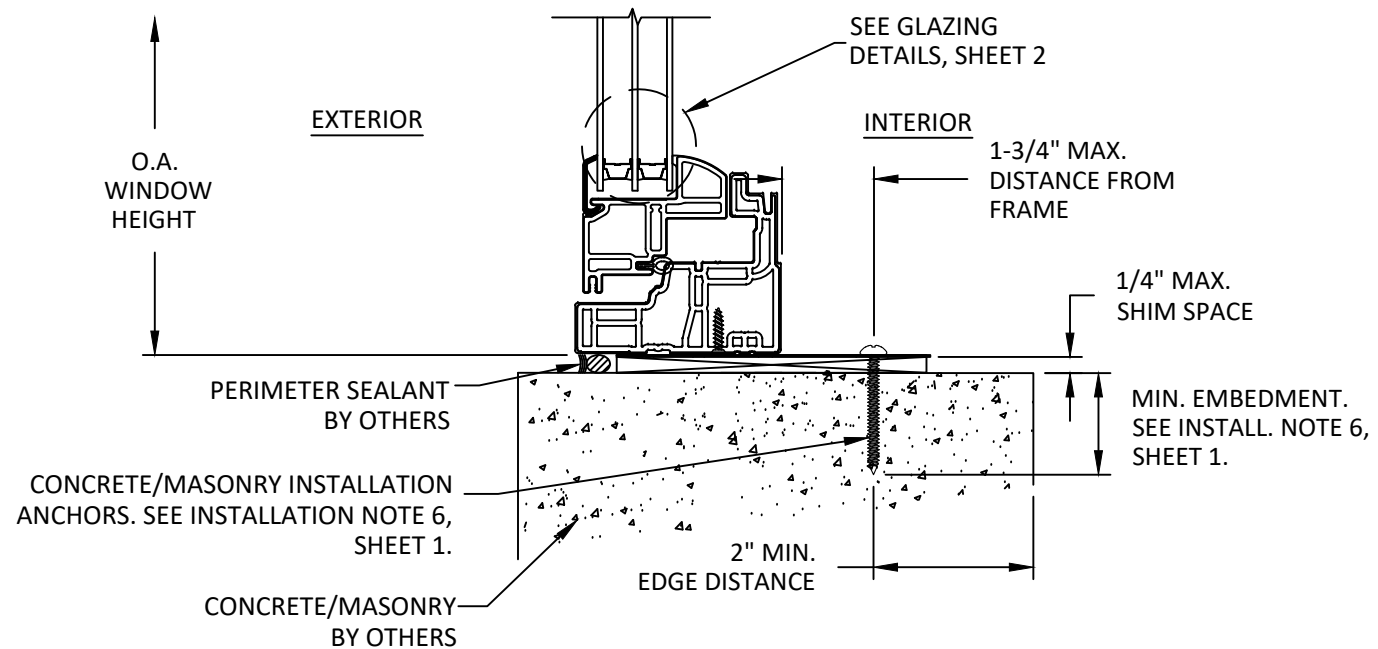

**A**  
**5** **VERTICAL SECTION**  
SILL - CONCRETE/MASONRY  
INSTALLATION CLIP



100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)


VERTICAL SECTIONS

PREPARED BY:  
**BUILDING DROPS, INC.**  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 999-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com

**BD**  
BUILDING DROPS


| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

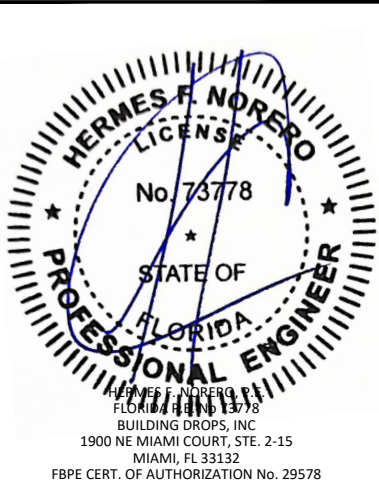


|          |     |            |     |
|----------|-----|------------|-----|
| FL #:    |     | FL15908    |     |
| DATE:    |     | 07.27.2010 |     |
| DWG. BY: | MSS | CHK. BY:   | HFN |
| SCALE:   |     | NTS        |     |
| DWG. #:  |     | AWD032     |     |
| SHEET:   |     | 5          |     |

c:\users\harley\appdata\local\temp\building drops, inc.\building drops landing - common\projects\andersen corporation\100 series windows - triple ig revisions\dwgs\awd032.dwg  
12/4/2025 12:28 PM

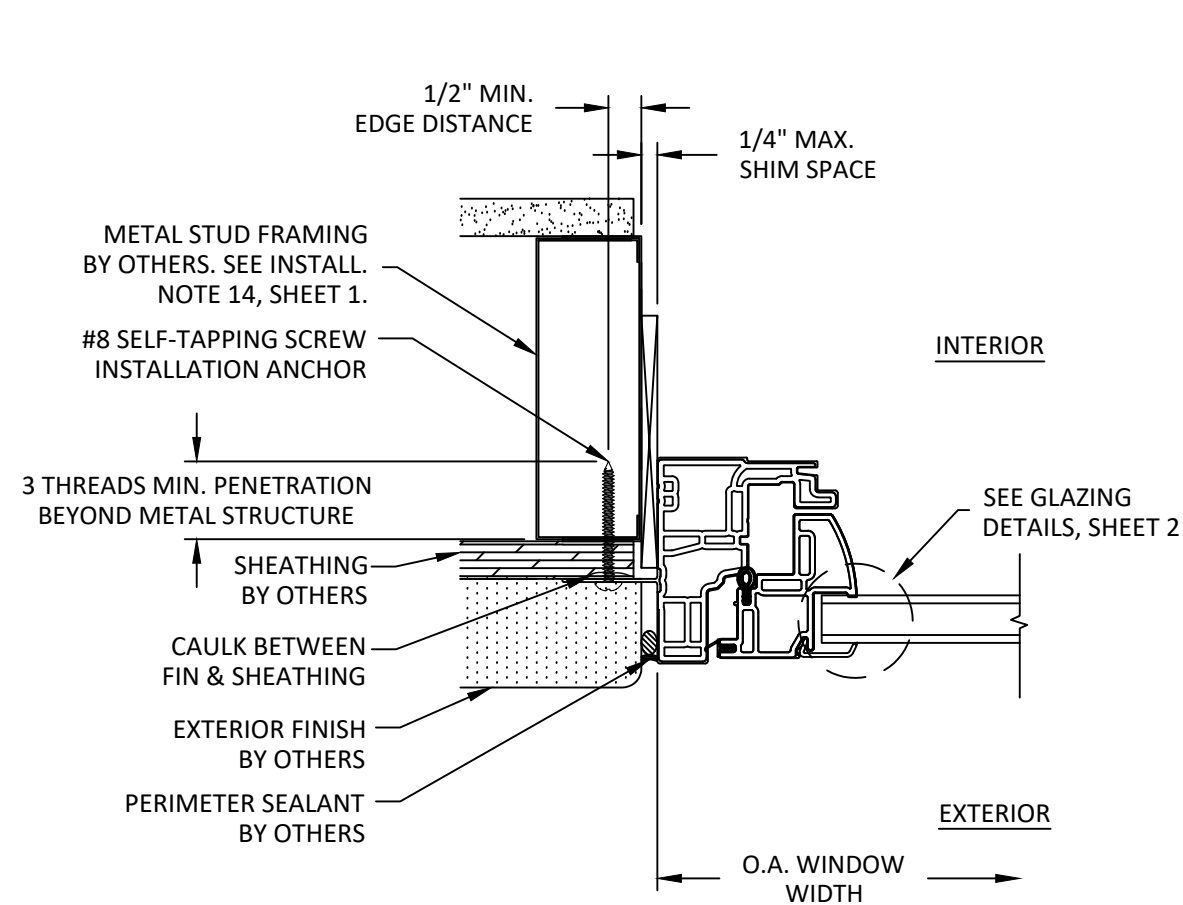


**E**  
**6** **HORIZONTAL SECTION**  
JAMB - METAL STUD FRAME  
NAIL FIN

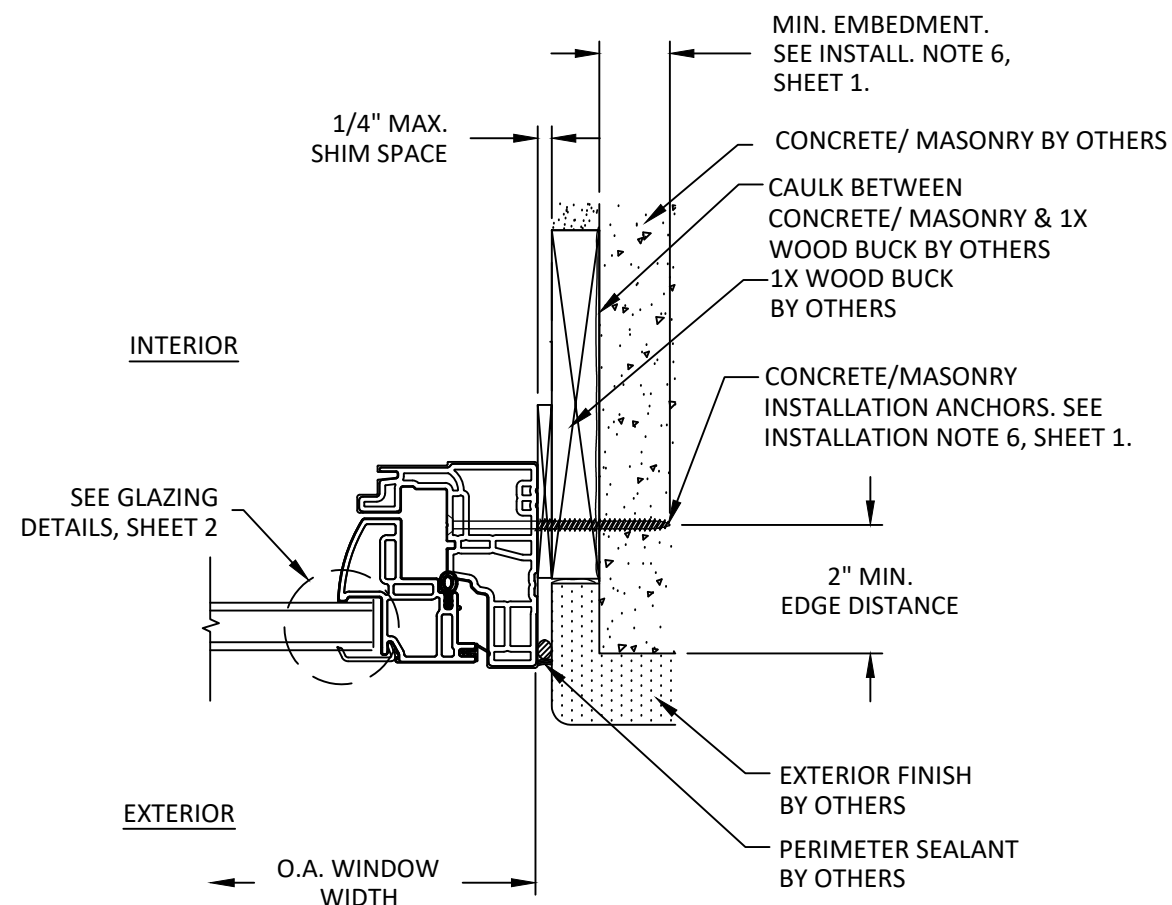


**F**  
**6** **HORIZONTAL SECTION**  
JAMB - 1X WOOD/CONCRETE/MASONRY  
THROUGH FRAME

NOTE: DUAL PANE AND TRIPLE PANE ARE QUALIFIED FOR ALL DETAILS SHOWN. SEE SHEET 2 FOR GLAZING DETAILS.

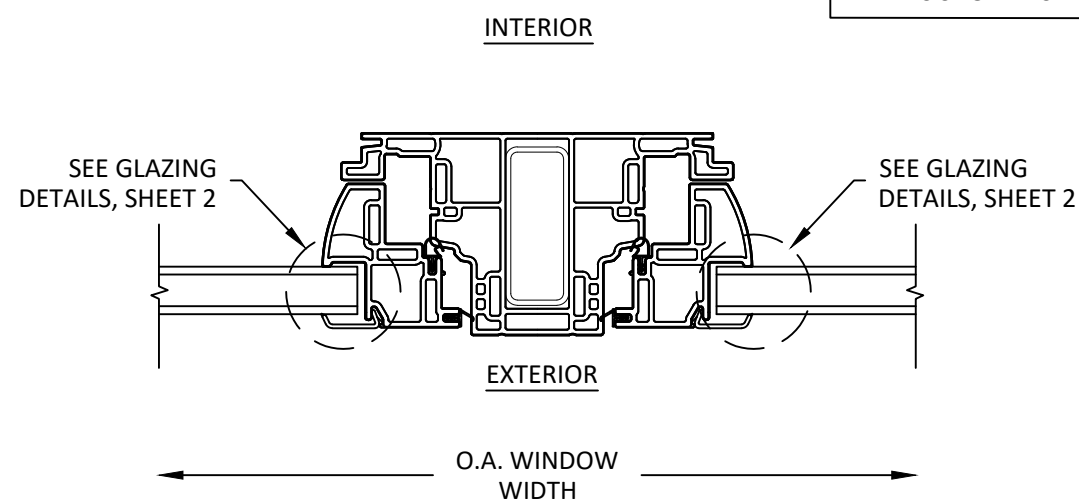

**G**  
**6** **HORIZONTAL SECTION**  
INTEGRAL MULLION POST  
DUAL PANE

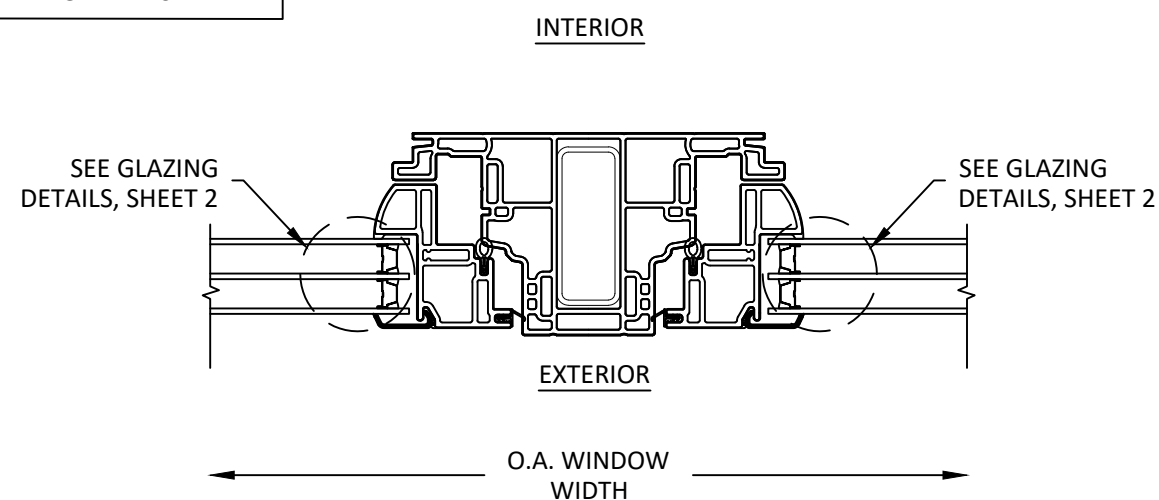

**H**  
**6** **HORIZONTAL SECTION**  
INTEGRAL MULLION POST  
TRIPLE PANE



100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)

HORIZONTAL SECTIONS


PREPARED BY: BUILDING DROPS, INC.

1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 399-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com



| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

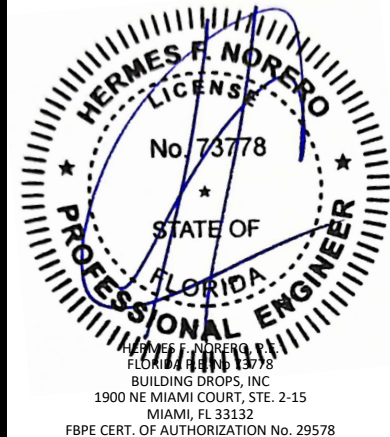

FL #: **FL15908**

DATE: **07.27.2010**

DWG. BY: **MSS** CHK. BY: **HFN**

SCALE: **NTS**


DWG. #: **AWD032**

SHEET:


**6**

OF 7


ALTERNATE FRAME OPTIONS

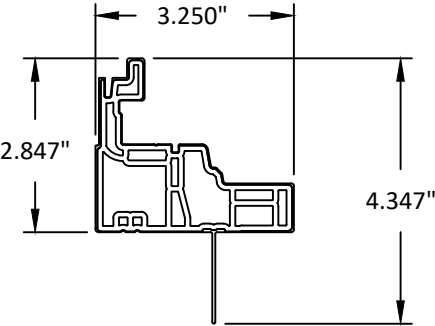


1-3/8" SETBACK FRAME




1-3/8" SETBACK FRAME  
FLANGELESS

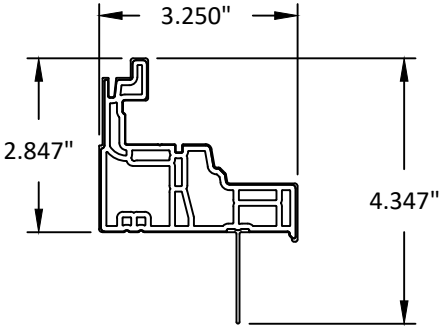


1" W/ STUCCO KEY FRAME




INSERT FRAME



DUAL PANE SASH



TRIPLE PANE SASH

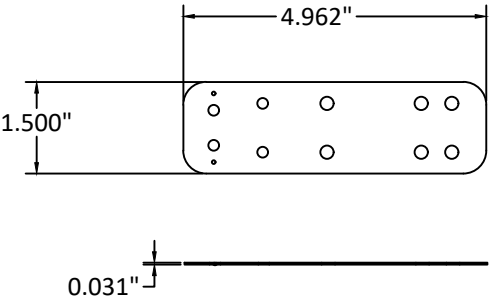

INSTALLATION CLIP



100 FOURTH AVE NORTH  
BAYPORT, MN 55003-1096  
PH: (651) 264-5150 FX: (651) 264-5485

TITLE: 100 SERIES CASEMENT WINDOW  
(NON-HVHZ)/(NON-IMPACT)

ALTERNATE FRAME  
OPTIONS

PREPARED BY:  
BUILDING DROPS, INC.  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
PH: (954) 399-8478  
FAX: (954) 744-4738  
WEB: www.buildingdrops.com

BUILDING DROPS

| REMARKS                   | BY | DATE     |
|---------------------------|----|----------|
| MULL TABLE REMOVAL        | LL | 07.02.19 |
| 8TH FBC CODE CHANGE       | SH | 05.30.23 |
| ALTERNATE FRAME ADDITIONS | SH | 04.24.24 |
| TRIPLE IG REVISION        | HJ | 12.02.25 |

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

HERMES F. NORERO, P.E.  
FLORIDA LICENSE NO. 73778  
BUILDING DROPS, INC.  
1900 NE MIAMI COURT, STE. 2-15  
MIAMI, FL 33132  
FBPE CERT. OF AUTHORIZATION No. 29578

|          |            |
|----------|------------|
| FL #:    | FL15908    |
| DATE:    | 07.27.2010 |
| DWG. BY: | CHK. BY:   |
| MSS      | HFN        |
| SCALE:   | NTS        |
| DWG. #:  | AWD032     |

SHEET:

7

OF 7