

PLY GEM WINDOWS

SERIES 4880 SLIDING GLASS DOOR

(NON-IMPACT)

NOTES:

1. THIS INSTALLATION HAS BEEN EVALUATED FOR USE IN LOCATIONS ADHERING TO THE FLORIDA BUILDING CODE OUTSIDE THE HVHZ, AND WHERE PRESSURE REQUIREMENTS AS DETERMINED BY ASCE 7 MINIMUM DESIGN LOADS FOR BUILDINGS AND OTHER STRUCTURES DO NOT EXCEED THE DESIGN PRESSURE RATINGS HEREIN.
2. WHEN USED IN AREAS REQUIRING IMPACT PROTECTION, THIS PRODUCT REQUIRES THE USE OF APPROVED IMPACT PROTECTIVE DEVICES (SHUTTERS).
3. ANCHOR TYPE, SIZE, SPACING, EMBEDMENT, AND EDGE DISTANCE SHALL BE AS SPECIFIED IN THESE DRAWINGS. USE APPROPRIATE ANCHORAGE FROM TABLE I ACCORDING TO SUBSTRATE TYPE. A MINIMUM CENTER-TO-CENTER SPACING OF 3" SHALL BE MAINTAINED BETWEEN ALL INSTALLATION FASTENERS IN ANY DIRECTION. IF PRODUCT IS INSTALLED WITHIN 3000 FEET OF A SALTWATER COASTLINE, THE ANCHORAGE MUST BE REVIEWED FOR COMPLIANCE WITH FBC SECTION I7II, SEE EVALUATION REPORT FOR THIS APPROVAL FOR DETAILS.
4. ANCHOR EMBEDMENT TO SUBSTRATE SHALL BE BEYOND WALL DRESSING OR STUCCO. FOR MASONRY OPENINGS WITH WOOD BUCKS LESS THAN 1-1/2" THICK, EMBEDMENT SHALL BE BEYOND WOOD BUCKS, IF USED, AND INTO MASONRY SUBSTRATE. WOOD BUCKS WITH MASONRY ARE OPTIONAL.
5. WOOD, METAL, OR MASONRY OPENINGS, BUCKS, AND BUCK FASTENERS, BY OTHERS, SHALL BE PROPERLY DESIGNED AND INSTALLED BY OTHERS TO TRANSFER SUPERIMPOSED LOADS TO THE STRUCTURE. ADEQUACY OF THE STRUCTURE TO RECEIVED THESE LOADS SHALL BE VERIFIED BY THE CONTRACTOR OR AUTHORITY HAVING JURISDICTION (AHJ).
6. IT IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD OR AS APPROVED BY THE AHJ TO SELECT PLY GEM PRODUCTS TO MEET ALL APPLICABLE LOCAL LAWS, BUILDING CODES, ORDINANCES, OR OTHER SAFETY REQUIREMENTS FOR EACH INSTALLATION.
7. SHIMS ARE REQUIRED WHERE GAPS OF GREATER THAN 1/16" EXIST BETWEEN OPENING AND FRAME. MAX. SHIM STACK IS 1/4". SHIMS SHALL BE LOAD-BEARING AND CAPABLE OF TRANSFERRING LOADS TO THE SUBSTRATE.
8. SEALING AND FLASHING STRATEGIES FOR OVERALL WATER INFILTRATION RESISTANCE OF THE INSTALLED PRODUCT SHALL BE THE RESPONSIBILITY OF OTHERS USING ASTM E2112 AND IS NOT ADDRESSED BY THIS DOCUMENT.
9. INSTALLED GLAZING SHALL COMPLY WITH ASTM E1300 AND BE SAFETY GLAZING.
10. ALL FASTENERS PENETRATING INTO PRESSURE TREATED WOOD SHALL BE CAPABLE OF PREVENTING CORROSION DUE TO REACTION WITH PRESSURE TREATMENT CHEMICALS. ANY DISSIMILAR MATERIALS THAT COME INTO CONTACT SHALL BE PROTECTED TO PREVENT REACTIONS IN ACCORDANCE WITH CODE REQUIREMENTS.
11. A WIND LOAD DURATION FACTOR Cd = 1.6 WAS USED FOR THE ANALYSIS OF WOOD SCREWS ONLY.
12. PRODUCTS SHALL BE CONSTRUCTED AS SPECIFIED IN TEST REPORTS CONSTRUCTION CONSULTING LABORATORY, INTERNATIONAL I2-I47.
13. DESIGNATION "X" IS FOR OPERABLE PANEL
14. USE A BACKER ROD ON ALL JOINTS >3/4" DEEP AND/OR WIDER THAN 1/4". FINISHED CAULK JOINT SHOULD BE A MINIMUM OF 3/8" DEEP.

SIZE CHART		
MAX. O.A. SIZE	DESIGN PRESSURE	MISSILE IMPACT RATING
185-5/8" X 95-3/4"	+/- 50.0 PSF	NON-IMPACT

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATION & ANCHOR LAYOUT
3	QUALIFIED CONFIGURATIONS
4	VERTICAL SECTIONS
5	HORIZONTAL SECTIONS & GLAZING DETAIL

Lucas Turner

2026.09.25

13:42:47

-05'00'




Part of the Cornerstone Building Brands Family

433 N. MAIN ST.,
PO BOX 559,
ROCKY MOUNT, VA 24151

PH: 540-484-6348
FX: 540-484-6683

TITLE: SERIES 4880 SLIDING GLASS DOOR INSTALLATION & GENERAL NOTES	DATE	BY	REVISION DESCRIPTION	NO.
	04.25.18	LMH	ADDED SILL PAN NOTE ON PAGE 4	C
	12.16.20	LMH	7TH EDITION 2020 FBC	D
	12.04.23	LMH	8TH EDITION 2023 FBC	E
	08.17.26	LMH	UPDATED TO CURRENT FBC	F

DATE: 09.05.12	DWN BY: MSS	CHK BY:	SCALE: NTS
-------------------	----------------	---------	---------------

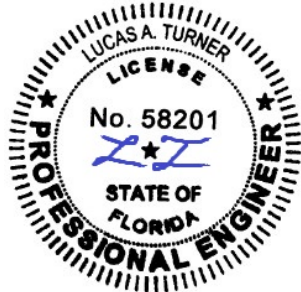

08/17/2026

LUCAS A. TURNER, P.E.

FL PE # 58201

TURNER ENGINEERING &
CONSULTING, INC.

(COA # 29779)

2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320

PH. 941-380-1574

FL#:

15943




DWG #:

PGWI73

SHEET:

1 OF 5

TITLE: SERIES 4880 SLIDING GLASS DOOR ELEVATION & ANCHOR LAYOUT	DATE	BY	REVISION DESCRIPTION
	09.05.12	MSS	
	04.25.18	LMH	ADDED SILL PAN NOTE ON PAGE 4
	12.16.20	LMH	7TH EDITION 2020 FBC
	12.04.23	LMH	8TH EDITION 2023 FBC
	08.17.26	LMH	UPDATED TO CURRENT FBC

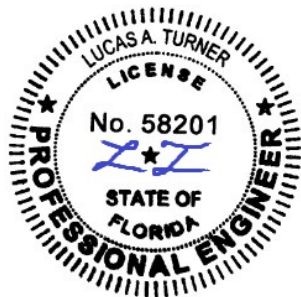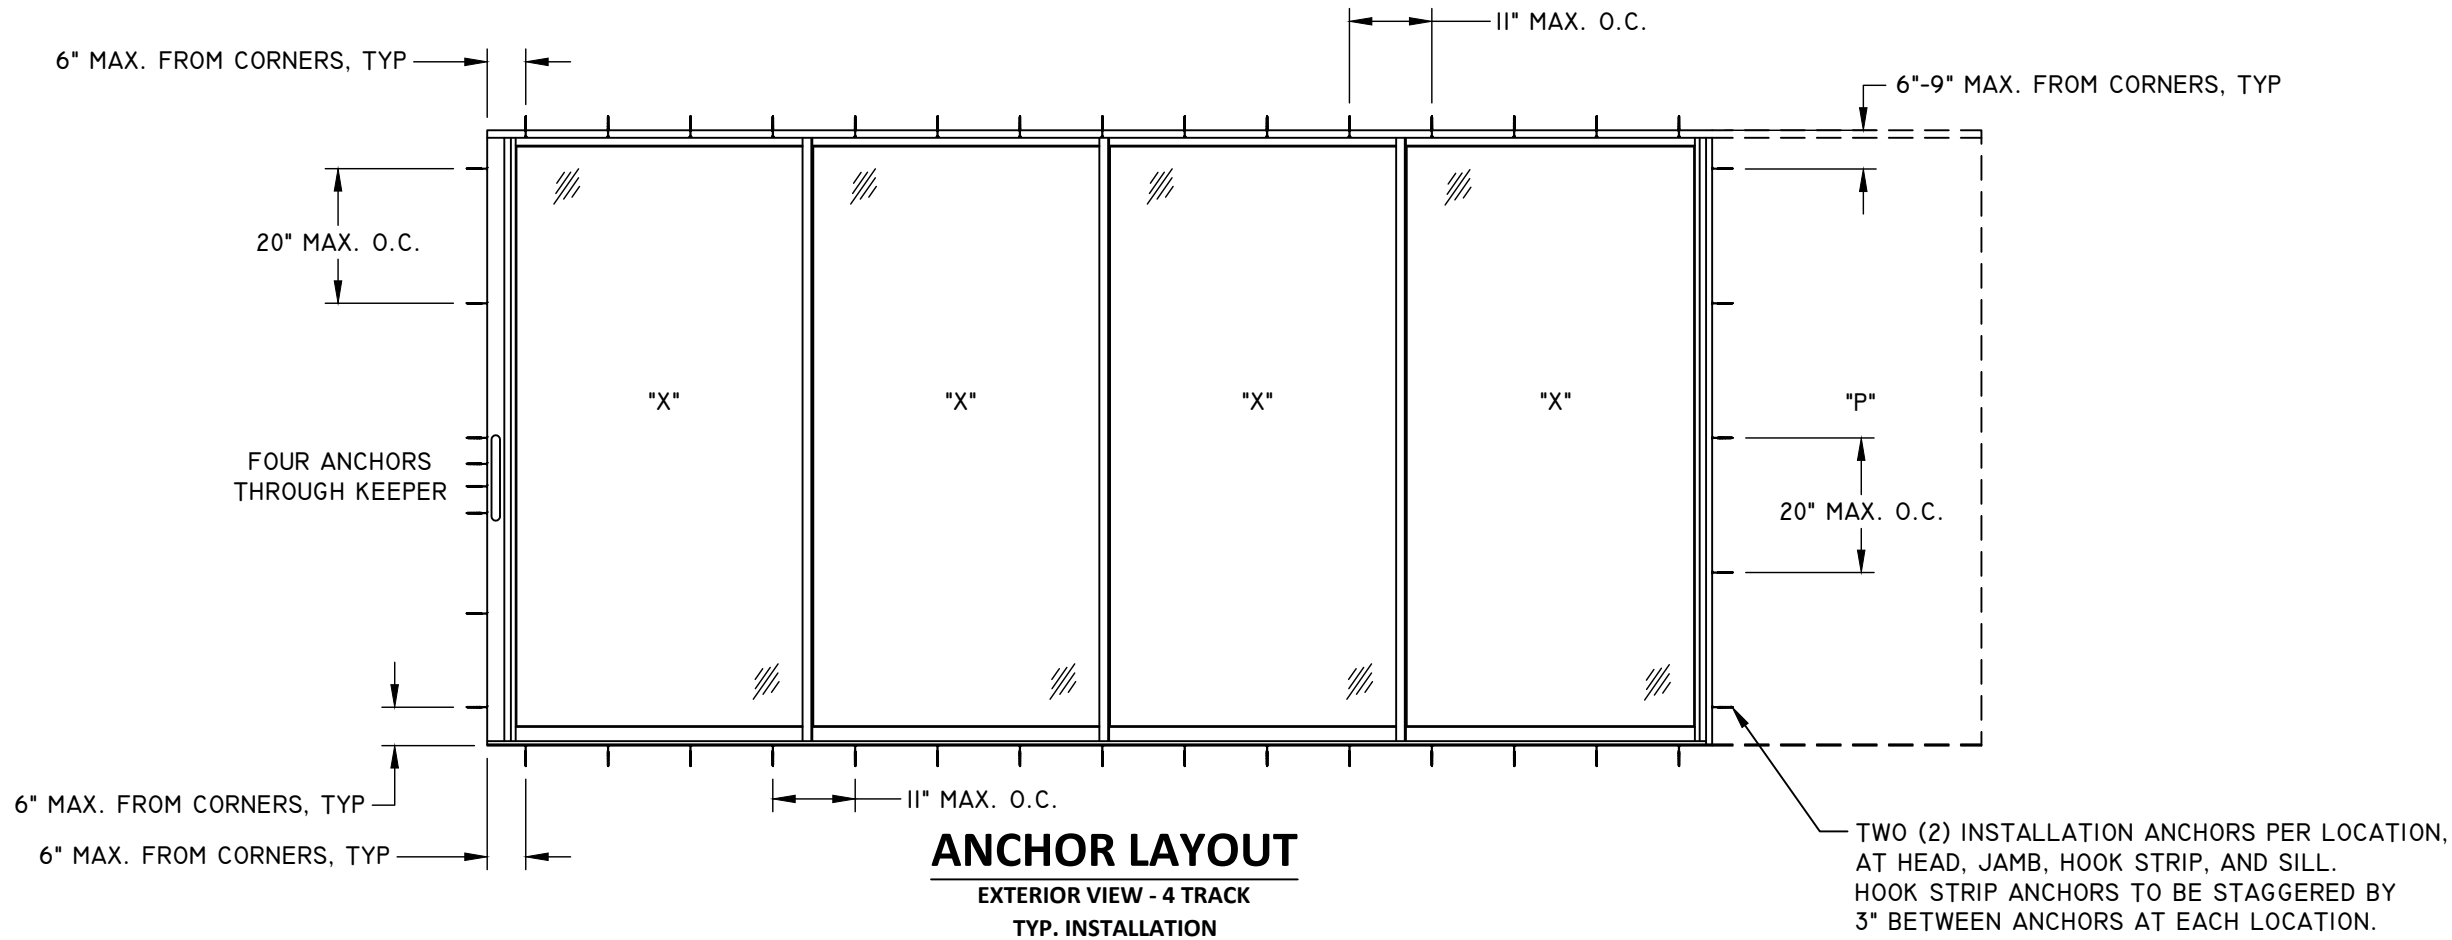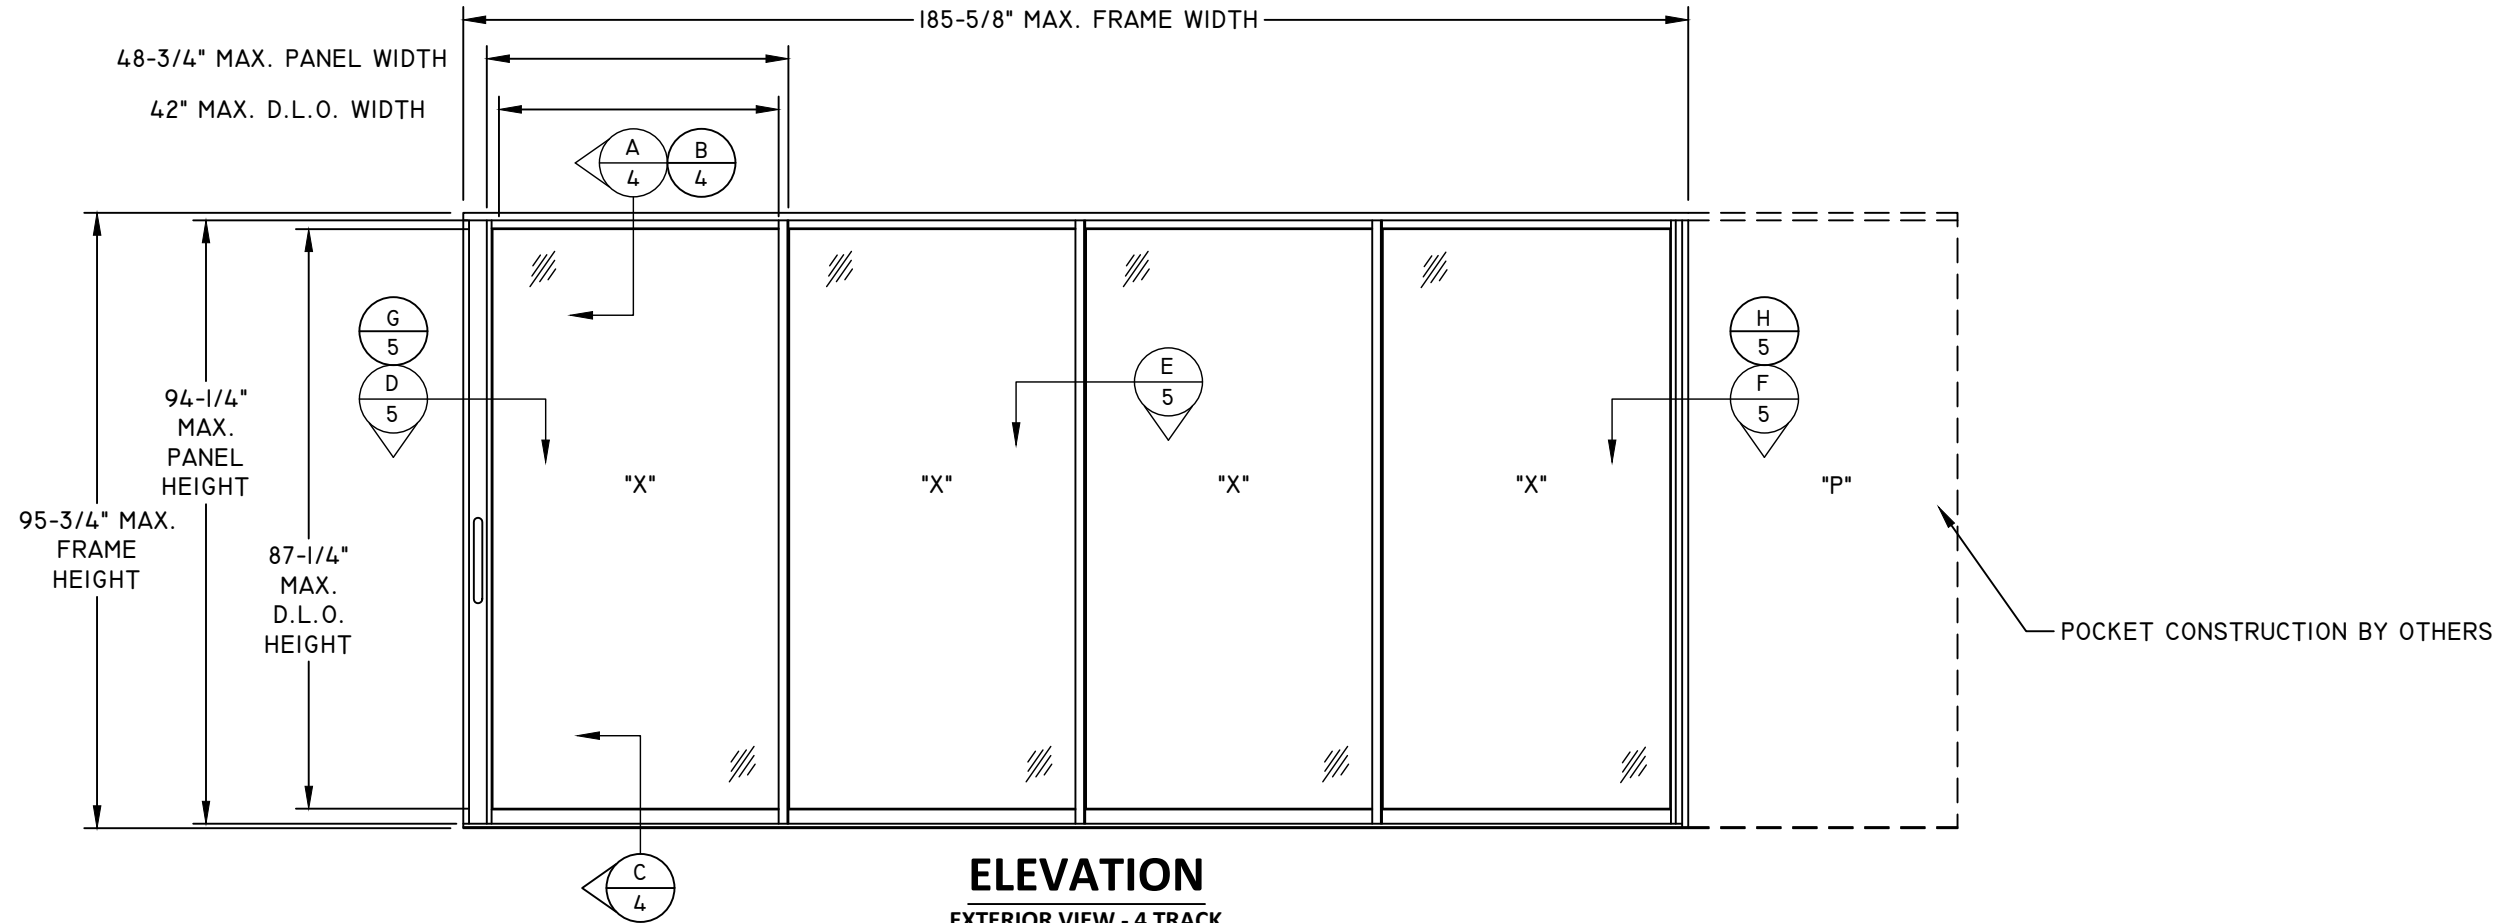


08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574


FL#: 15943

DWG #: PGWI73


SHEET: 2 OF 5

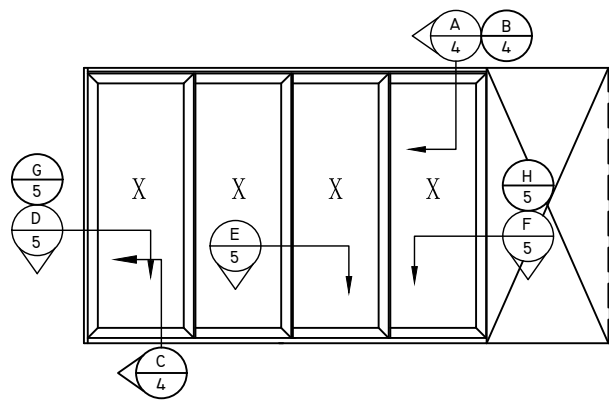


XXXXP
(POCKETING DOORS)
4 TRACK

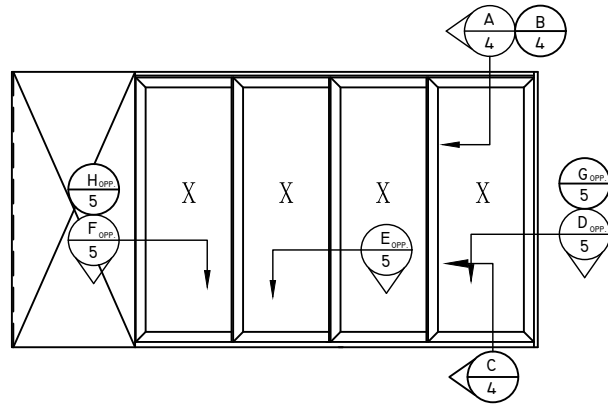


PXXXX
(POCKETING DOORS)
4 TRACK

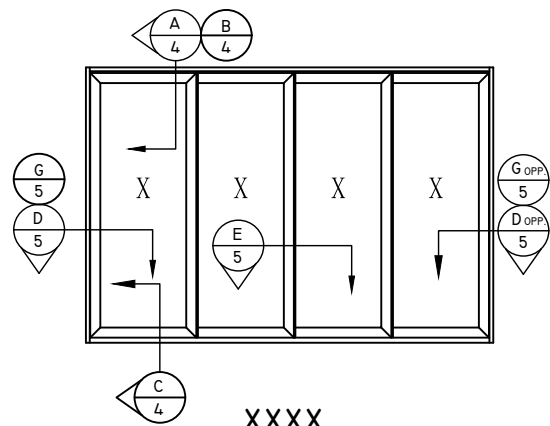


XXXX
(NON-POCKETING DOORS)
4 TRACK

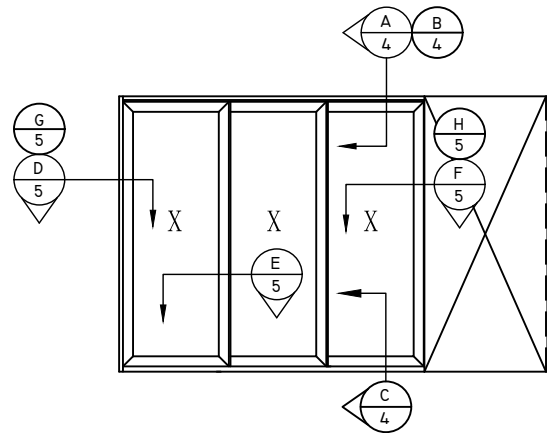


XXXP
(POCKETING DOORS)
3 TRACK

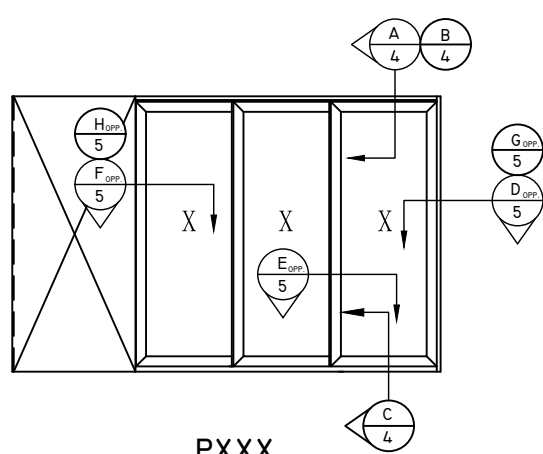


PXXX
(POCKETING DOORS)
3 TRACK

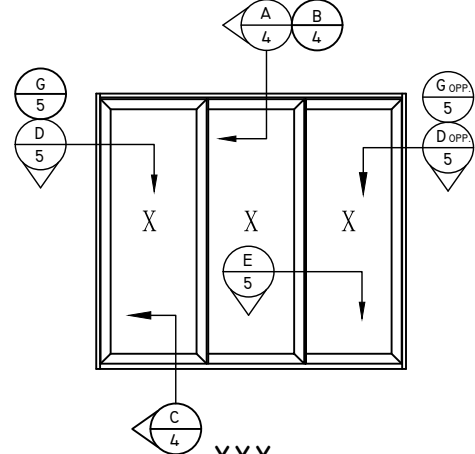


XXX
(NON-POCKETING DOORS)
3 TRACK

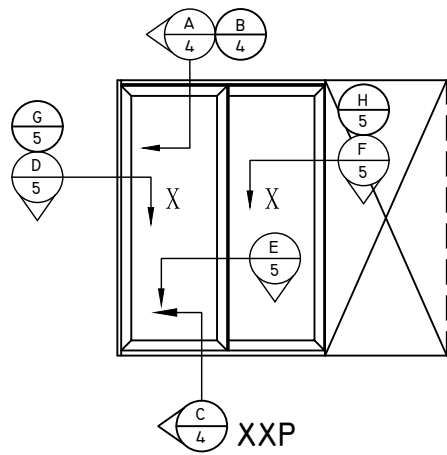

XXP
(POCKETING DOORS)
2 TRACK

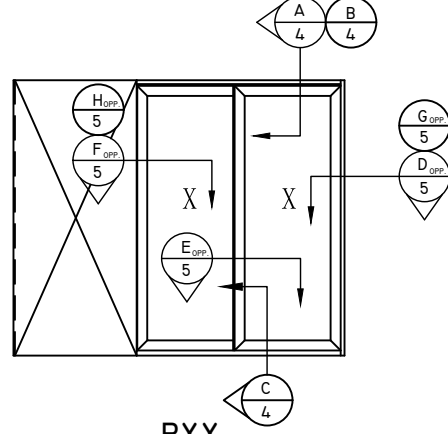

PXX
(POCKETING DOORS)
2 TRACK

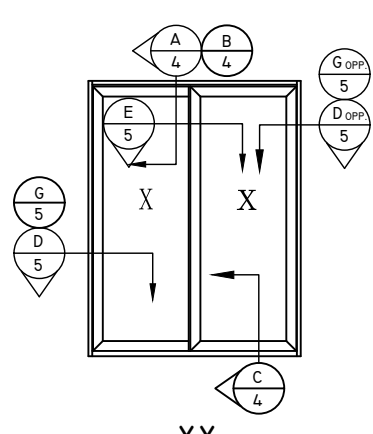

XX
(NON-POCKETING DOORS)
2 TRACK


NOTE: SECTION DETAILS SHOW 4 TRACK FRAMES, INSTALLATION AND CONSTRUCTION OF 2 TRACK AND 3 TRACK FRAMES ARE SIMILAR AND SHALL FOLLOW INSTALLATION REQUIREMENTS SET FORTH HEREIN.

TITLE: SERIES 4880 SLIDING GLASS DOOR QUALIFIED CONFIGURATIONS	DATE	BY	REVISION DESCRIPTION	NO.
	09.05.12	MSS	ADDED SILL PAN NOTE ON PAGE 4	C
		CHK BY:	7TH EDITION 2020 FBC	D
		SCALE: NTS	8TH EDITION 2023 FBC	E
			UPDATED TO CURRENT FBC	F






08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NACHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574

TITLE: SERIES 4880 SLIDING GLASS DOOR VERTICAL SECTIONS	DATE	04.25.18
	BY	LMH
	REVISION DESCRIPTION	
	NO.	
	C	ADDED SILL PAN NOTE ON PAGE 4
	D	7TH EDITION 2020 FBC
DATE: 09.05.12	DWN BY:	MSS
	CHK BY:	
	SCALE:	NTS

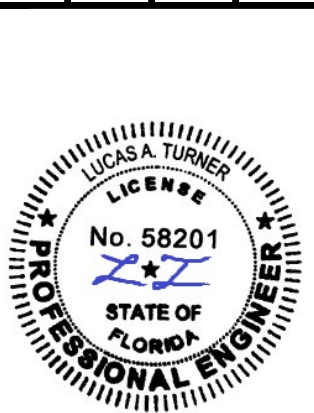


08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574

FL#: 15943
DWG #: PGWI73
SHEET: 4 OF 5

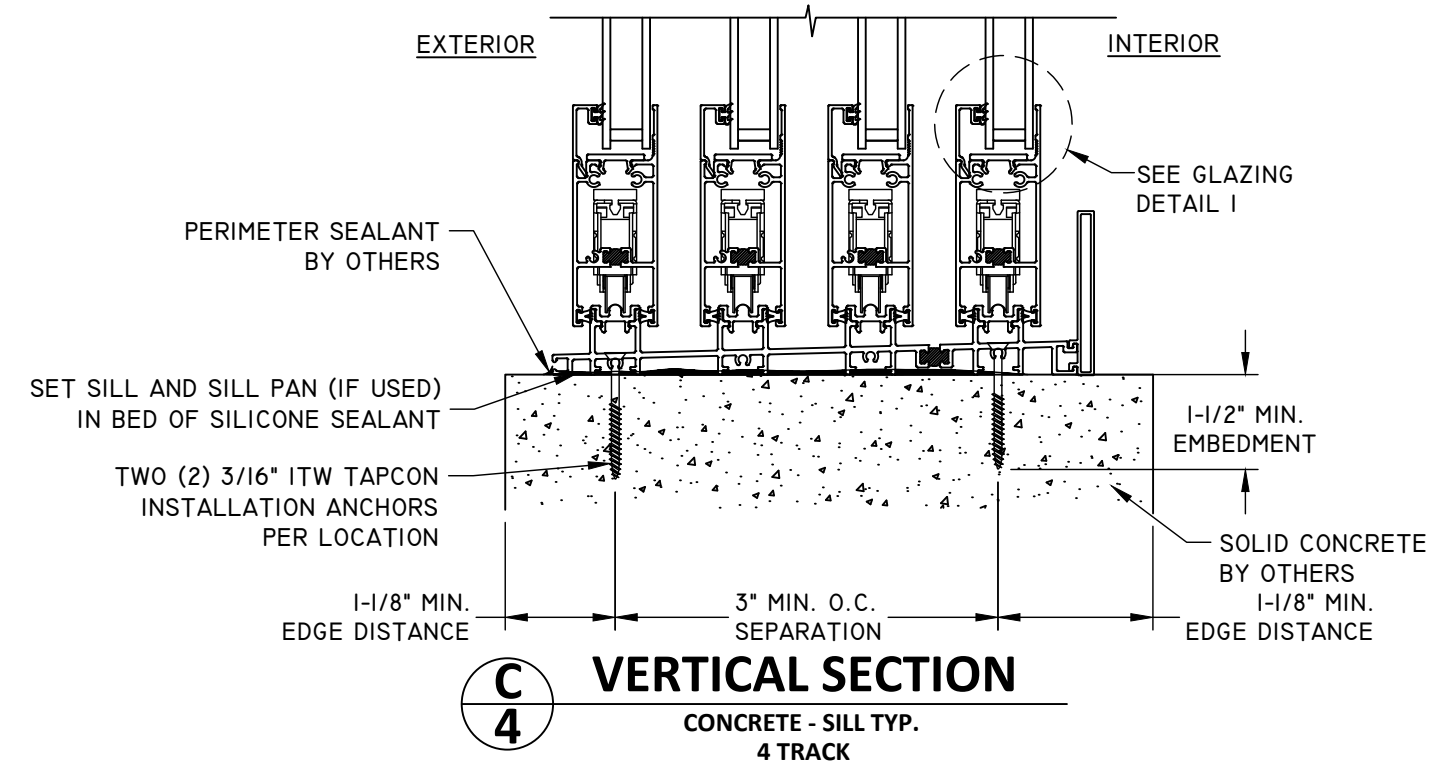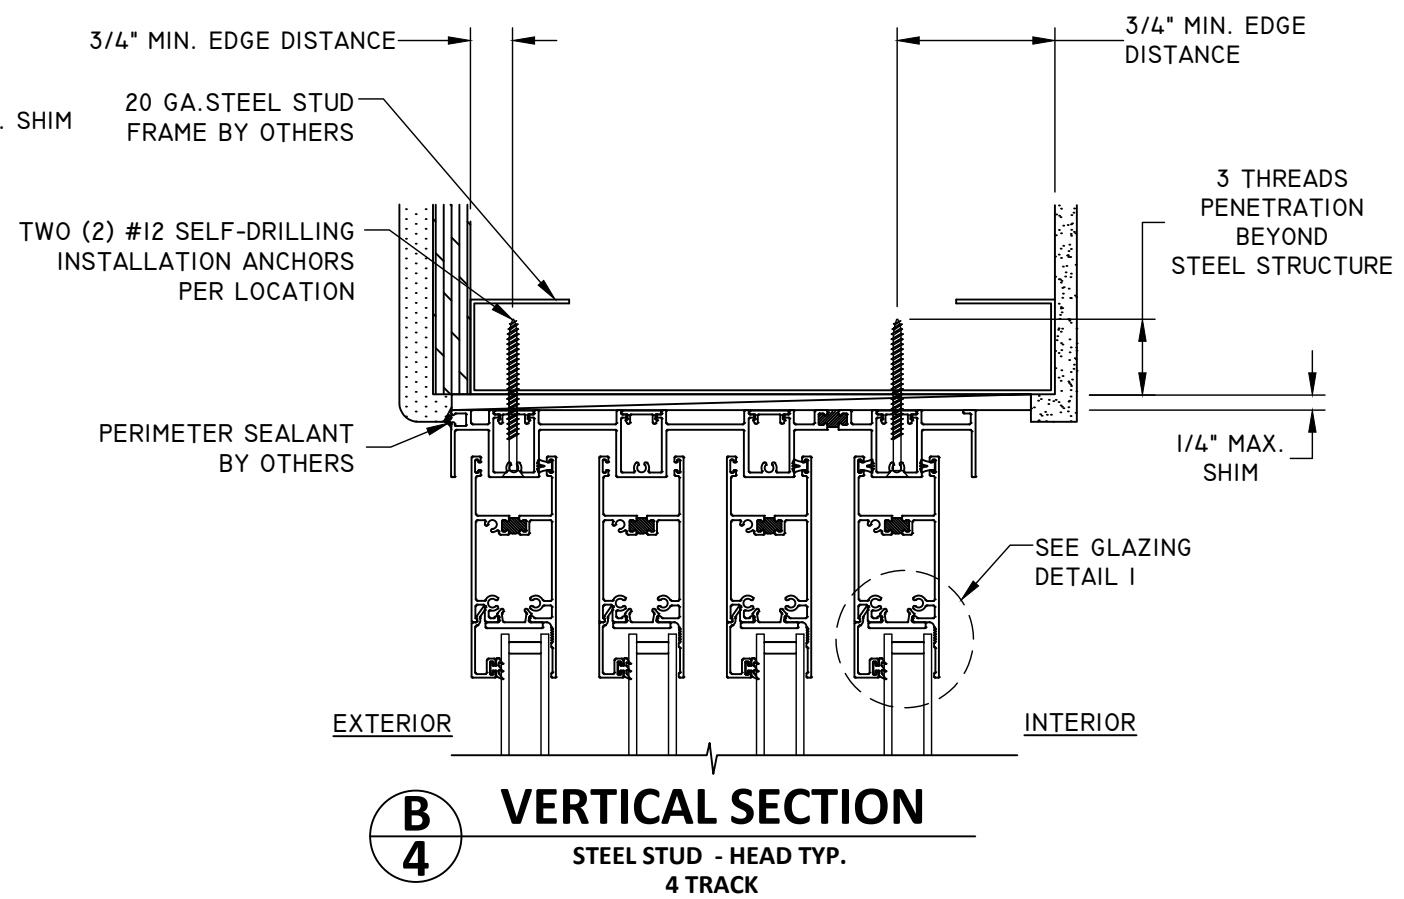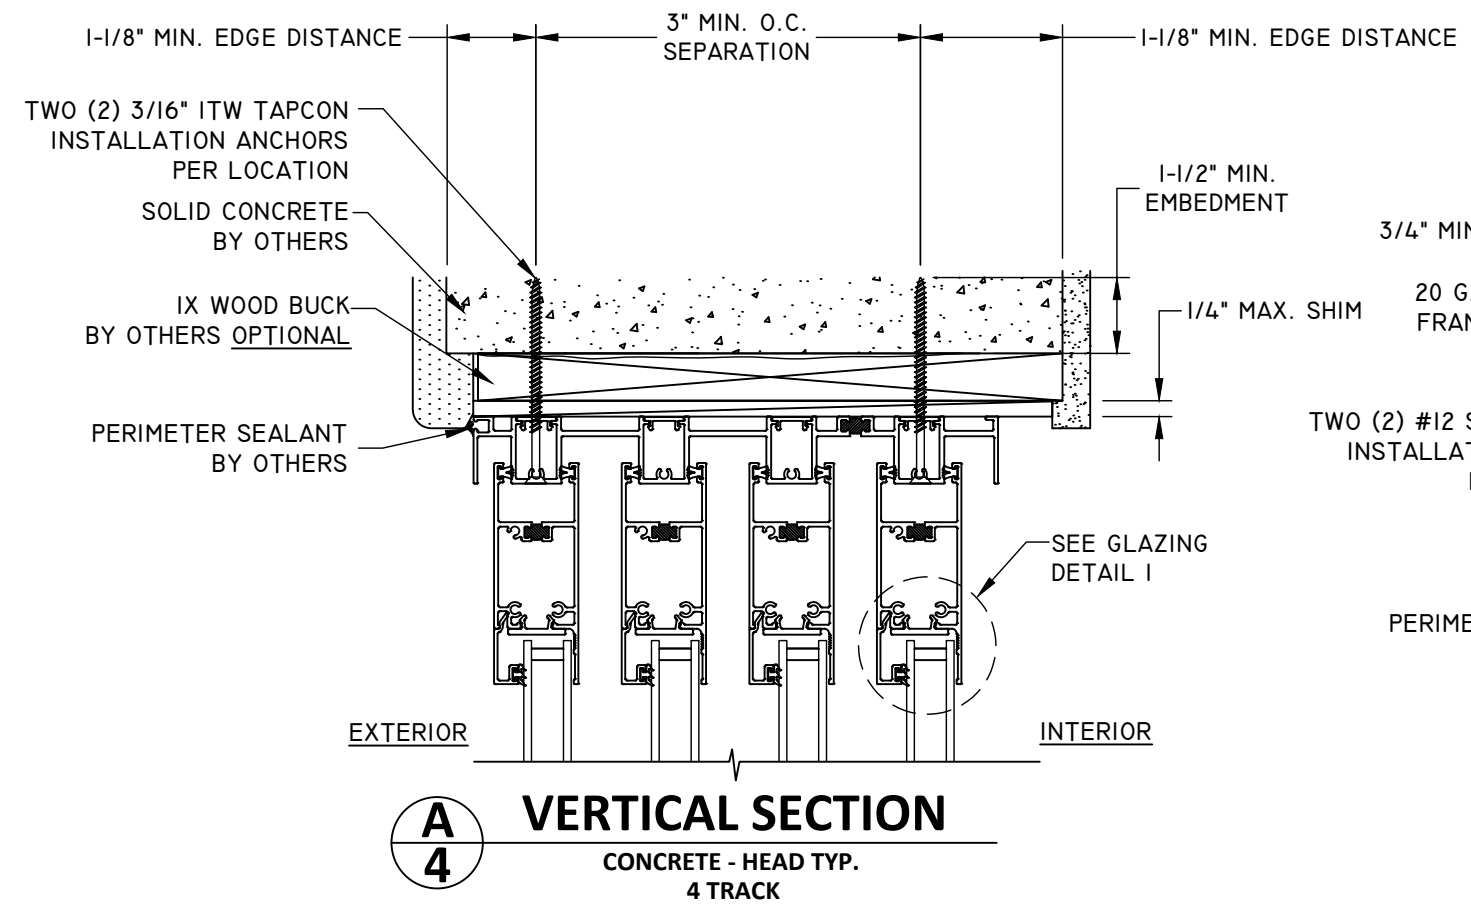


- NOTE:
- 4 TRACK FRAME SHOWN, 2 TRACK AND 3 TRACK FRAMES QUALIFIED UNDER THIS APPROVAL.
 - TWO INSTALLATION ANCHORS REQUIRED PER LOCATION INDICATED IN TYP. ANCHOR LAYOUT, AS SHOWN ON SHEET 2.
 - INSTALLATION ANCHORS SHALL BE FASTENED THROUGH EXTERIOR AND INTERIOR MOST TRACKS.
 - INSTALLATION ANCHORS MAY BE STAGGERED IN ORDER TO MAINTAIN MINIMUM O.C. SPACING.
 - INSTALLATION AT SILL MAY BE THROUGH 1X WOOD BUCK OR DIRECTLY INTO CONCRETE OR THROUGH MIN. 18 GA. STEEL SUBSTRATE.


SILL NOTE:
WHEN PENETRATING THE SILL WITH FASTENERS, PRE-DRILL THE HOLE, APPLY SEALANT INTO THE HOLE, ATTACH THE FASTENER, THEN SEAL OVER THE FASTENER HEAD WITH APPROPRIATE SEALANT. SEE NOTE 8, SHEET 1.

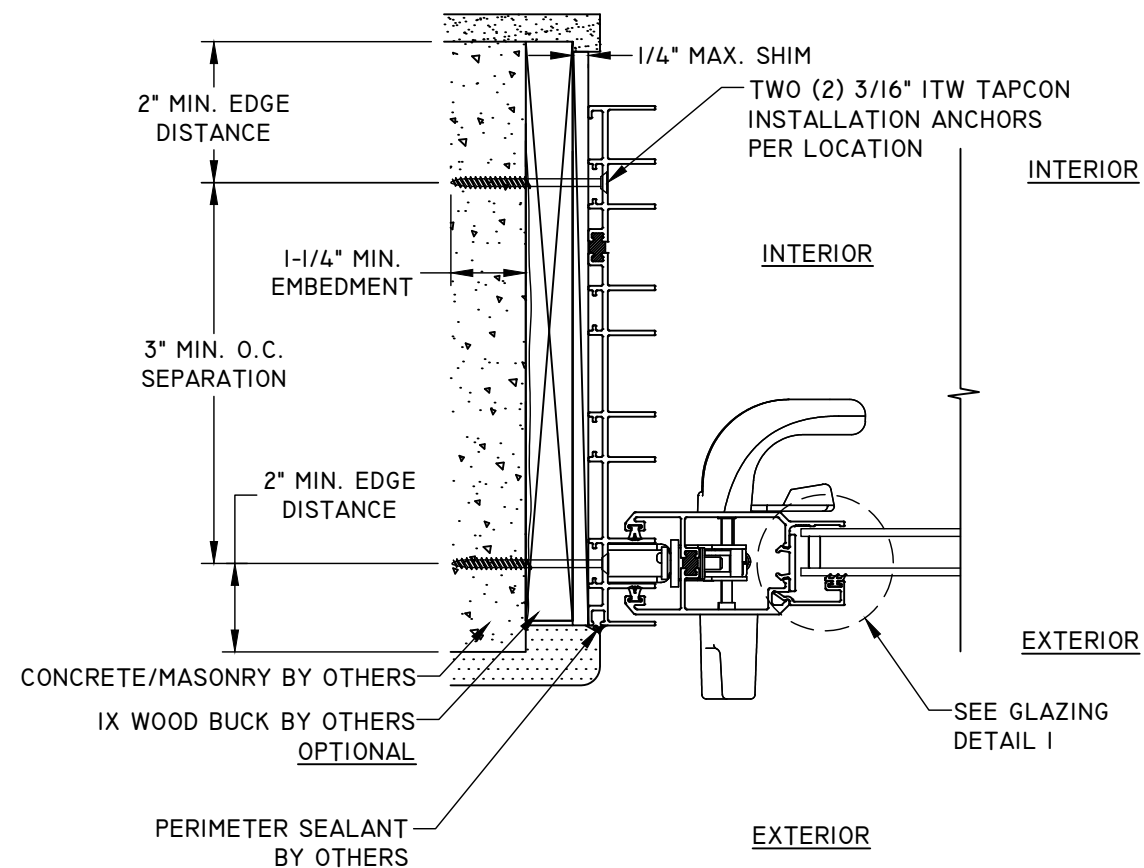


D
5 **HORIZONTAL SECTION**
CONCRETE/ MASONRY - JAMB TYP.
4 TRACK

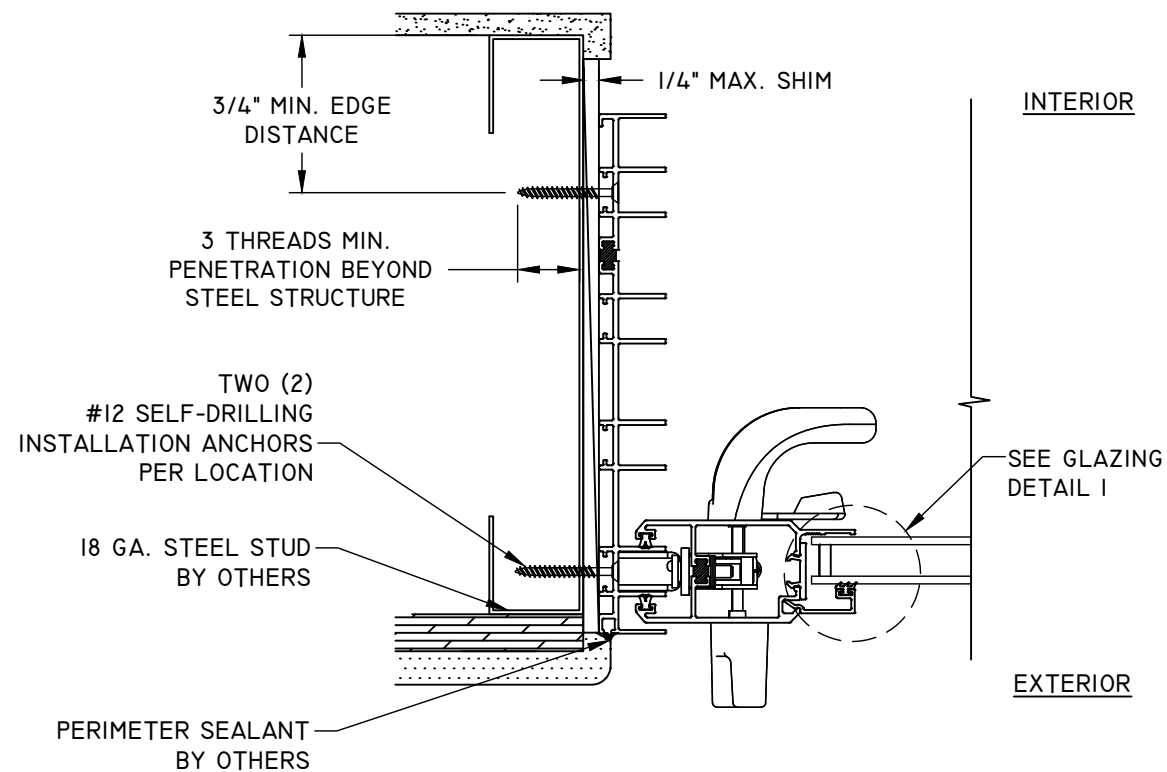


G
5 **HORIZONTAL SECTION**
STEEL STUD - JAMB TYP.
4 TRACK

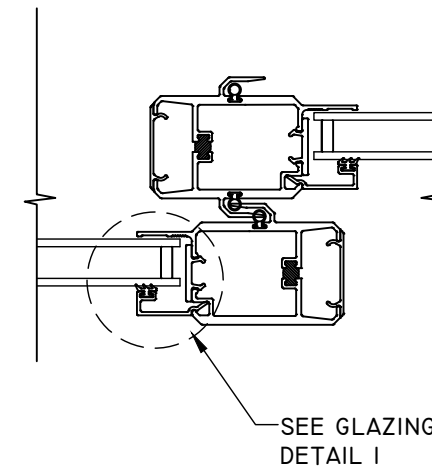


E
5 **HORIZONTAL SECTION**
INTERLOCK

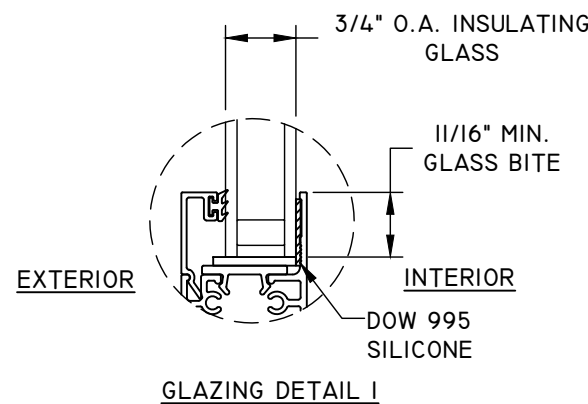

- NOTE:
1. 4 TRACK FRAME SHOWN, 2 TRACK AND 3 TRACK FRAMES QUALIFIED UNDER THIS APPROVAL.
 2. TWO INSTALLATION ANCHORS REQUIRED PER LOCATION INDICATED IN TYP. ANCHOR LAYOUT, AS SHOWN ON SHEET 2.
 3. INSTALLATION ANCHORS SHALL BE FASTENED THROUGH EXTERIOR AND INTERIOR MOST TRACKS.
 4. INSTALLATION ANCHORS MAY BE STAGGERED IN ORDER TO MAINTAIN MINIMUM O.C. SPACING

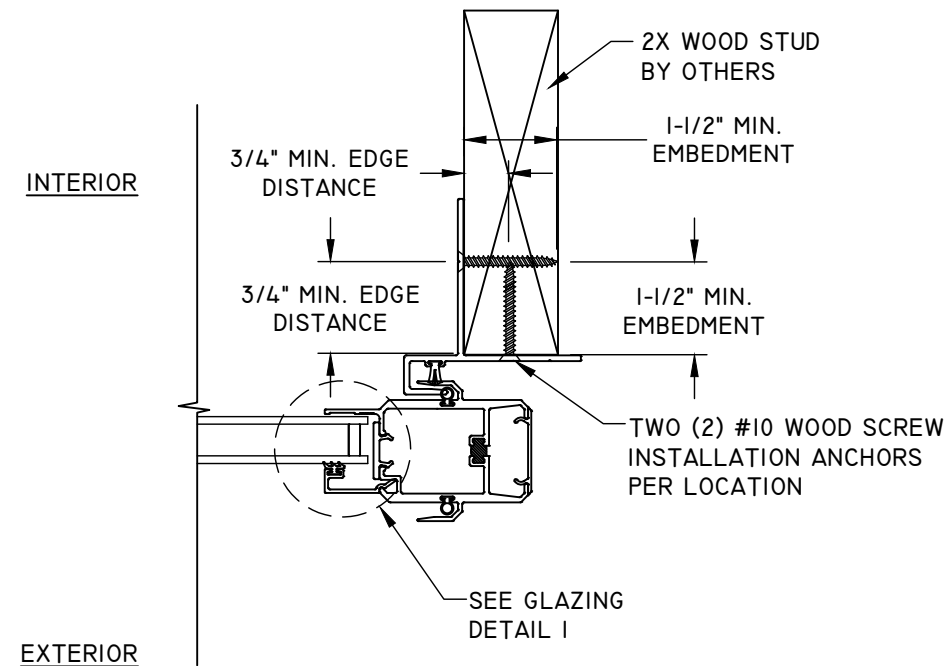


F
5 **HORIZONTAL SECTION**
2X WOOD - POCKET JAMB TYP.

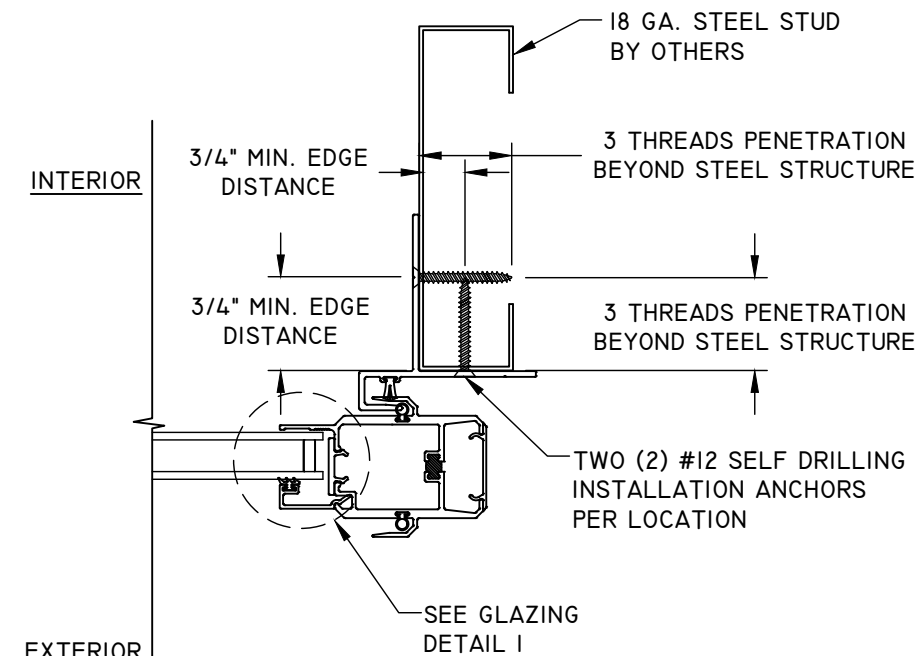

H
5 **HORIZONTAL SECTION**
STEEL STUD - POCKET JAMB TYP.

TITLE: SERIES 4880 SLIDING GLASS DOOR HORIZONTAL SECTIONS & GLAZING DETAIL	DATE	BY	REVISION DESCRIPTION	NO.
	09.05.12	MSS		C
		LMH	ADDED SILL PAN NOTE ON PAGE 4	D
		LMH	7TH EDITION 2020 FBC	E
		LMH	8TH EDITION 2023 FBC	F
		LMH	UPDATED TO CURRENT FBC	F
DWN BY:	CHK BY:	SCALE:		
MSS		NTS		

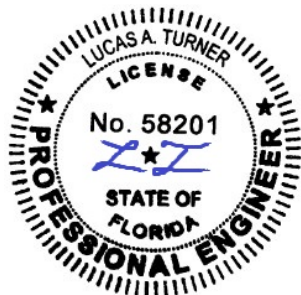

08/17/2026
LUCAS A. TURNER, P.E.
FL PE # 58201
TURNER ENGINEERING &
CONSULTING, INC.
(COA # 29779)
2428 OLD NATCHEZ TRACE
TRAIL, CAMDEN, TN 38320
PH. 941-380-1574

FL#: **15943**

DWG #:
PGWI73

SHEET: **5 OF 5**