


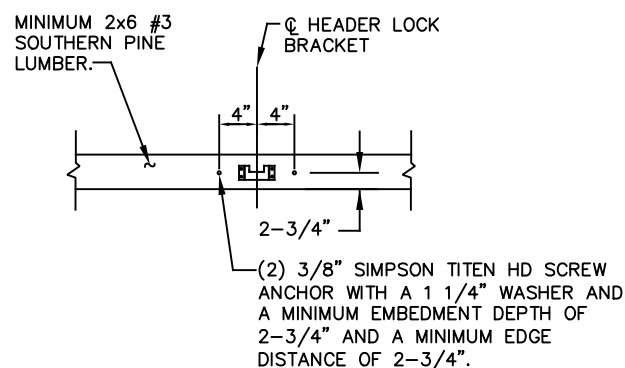


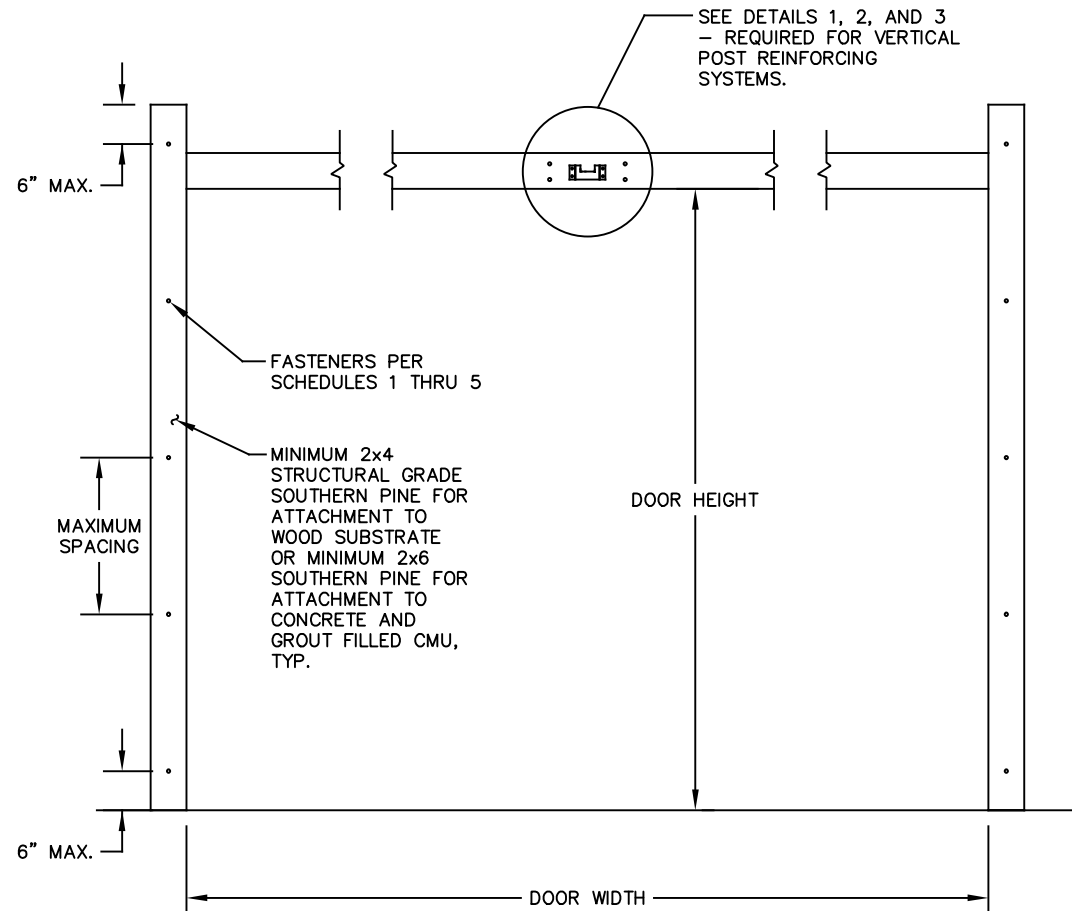


DETAIL 1
MINIMUM 2500 PSI CONCRETE
NOTE: MAXIMUM DESIGN LOAD
CAPACITY OF 2085 LBS.

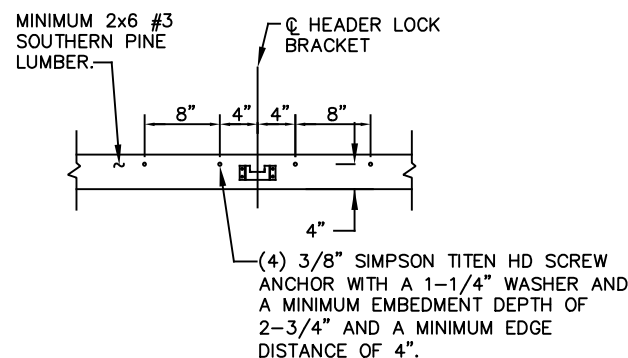

DETAIL 2
MINIMUM 2000 PSI GROUT FILLED CMU
NOTE: MAXIMUM DESIGN LOAD
CAPACITY OF 2400 LBS.

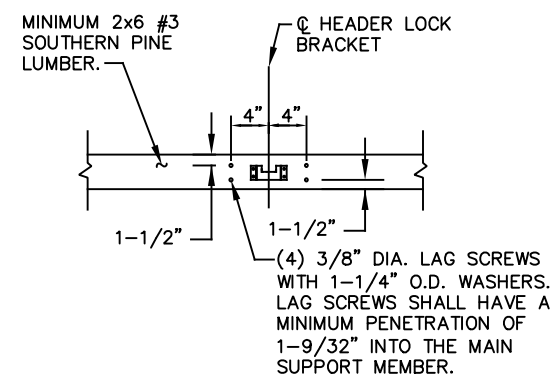

DETAIL 3
WOOD SUPPORT STRUCTURE
NOTE: MAXIMUM DESIGN LOAD
CAPACITY OF 2430 LBS.

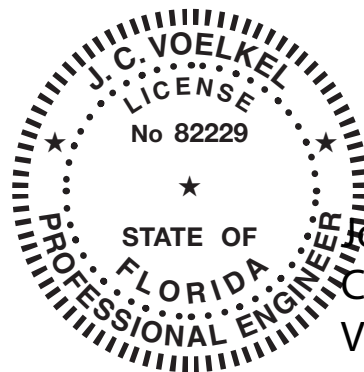

John
Christian
Voelkel

Digitally signed
by John Christian
Voelkel
Date: 2020.08.11
07:40:57 -05'00'

J. CHRISTIAN VOELKEL, PE
312 N. NEW WARRINGTON ROAD, UNIT 1A
PENSACOLA, FL
FL PE 82229
TX PE 133174


PROFESSIONAL ENGINEER'S SEAL PROVIDED ONLY FOR
VERIFICATION OF WINDLOAD CONSTRUCTION DETAILS.

	DATE	NAME
DRAWN	8/6/18	ESC
CHECKED		


SHEET 1 OF 2

JAMB CONNECTION SUPPLEMENT


DRAWING PART NO.
363342
REV.
P01

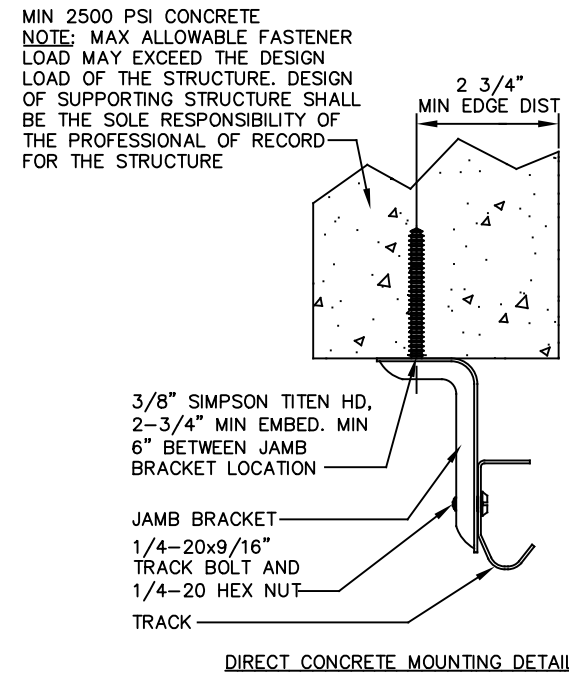

TRACK BRACKET LOCATIONS AND
SPACING PER THE WINDLOAD DOOR
DRAWING

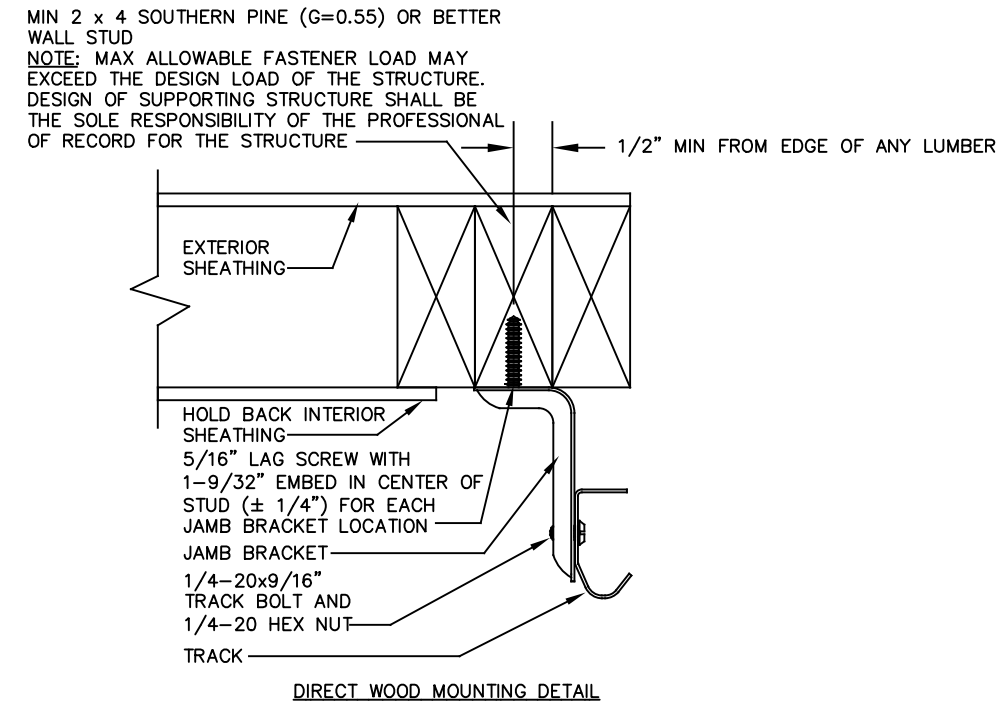

IF JAMBS ARE NOT SOUTHERN
PINE, MUST ATTACH A SOUTHERN
PINE 2X6 PER SCHEDULE 1. IF 2X6
WILL NOT FIT, MAY USE 2X4.

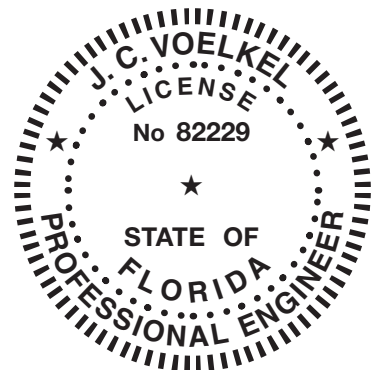

	DATE	NAME
DRAWN	8/6/18	ESC
CHECKED		

SHEET 2 OF 2

JAMB CONNECTION SUPPLEMENT

DRAWING PART NO.	REV.
363342	P01