


GLAZED FIBERGLASS DOUBLE DOOR

w/ or w/out SIDELITES

Inswing / Outswing

"IMPACT"


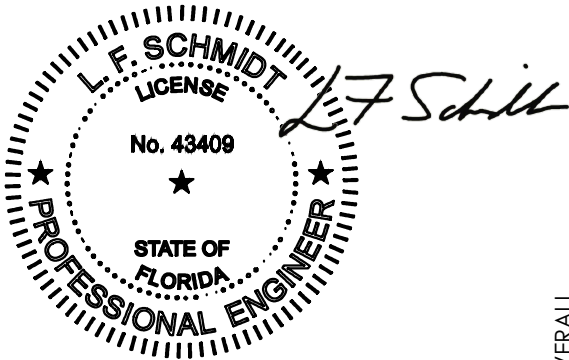


Digitally signed by Lyndon F Schmidt
Date: 2026.08.04 08:47:17 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.

Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

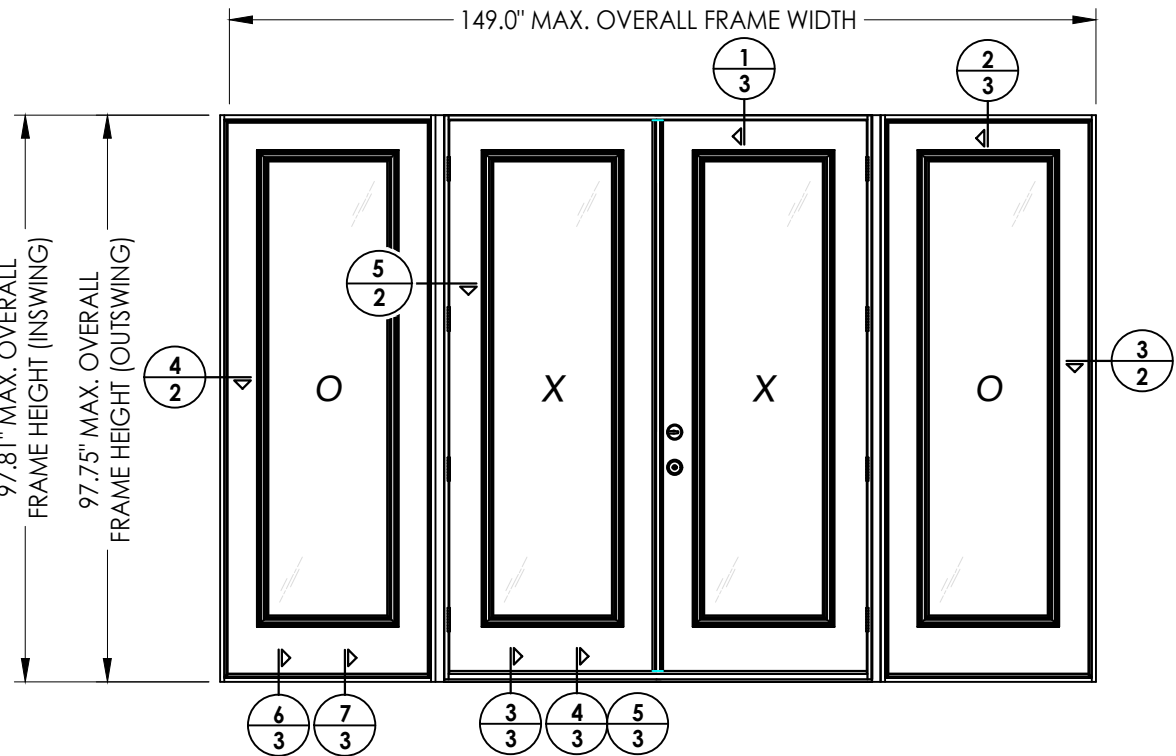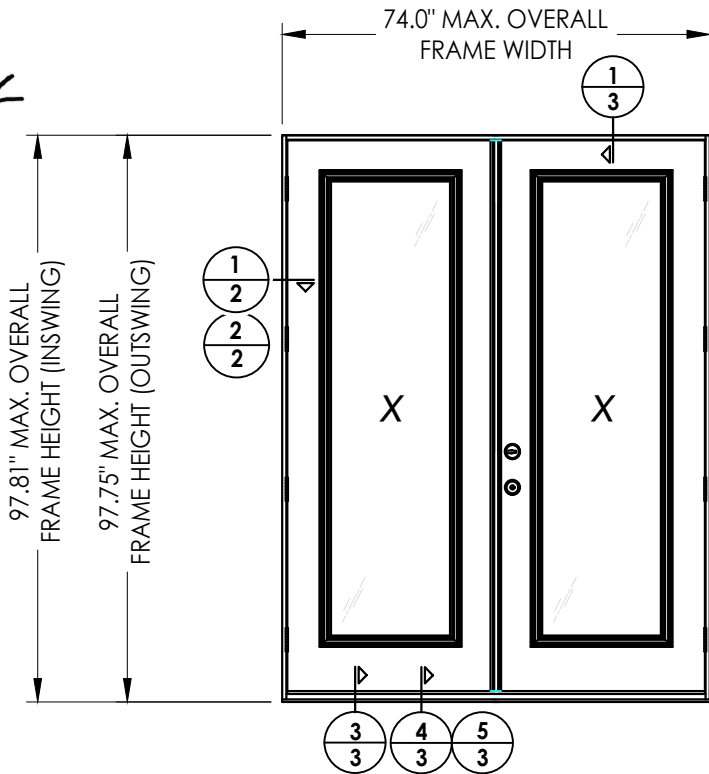

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF)			
		INSWING		OUTSWING	
		POS.	NEG.	POS.	NEG.
XX	74.0" x 97.81"	+47.5	-47.5	+50.0	-50.0
OXXO	149.0" x 97.81"	+47.5	-47.5	+50.0	-50.0

GENERAL NOTES

- This product anchoring drawing has been developed and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ). See the Certification Agency Certificate for sizes, specifications and rating.
- Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
- When used in areas outside of the "HVHZ" requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996.
- For 2x stud construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
- Outswing configurations utilizing the high dam sill (see Section 5/3), meet water infiltration requirements for "HVHZ". All other configurations do not meet the water infiltration requirements for the "HVHZ" and must be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Horizontal cross sections
3	Vertical cross sections
4	Buck anchoring & bill of materials
5	Frame anchoring & glazing details

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:

PLASTPRO
FIBERGLASS DOOR

LFS

FBC

7/02/26

UPDATE TO 9TH ED. (2026)

8/14/23

UPDATE TO 8TH ED. (2023)

7/23/20

UPDATE TO 7TH ED. (2020)

10/14/17

UPDATE TO 6TH ED. (2017)

8/04/14

CLARIFIED INSTALLATION DETAILS

NO.

DATE

5

7/02/26

4

8/14/23

3

7/23/20

2

10/14/17

1

8/04/14

SHEET

1

OF

5

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

RW

PART OR ASSEMBLY:
TYPICAL ELEVATION, DESIGN
PRESSURES & GENERAL NOTES

REVISIONS

DATE: 12/10/12

SCALE: N.T.S.


DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-16094.4


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.1-4.dwg

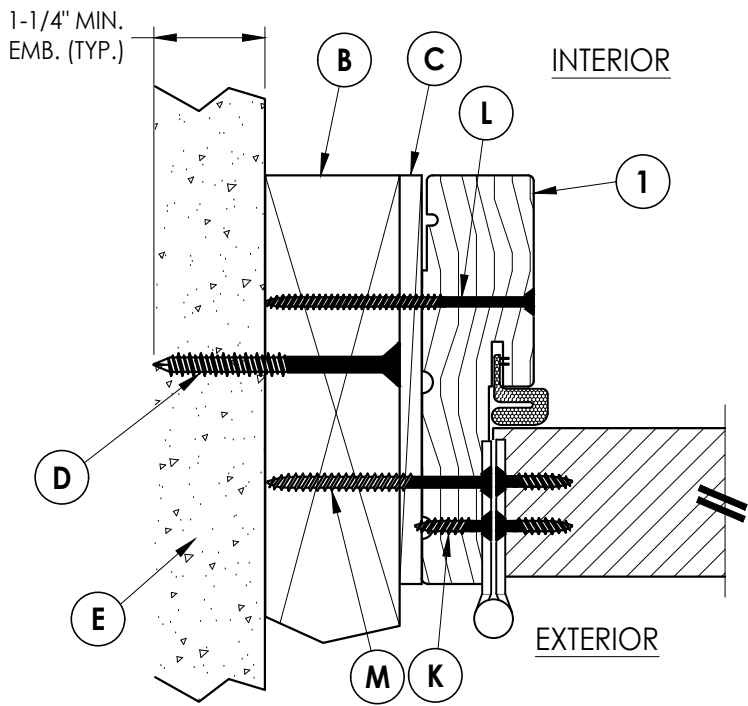


1 **HORIZONTAL CROSS SECTION**
2 Outswing shown - Inswing similar
2X Buck Construction

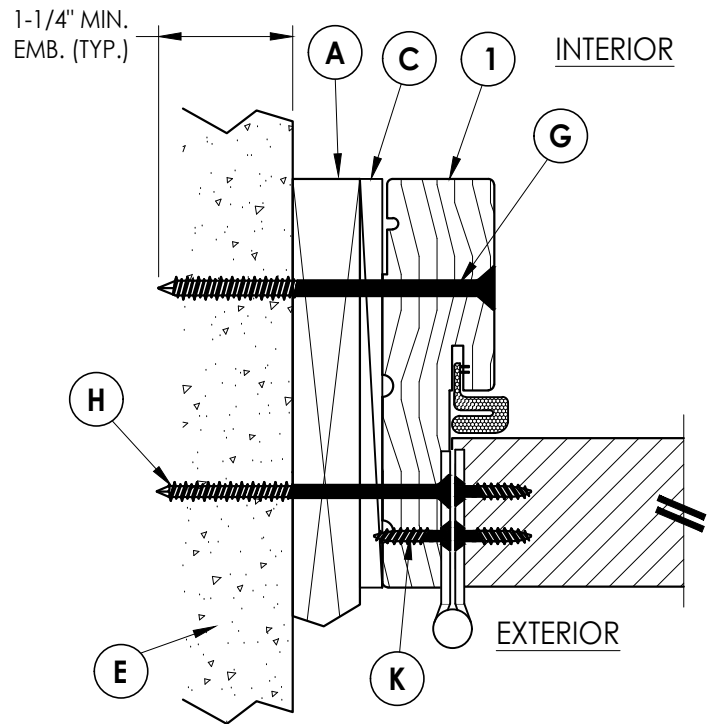


2 **HORIZONTAL CROSS SECTION**
2 Outswing shown - Inswing similar
1X Buck Construction

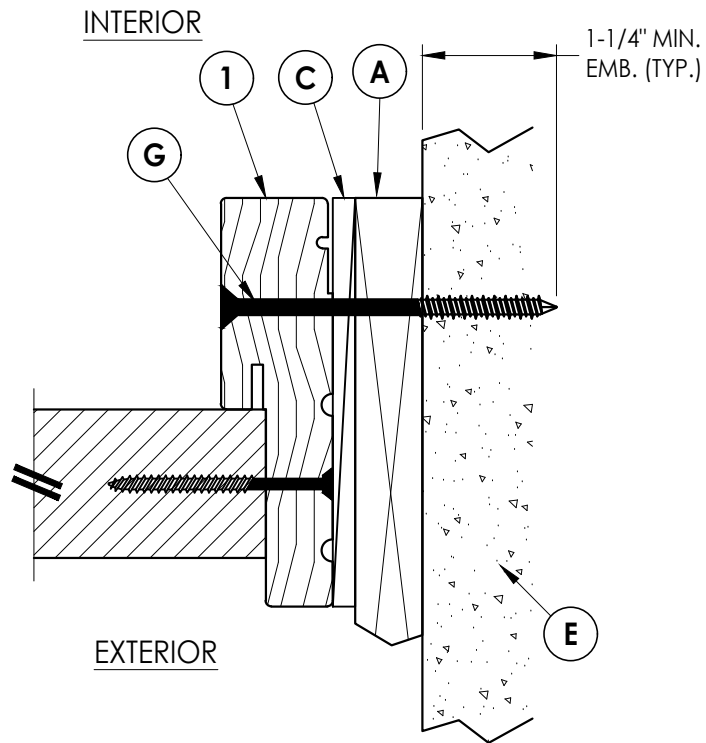

3 **HORIZONTAL CROSS SECTION**
2 Outswing shown - Inswing similar
1X Buck Construction

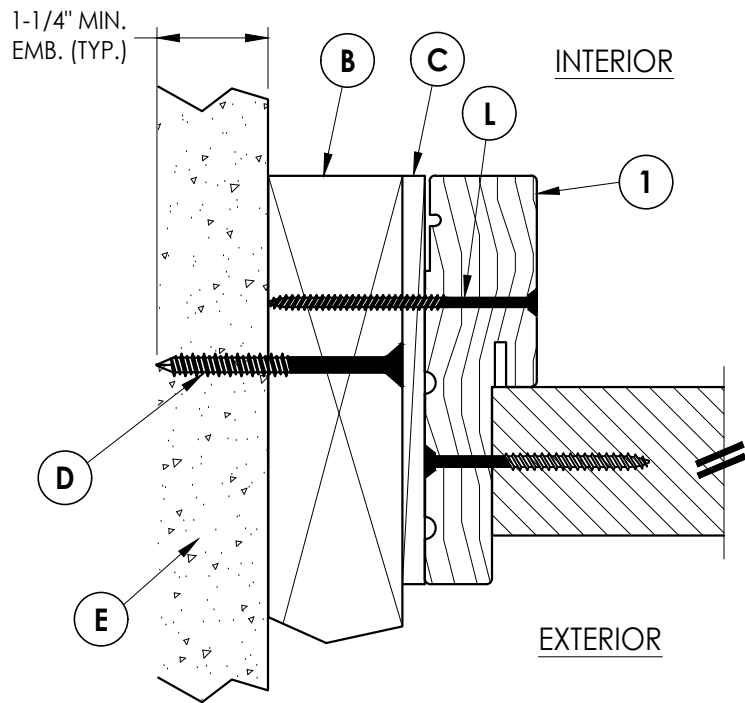

4 **HORIZONTAL CROSS SECTION**
2 Outswing shown - Inswing similar
1X Buck Construction

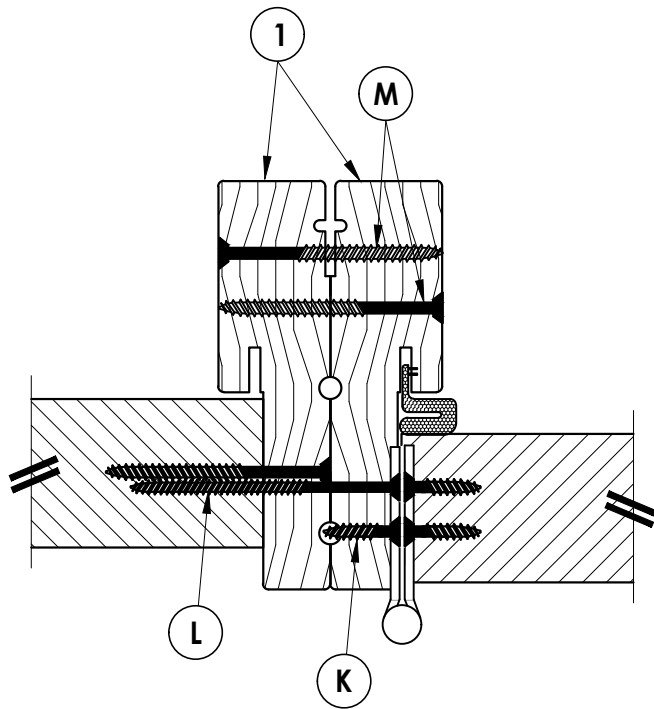

5 **HORIZONTAL CROSS SECTION**
2 @ BACK-TO-BACK JAMBS

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409








RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR
PART OR ASSEMBLY:

HORIZONTAL & VERTICAL
CROSS SECTIONS


NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC LFS
4	8/14/23	UPDATE TO 8TH ED. (2023) FBC LFS
3	7/23/20	UPDATE TO 7TH ED. (2020) FBC LFS
2	10/14/17	UPDATE TO 6TH ED. (2017) FBC LFS
1	8/04/14	CLARIFIED INSTALLATION DETAILS LFS
NO.	DATE	BY

DATE: 12/10/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-16094.4
SHEET 2 OF 5

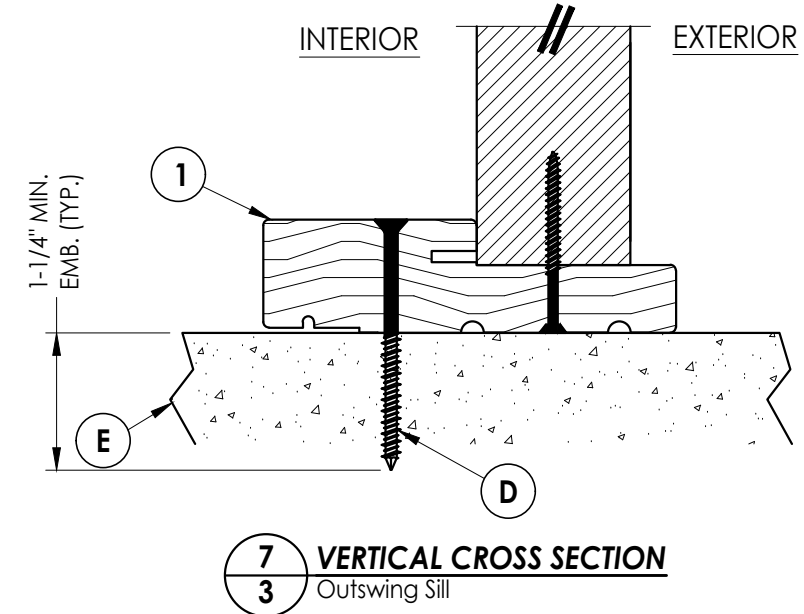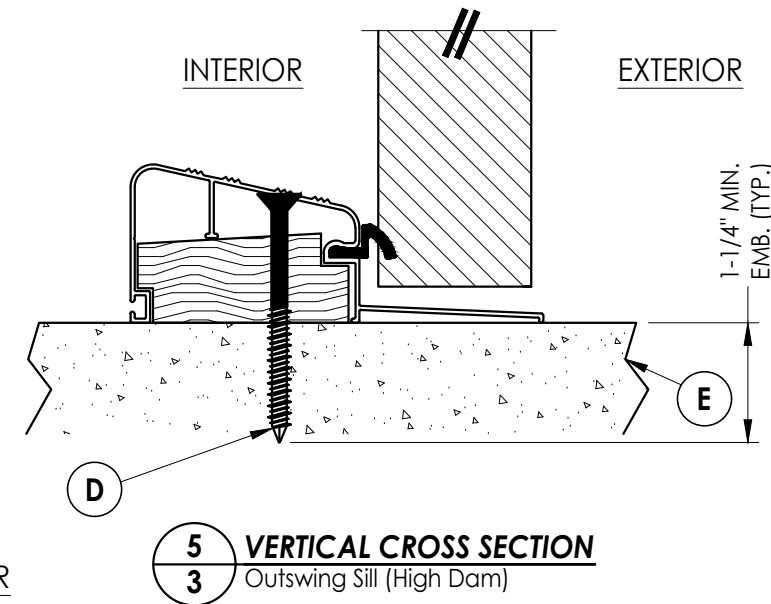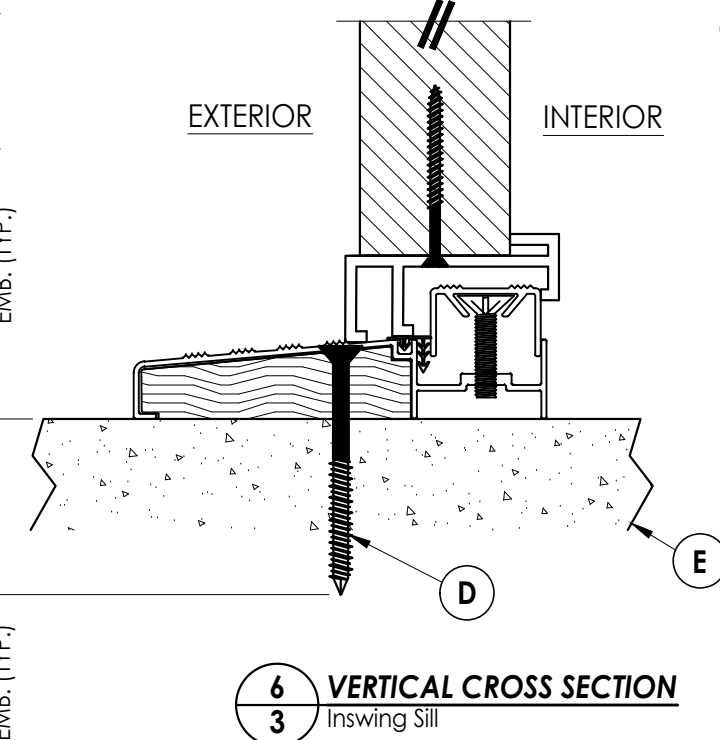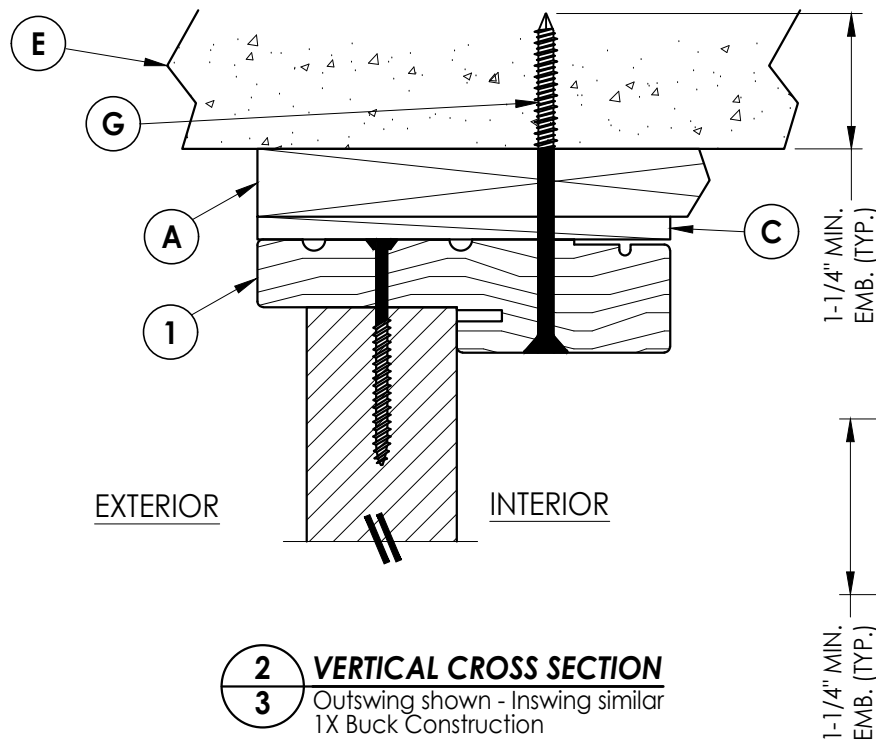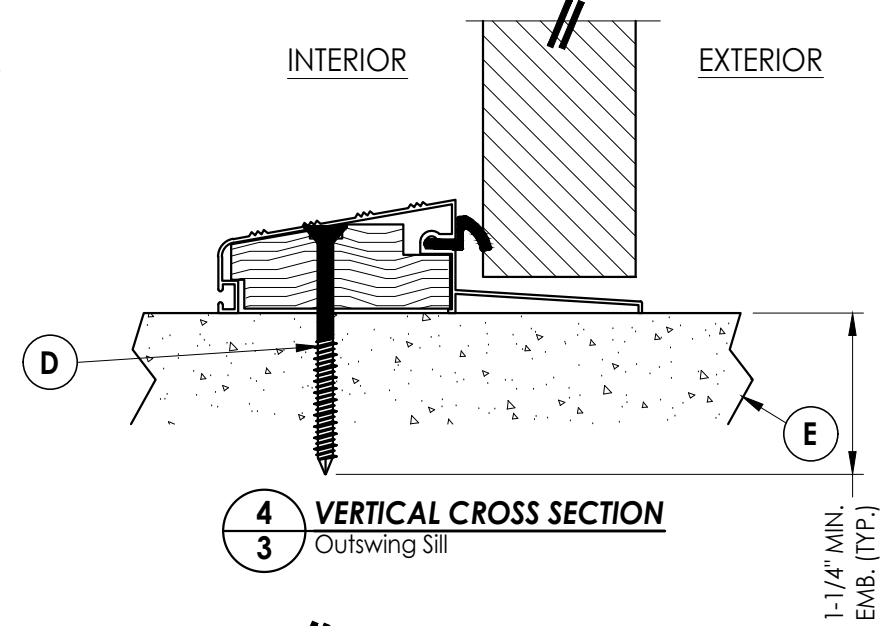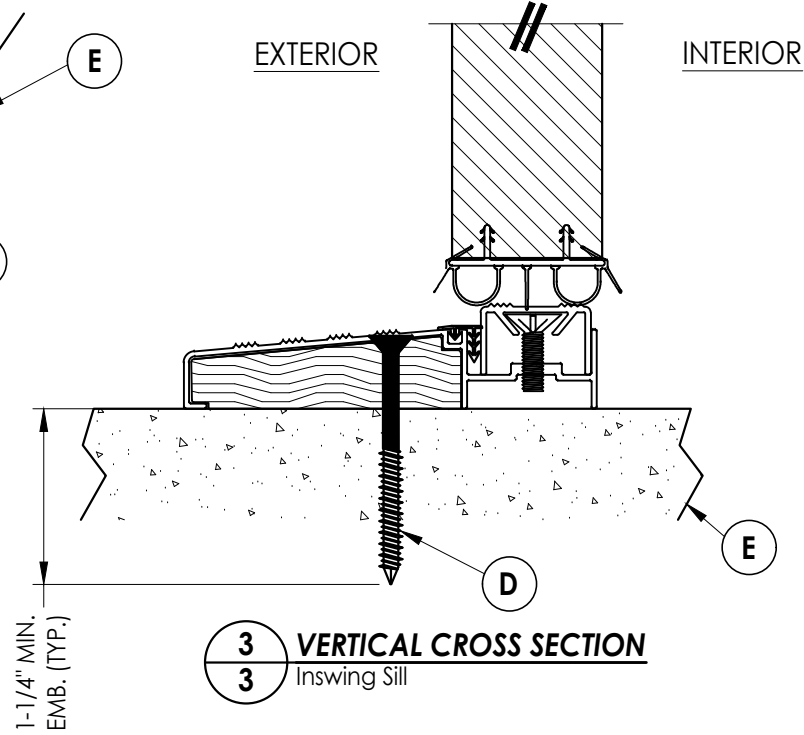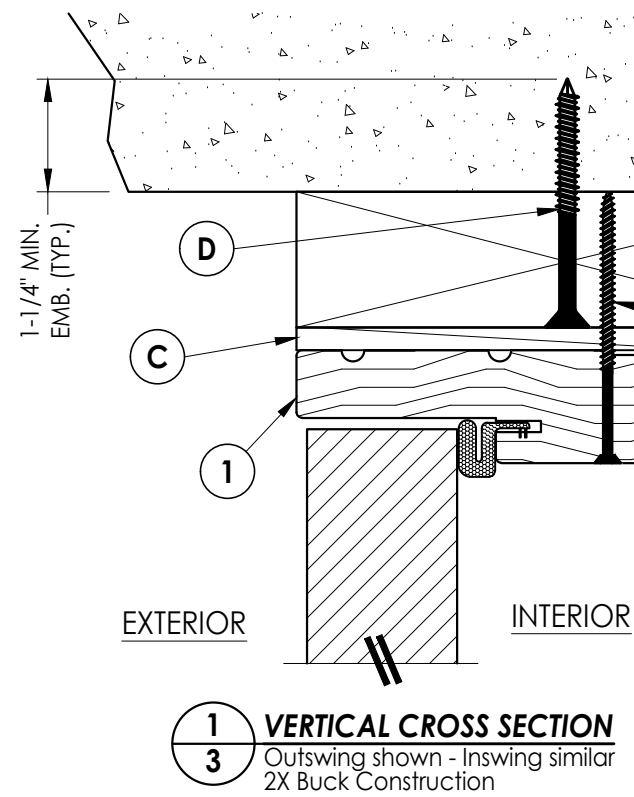


DATE: 12/10/12				PRODUCT: PLASTPRO INC. FIBERGLASS DOOR PART OR ASSEMBLY: VERTICAL CROSS SECTIONS		Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409 RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813					
SCALE: N.T.S.											
DWG. BY: JK											
CHK. BY: LFS											
DRAWING NO.: FL-16094.4											
SHEET 3 OF 5											
NO. DATE				REVISIONS							
5		7/02/26		UPDATE TO 9TH ED. (2026) FBC						LFS	
4		8/14/23		UPDATE TO 8TH ED. (2023) FBC						LFS	
3		7/23/20		UPDATE TO 7TH ED (2020) FBC						LFS	
2		10/14/17		UPDATE TO 6TH ED. (2017) FBC		LFS					
1		8/04/14		CLARIFIED INSTALLATION DETAILS		LFS					
NO.		DATE				BY					

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.1-4.dwg

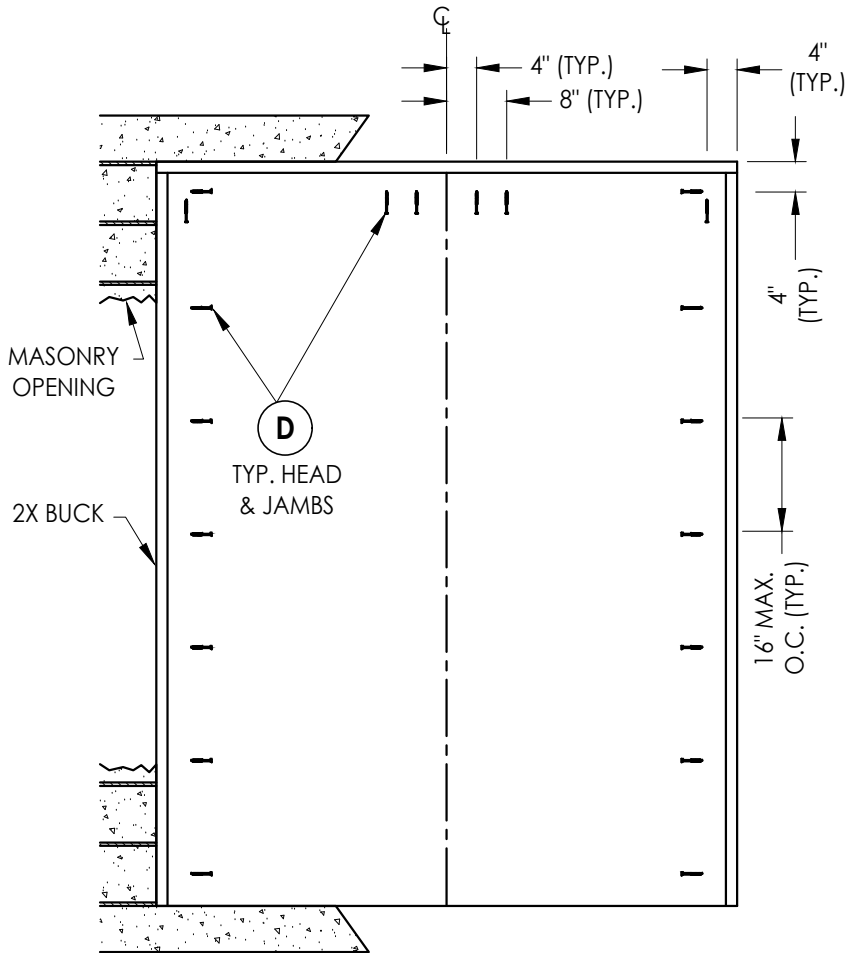

BUCK ANCHORING
XX

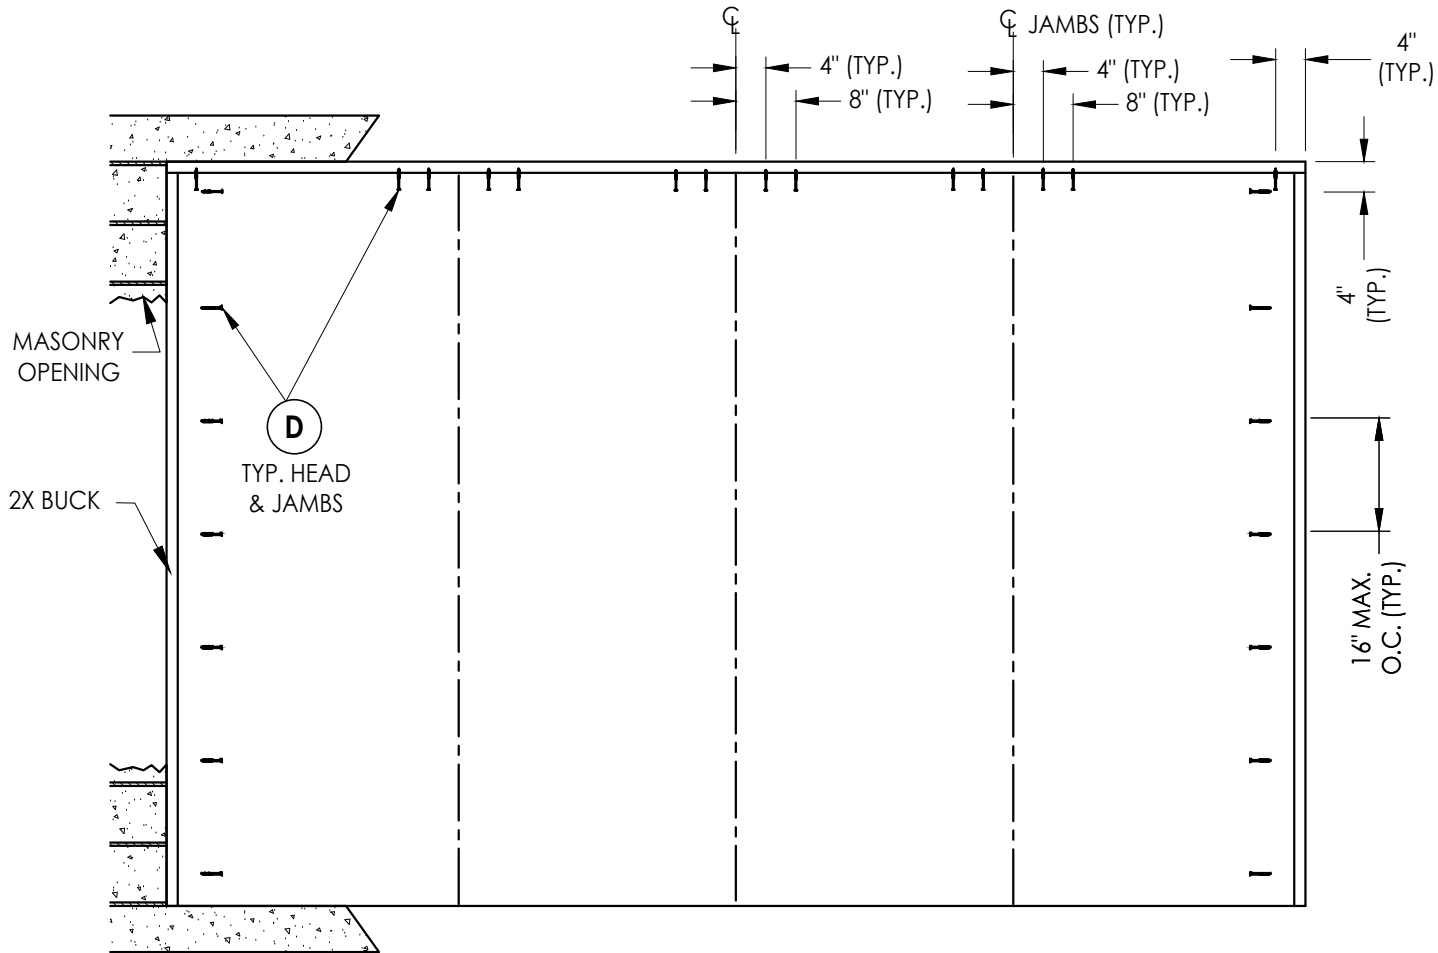

BUCK ANCHORING
OXXO

BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.55)	WOOD
B	2X BUCK (SG >= 0.55)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	1/4" X 3-3/4" PFH ITW CONCRETE SCREW	STEEL
H	3/16" x 3-1/4" PFH ITW CONCRETE SCREW	STEEL
I	3/16" x 2-3/4" PFH ITW CONCRETE SCREW	STEEL
J	3/16" x 1-3/4" PFH ITW CONCRETE SCREW	STEEL
K	#9 X 3/4" PFH WOOD SCREW	STEEL
L	#8 X 3" PFH WOOD SCREW (1-1/2" MIN. EMBEDMENT)	STEEL
M	#10 X 2-1/2" PFH WOOD SCREW	STEEL
1	FINGER JOINTED PINE HEAD & JAMB (SG >= 0.42)	WOOD

CONCRETE ANCHOR NOTES:

- Substitution of equal concrete anchors from a different supplier may have different edge distance and center distance requirements.
- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints. Concrete anchor locations noted as "MAX. O.C. (TYP.)" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. O.C. (TYP.)" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:

PLASTPRO INC.

FIBERGLASS DOOR

PART OR ASSEMBLY:

BUCK ANCHORING &
BILL OF MATERIALS

DATE: 12/10/12

SCALE: N.T.S.

DWG. BY: JK




CHK. BY: LFS

DRAWING NO.:
FL-16094.4

SHEET 4 OF 5

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.1-4.dwg

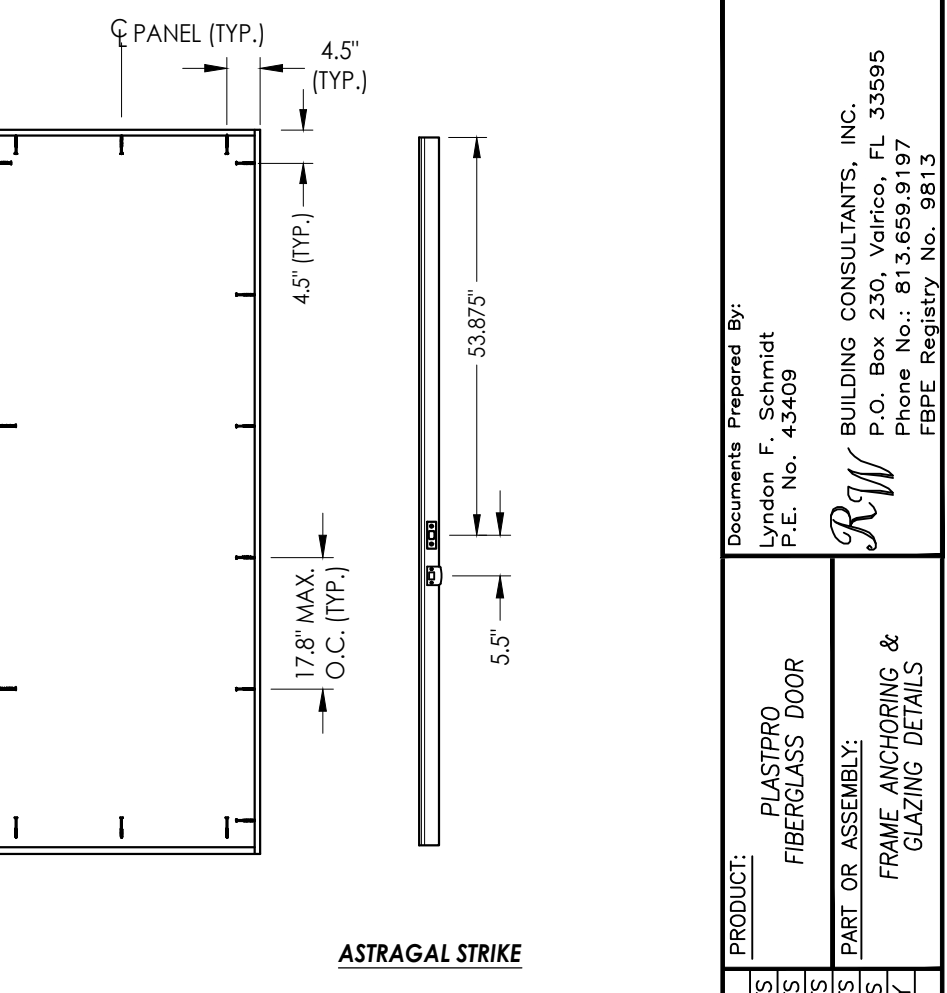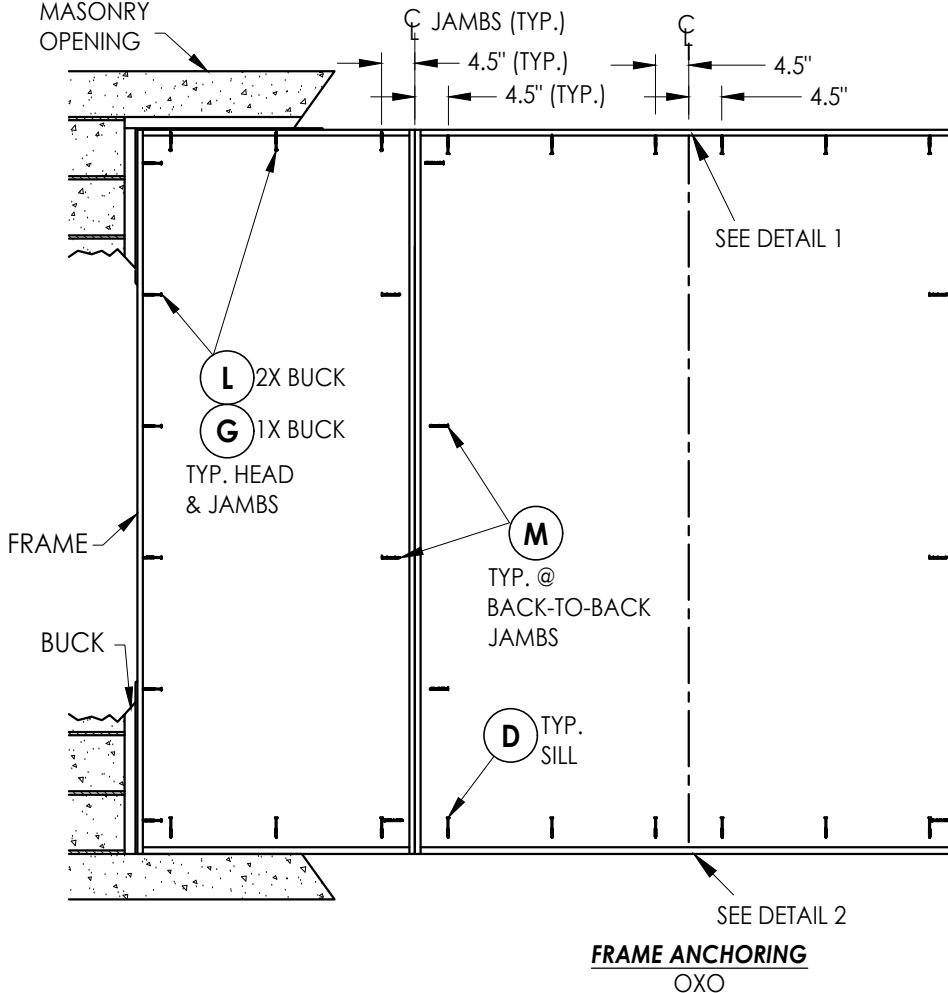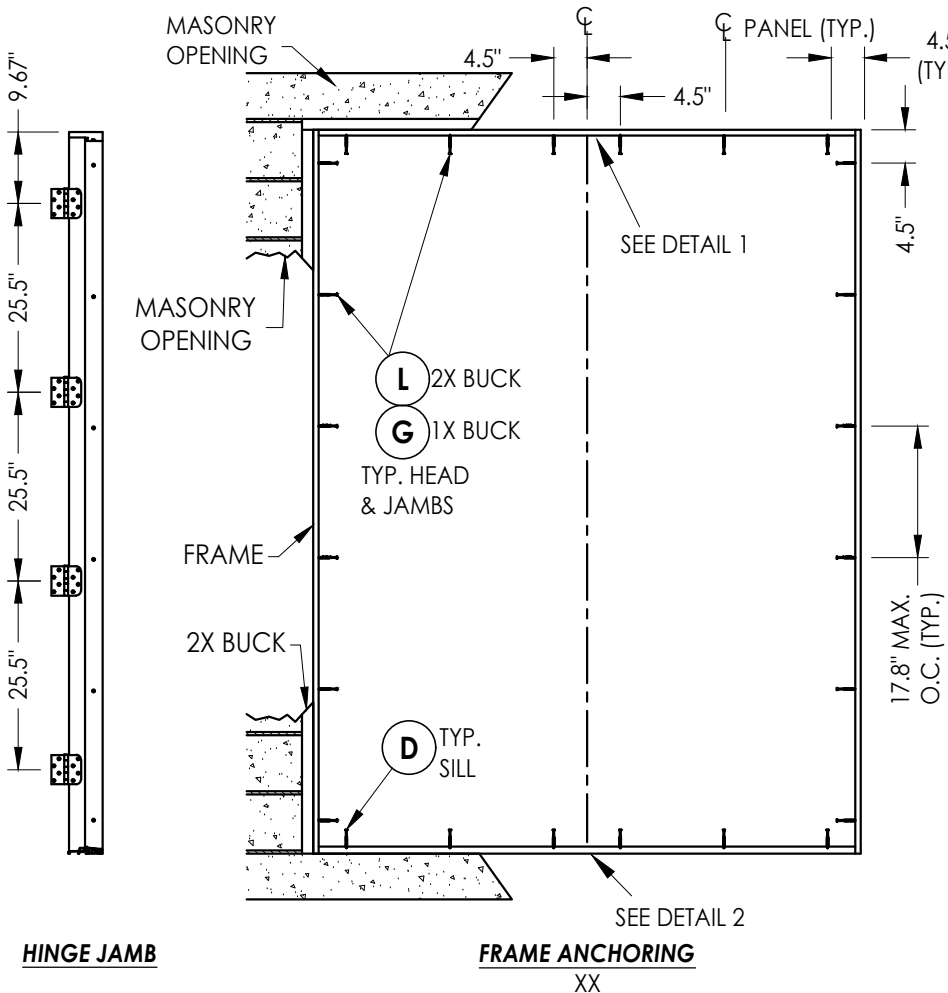



HARDWARE TABLE		
MANUFACTURER	MODEL	
KWIKSET	KNOB:	SIGNATURE SERIES
	DEADBOLT:	SIGNATURE SERIES (980)

CORROSION RESISTANCE - SALTWATER ENVIRONMENT
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

- CONCRETE ANCHOR NOTES:**
- Substitution of equal concrete anchors from a different supplier may have different edge distance and center distance requirements.
 - Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints. Concrete anchor locations noted as "MAX. O.C. (TYP.)" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. O.C. (TYP.)" dimension are not exceeded.
 - Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

- WOOD SCREW INSTALLATION NOTES:**
- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

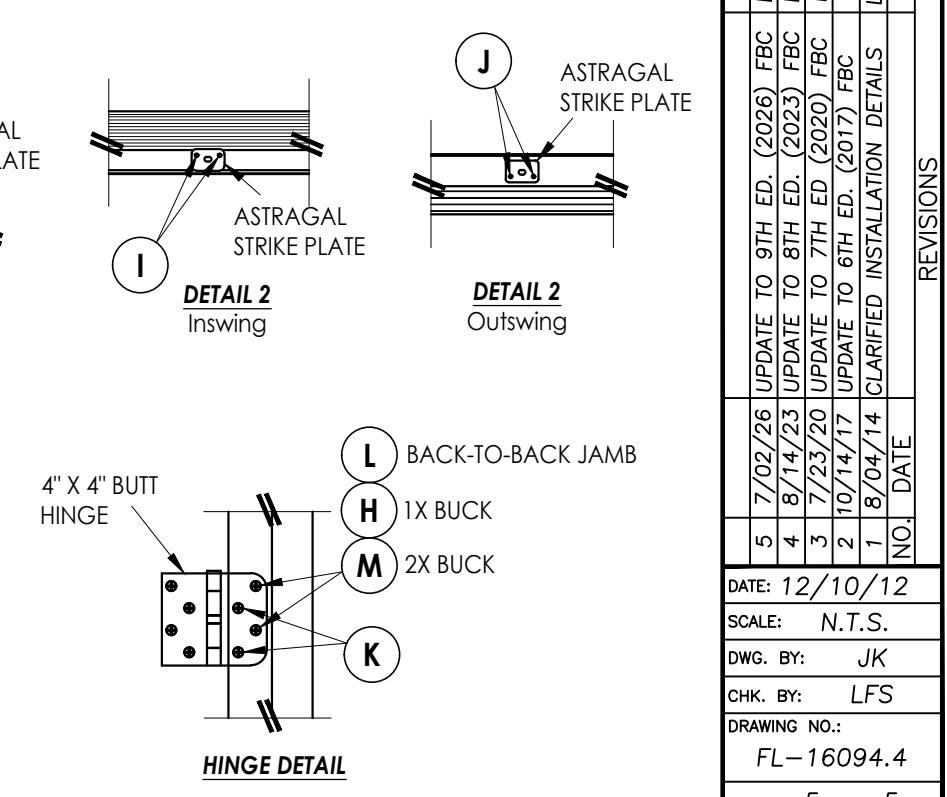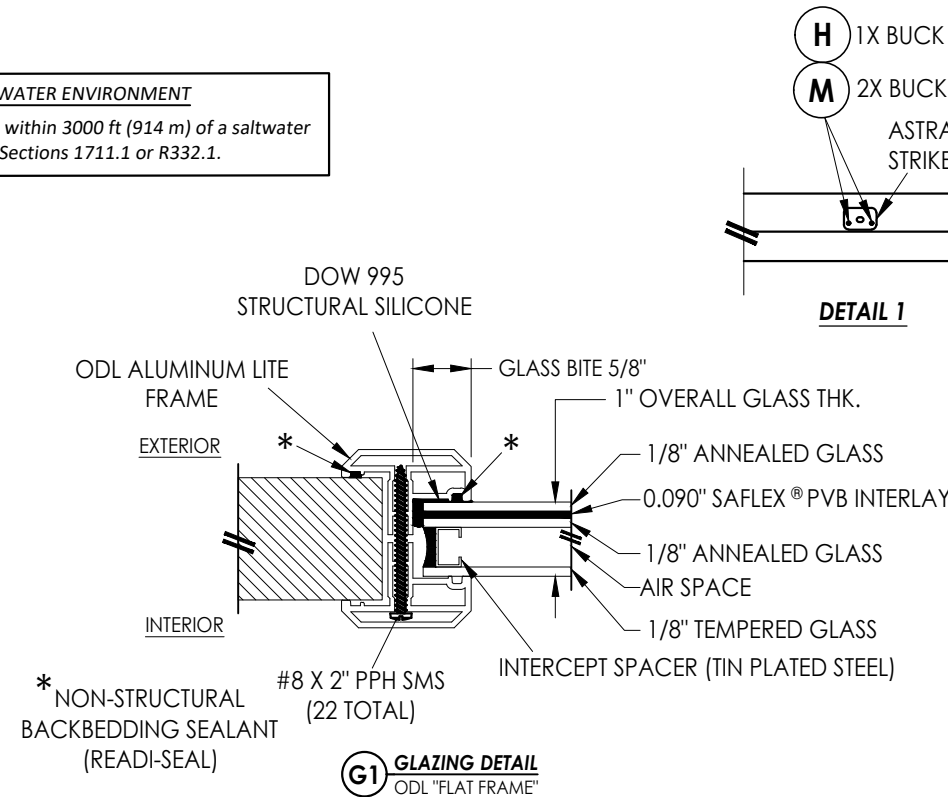

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO
FIBERGLASS DOOR

PART OR ASSEMBLY:
FRAME ANCHORING &
GLAZING DETAILS

	LFS	FBC	DATE	NO.	BY
5	7/02/26	UPDATE TO 9TH ED. (2026)			
4	8/14/23	UPDATE TO 8TH ED. (2023)			
3	7/23/20	UPDATE TO 7TH ED. (2020)			
2	10/14/17	UPDATE TO 6TH ED. (2017)			
1	8/04/14	CLARIFIED INSTALLATION DETAILS			

DATE: 12/10/12
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-16094.4
SHEET 5 OF 5

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

© 2012 R.W. BUILDING CONSULTANTS INC.