


plastpro

5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045



OPAQUE FIBERGLASS SINGLE DOOR
w/ or w/out SIDELITE(S)
Outswing
"IMPACT"

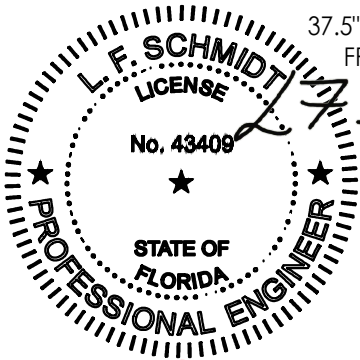

Digitally signed by Lyndon F Schmidt
Date: 2026.08.04 08:46:39 -04'00'

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.

THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

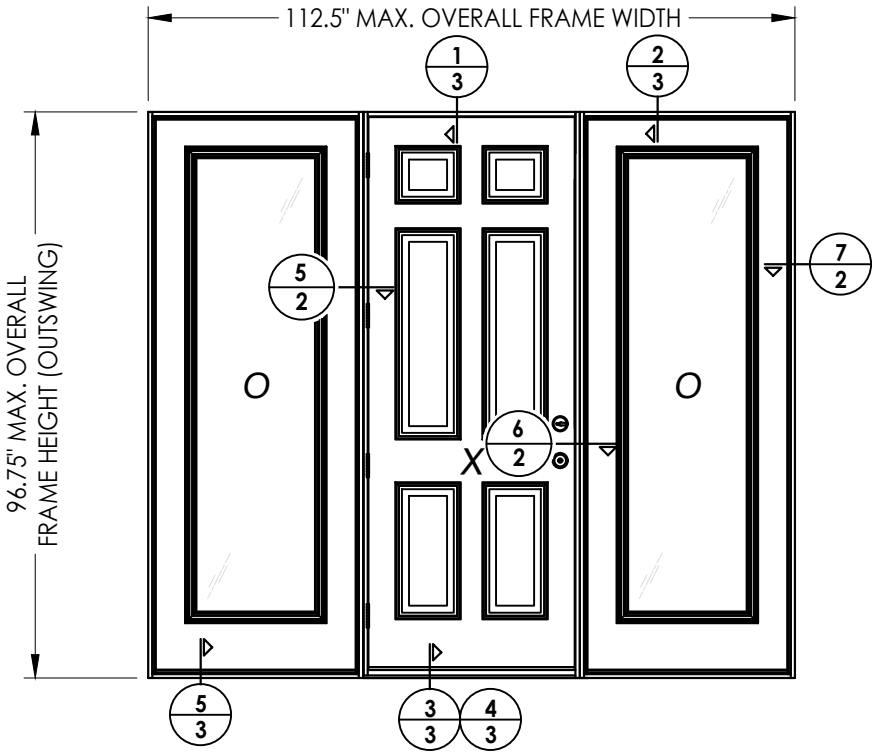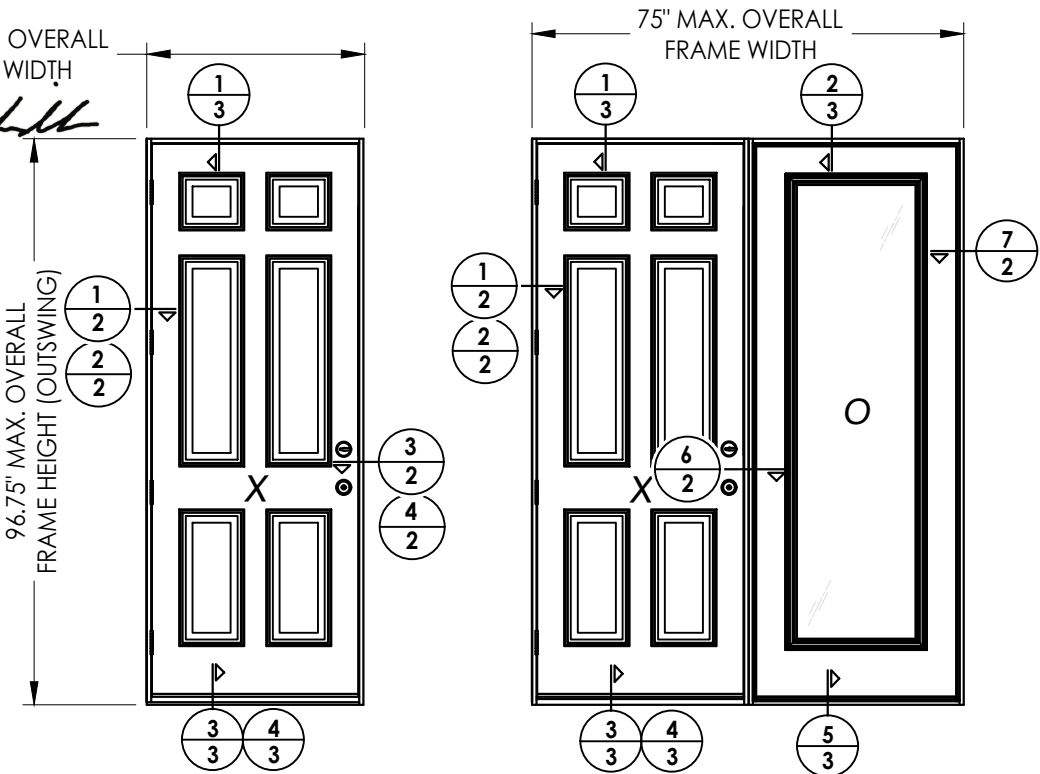

CONFIGURATION	MAX. FRAME DIMENSION	DESIGN PRESSURE (PSF)	
		POSITIVE	NEGATIVE
X	37.5" x 96.75"	+50.0	-50.0
XO/OX	75.0" x 96.75"	+50.0	-50.0
OXO	112.5" x 96.75"	+50.0	-50.0

GENERAL NOTES

- This product anchoring drawing has been developed and is in compliance with the 9th Edition (2026) Florida Building Code (FBC) structural requirements including the "High Velocity Hurricane Zone" (HVHZ). See the Certification Agency Certificate for sizes, specifications and rating.
- Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
- When used in the "HVHZ" this product complies with Section 1626 of the Florida Building Code and does not require an impact resistant covering.
- When used in areas outside of the "HVHZ" requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E 1996.
- For 2x stud construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
- Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.
- Outswing configurations utilizing the high dam sill (see Section 4/3), meet water infiltration requirements for "HVHZ". All other configurations do not meet the water infiltration requirements for the "HVHZ" and must be installed only in non-habitable areas or at habitable locations protected by an overhang or canopy such that the angle between the edge of canopy or overhang to sill is less than 45 degrees.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Horizontal cross sections
3	Vertical cross sections
4	Buck anchoring & bill of materials
5	Frame anchoring & glazing details

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO FIBERGLASS DOOR
PART OR ASSEMBLY: TYPICAL ELEVATION, DESIGN PRESSURES & GENERAL NOTES

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC
4	8/14/23	UPDATE TO 8TH ED. (2023) FBC
3	7/23/20	UPDATE TO 7TH ED. (2020) FBC
2	10/14/17	UPDATE TO 6TH ED. (2017) FBC
1	09/02/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 8/06/14

SCALE: N.T.S.

DWG. BY: JK


CHK. BY: LFS

DRAWING NO.:


FL-16094.7

SHEET 1 OF 5


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.5-8.dwg

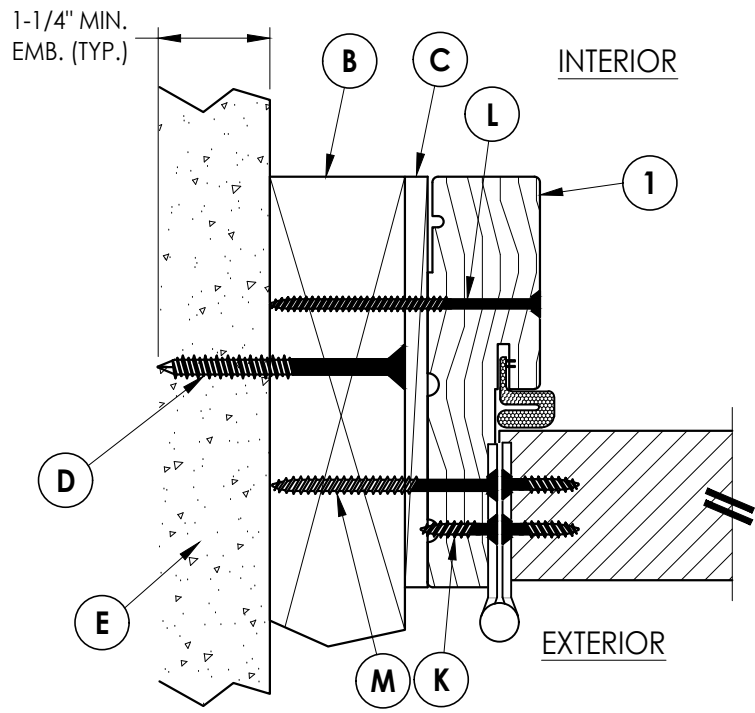


1 **HORIZONTAL CROSS SECTION**
2 Outswing
2X Buck Construction

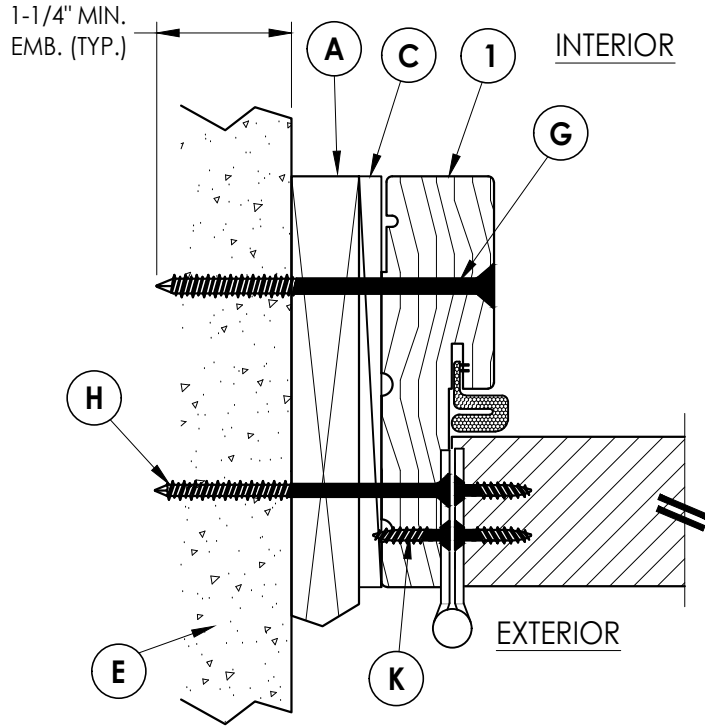


2 **HORIZONTAL CROSS SECTION**
2 Outswing
1X Buck Construction

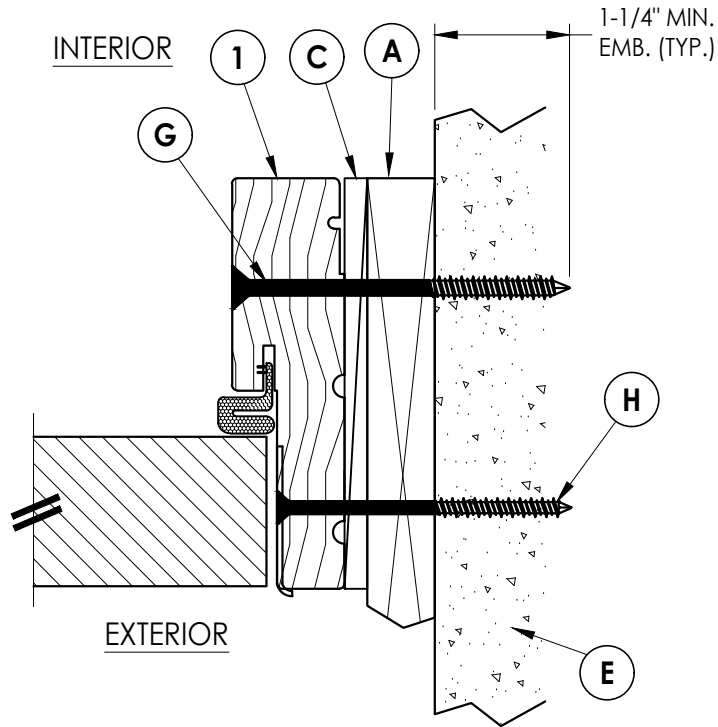


3 **HORIZONTAL CROSS SECTION**
2 Outswing
1X Buck Construction

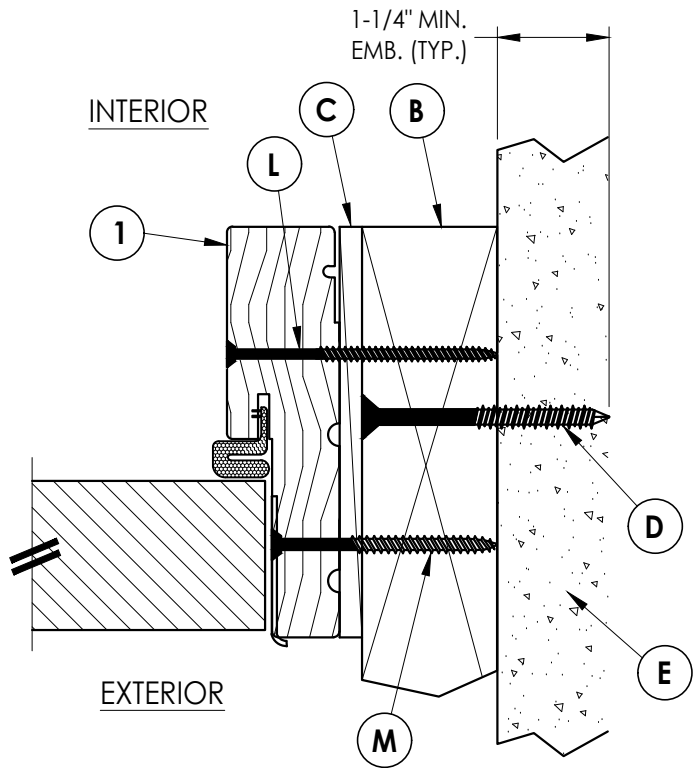


4 **HORIZONTAL CROSS SECTION**
2 Outswing
2X Buck Construction

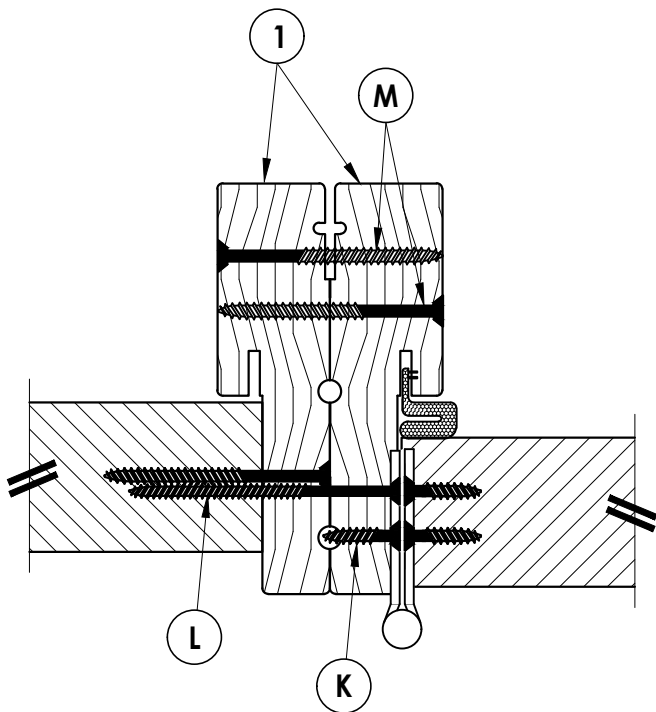

5 **HORIZONTAL CROSS SECTION**
2 @ BACK-TO-BACK JAMBS

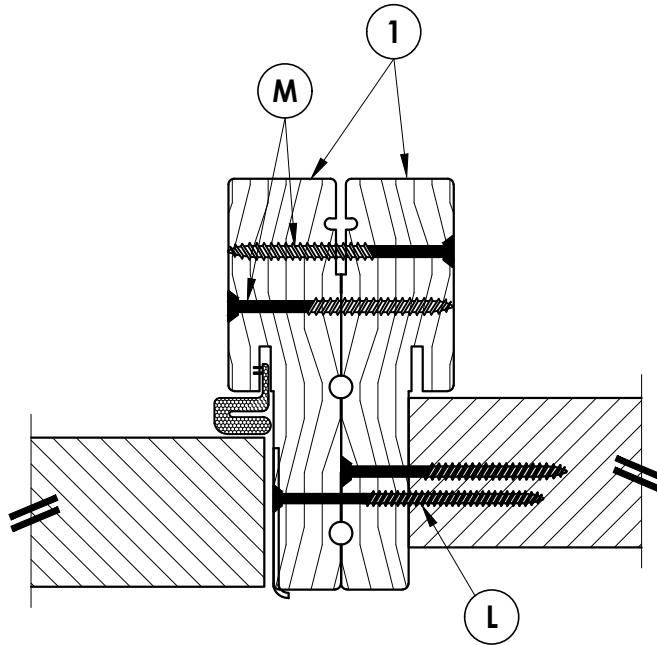

6 **HORIZONTAL CROSS SECTION**
2 @ BACK-TO-BACK JAMBS

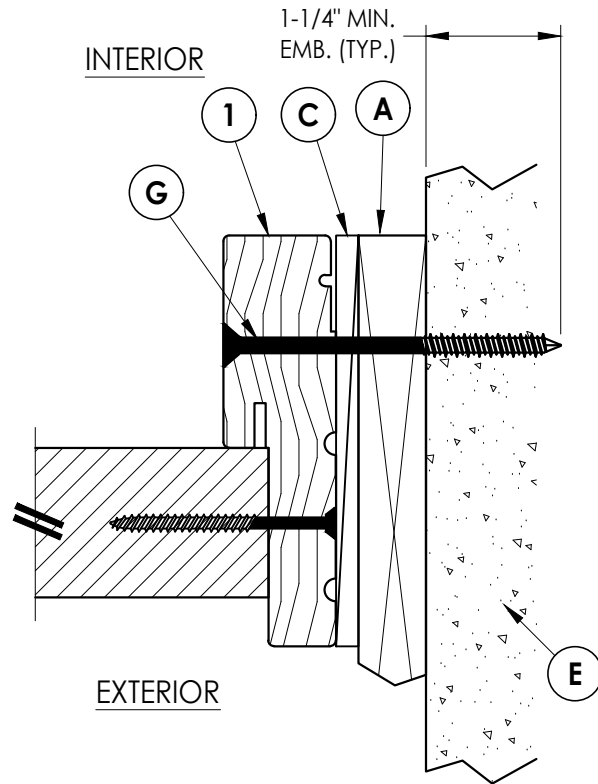

7 **HORIZONTAL CROSS SECTION**
2 Outswing
1X Buck Construction

Documents Prepared By:

Lyndon F. Schmidt
P.E. No. 43409

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:

HORIZONTAL
CROSS SECTIONS

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

DATE: 8/06/14

SCALE: N.T.S.

DWG. BY: JK

CHK. BY: LFS


DRAWING NO.:

FL-16094.7


SHEET 2 OF 5

© 2014 R.W. BUILDING CONSULTANTS INC.


G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.5--8.dwg

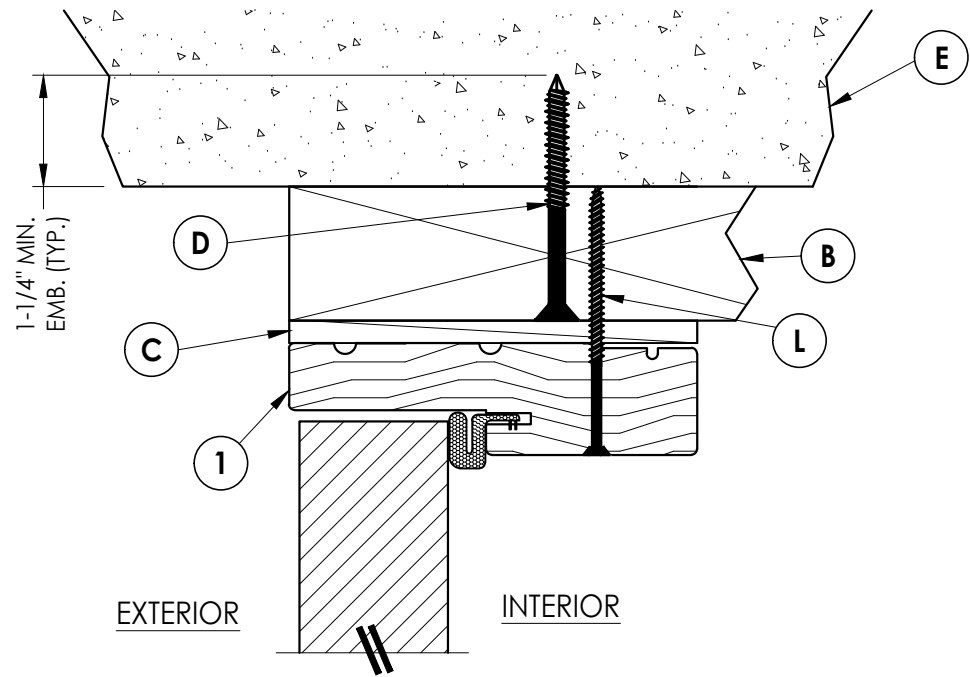


1
3 **VERTICAL CROSS SECTION**
Outswing
2X Buck Construction

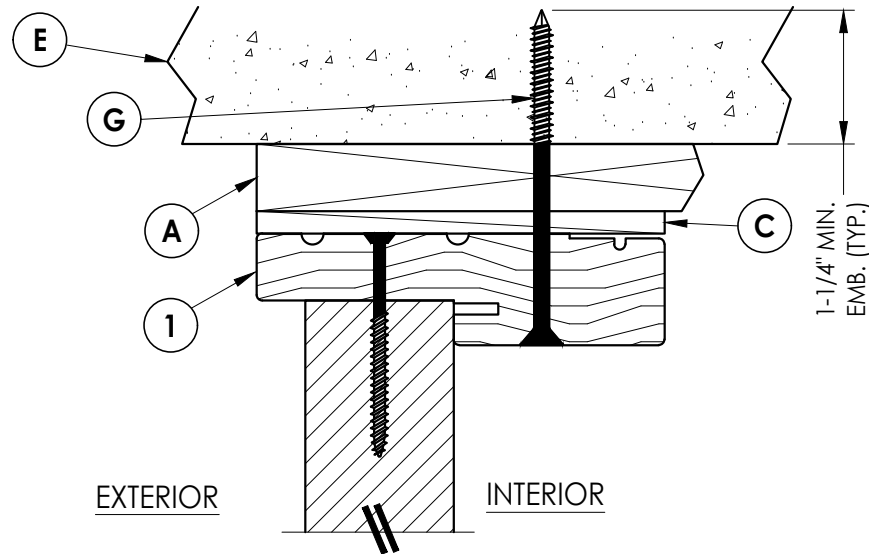


2
3 **VERTICAL CROSS SECTION**
Outswing
1X Buck Construction

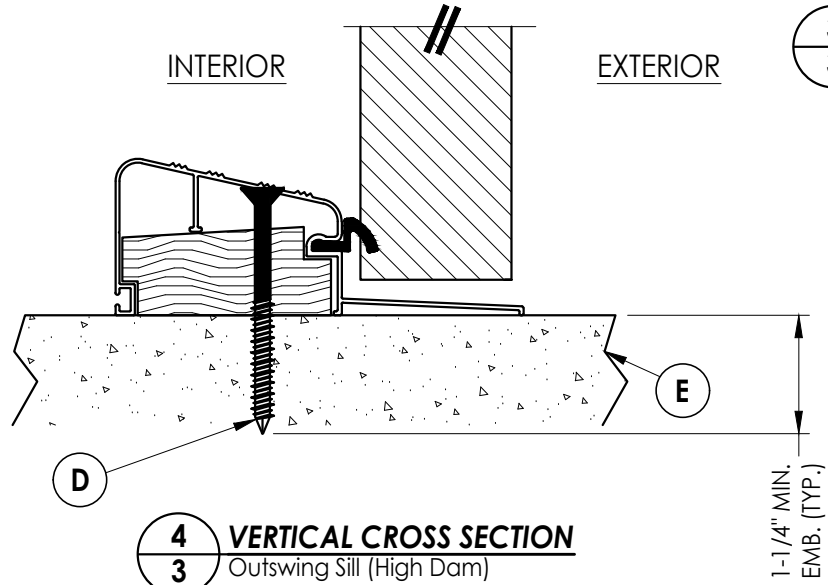

4
3 **VERTICAL CROSS SECTION**
Outswing Sill (High Dam)

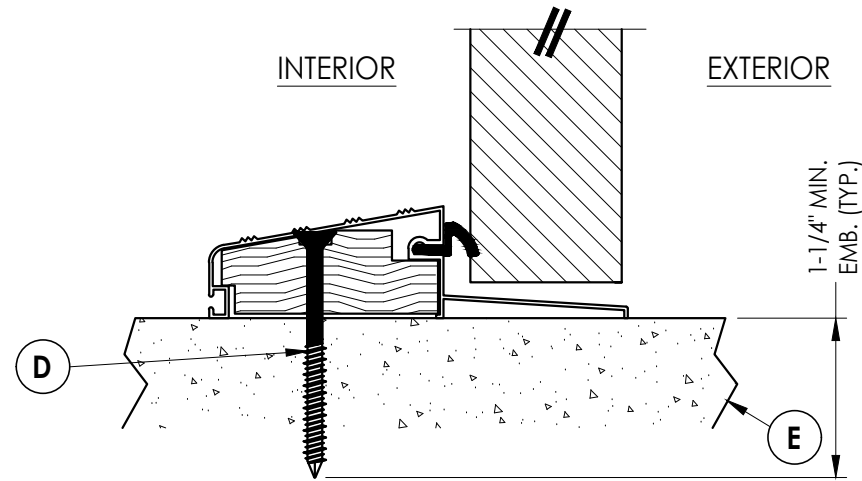

3
3 **VERTICAL CROSS SECTION**
Outswing Sill

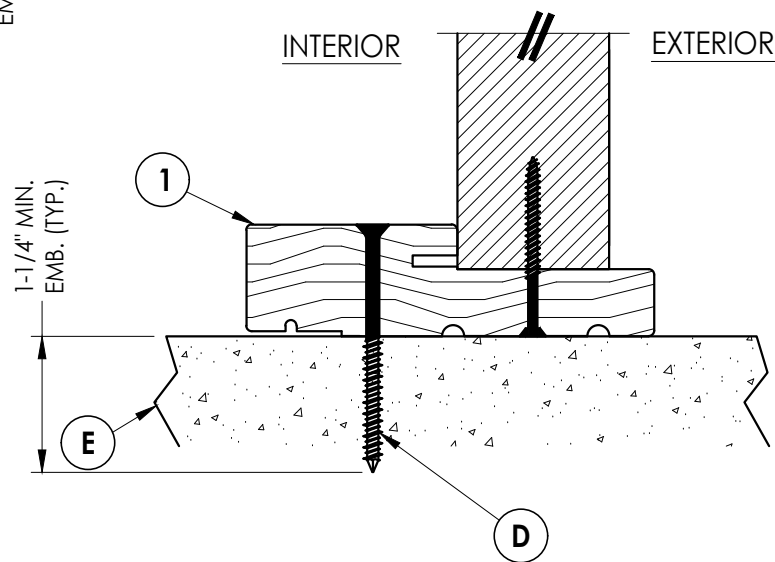

5
3 **VERTICAL CROSS SECTION**
Outswing Sill

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR


PART OR ASSEMBLY:
VERTICAL
CROSS SECTIONS

NO.	DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026) FBC
4	8/14/23	UPDATE TO 8TH ED. (2023) FBC
3	7/23/20	UPDATE TO 7TH ED (2020) FBC
2	10/14/17	UPDATE TO 6TH ED. (2017) FBC
1	09/02/15	UPDATE TO 5TH ED. (2014) FBC
NO.	DATE	BY

DATE: 8/06/14
SCALE: N.T.S.
DWG. BY: JK
CHK. BY: LFS
DRAWING NO.: FL-16094.7
SHEET 3 OF 5

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.5--8.dwg

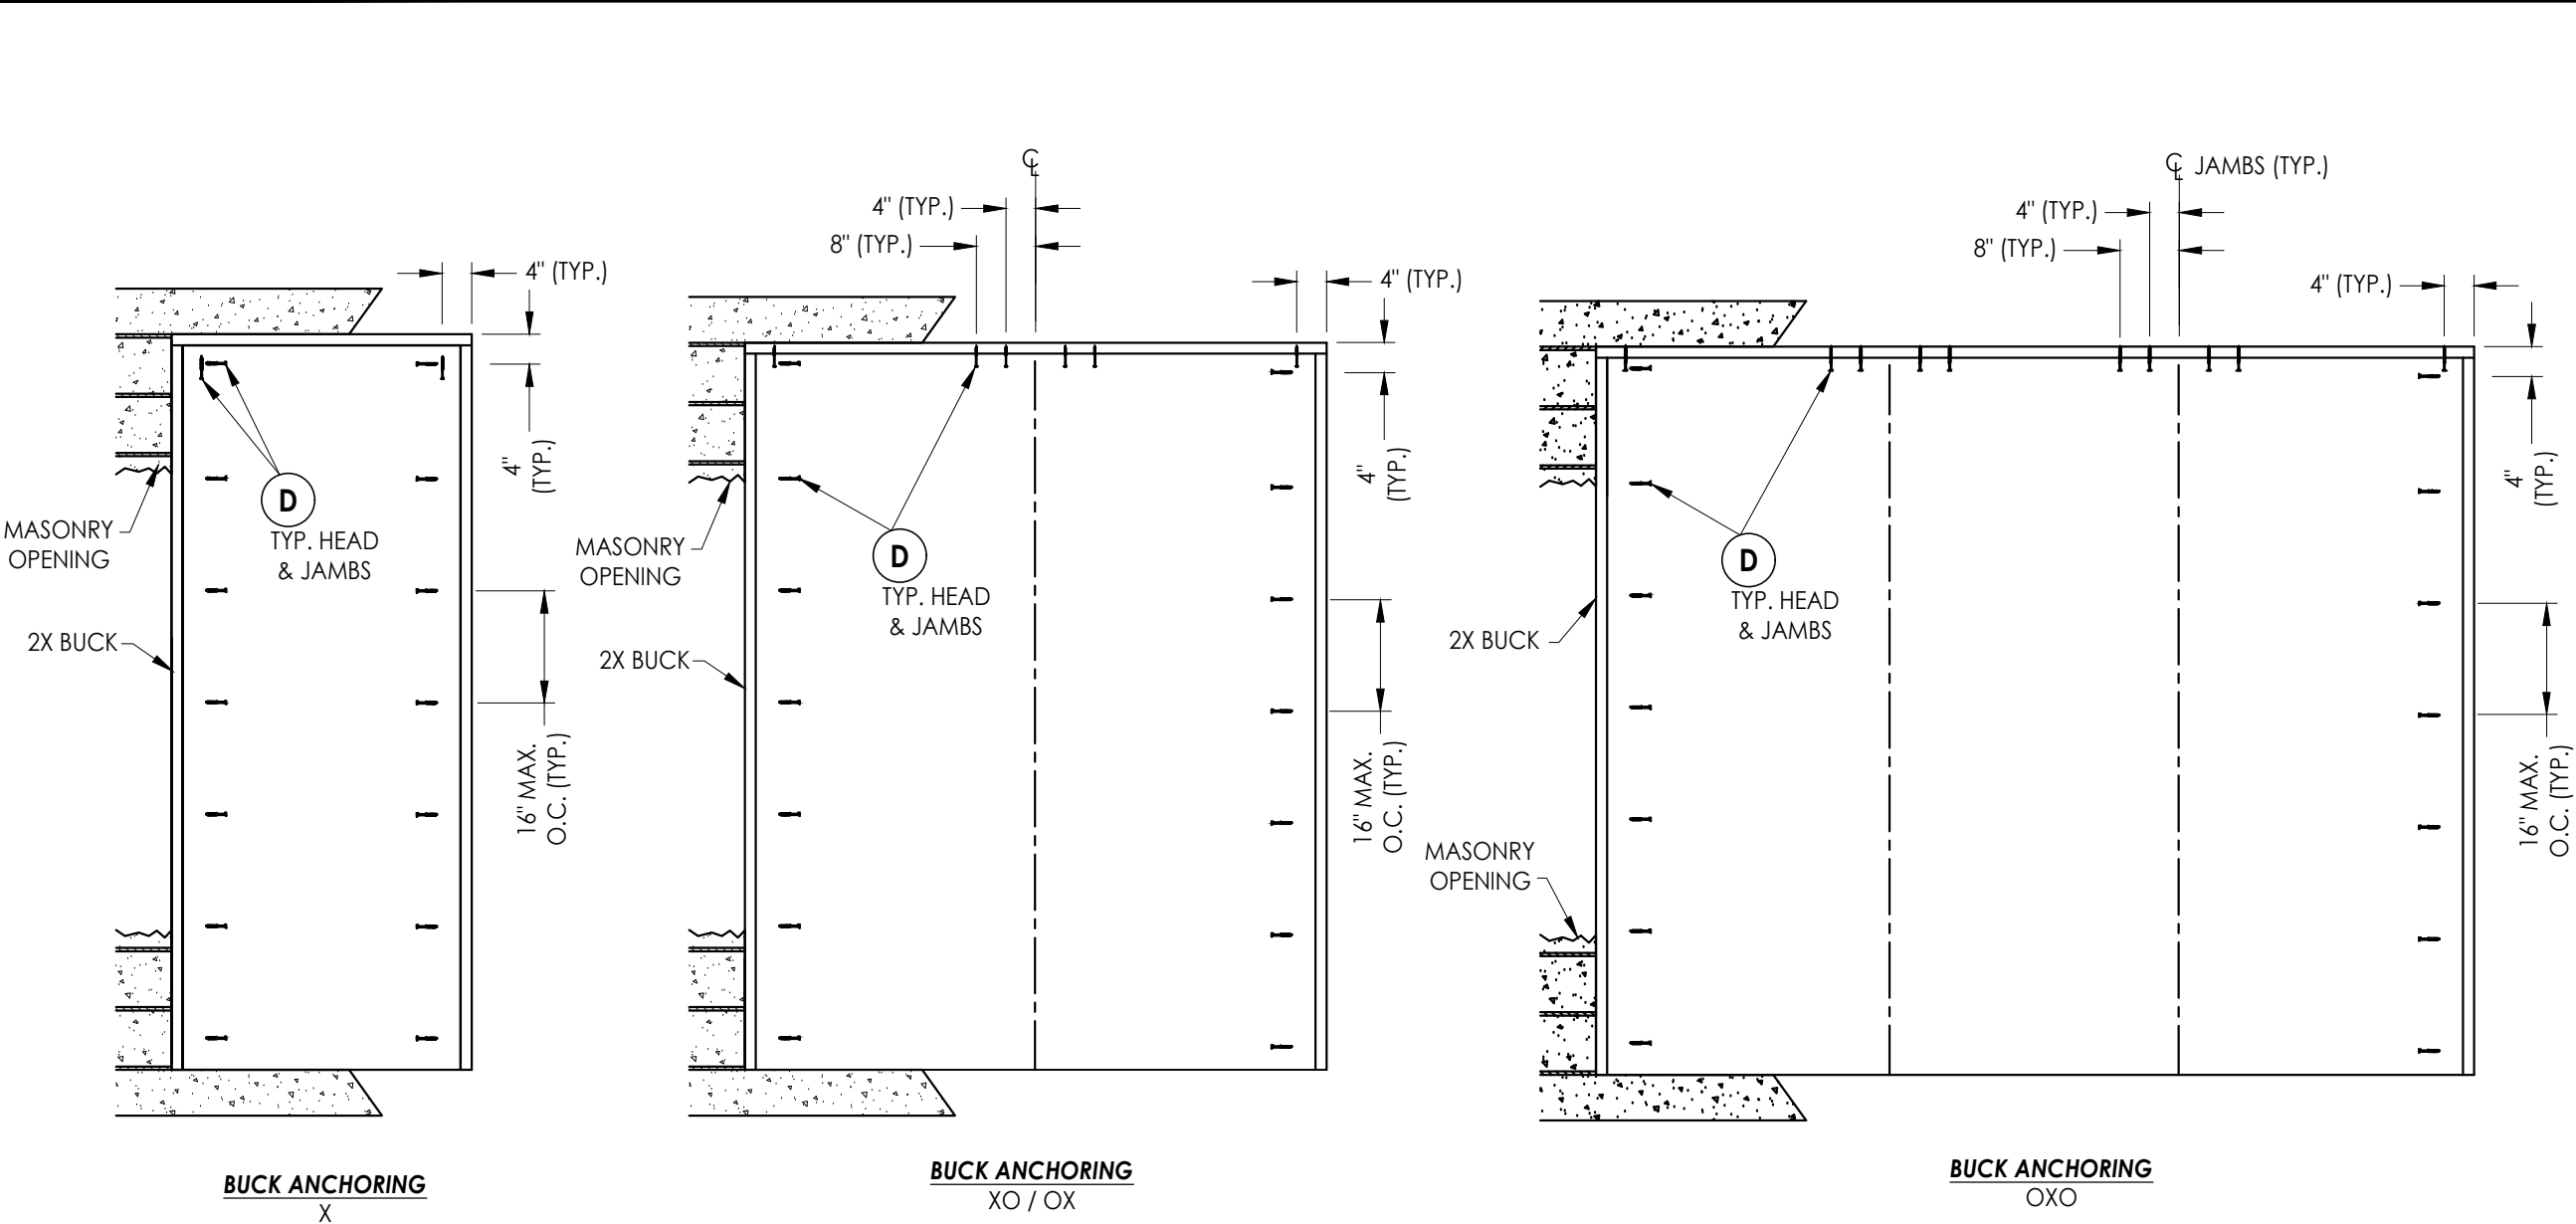


BILL OF MATERIALS		
ITEM #	DESCRIPTION	MATERIAL
A	1X BUCK (SG >= 0.55)	WOOD
B	2X BUCK (SG >= 0.55)	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
G	1/4" X 3-3/4" PFH ITW CONCRETE SCREW	STEEL
H	3/16" x 3-1/4" PFH ITW CONCRETE SCREW	STEEL
K	#9 X 3/4" PFH WOOD SCREW	STEEL
L	#8 X 3" PFH WOOD SCREW (1-1/2" MIN. EMBEDMENT)	STEEL
M	#10 X 2-1/2" PFH WOOD SCREW	STEEL
1	FINGER JOINTED PINE HEAD & JAMB (SG >= 0.42)	WOOD

- CONCRETE ANCHOR NOTES:
- Substitution of equal concrete anchors from a different supplier may have different edge distance and center distance requirements.
 - Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints. Concrete anchor locations noted as "MAX. O.C. (TYP.)" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. O.C. (TYP.)" dimension are not exceeded.
 - Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PRODUCT: PLASTPRO FIBERGLASS DOOR				PART OR ASSEMBLY: BUCK ANCHORING & BILL OF MATERIALS			
5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC	LFS			
4	8/14/23	UPDATE TO 8TH ED. (2023)	FBC	LFS			
3	7/23/20	UPDATE TO 7TH ED (2020)	FBC	LFS			
2	10/14/17	UPDATE TO 6TH ED. (2017)	FBC	LFS			
1	09/02/15	UPDATE TO 5TH ED. (2014)	FBC	LFS			
NO.	DATE			BY			
				REVISIONS			
DATE: 8/06/14							
SCALE: N.T.S.							
DWG. BY: JK							
CHK. BY: LFS							
DRAWING NO.: FL-16094.7							
SHEET 4 OF 5							

G:\2023 FBC DRAWINGS 7-27-26\Plastpro\FL-16094 R10\FL-16094.5--8.dwg

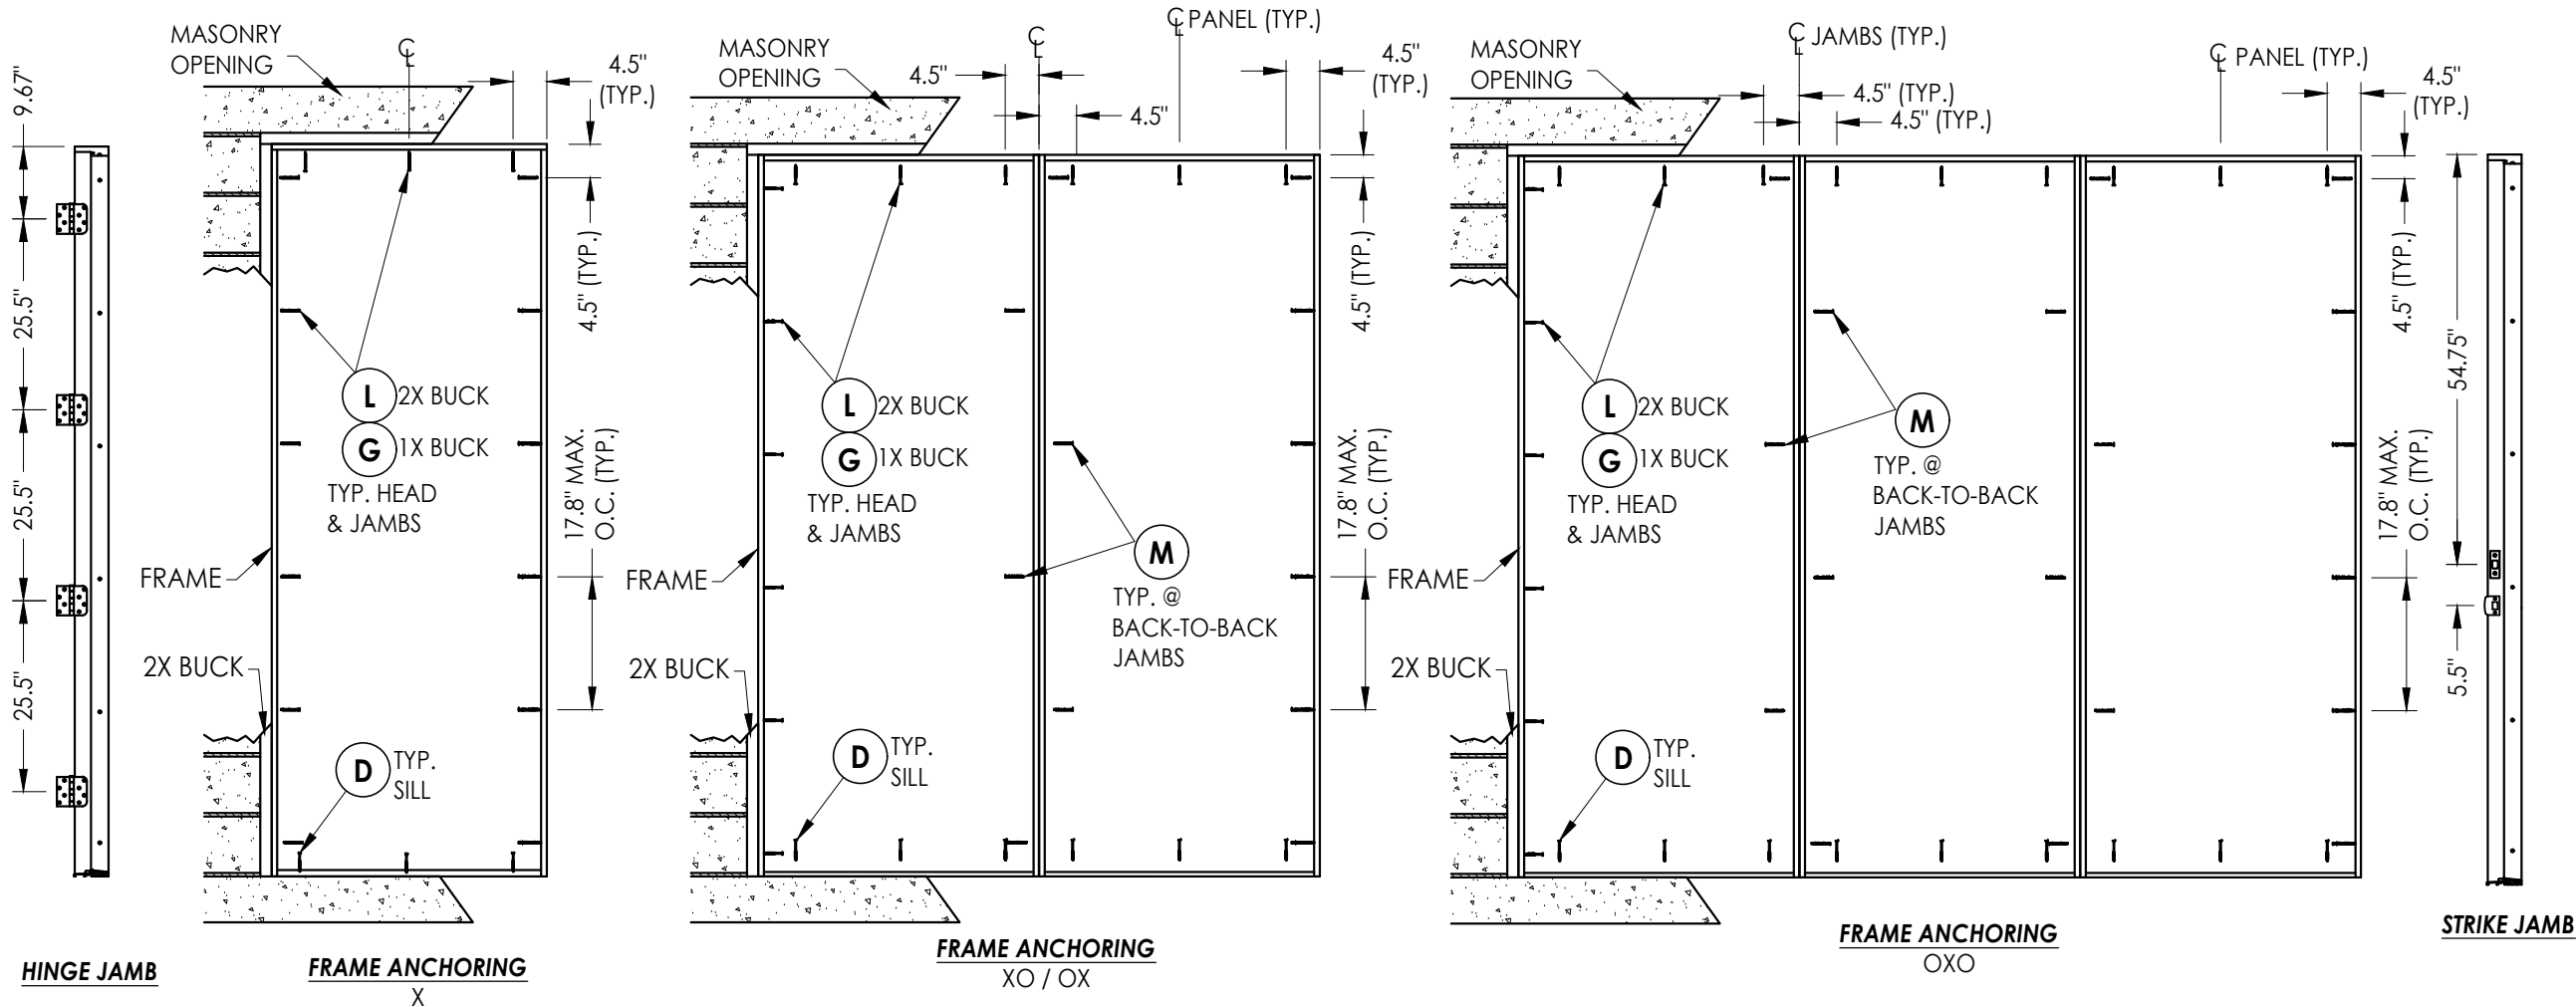

CORROSION RESISTANCE - SALTWATER ENVIRONMENT
Fasteners & connectors in areas within 3000 ft (914 m) of a saltwater coastline shall comply with FBC Sections 1711.1 or R332.1.

HARDWARE TABLE		
MANUFACTURER	MODEL	
KWIKSET	KNOB:	SIGNATURE SERIES
	DEADBOLT:	SIGNATURE SERIES (980)


CONCRETE ANCHOR NOTES:

- Substitution of equal concrete anchors from a different supplier may have different edge distance and center distance requirements.
- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints. Concrete anchor locations noted as "MAX. O.C. (TYP.)" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. O.C. (TYP.)" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

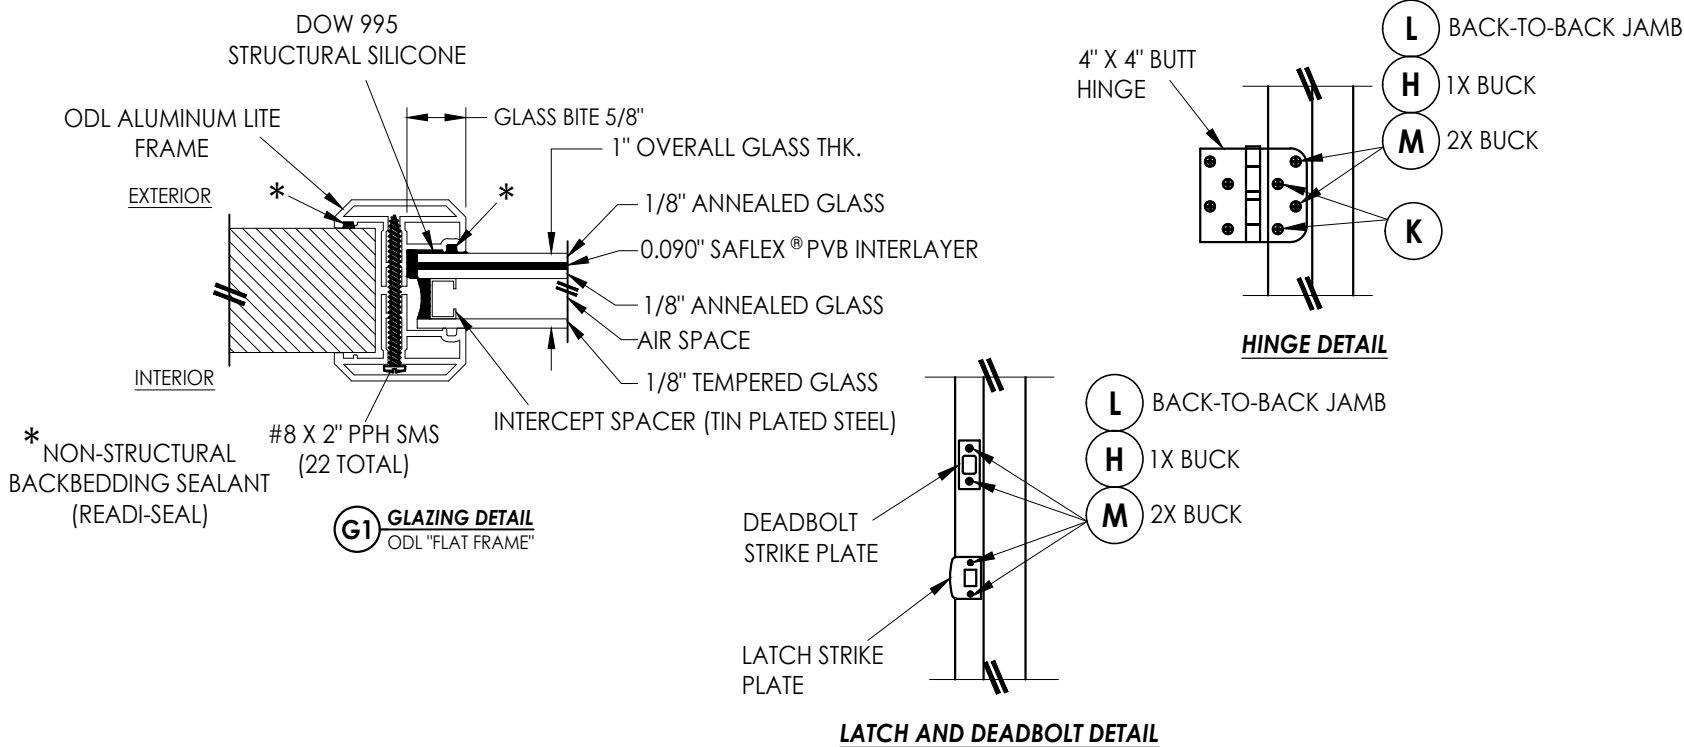

Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409		BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
PRODUCT: PLASTPRO FIBERGLASS DOOR		PART OR ASSEMBLY: FRAME ANCHORING & GLAZING DETAILS	
LFS	UPDATE TO 9TH ED. (2026)	FBC	BY
LFS	UPDATE TO 8TH ED. (2023)	FBC	
LFS	UPDATE TO 7TH ED. (2020)	FBC	
LFS	UPDATE TO 6TH ED. (2017)	FBC	
LFS	UPDATE TO 5TH ED. (2014)	FBC	
NO.		DATE	REVISIONS
5	7/02/26	UPDATE TO 9TH ED. (2026)	FBC
4	8/14/23	UPDATE TO 8TH ED. (2023)	FBC
3	7/23/20	UPDATE TO 7TH ED. (2020)	FBC
2	10/14/17	UPDATE TO 6TH ED. (2017)	FBC
1	09/02/15	UPDATE TO 5TH ED. (2014)	FBC
DATE: 8/06/14			
SCALE: N.T.S.			
DWG. BY: JK			
CHK. BY: LFS			
DRAWING NO.: FL-16094.7			
SHEET 5 OF 5			