

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1–1/2” WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1–1/2” OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER’S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16” OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4”.
9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: EXTRUDED RIGID PVC.
12. UNITS MUST BE GLAZED PER ASTM E1300–04.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING THROUGH FIN INTO WOOD FRAMING OR 2X BUCK USE #6 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR ANCHORING THROUGH FRAME INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING THROUGH FRAME INTO MASONRY/CONCRETE USE 3/16” TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4” MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2” MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR ANCHORING THROUGH FRAME INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER’S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

A. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42

B. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.

C. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH f’m=2,000PSI MINIMUM.

D. METAL STRUCTURE: STEEL 18GA (.048”) FY=33KSI/FU=52KSI OR ALUMINUM 6063–T5 FU=30KSI 1/8” THICK MINIMUM

SIGNED: 11/09/2015

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 6	INSTALLATION DETAILS

VIWINCO, INC.

MORGANTOWN BUSINESS PARK P.O. BOX 499
MORGANTOWN, PA 19543–0499

S–SERIES STACKED FIXED/CASEMENT/FIXED
COMBINATION ASSEMBLY – NON–IMPACT
NOTES

DRAWN:
N.G.

DWG NO.
08–02843


REV
—

SCALE
NTS

DATE
11/05/15

SHEET
1 OF 6



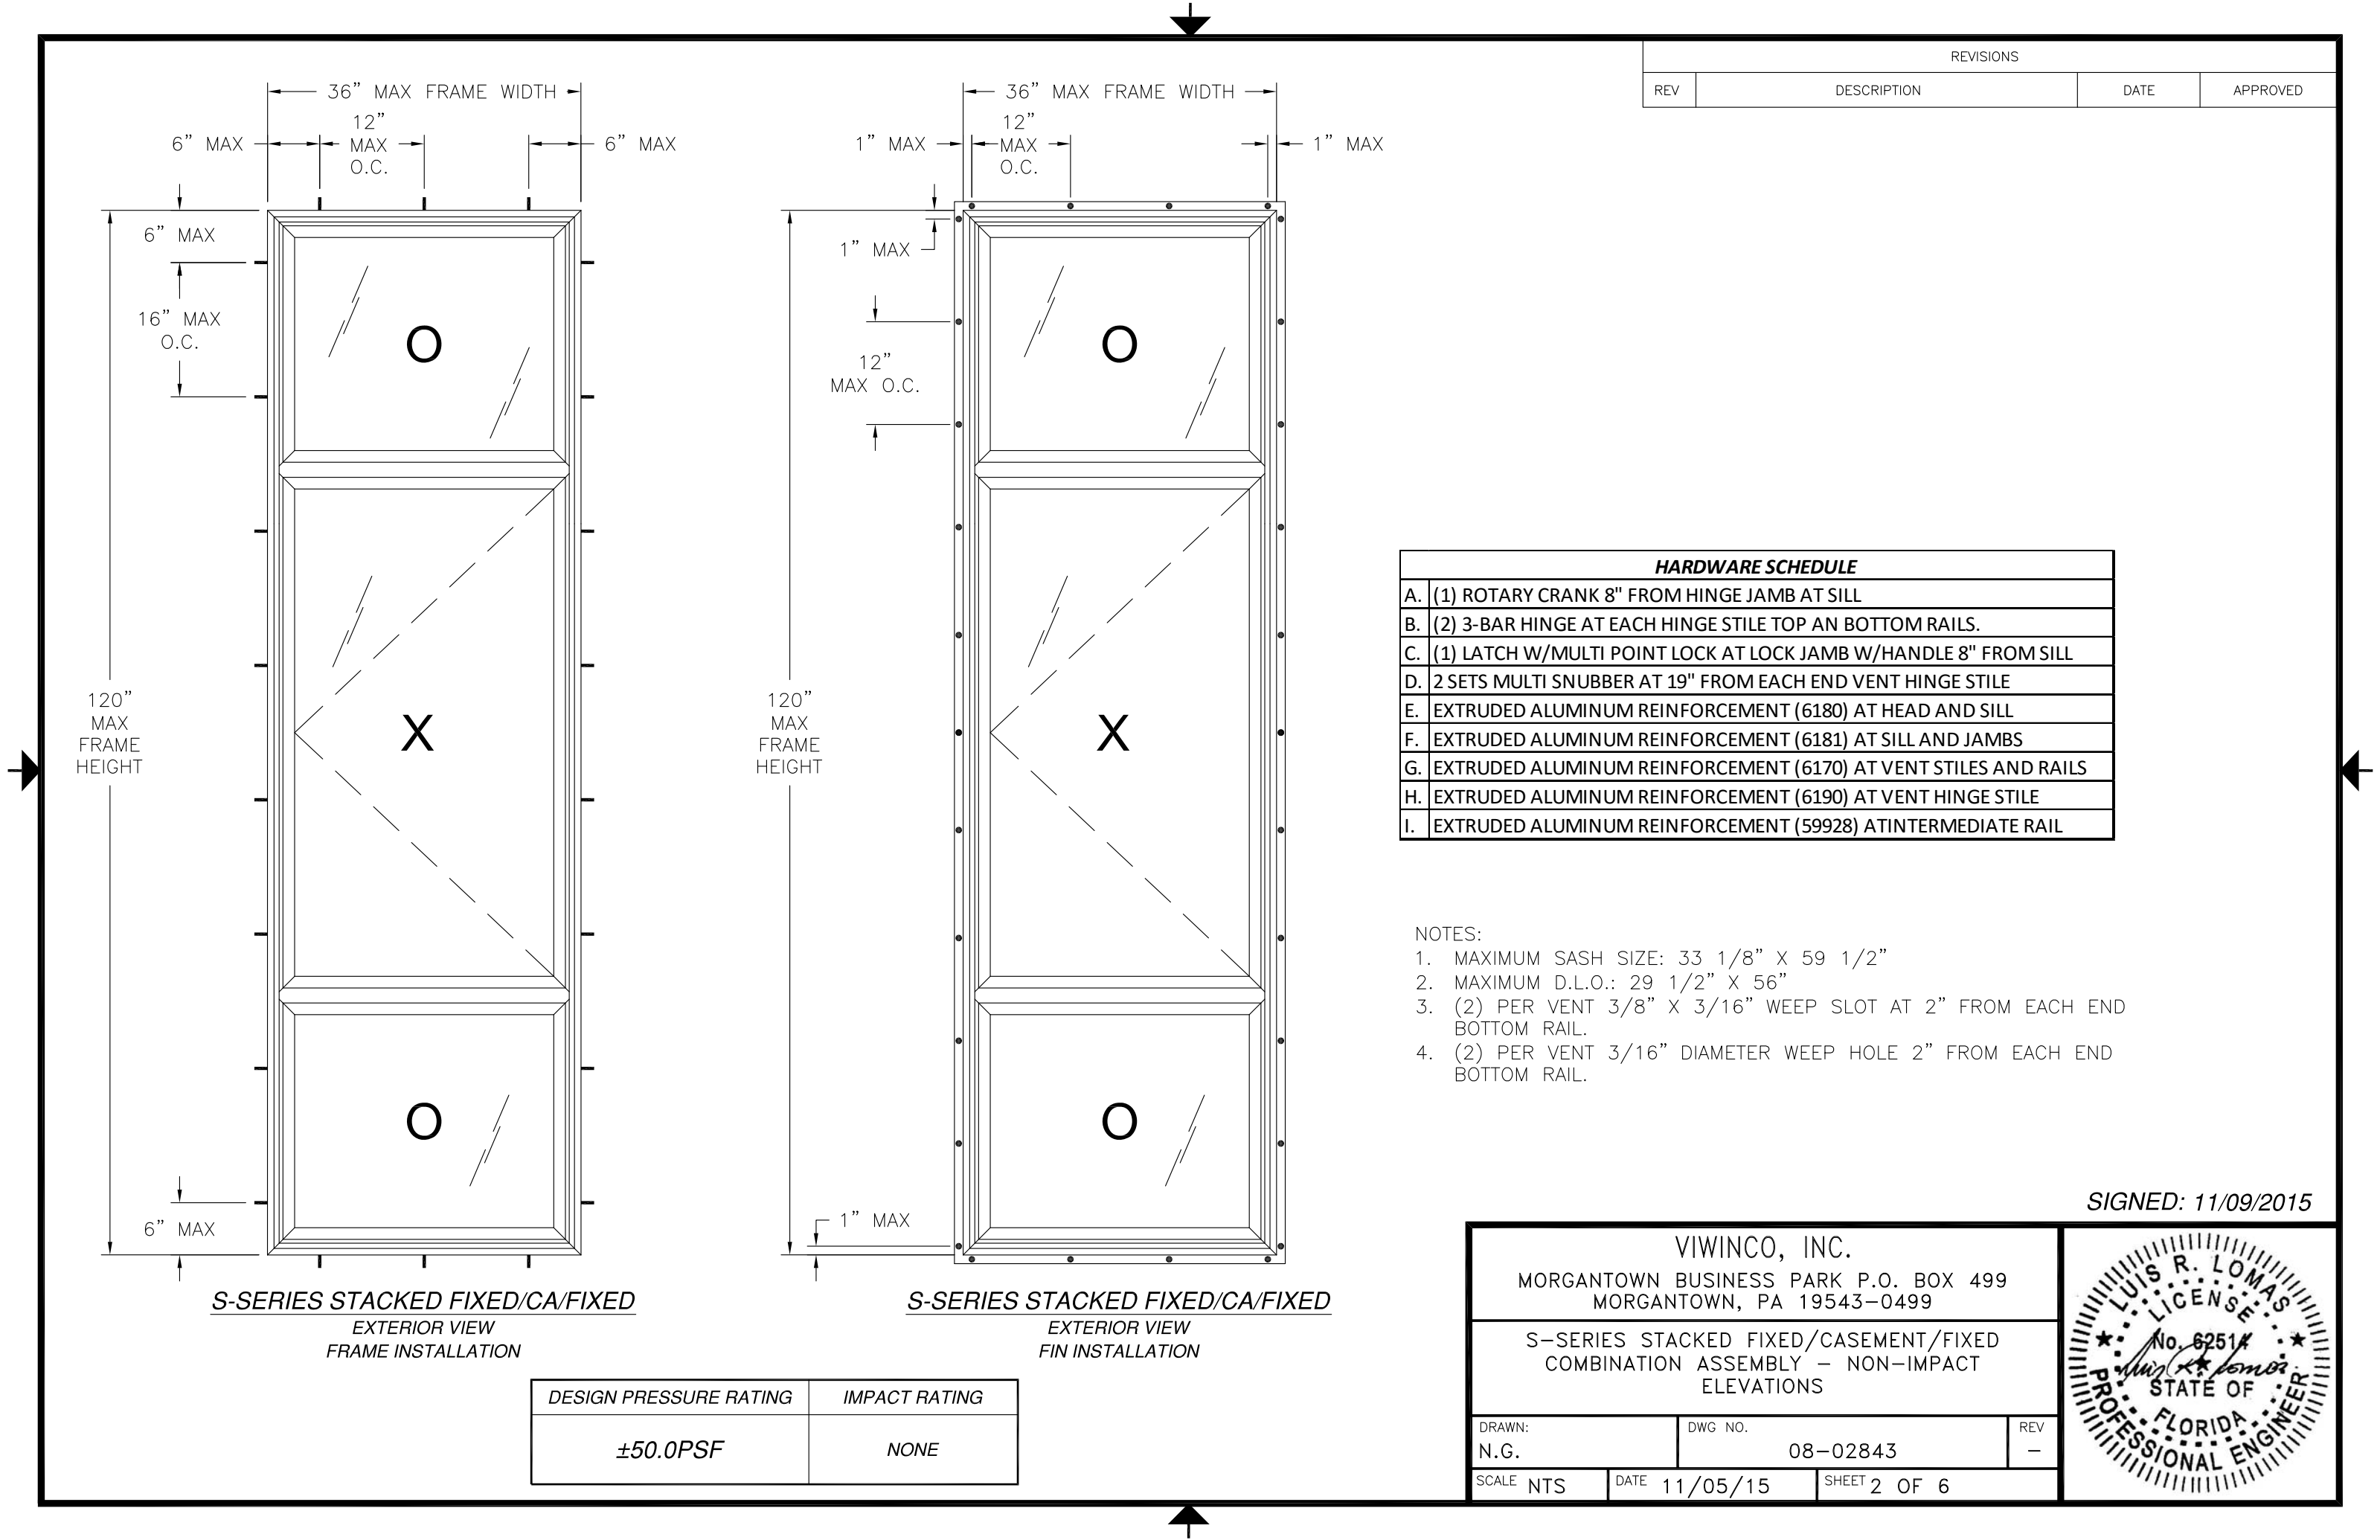

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

HARDWARE SCHEDULE	
A.	(1) ROTARY CRANK 8" FROM HINGE JAMB AT SILL
B.	(2) 3-BAR HINGE AT EACH HINGE STILE TOP AN BOTTOM RAILS.
C.	(1) LATCH W/MULTI POINT LOCK AT LOCK JAMB W/HANDLE 8" FROM SILL
D.	2 SETS MULTI SNUBBER AT 19" FROM EACH END VENT HINGE STILE
E.	EXTRUDED ALUMINUM REINFORCEMENT (6180) AT HEAD AND SILL
F.	EXTRUDED ALUMINUM REINFORCEMENT (6181) AT SILL AND JAMBS
G.	EXTRUDED ALUMINUM REINFORCEMENT (6170) AT VENT STILES AND RAILS
H.	EXTRUDED ALUMINUM REINFORCEMENT (6190) AT VENT HINGE STILE
I.	EXTRUDED ALUMINUM REINFORCEMENT (59928) AT INTERMEDIATE RAIL


- NOTES:
1. MAXIMUM SASH SIZE: 33 1/8" X 59 1/2"
 2. MAXIMUM D.L.O.: 29 1/2" X 56"
 3. (2) PER VENT 3/8" X 3/16" WEEP SLOT AT 2" FROM EACH END BOTTOM RAIL.
 4. (2) PER VENT 3/16" DIAMETER WEEP HOLE 2" FROM EACH END BOTTOM RAIL.

SIGNED: 11/09/2015


VIWINCO, INC. MORGANTOWN BUSINESS PARK P.O. BOX 499 MORGANTOWN, PA 19543-0499		
S-SERIES STACKED FIXED/CASEMENT/FIXED COMBINATION ASSEMBLY – NON-IMPACT ELEVATIONS		
DRAWN: N.G.	DWG NO. 08-02843	REV —
SCALE NTS	DATE 11/05/15	SHEET 2 OF 6



DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

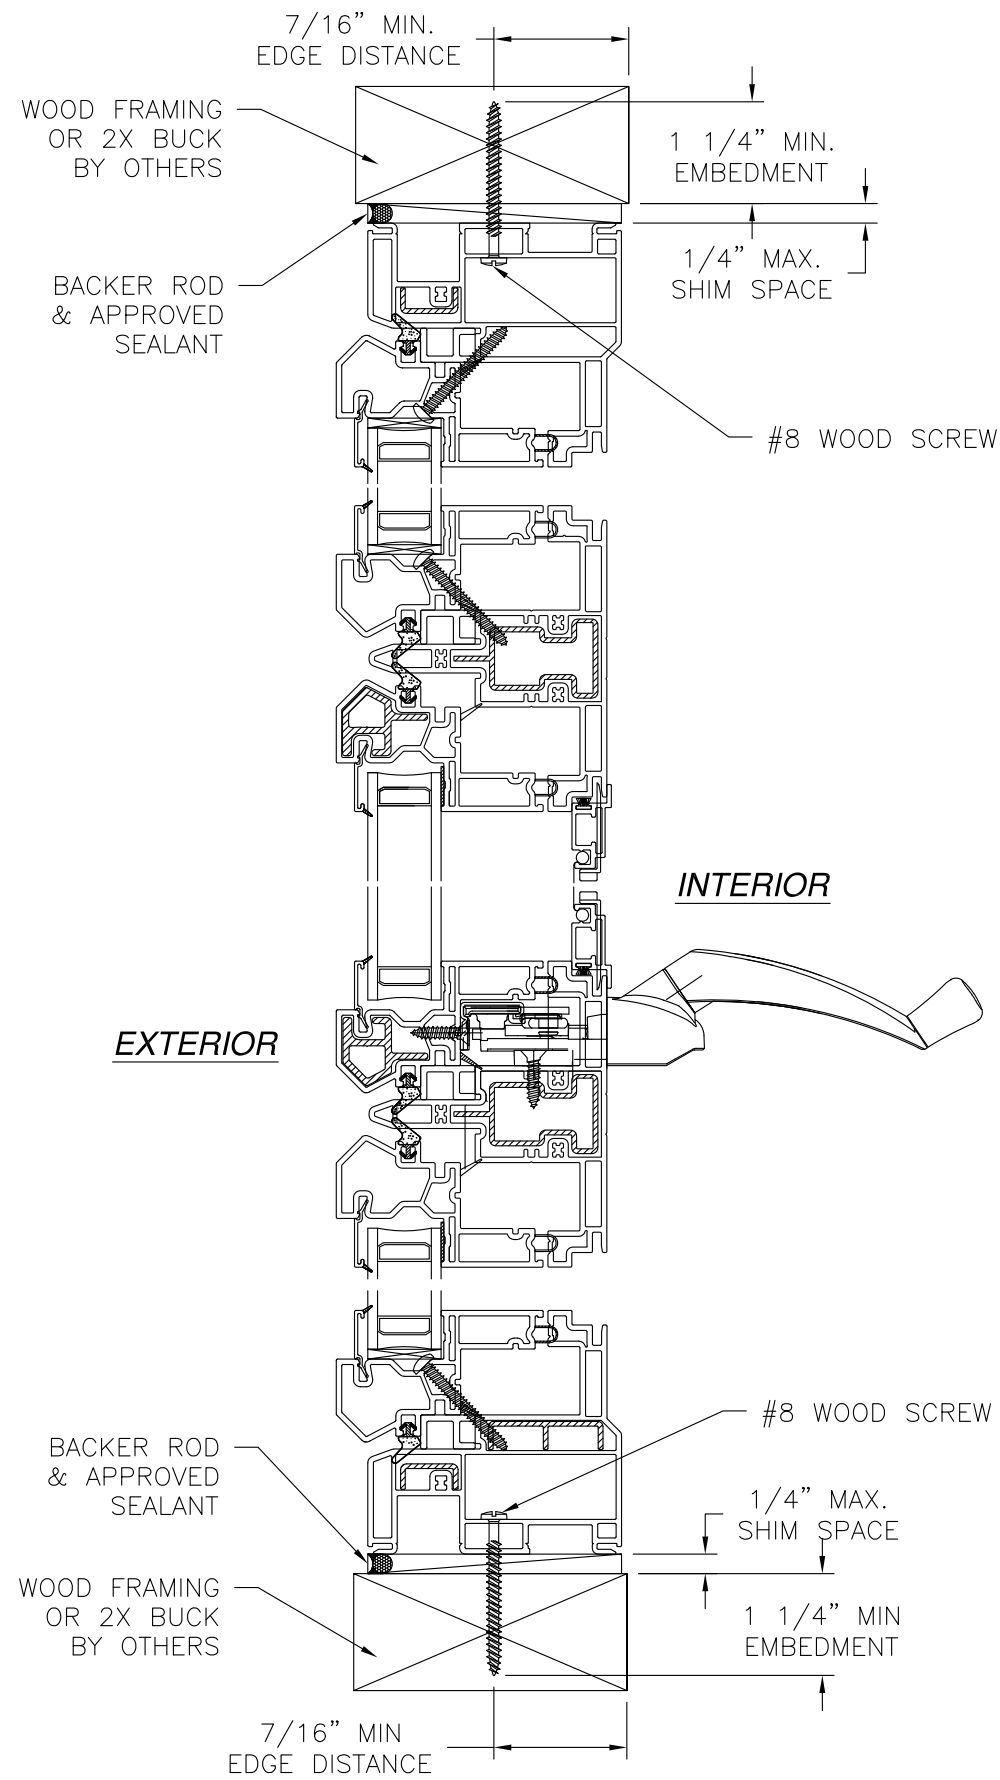

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

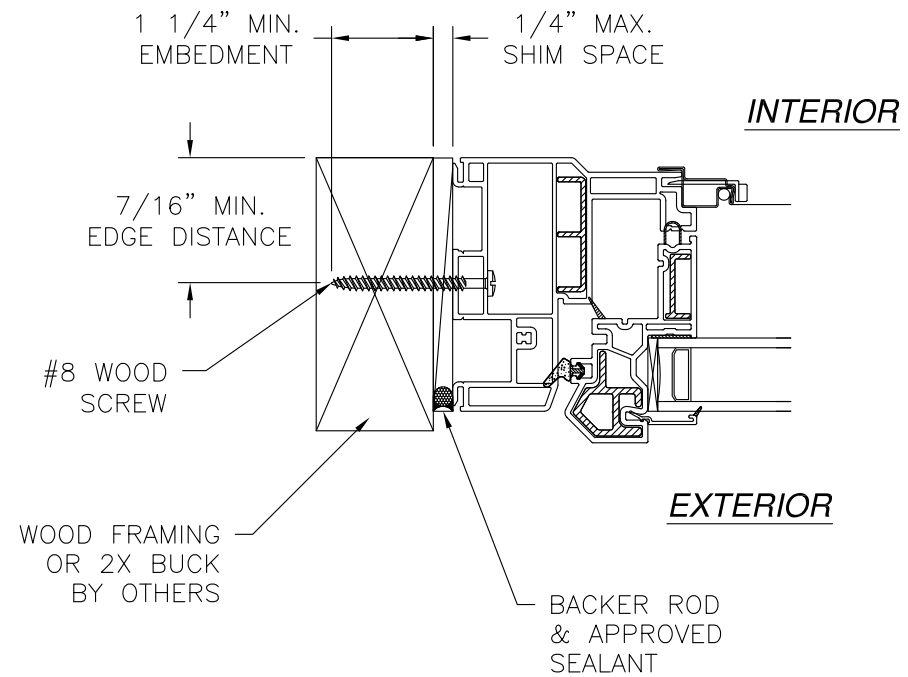

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

SIGNED: 11/09/2015


VIWINCO, INC. MORGANTOWN BUSINESS PARK P.O. BOX 499 MORGANTOWN, PA 19543-0499		
S-SERIES STACKED FIXED/CASEMENT/FIXED COMBINATION ASSEMBLY – NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02843	REV —
SCALE NTS	DATE 11/05/15	SHEET 3 OF 6



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

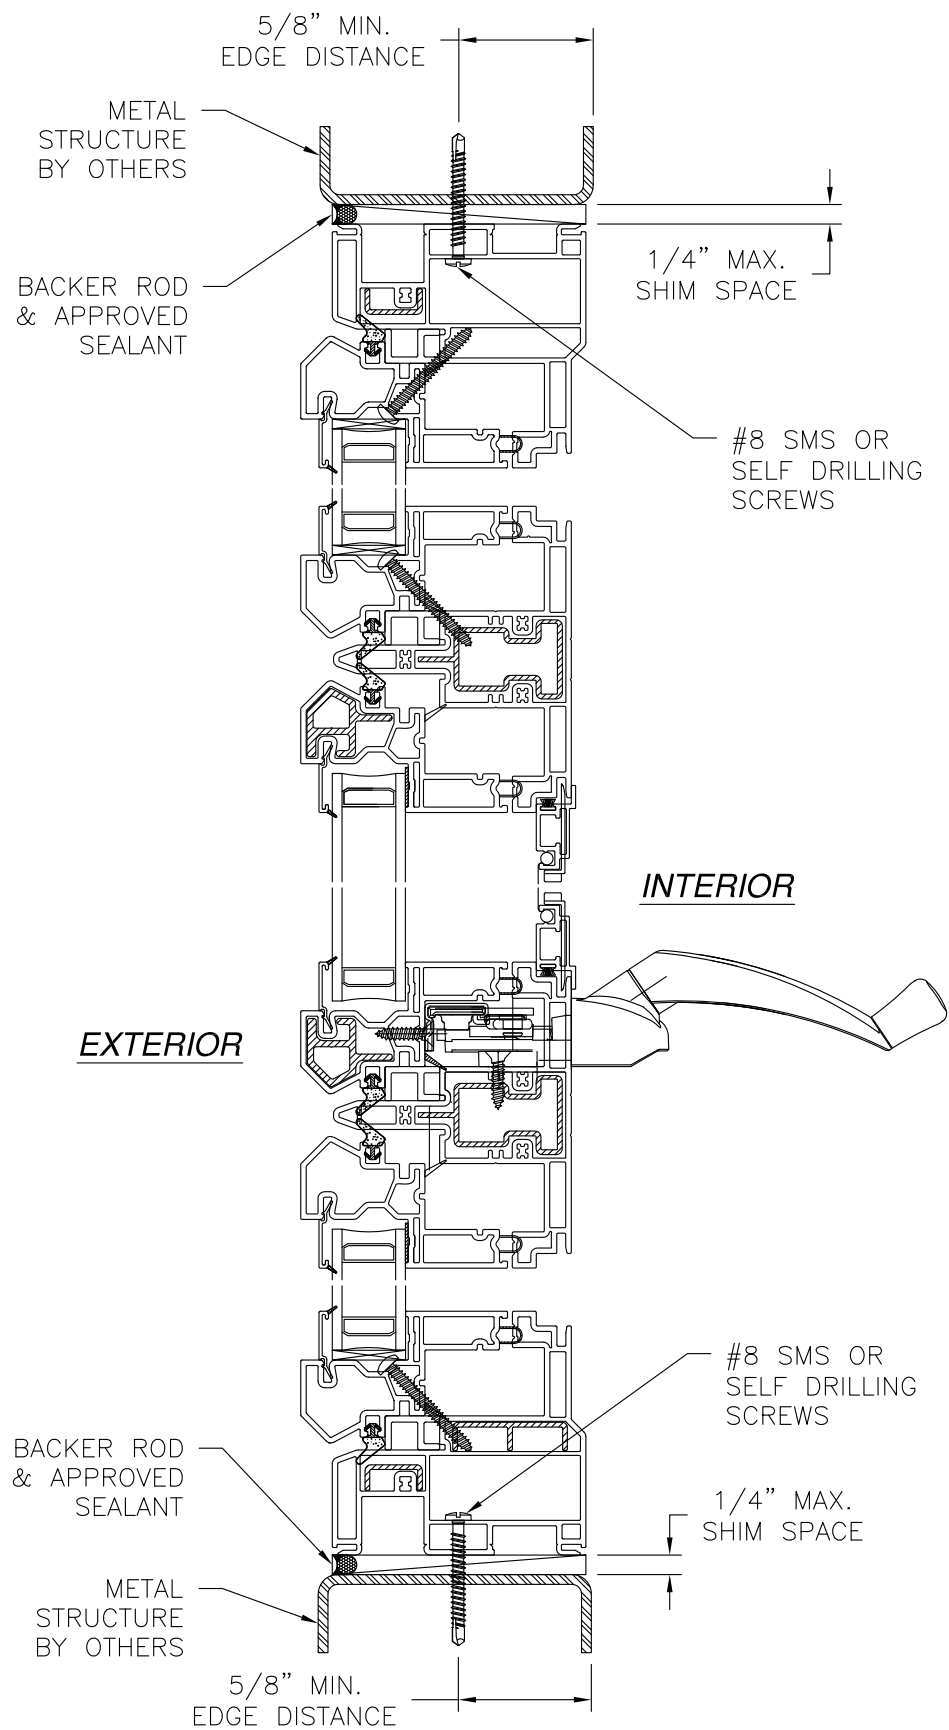

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

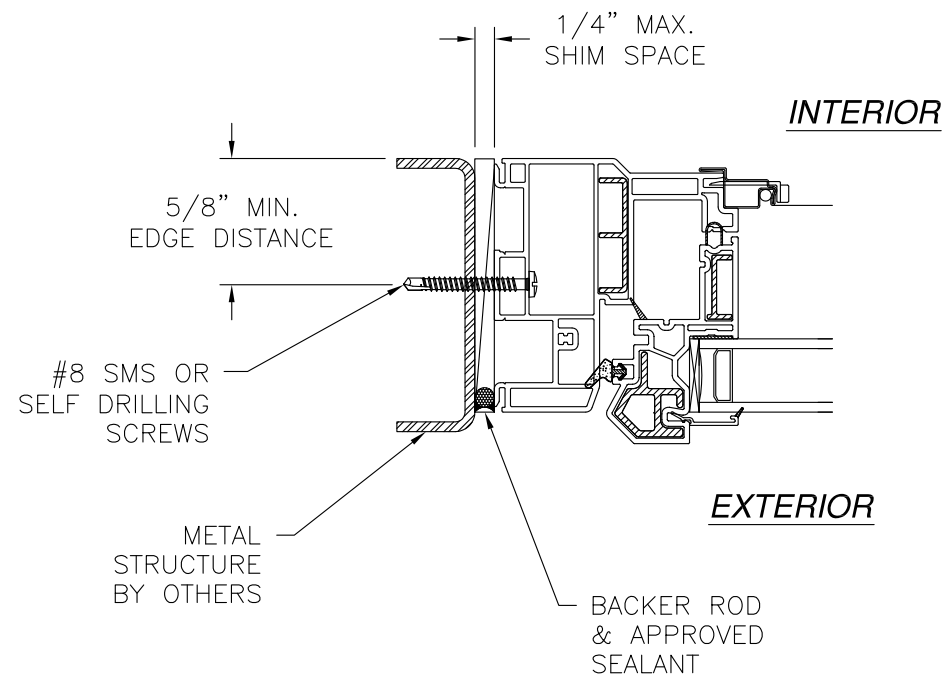


JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION


NOTES:

1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 11/09/2015


VIWINCO, INC. MORGANTOWN BUSINESS PARK P.O. BOX 499 MORGANTOWN, PA 19543-0499		
S-SERIES STACKED FIXED/CASEMENT/FIXED COMBINATION ASSEMBLY – NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02843	REV —
SCALE NTS	DATE 11/05/15	SHEET 4 OF 6

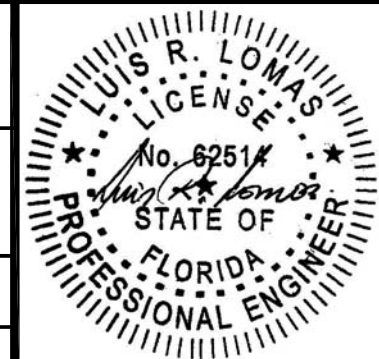

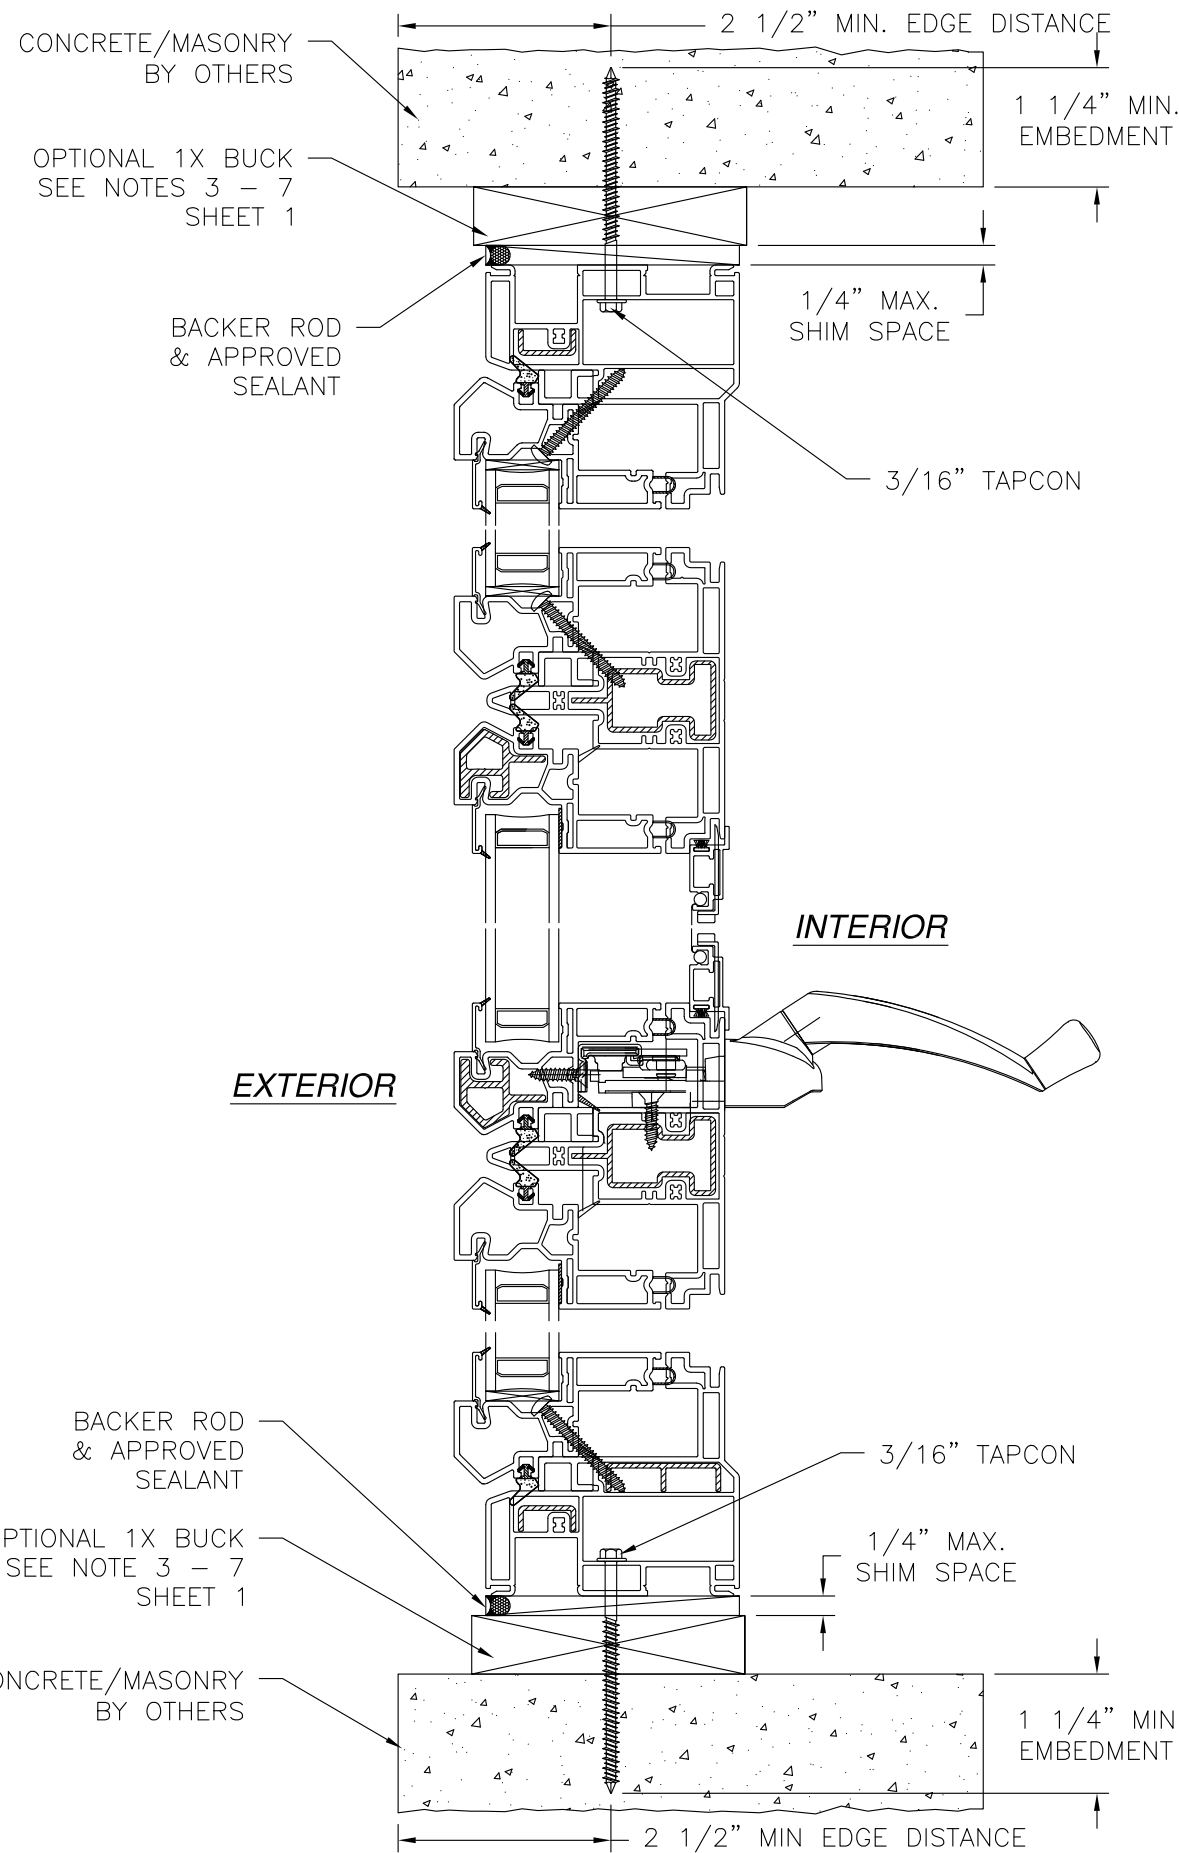

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

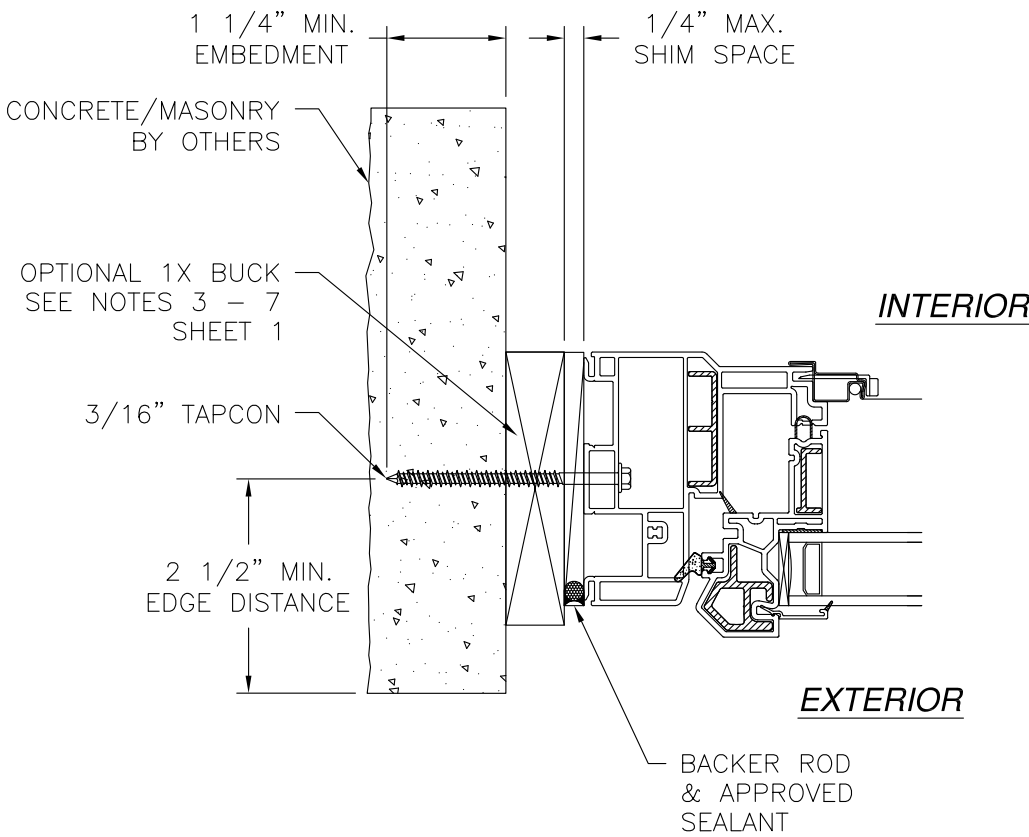



JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 11/09/2015

VIWINCO, INC. MORGANTOWN BUSINESS PARK P.O. BOX 499 MORGANTOWN, PA 19543-0499		
S-SERIES STACKED FIXED/CASEMENT/FIXED COMBINATION ASSEMBLY – NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02843	REV —
SCALE NTS	DATE 11/05/15	SHEET 5 OF 6



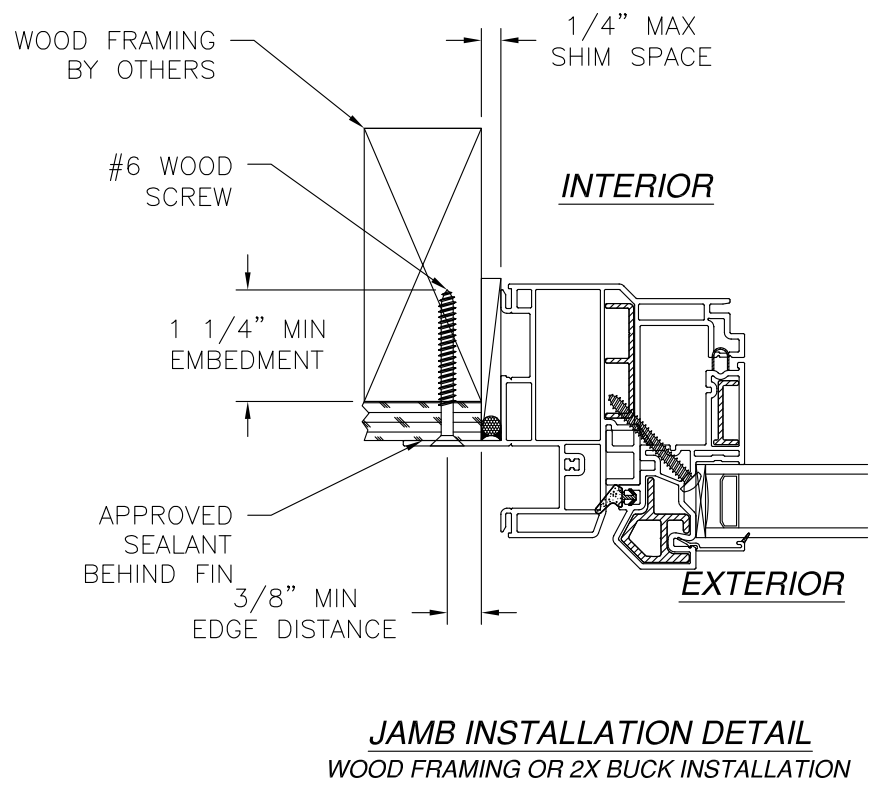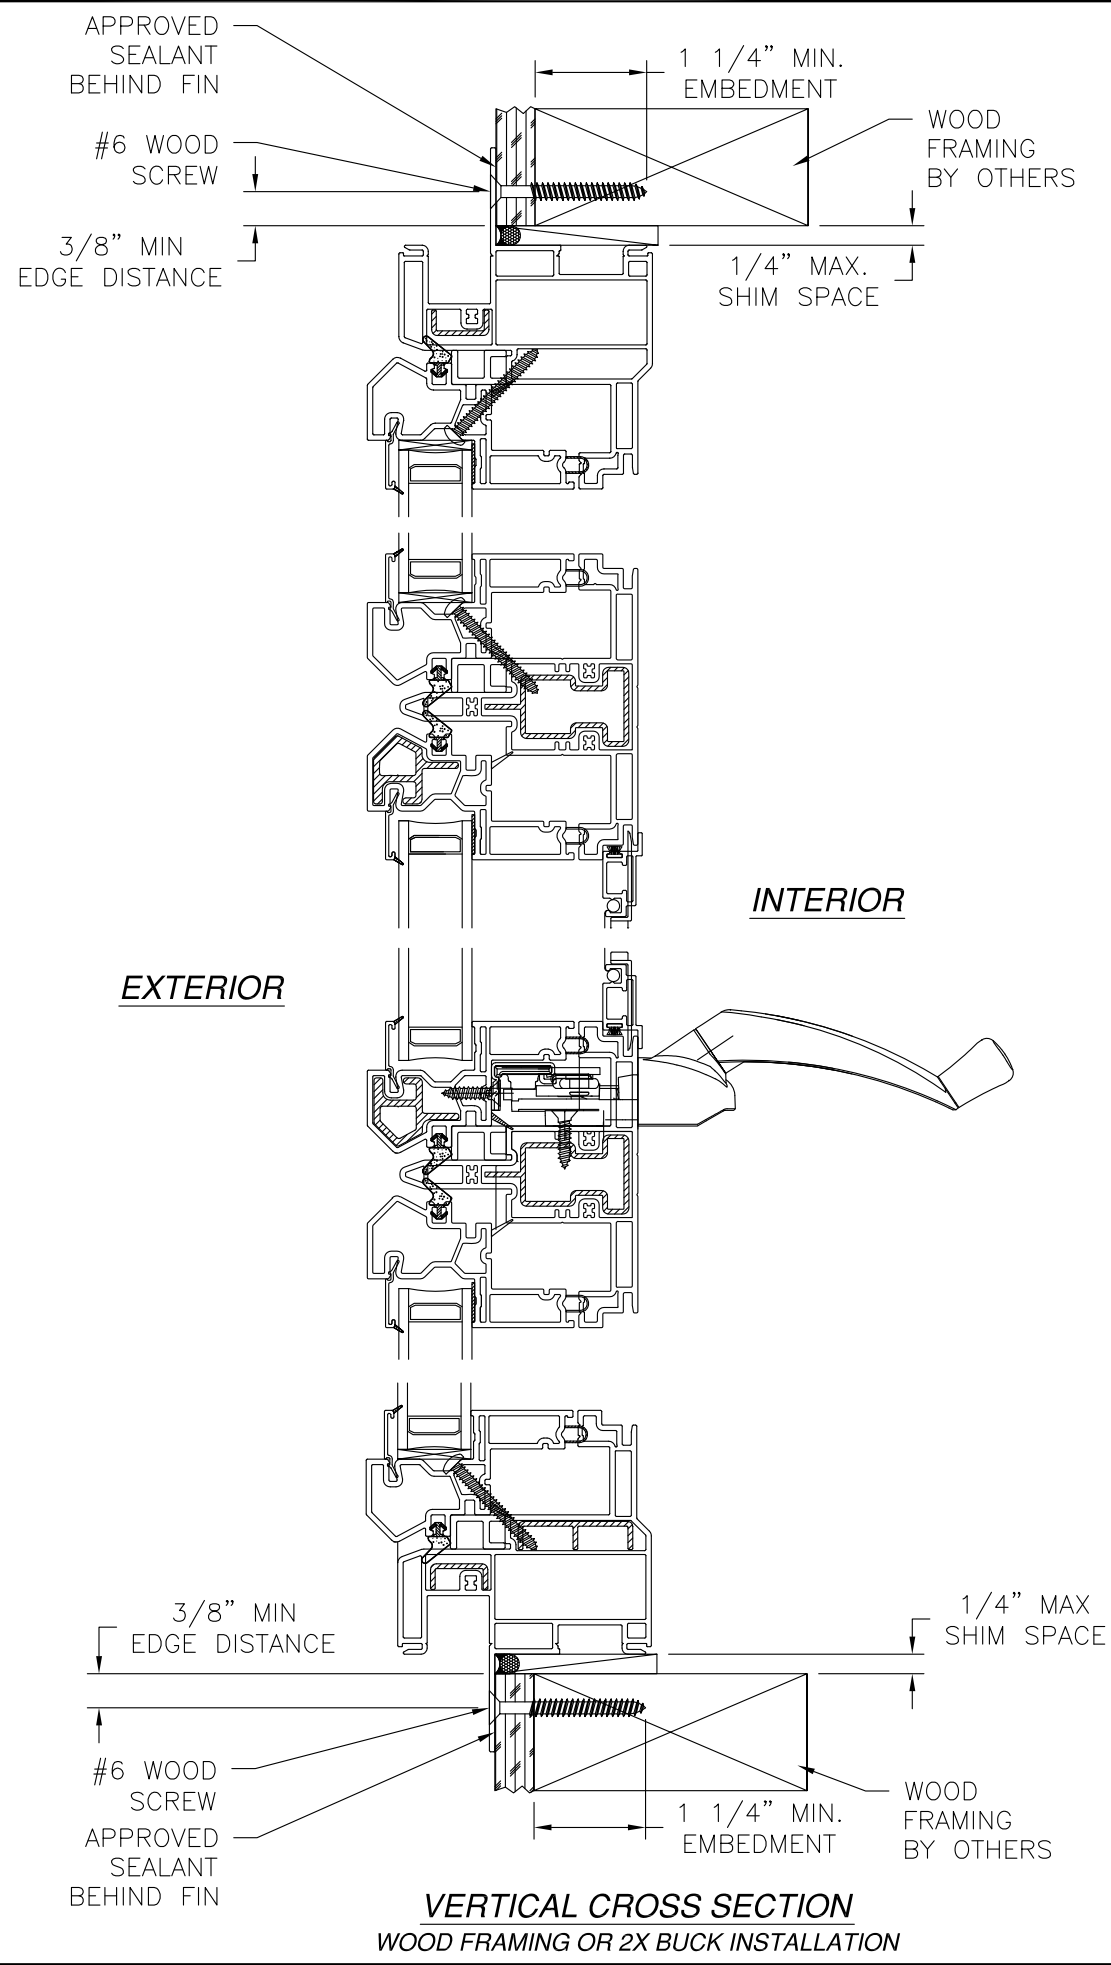

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

VIWINCO, INC.
MORGANTOWN BUSINESS PARK P.O. BOX 499
MORGANTOWN, PA 19543-0499

S-SERIES STACKED FIXED/CASEMENT/FIXED
COMBINATION ASSEMBLY – NON-IMPACT
INSTALLATION DETAILS

DRAWN: N.G.	DWG NO. 08-02843	REV —
SCALE NTS	DATE 11/05/15	SHEET 6 OF 6

SIGNED: 11/09/2015