

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED TO ADD CORROSION CHART	09/28/26	R.L.

NOTES:


1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING, METAL STRUCTURE AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
4. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
5. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
6. BUCKS SHALL EXTEND BEYOND UNIT FRAME INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
7. SHIM AS NEEDED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
8. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
9. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
10. FRAME MATERIAL: COMPOSITE.
11. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 6 FOR GLAZING DETAILS.
12. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.

13. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
14. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. ALL FASTENERS TO BE CORROSION RESISTANT.
17. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - 17.1. WOOD: MINIMUM SPECIFIC GRAVITY OF G=0.42
 - 17.2. CONCRETE: MINIMUM COMPRESSIVE STRENGTH OF 2,000 PSI.
 - 17.3. MASONRY: HOLLOW/FILLED BLOCK PER ASTM C90 WITH Fm=2,000PSI MINIMUM.
 - 17.4. METAL STRUCTURE: STEEL 18GA (.048") FY=33KSI/FU=52KSI OR ALUMINUM 6063-T5 FU=30KSI 1/8" THICK MINIMUM


TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATION
3	B.O.M. AND CROSS SECTIONS
4 - 5	INSTALLATION DETAILS
6	GLAZING DETAILS AND COMPONENTS

PROVIA DOOR, INC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL FIXED SIDELITE WINDOW COMPOSITE NON-IMPACT NOTES		
DRAWN: V.L.	DWG NO. 08-02107B	REV B
SCALE NTS	DATE 07/16/13	SHEET 1 OF 6
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 09/28/2026

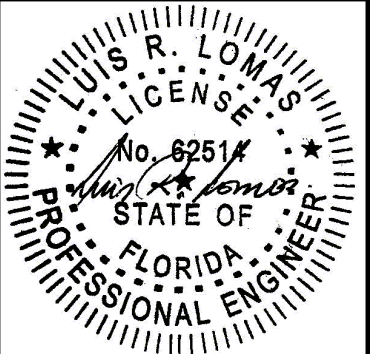

Luis R. Lomas P.E.
FL No.: 62514

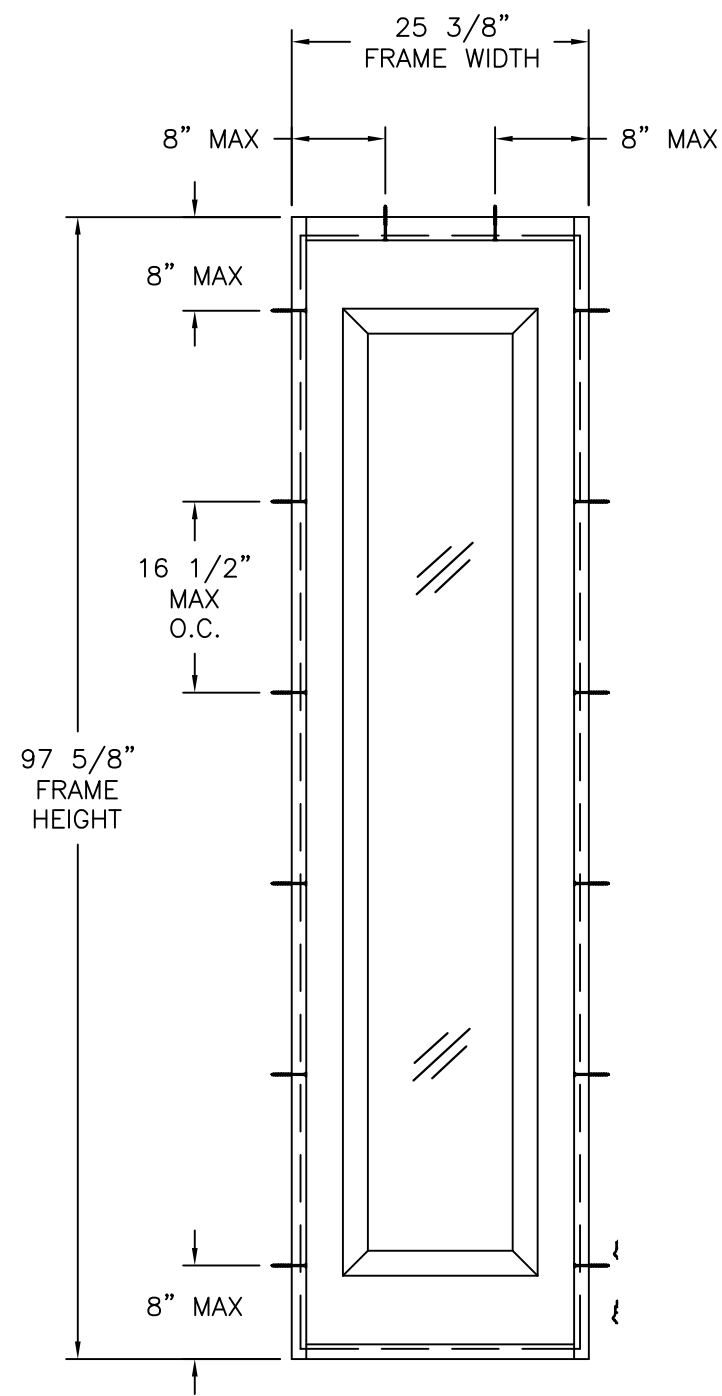


- NOTES:
- 1. PANEL SIZE: 23 7/8" X 95 1/8"
 - 2. D.L.O. SIZE: 12 3/8" X 78 3/8"

STEEL FIXED SIDELITE WINDOW
EXTERIOR VIEW

DESIGN PRESSURE RATING	IMPACT RATING
±55.0PSF	NONE

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED TO ADD CORROSION CHART	09/28/26	R.L.


SIGNED: 09/28/2026

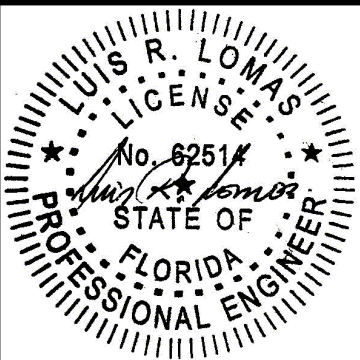PROVIA DOOR, INC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681			
STEEL FIXED SIDELITE WINDOW COMPOSITE NON-IMPACT ELEVATION			
DRAWN: V.L.	DWG NO. 08-02107B	REV B	
SCALE NTS	DATE 07/16/13	SHEET 2 OF 6	
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com			


Luis R. Lomas P.E.
FL No.: 62514

PARTS LIST				
NO.	PART NUMBER	DESCRIPTION	MANUFACTURER	MATERIAL
1	P-TH-TN24-70	THRESHOLD	ORRVILON	ALUMINUM
2	P-CJ-JXX-XXX	JAMB	PROVIA	COMPOSITE
3	P-SO-WT-A01X	HURRICANE GLASS TRIM		ALUMINUM
4	P-HW-FSNRZN-65	#10 WOOD SCREW 12 X 1 3/4		STEEL
5	P-WS-CCL-01	RIBBED GASKET SEAL		FOAM
6	P-TH-ENSS-00	SIDELITE SILL SUPPORT	OMEGA PLASTICS	PLASTIC
7		STANDARD SIDELITE SLAB	PROVIA	STEEL
8		#8 x 3" SCREW		STEEL
9		#6 x 1 1/2" SCREW		STEEL
10		#6 x 1 1/2" WOOD SCREW		STEEL

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED TO ADD CORROSION CHART	09/28/26	R.L.

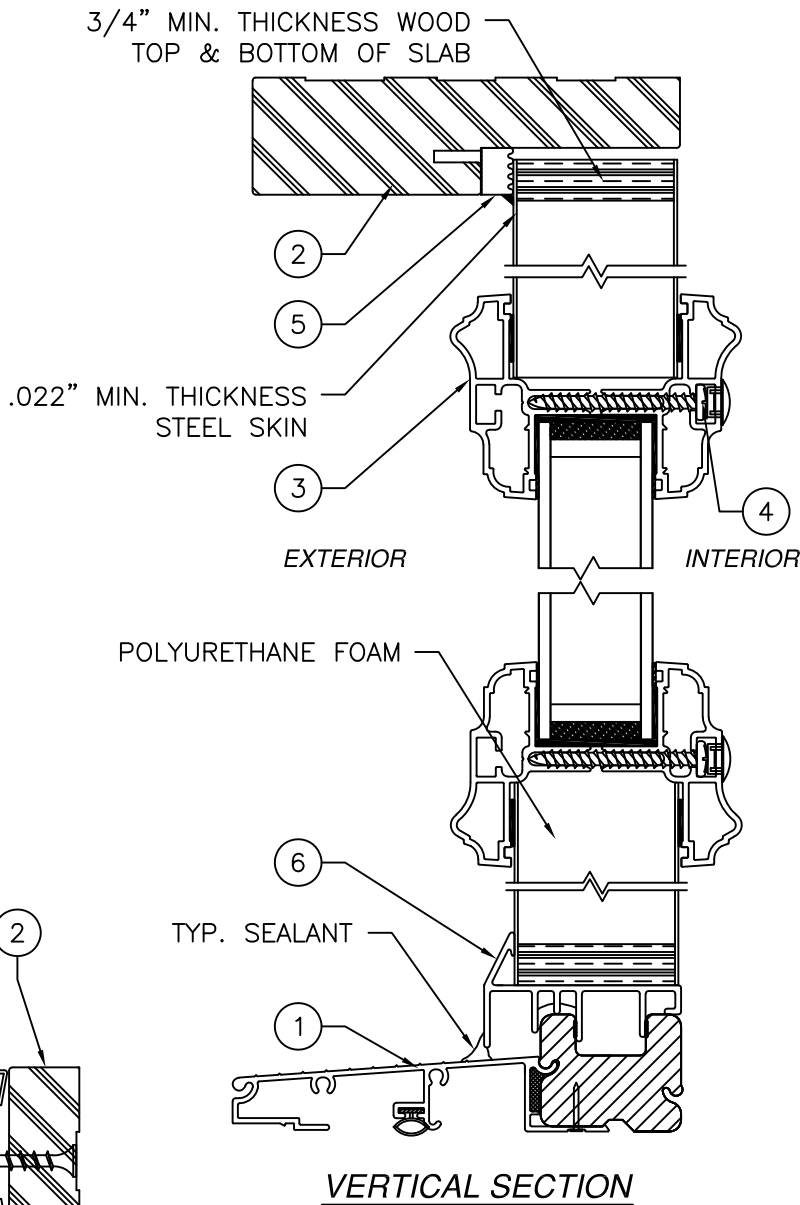


- CORNER CONSTRUCTION:
1. - JAMBS ARE ATTACHED TO SILL USING (3) #6 x 1 1/2" SCREWS (ITEM 9)
 2. - JAMBS ARE ATTACHED TO HEAD USING (3) #8 x 3" SCREWS (ITEM 8)

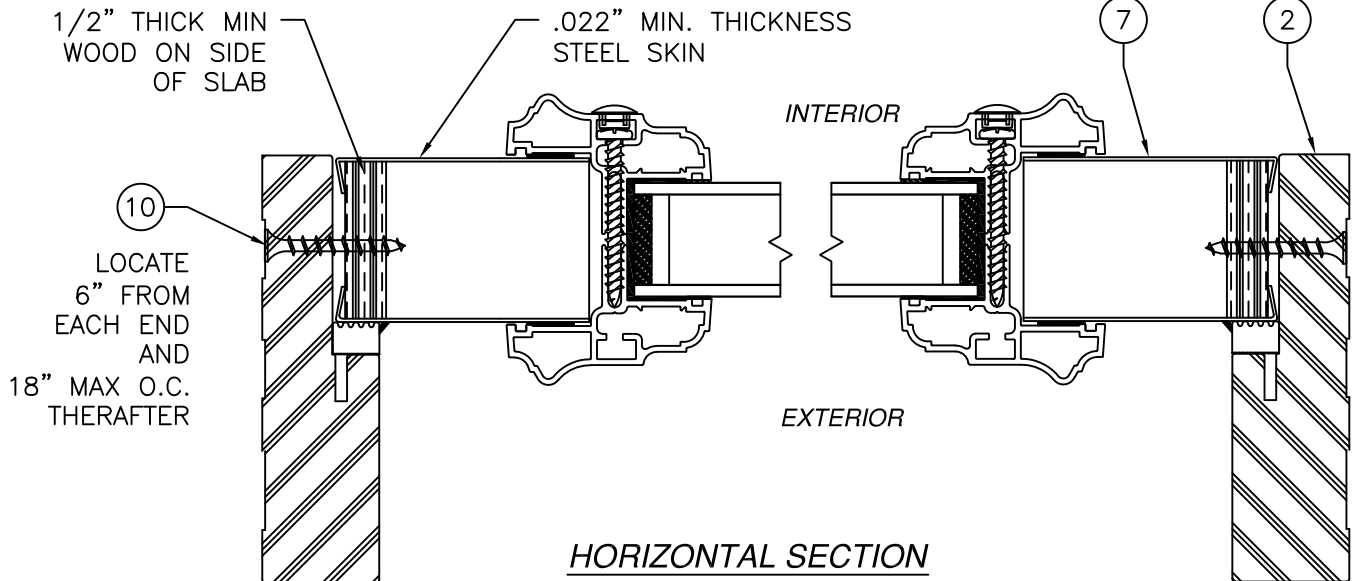


PROVIA DOOR, INC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL FIXED SIDELITE WINDOW COMPOSITE NON-IMPACT B.O.M. AND CROSS SECTIONS		
DRAWN: V.L.	DWG NO. 08-02107B	REV B
SCALE NTS	DATE 07/16/13	SHEET 3 OF 6
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		

SIGNED: 09/28/2026

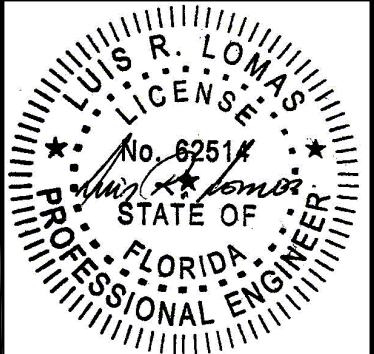


Luis R. Lomas P.E.
FL No.: 62514

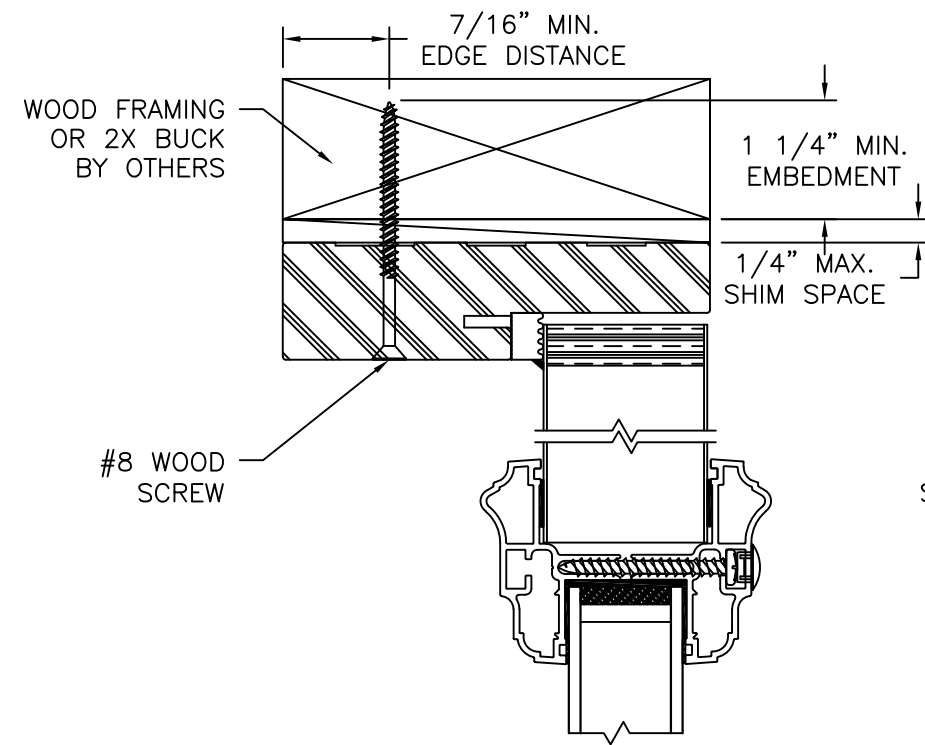


EXTERIOR

INTERIOR

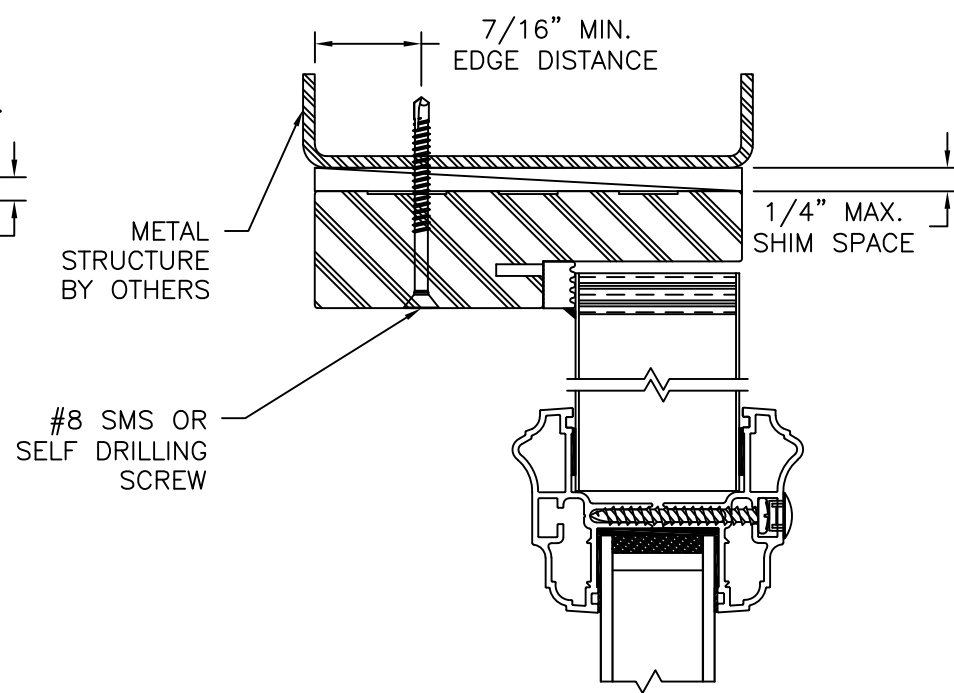


EXTERIOR


INTERIOR

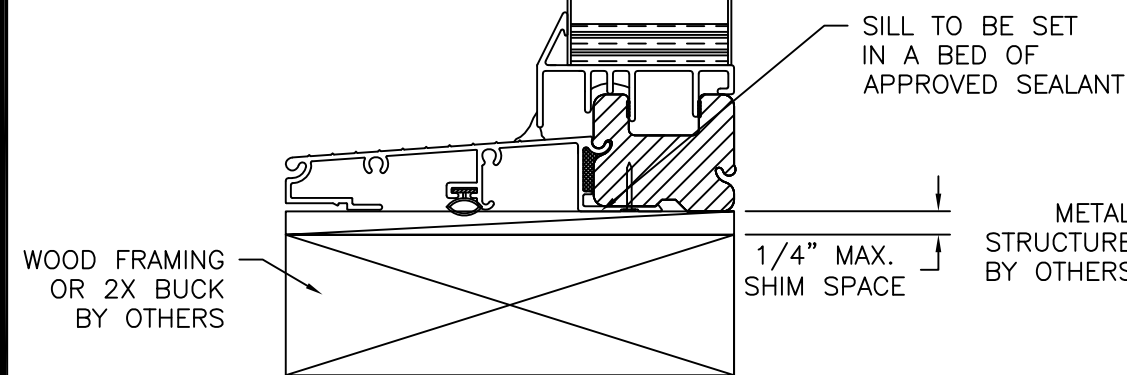


VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

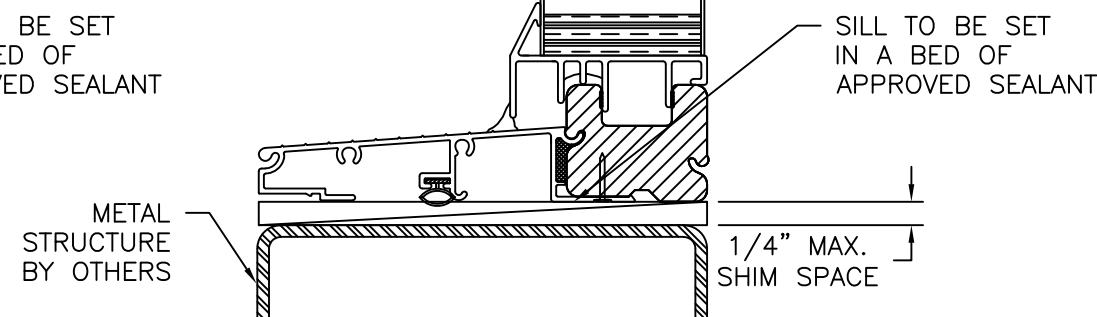

VERTICAL CROSS SECTION
METAL STRUCTURE INSTALLATION

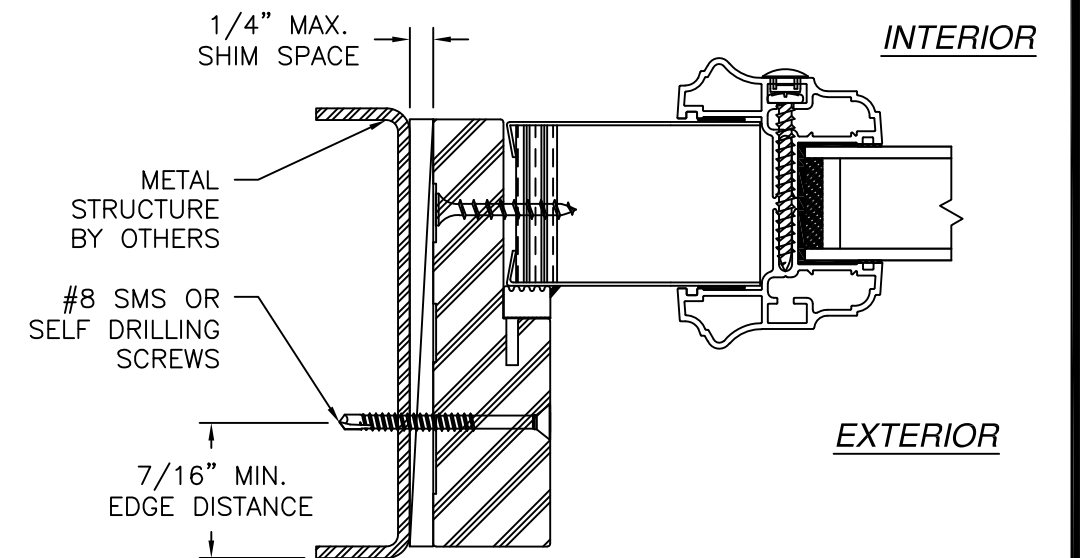

JAMB INSTALLATION DETAIL
METAL STRUCTURE INSTALLATION

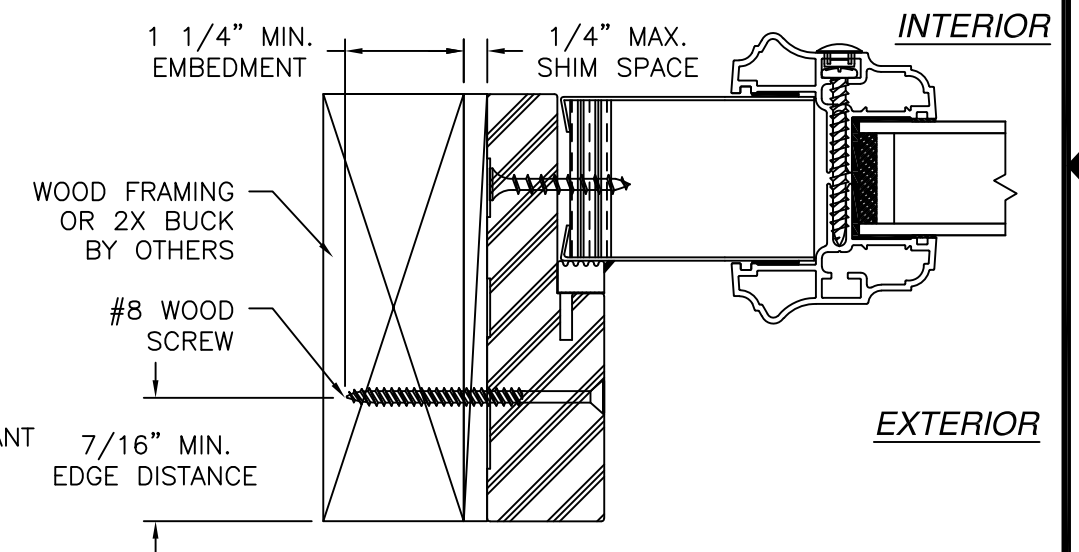

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

SIGNED: 09/28/2026

PROVIA DOOR, INC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL FIXED SIDELITE WINDOW
COMPOSITE NON-IMPACT
INSTALLATION DETAILS

DRAWN:
V.L.

DWG NO.

08-02107B

REV
B

SCALE NTS


DATE

07/16/13



SHEET

4 OF 6

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@rlomaspe.com

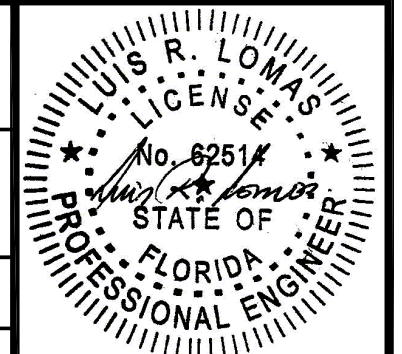


Luis R. Lomas P.E.
FL No.: 62514

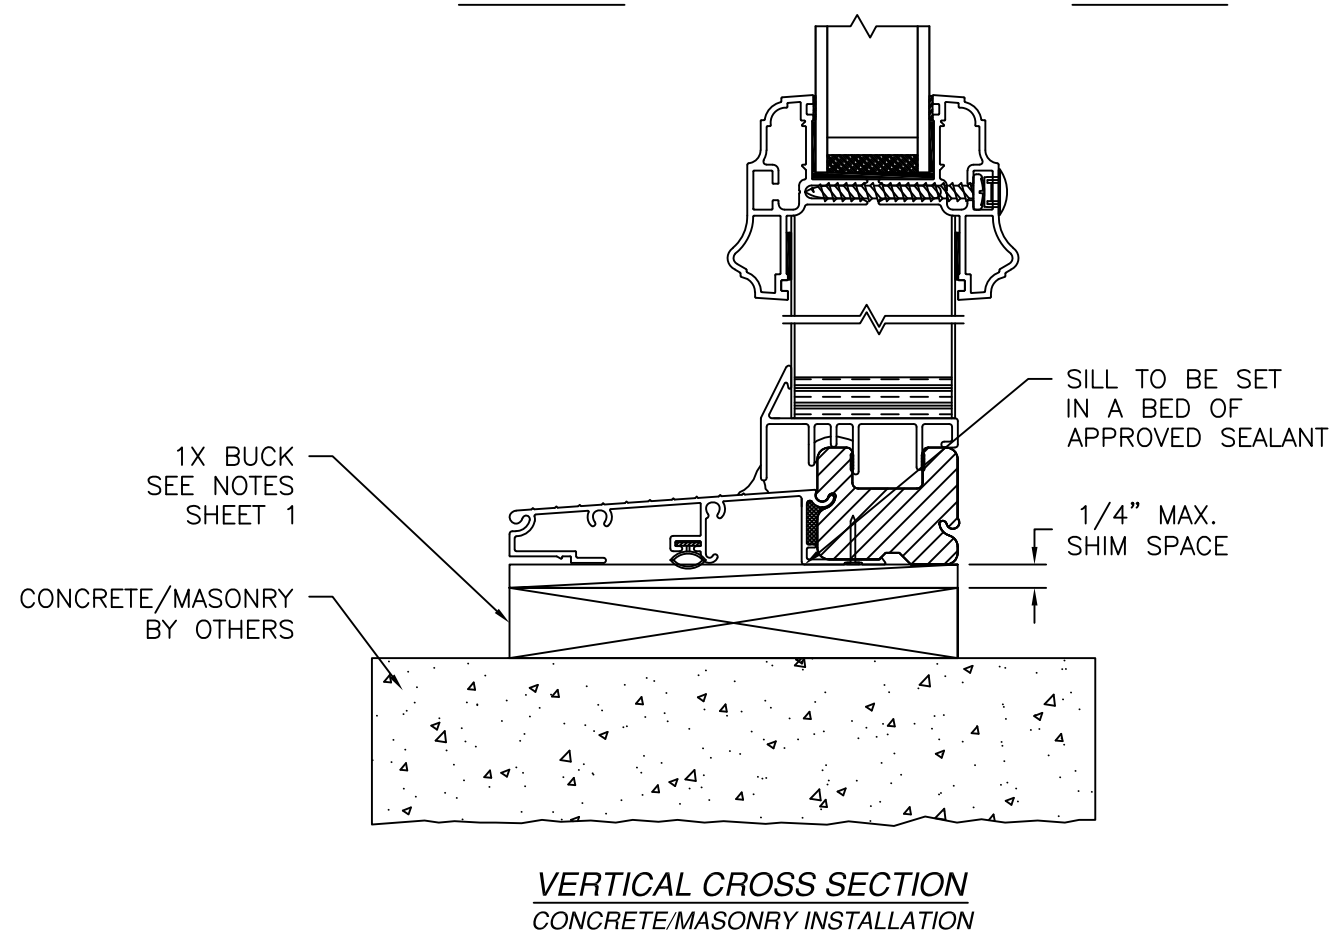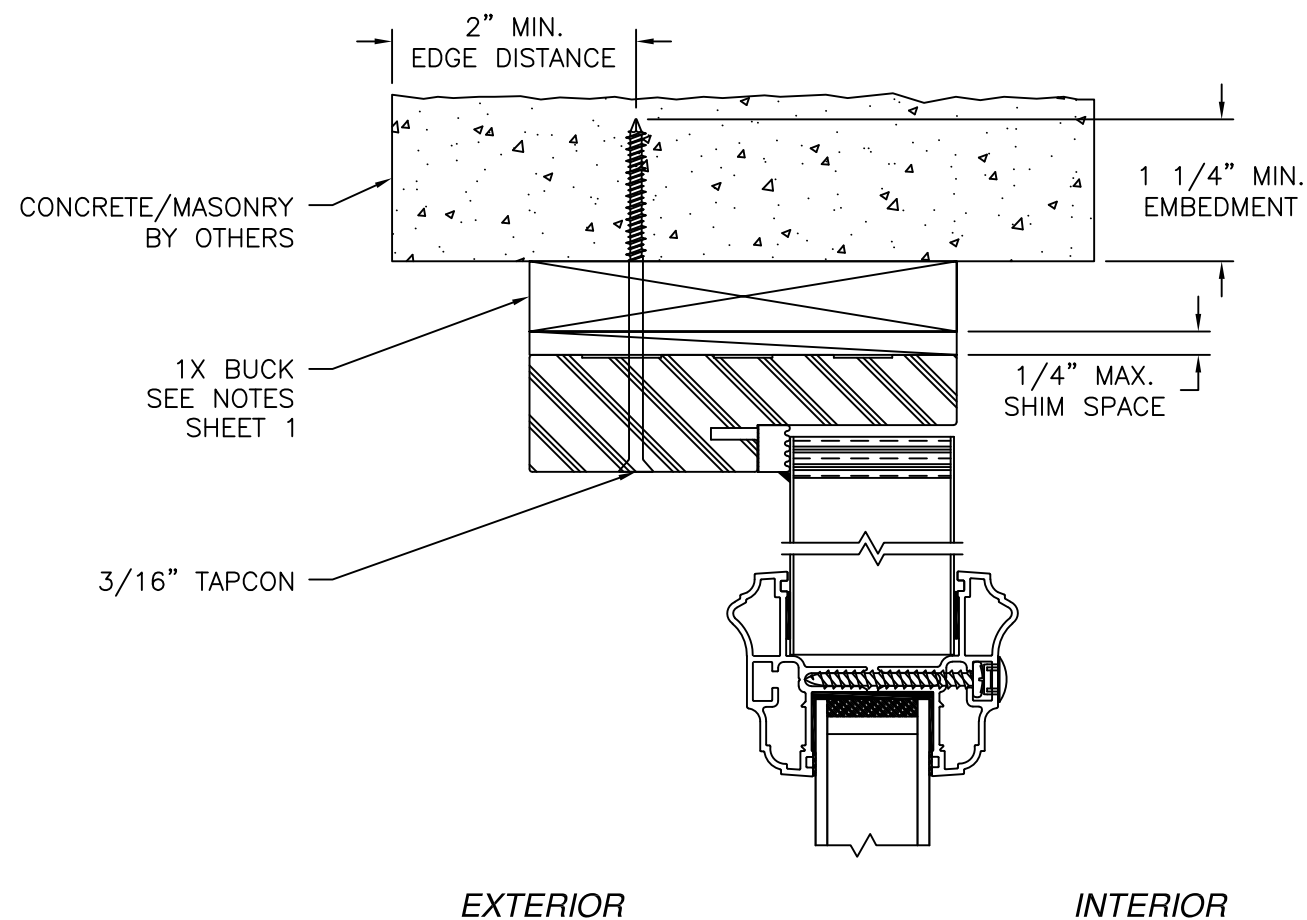

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED TO ADD CORROSION CHART	09/28/26	R.L.

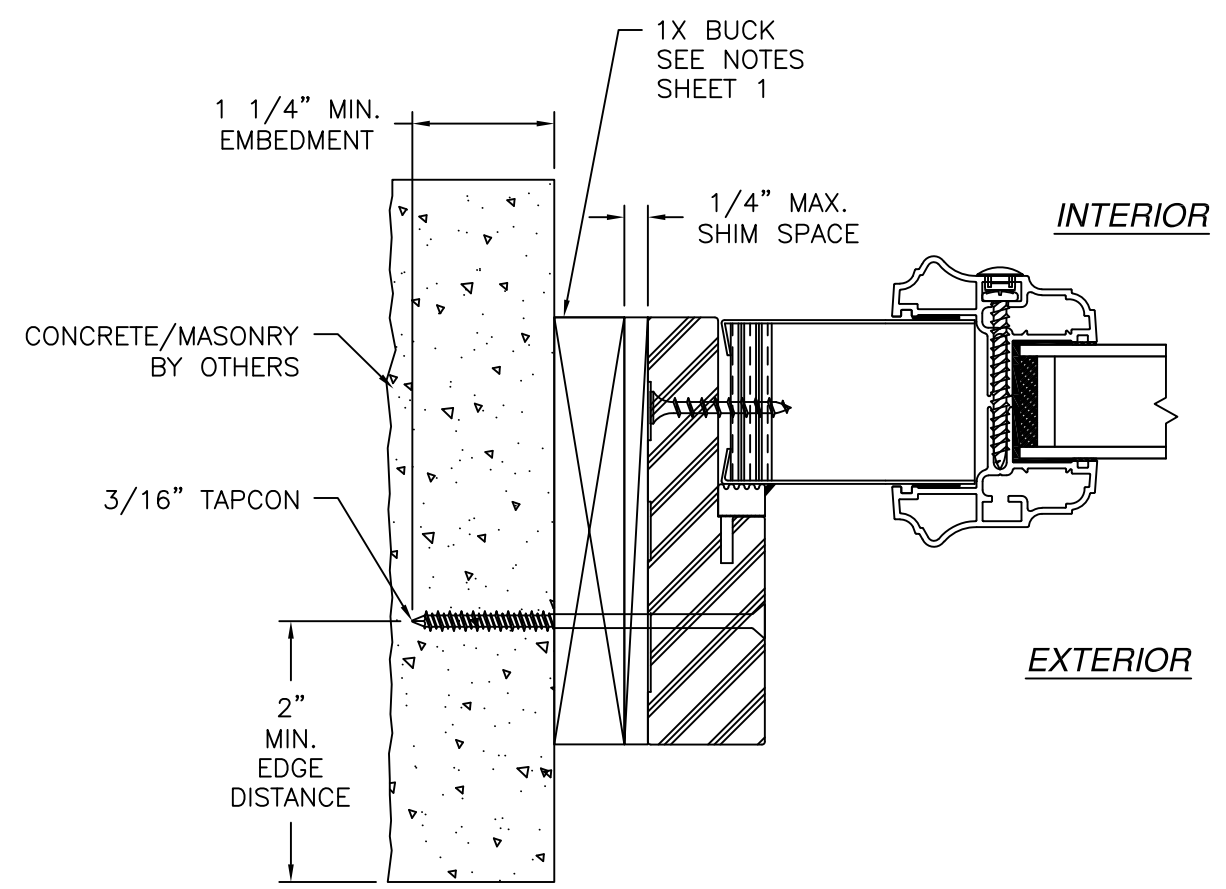




JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION

PROVIA DOOR, INC. 2150 STATE ROUTE 39 WEST SUGARCREEK, OH 44681		
STEEL FIXED SIDELITE WINDOW COMPOSITE NON-IMPACT INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-02107B	REV B
SCALE NTS	DATE 07/16/13	SHEET 5 OF 6
L. ROBERTO LOMAS P.E. 208 7th Ave, INDIALANTIC, FL 32903 434-688-0609 rllomas@lrlomaspe.com		


SIGNED: 09/28/2026

Luis R. Lomas P.E.
FL No.: 62514


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
B	REVISED TO ADD CORROSION CHART	09/28/26	R.L.

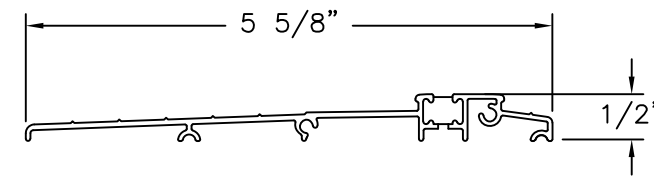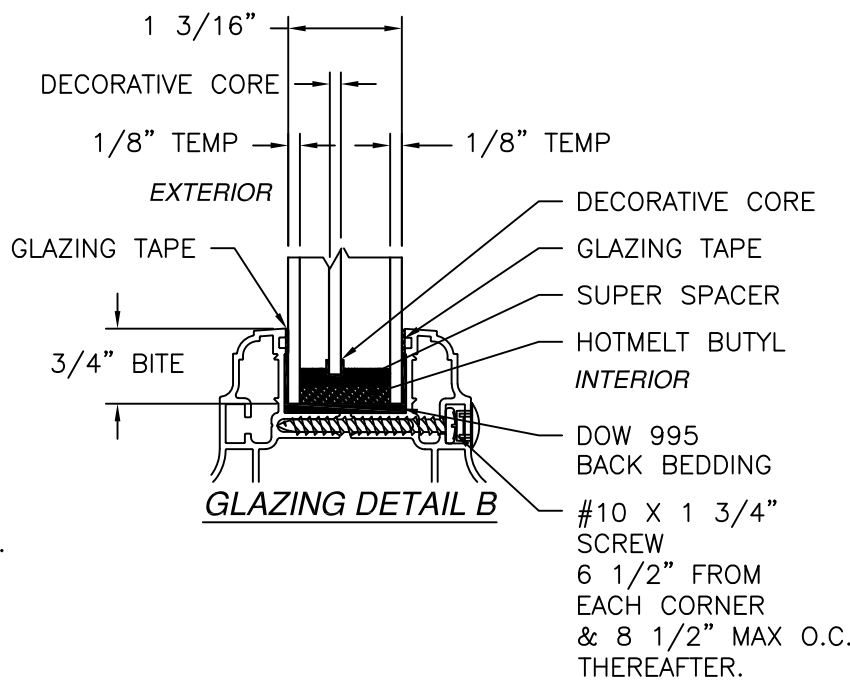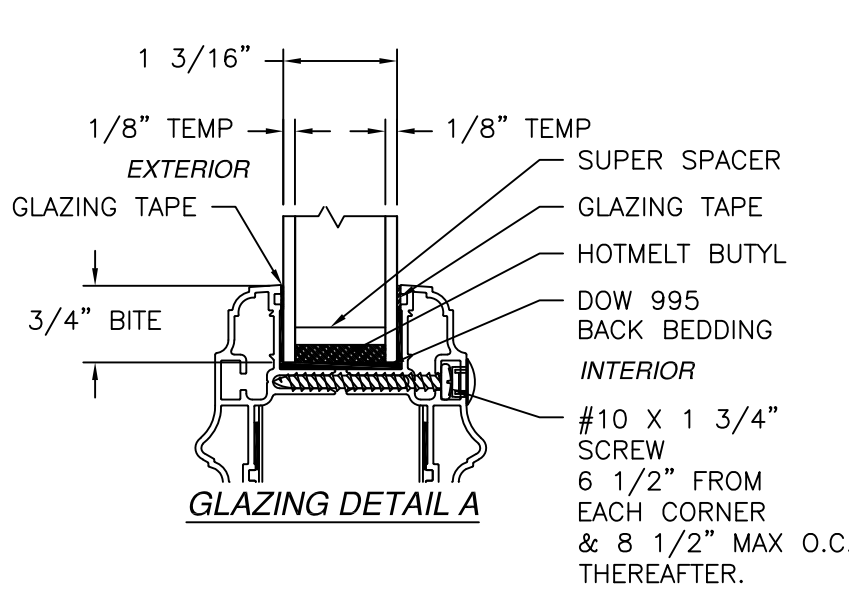


ADA THRESHOLD
ALUMINUM

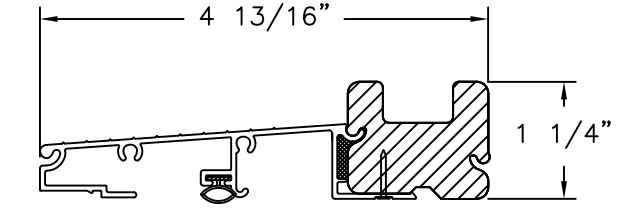



THRESHOLD
ALUMINUM / PVC

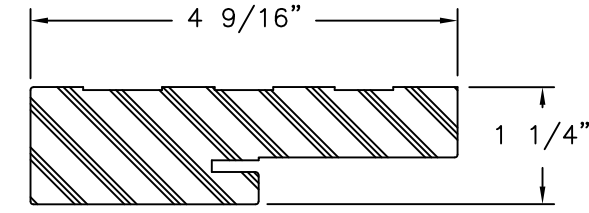


JAMB
COMPOSITE

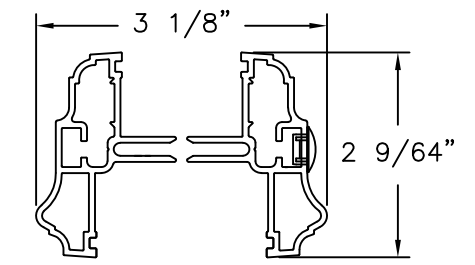

GLASS TRIM
ALUMINUM

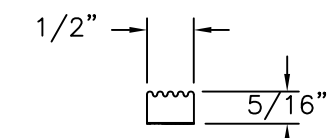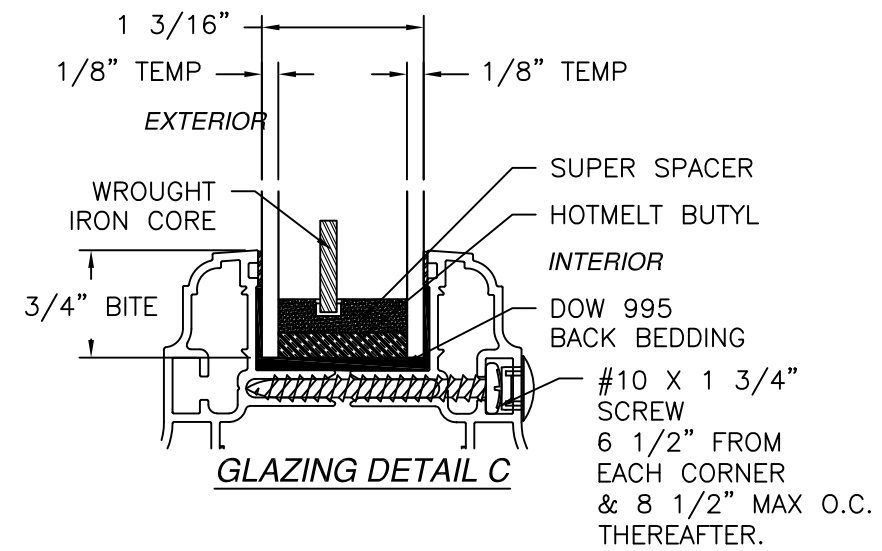

RIBBED GASKET SEAL
CLOSED CELL FOAM

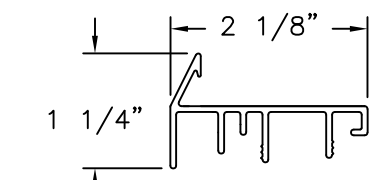

SIDELITE SILL SUPPORT
PLASTIC

SIGNED: 09/28/2026

PROVIA DOOR, INC.

2150 STATE ROUTE 39 WEST
SUGARCREEK, OH 44681

STEEL FIXED SIDELITE WINDOW
COMPOSITE NON-IMPACT
COMPONENTS AND GLAZING DETAILS

DRAWN: V.L.

DWG NO. 08-02107B

REV B

SCALE NTS

DATE 07/16/13

SHEET 6 OF 6

L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com

LUIS R. LOMAS

LICENSE

No. 62514

STATE OF FLORIDA

PROFESSIONAL ENGINEER

Luis R. Lomas P.E.

FL No.: 62514