

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
4. ALLOWABLE STRESS INCREASE OF 1/3 WAS NOT USED IN THE DESIGN OF THE PRODUCT SHOWN HEREIN. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
5. FRAME MATERIAL: EXTRUDED RIGID PVC.
6. UNITS MUST BE GLAZED PER ASTM E1300-04.
7. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
8. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
10. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
11. FOR ANCHORING INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
12. ALL FASTENERS TO BE CORROSION RESISTANT.
13. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:

A. WOOD – MINIMUM SPECIFIC GRAVITY OF G=0.42

B. CONCRETE – MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.

C. MASONRY – STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).

D. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 1/8" THICK MINIMUM


SIGNED: 09/7/2015

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3 – 5	INSTALLATION DETAILS


WINDOW MART 5760 ALBERT PIKE PO BOX 570 ROYAL, AR 71968		
4325 CASEMENT WINDOW NON-REINFORCED 36" X 72" NON-IMPACT NOTES		
DRAWN: N.G.	DWG NO. 08-02759	REV —
SCALE NTS	DATE 09/17/15	SHEET 1 OF 5



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

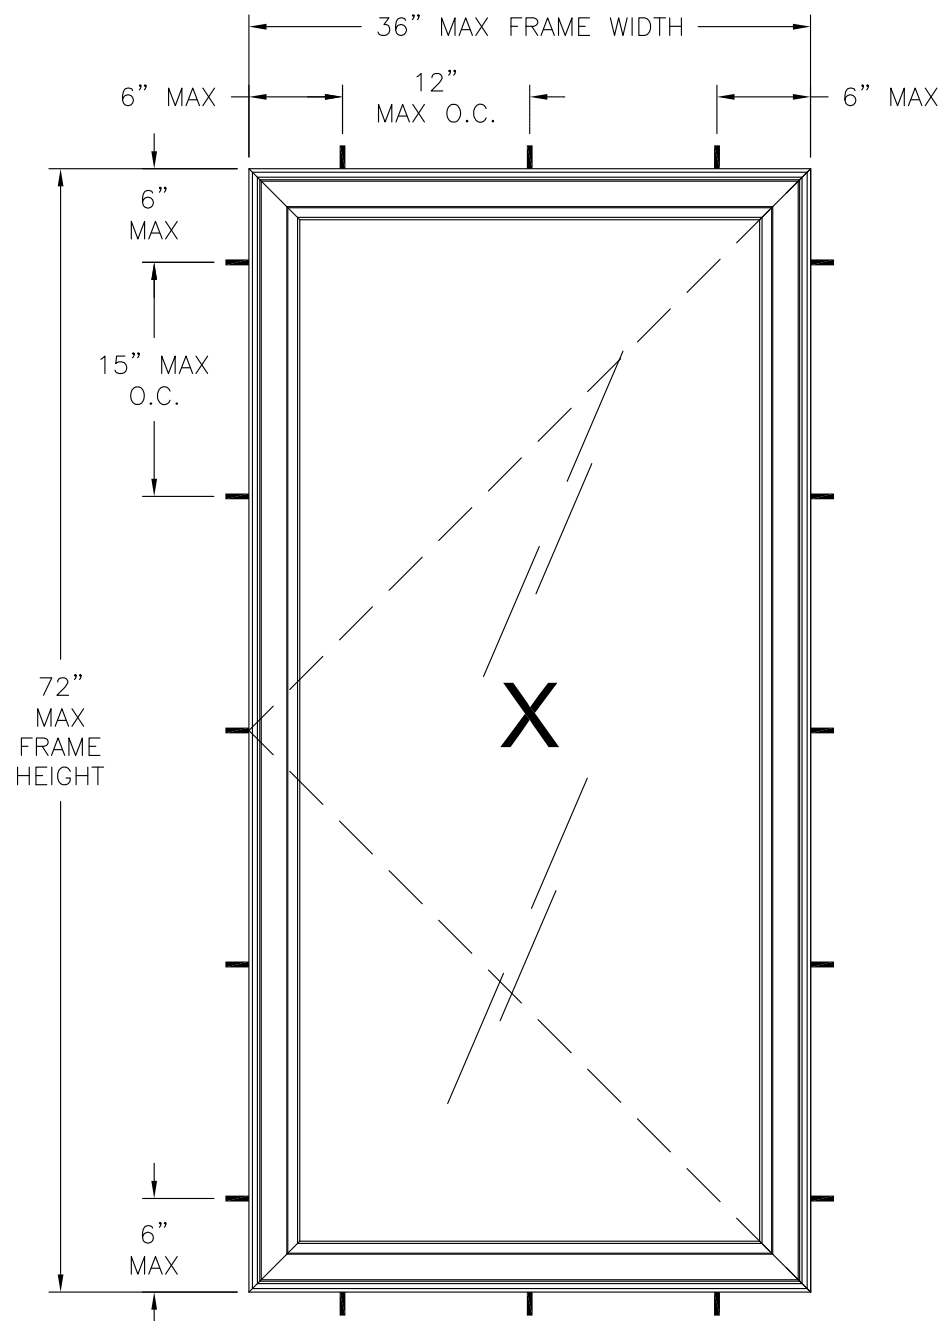

4325 CASEMENT WINDOW
EXTERIOR VIEW
FRAME INSTALLATION

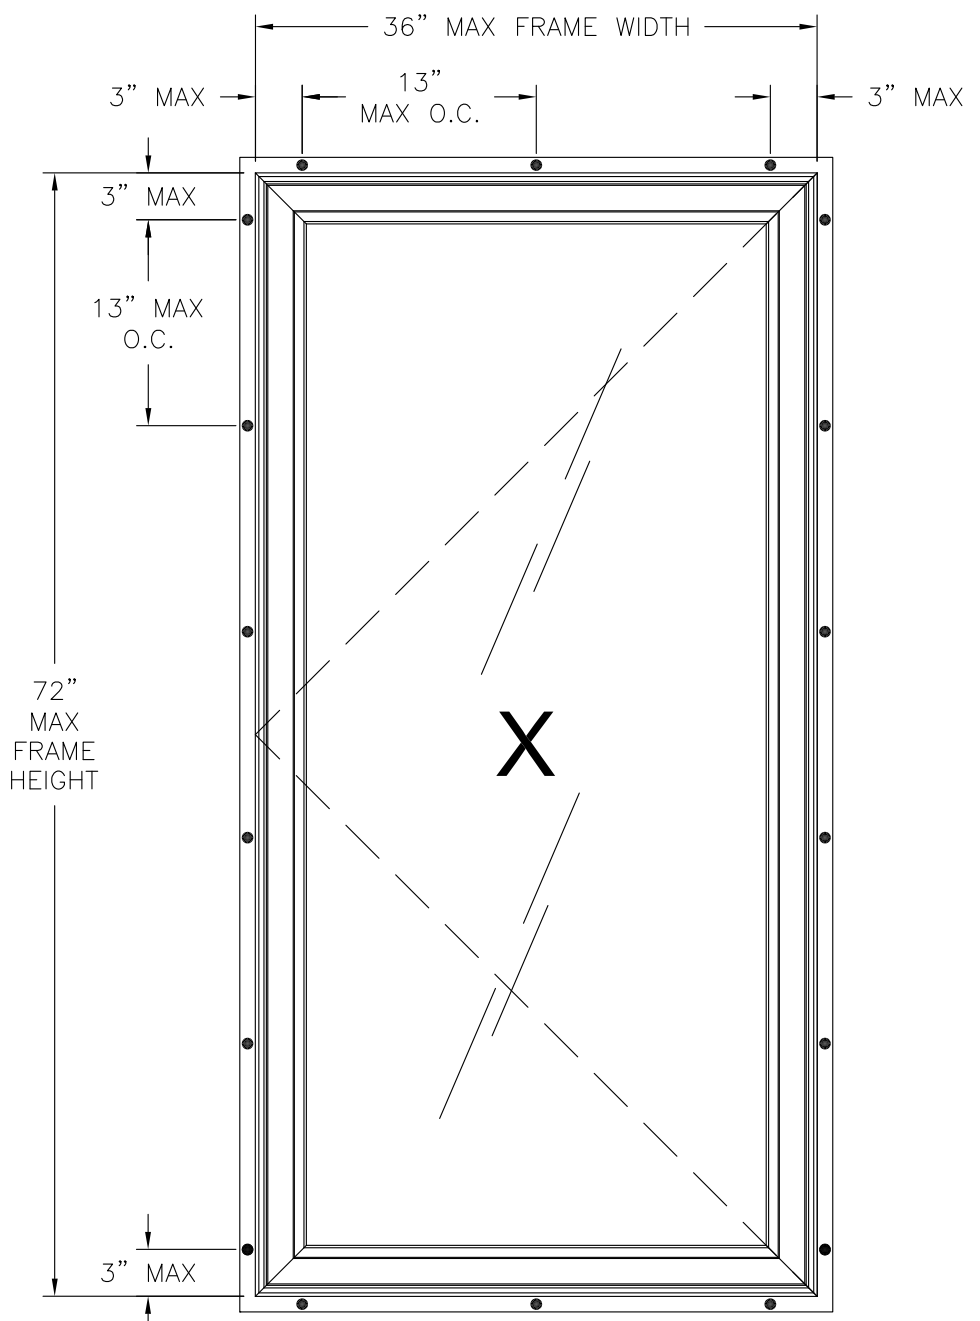

4325 CASEMENT WINDOW
EXTERIOR VIEW
FIN INSTALLATION


DESIGN PRESSURE RATING	IMPACT RATING
±40.0PSF	NONE

WINDOW MART 5760 ALBERT PIKE PO BOX 570 ROYAL, AR 71968		
4325 CASEMENT WINDOW NON-REINFORCED 36" X 72" NON-IMPACT ELEVATIONS		
DRAWN: N.G.	DWG NO. 08-02759	REV —
SCALE NTS	DATE 09/17/15	SHEET 2 OF 5

SIGNED: 09/7/2015




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

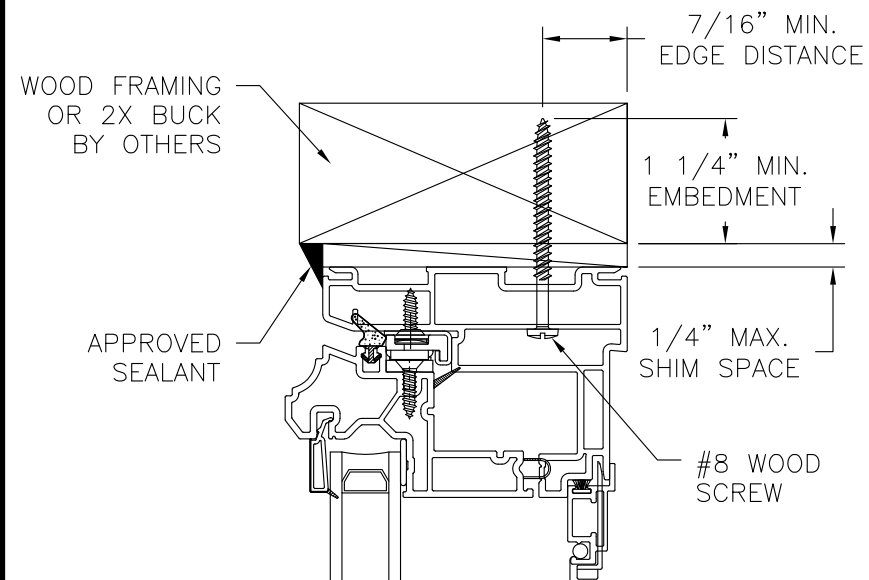


EXTERIOR

INTERIOR

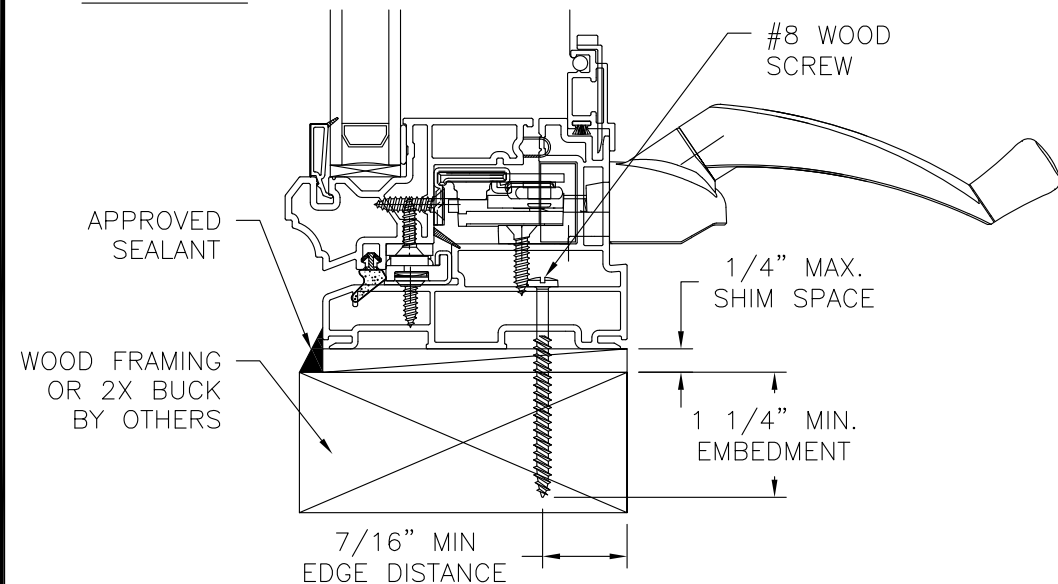


VERTICAL CROSS SECTION

WOOD FRAMING OR 2X BUCK INSTALLATION

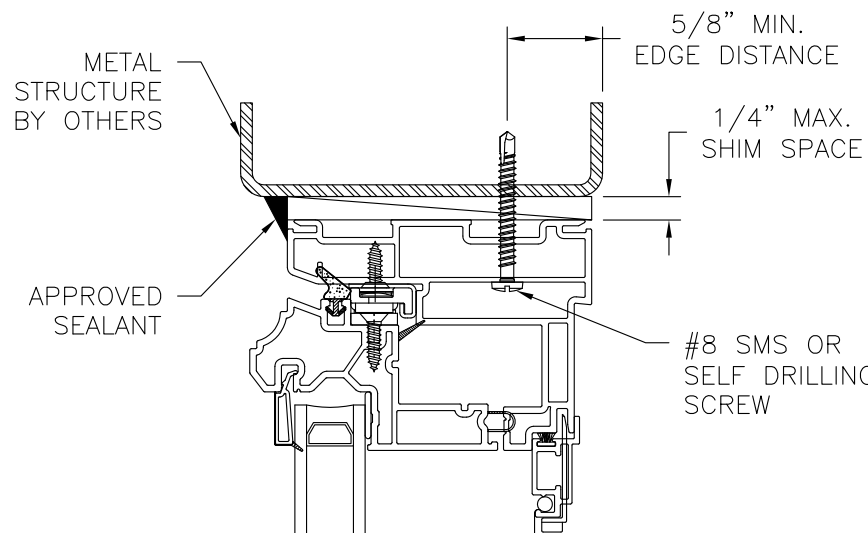


EXTERIOR

INTERIOR

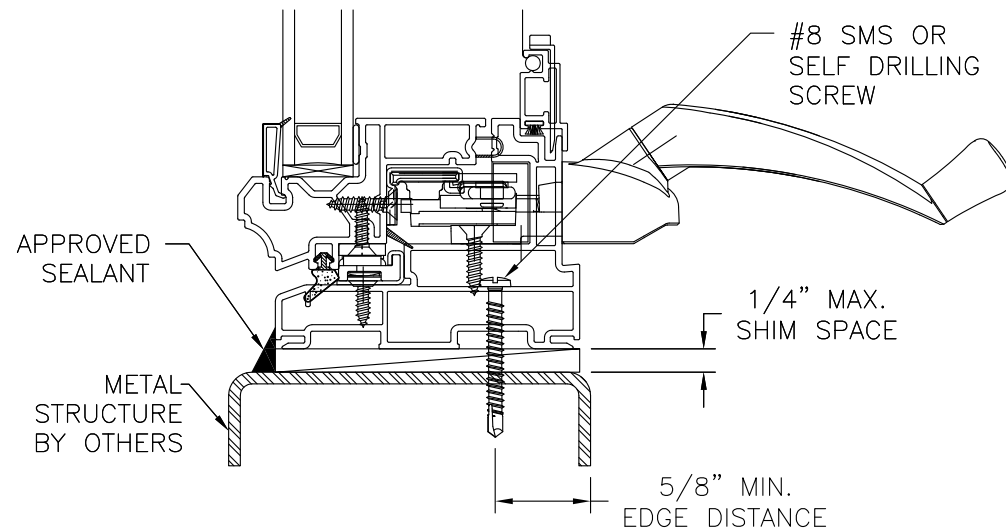


VERTICAL CROSS SECTION

METAL STRUCTURE INSTALLATION

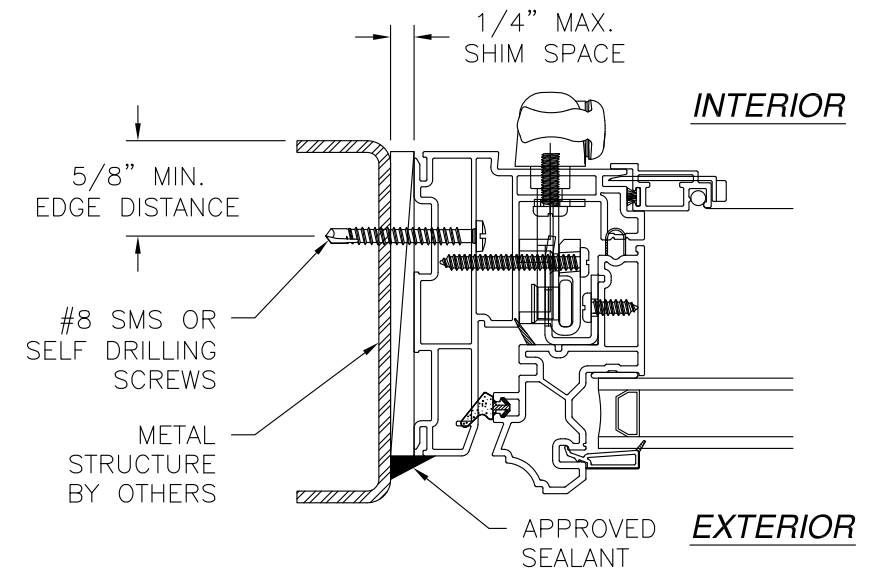

JAMB INSTALLATION DETAIL

METAL STRUCTURE INSTALLATION

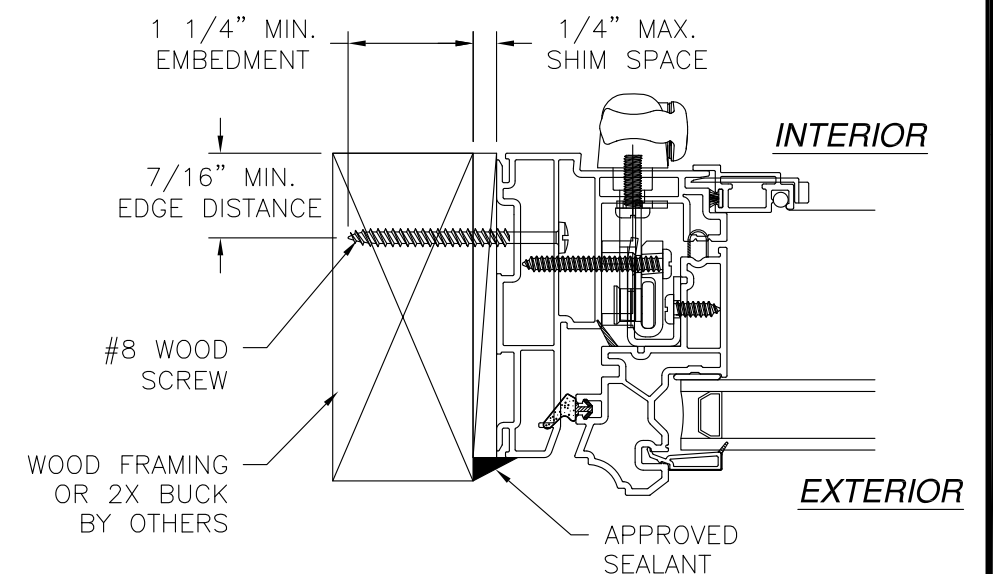


JAMB INSTALLATION DETAIL

WOOD FRAMING OR 2X BUCK INSTALLATION



SIGNED: 09/7/2015

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112


WINDOW MART		
5760 ALBERT PIKE PO BOX 570 ROYAL, AR 71968		
4325 CASEMENT WINDOW NON-REINFORCED 36" X 72" NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02759	REV —
SCALE NTS	DATE 09/17/15	SHEET 3 OF 5

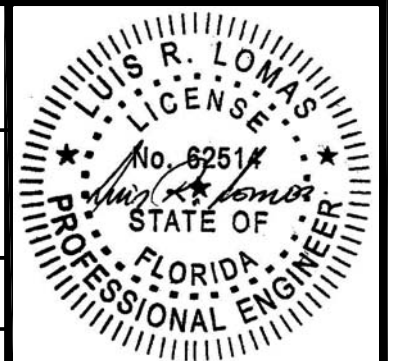

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

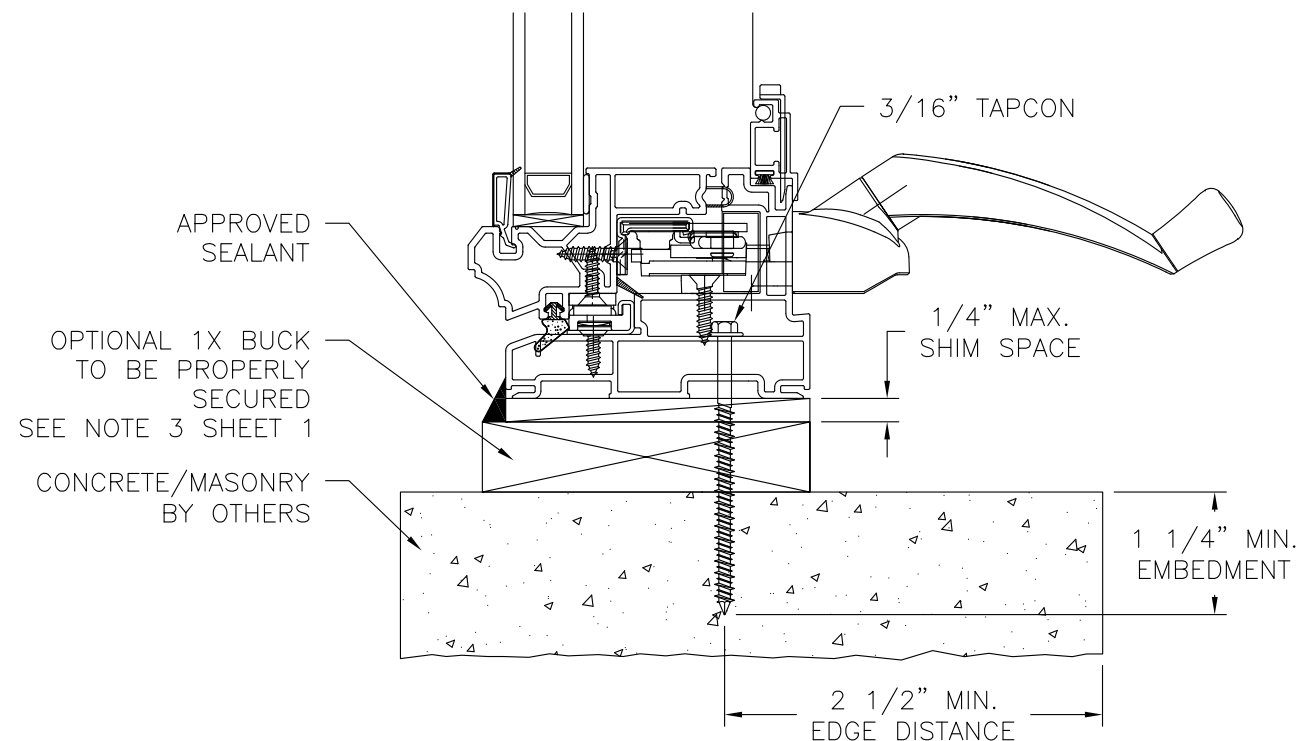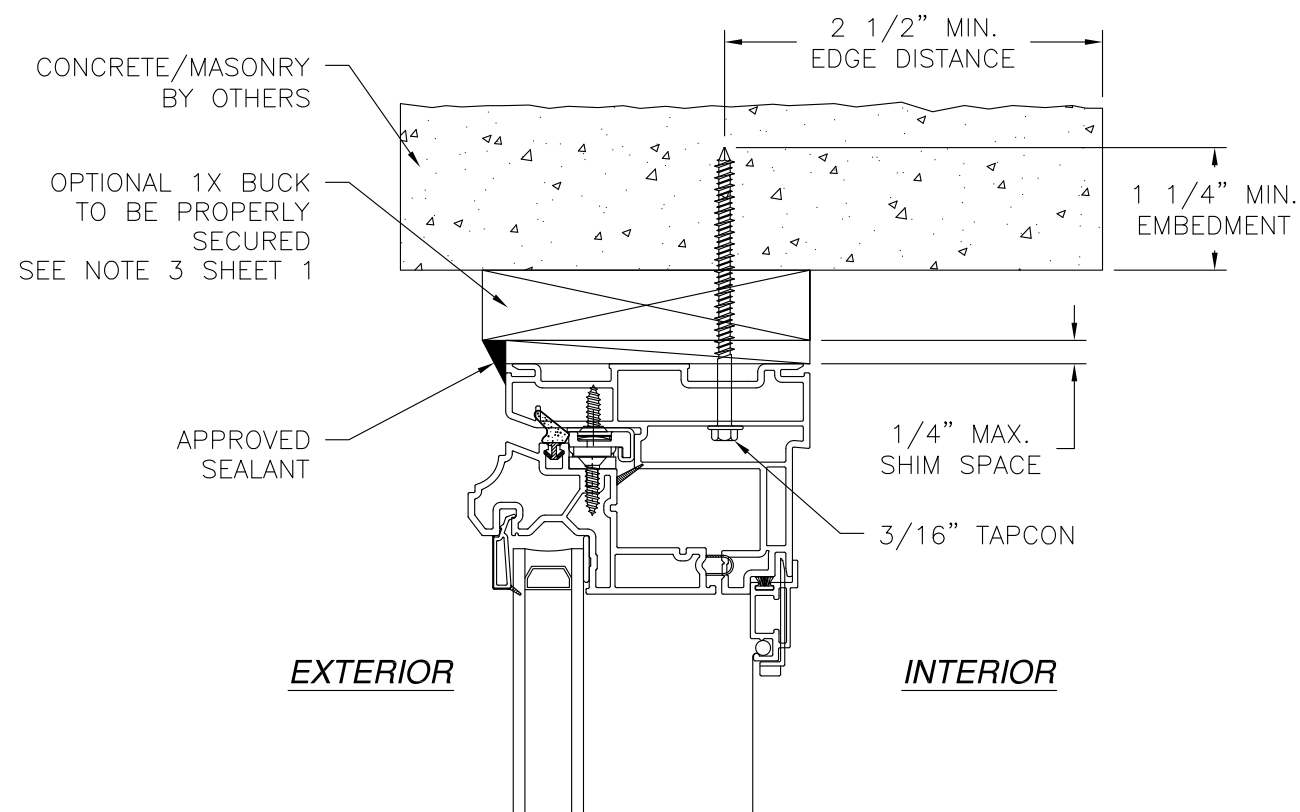

VERTICAL CROSS SECTION
CONCRETE/MASONRY INSTALLATION

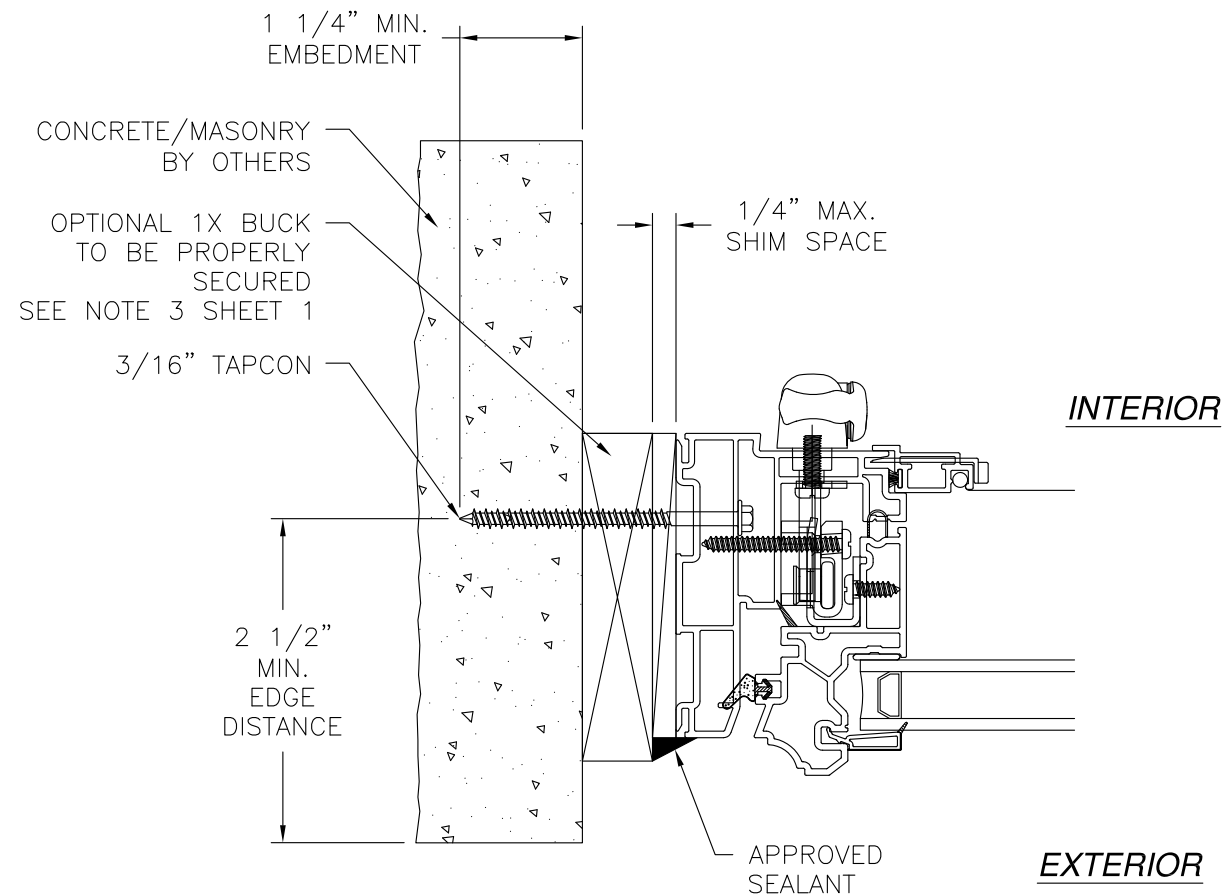


JAMB INSTALLATION DETAIL
CONCRETE/MASONRY INSTALLATION




- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/7/2015

WINDOW MART 5760 ALBERT PIKE PO BOX 570 ROYAL, AR 71968		
4325 CASEMENT WINDOW NON-REINFORCED 36" X 72" NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02759	REV -
SCALE NTS	DATE 09/17/15	SHEET 4 OF 5

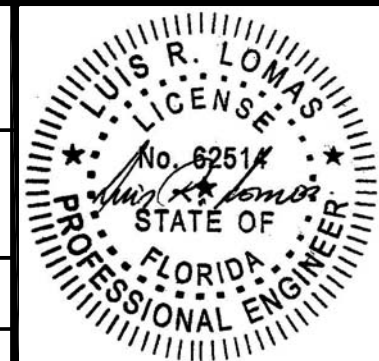

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

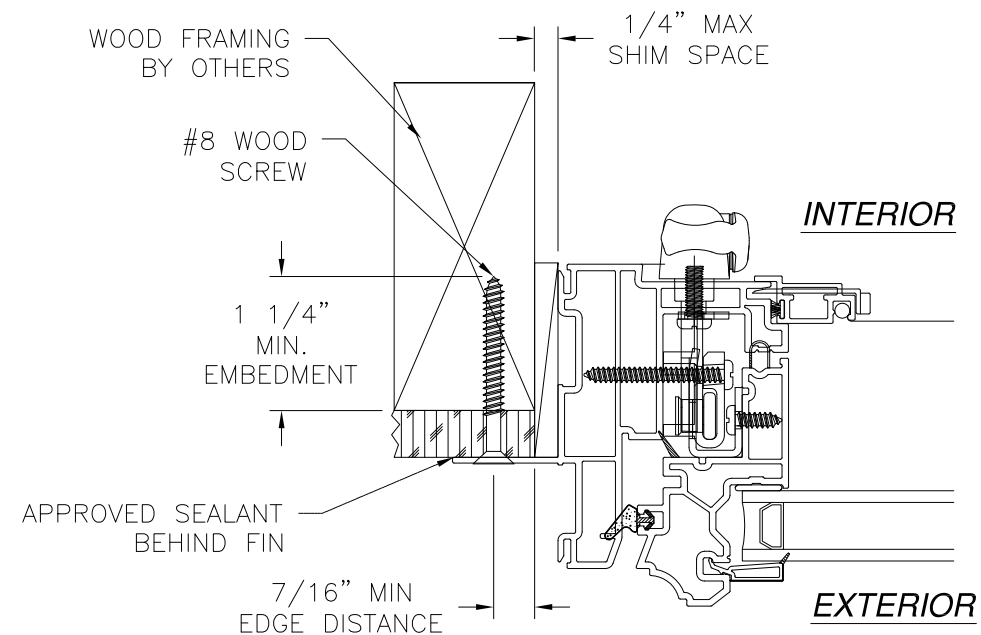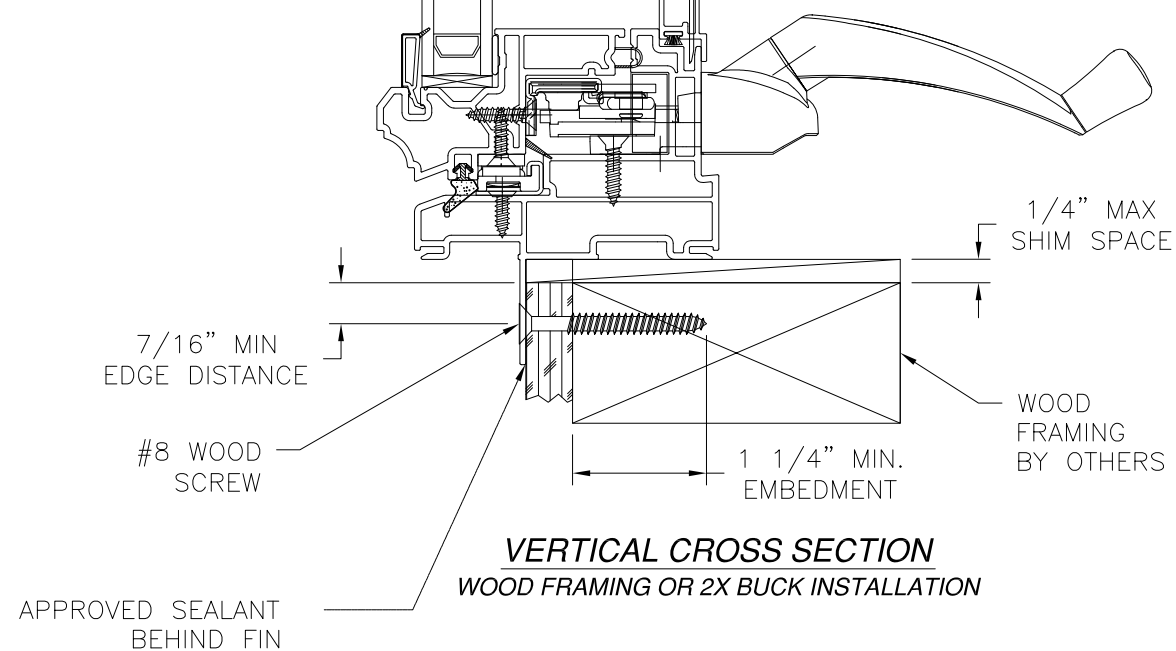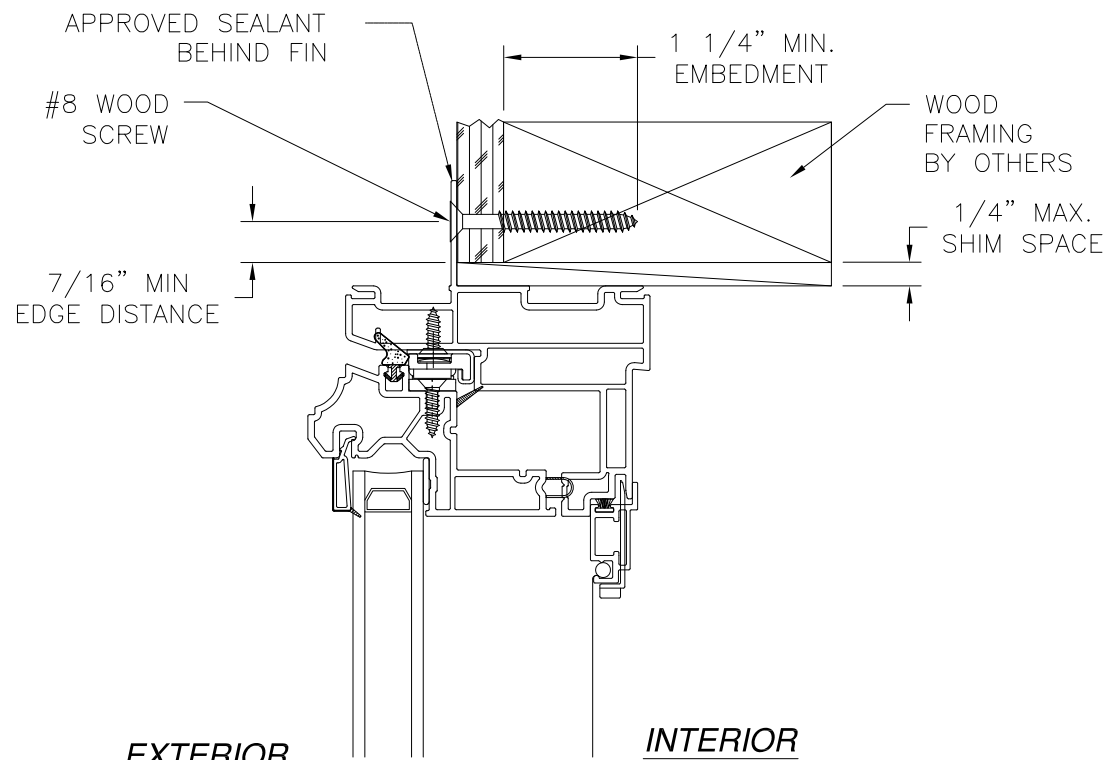

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 09/7/2015

WINDOW MART 5760 ALBERT PIKE PO BOX 570 ROYAL, AR 71968		
4325 CASEMENT WINDOW NON-REINFORCED 36" X 72" NON-IMPACT INSTALLATION DETAILS		
DRAWN: N.G.	DWG NO. 08-02759	REV —
SCALE NTS	DATE 09/17/15	SHEET 5 OF 5

