

NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE.
2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
5. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
8. SHIM AS REQUIRED AT WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
9. SHIMS SHALL BE MADE FROM MATERIALS CAPABLE OF SUSTAINING APPLICABLE LOADS, LOCATED AND APPLIED IN A THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
11. FRAME MATERIAL: PINE WITH ALUMINUM CLADDING.
12. UNITS MUST BE GLAZED PER ASTM E1300-04, SEE SHEET 3 FOR GLASS OPTIONS.
13. APPROVED IMPACT PROTECTIVE SYSTEM IS REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
14. FOR ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
15. FOR ANCHORING INTO MASONRY/CONCRETE USE 3/16" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1 1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2 1/2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR ANCHORING INTO METAL STRUCTURE USE #8 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. ALL FASTENERS TO BE CORROSION RESISTANT.
18. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD - MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.
 - C. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).
 - D. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 1/8" THICK MINIMUM

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2	ELEVATIONS
3	B.O.M., CROSS SECTIONS, COMPONENTS & GLAZING DETAILS
4 - 7	INSTALLATION DETAILS


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

FRONTLINE BUILDING PRODUCTS 610 JENSEN DRIVE MEDFORD, WI 54451		
400 CLAD CASEMENT PICTURE WINDOW NON-IMPACT NOTES		
DRAWN: V.L.	DWG NO. 08-02205	REV —
SCALE NTS	DATE 09/09/13	SHEET 1 OF 7

SIGNED: 12/27/2013




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

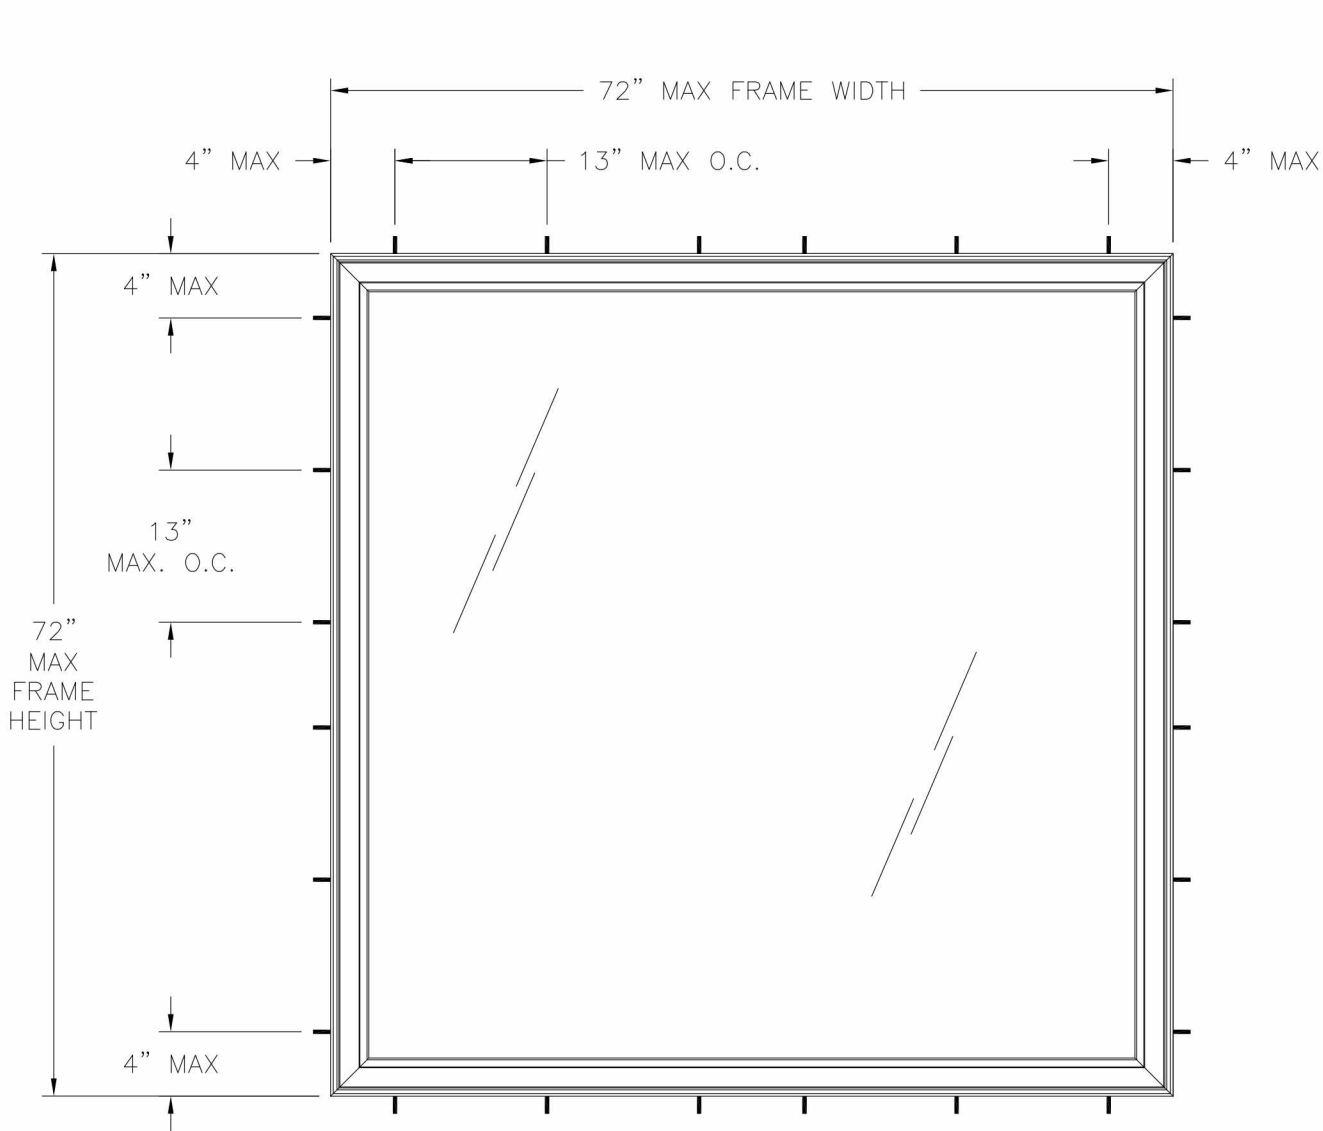

400 CLAD CASEMENT PICTURE WINDOW
EXTERIOR VIEW FRAME INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±50.0PSF	NONE

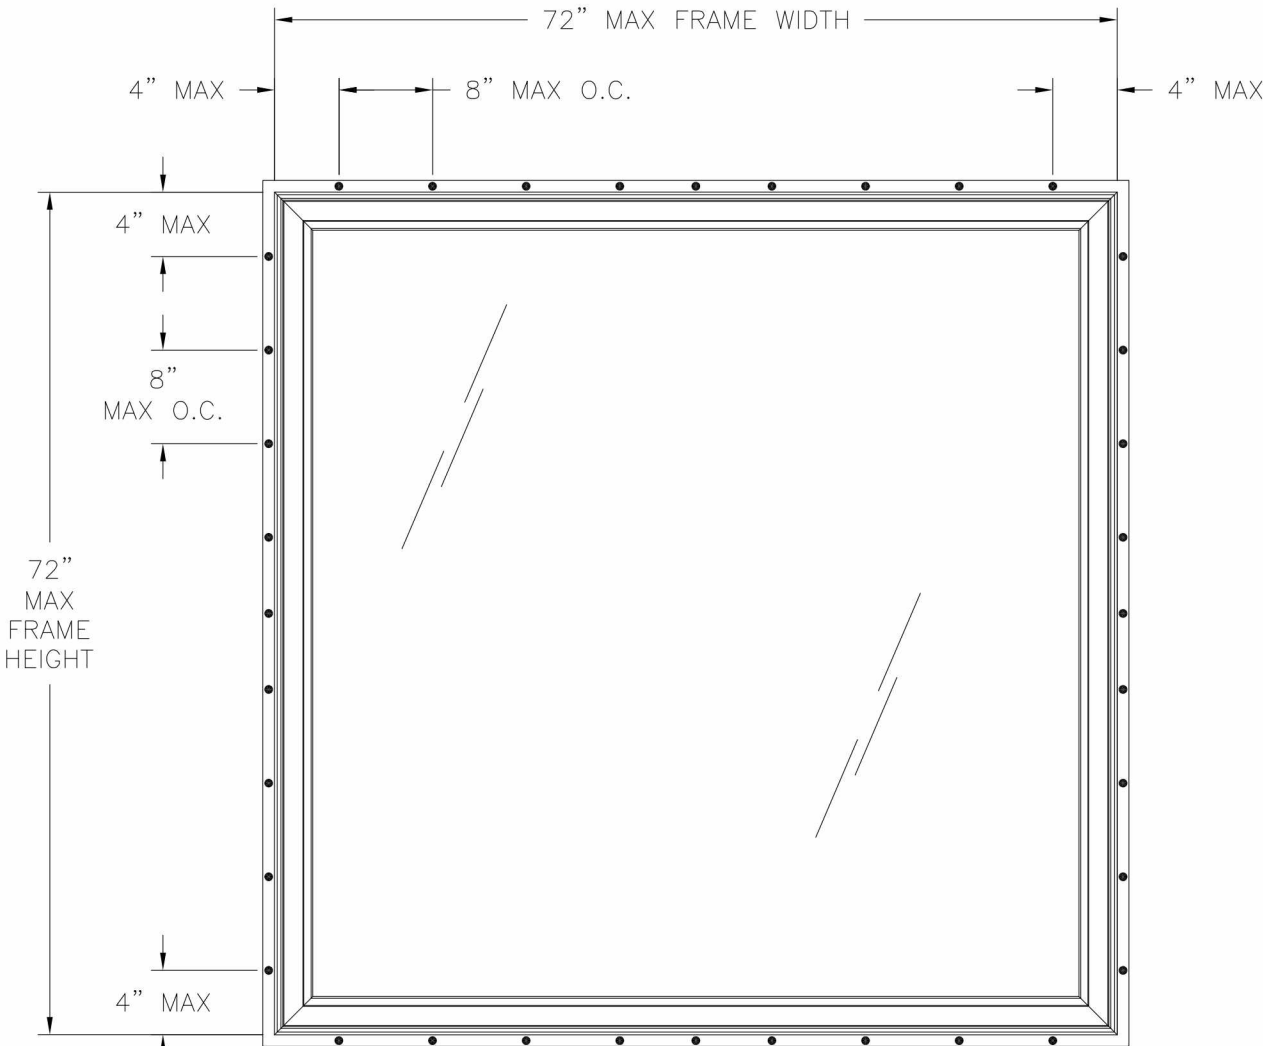

400 CLAD CASEMENT PICTURE WINDOW
EXTERIOR VIEW FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
±35.0PSF	NONE

FRONTLINE BUILDING PRODUCTS

610 JENSEN DRIVE
MEDFORD, WI 54451

400 CLAD CASEMENT PICTURE WINDOW

NON-IMPACT
ELEVATIONS

DRAWN:
V.L.

DWG NO.
08-02205

SCALE NTS

DATE 09/09/13


SHEET 2 OF 7

REV
—




BILL OF MATERIALS				
NO.:	PART NUMBER	DESCRIPTION	MANUFACTURER	MATERIAL
1		FRAME CLAD		6063-T5 ALUMINUM
2		SASH CLAD		6063-T5 ALUMINUM
3		SASH		PINE
4		GLAZING BEAD		PINE
5		FRAME JAMB		PINE
6		INTERIOR STOP		PINE
7		LEAF SEAL	AMESBURY	
8		1/16"x1/4" TAPE	ADHESIVE RESEARCH	
9		#8x1-1/2" SCREW		
10		#7x2" SCREW		
11	M150	SILICONE	NOVAFLEX	
12	M400	SILICONE	NOVAFLEX	
13		5/32"x1/2"x2" SETTING BLOCK		85 DUROMETER
14		1-1/8"x18 BRAD		
15		SPACER		PINE


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

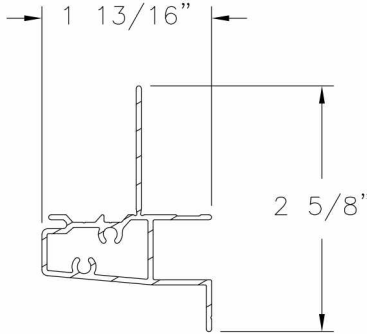


1 **FRAME CLAD**
ALUMINUM 6063-T5 .059" THICK

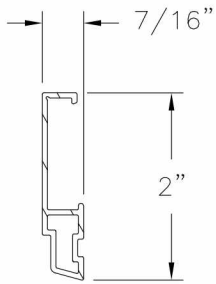


2 **SASH CLAD**
ALUMINUM 6063-T5 .069" THICK

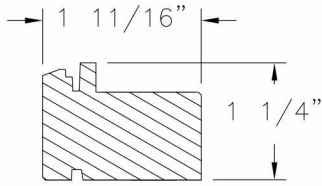


3 **SASH**
PINE




4 **GLAZING BEAD**
PINE

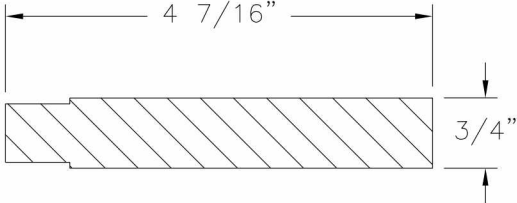


5 **FRAME JAMB**
PINE

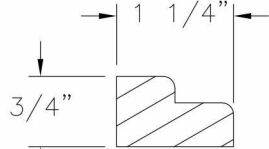


6 **INTERIOR STOP**
PINE

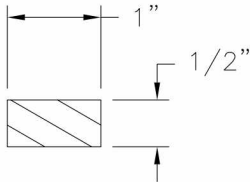


15 **SPACER**
PINE

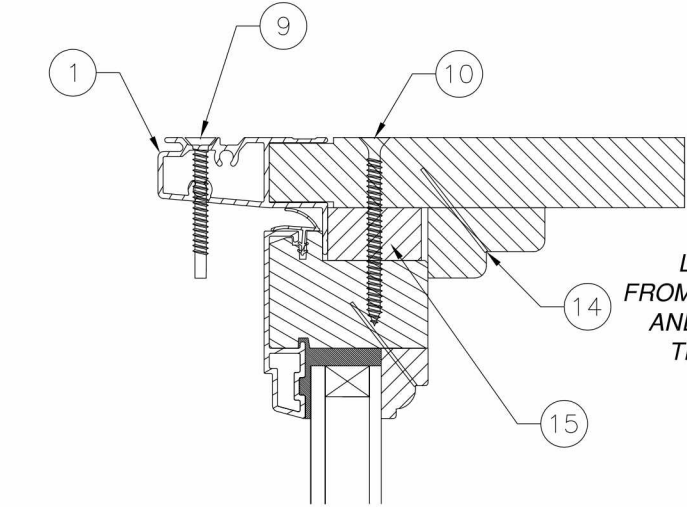

EXTERIOR INTERIOR

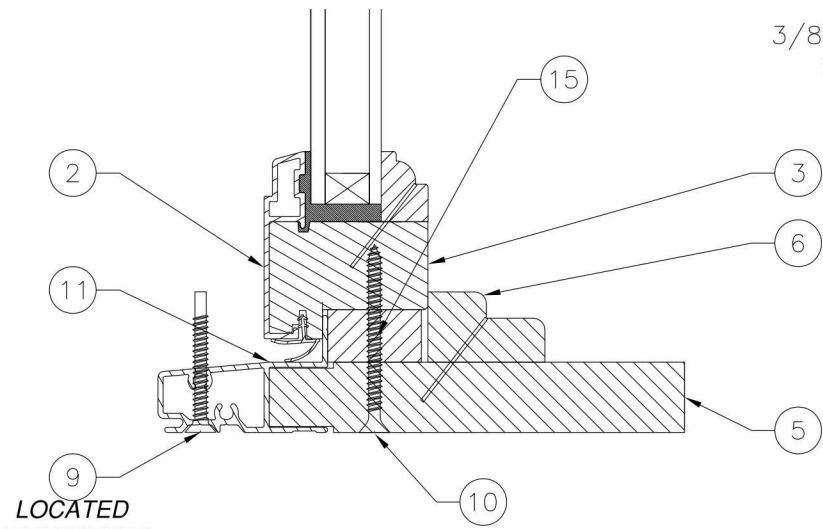


VERTICAL SECTION

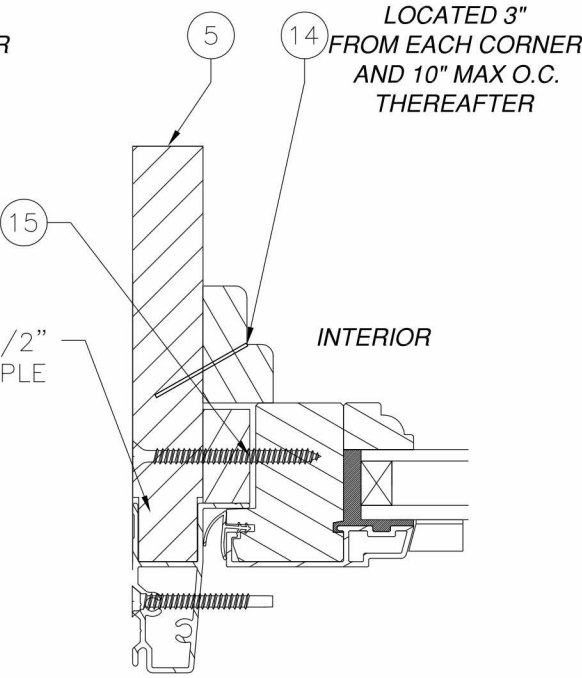

EXTERIOR
HORIZONTAL SECTION

CORNER CONSTRUCTION:
CORNERS ARE ASSEMBLED USING (3)
#7x2-1/2" SCREWS, ITEM 10, AT EACH CORNER.

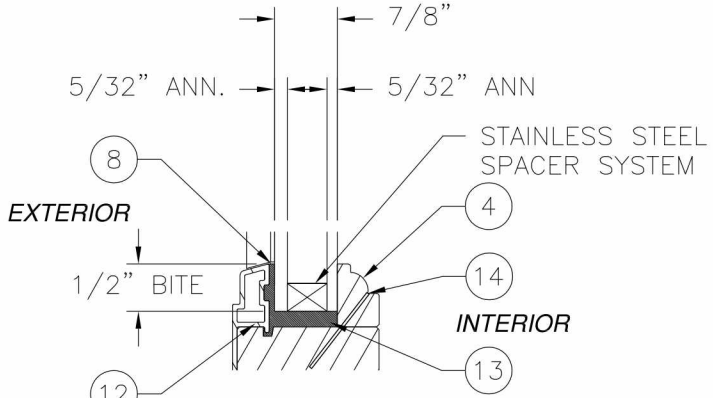


GLAZING DETAIL



FRONTLINE BUILDING PRODUCTS
610 JENSEN DRIVE
MEDFORD, WI 54451

400 CLAD CASEMENT PICTURE WINDOW
NON-IMPACT
B.O.M., CROSS SECTIONS & GLAZING DETAILS

DRAWN: V.L.	DWG NO. 08-02205	REV -
SCALE NTS	DATE 09/09/13	SHEET 3 OF 7

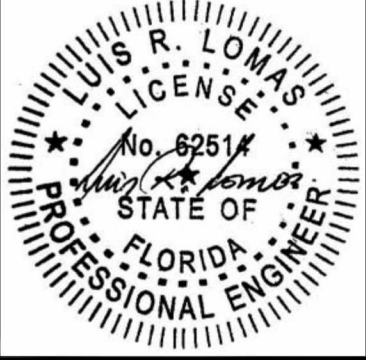


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

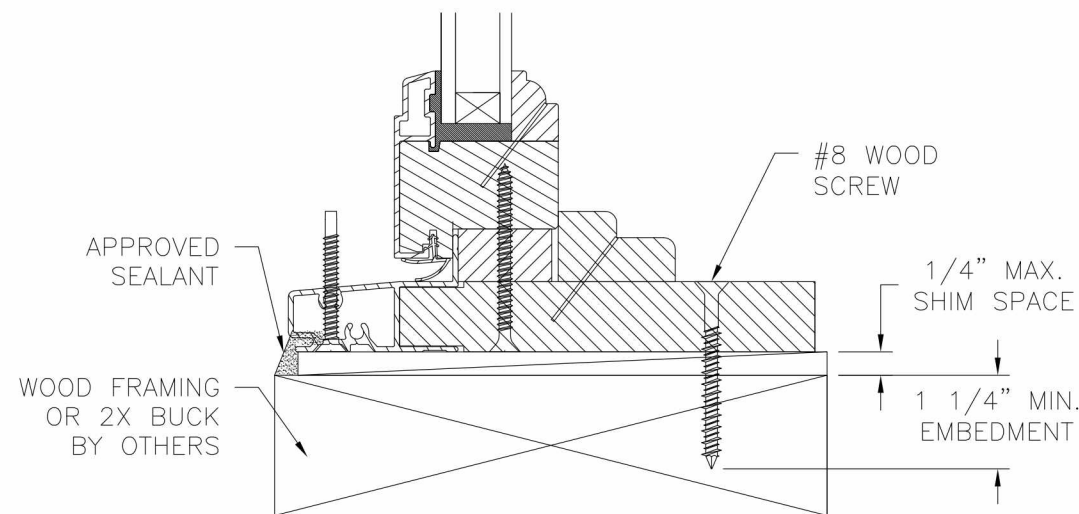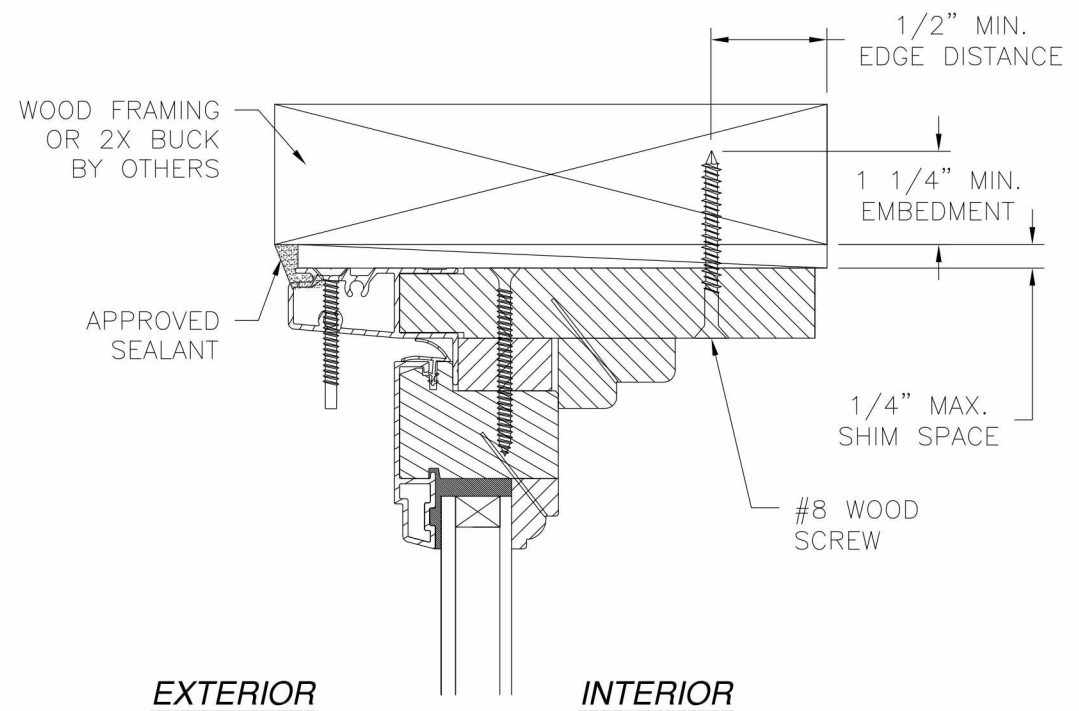

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION




NOTE:
INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT
SHOWN FOR CLARITY.

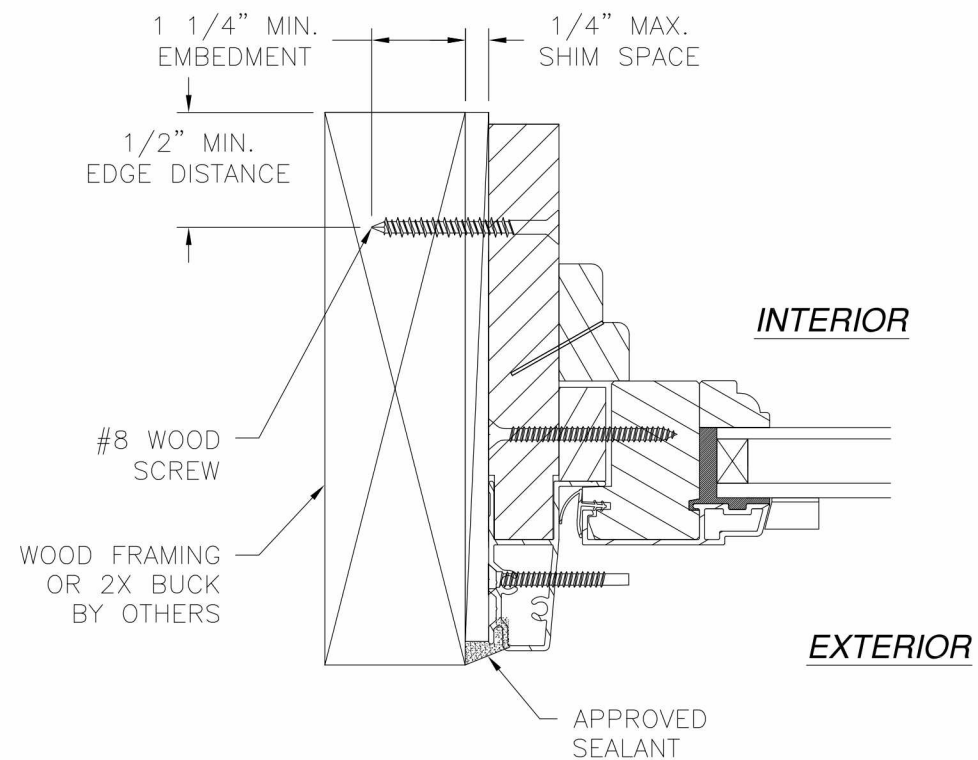

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

FRONTLINE BUILDING PRODUCTS 610 JENSEN DRIVE MEDFORD, WI 54451			
400 CLAD CASEMENT PICTURE WINDOW NON-IMPACT INSTALLATION DETAILS			
DRAWN: V.L.	DWG NO. 08-02205	REV -	
SCALE NTS	DATE 09/09/13	SHEET 4 OF 7	




REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

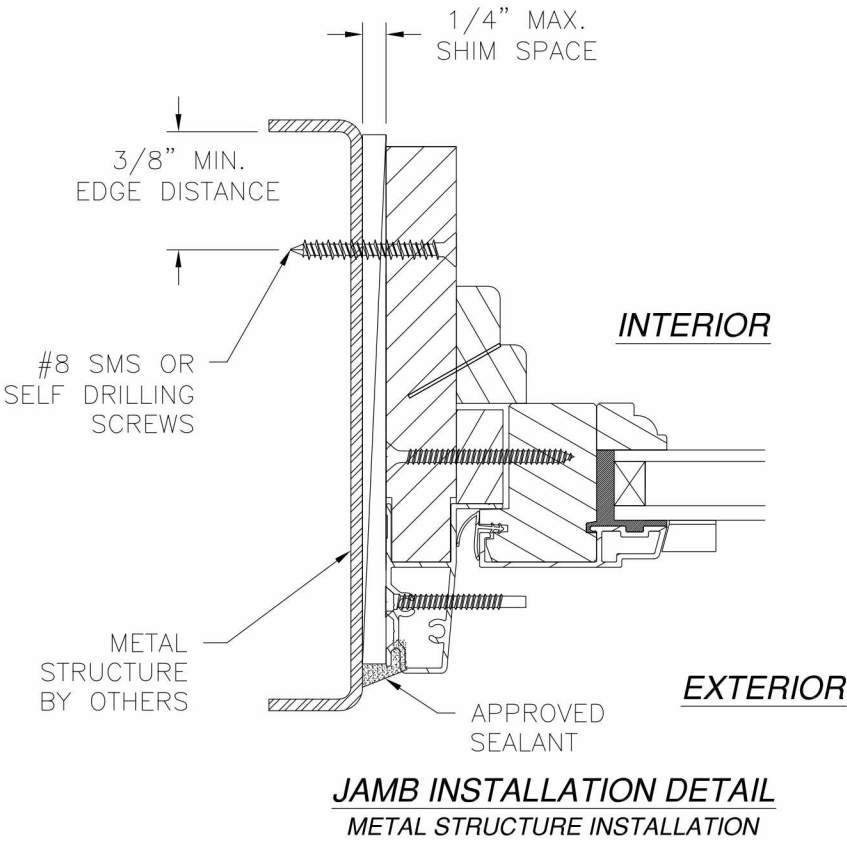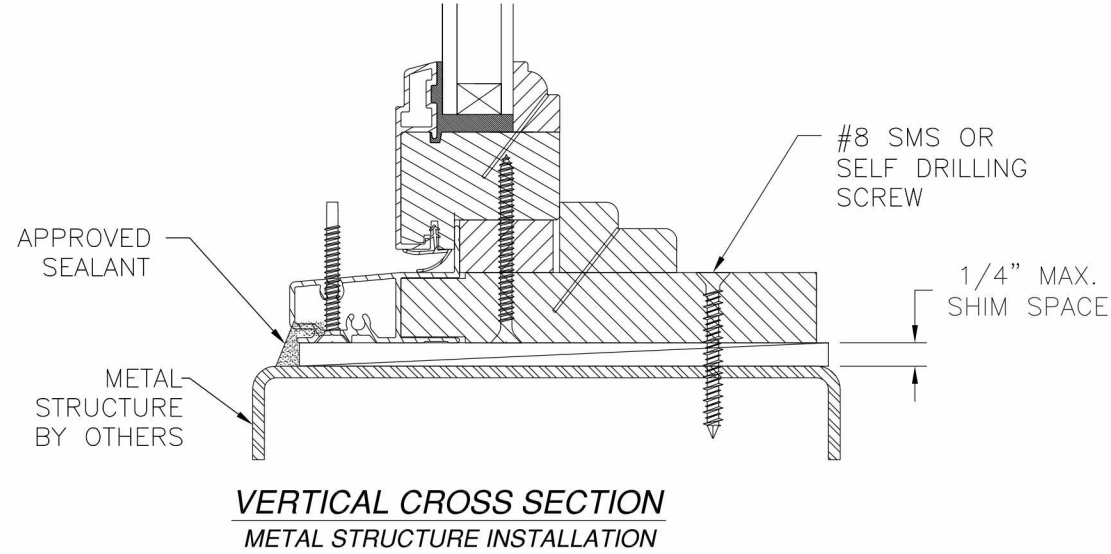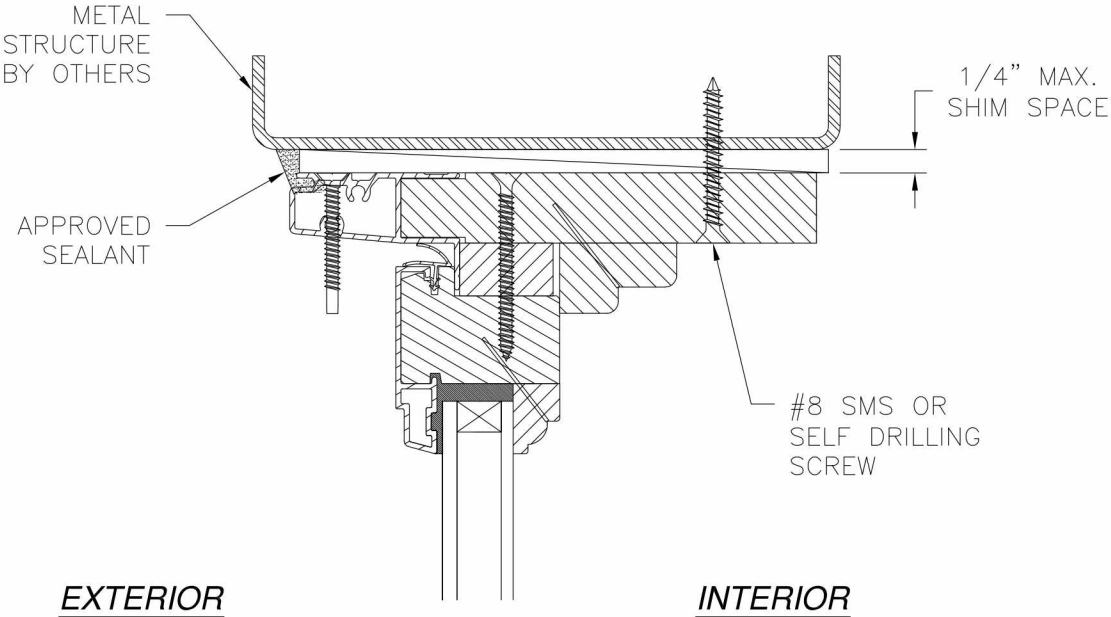

NOTE:
INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT
SHOWN FOR CLARITY.

FRONTLINE BUILDING PRODUCTS 610 JENSEN DRIVE MEDFORD, WI 54451		
400 CLAD CASEMENT PICTURE WINDOW NON-IMPACT INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-02205	REV -
SCALE NTS	DATE 09/09/13	SHEET 5 OF 7

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

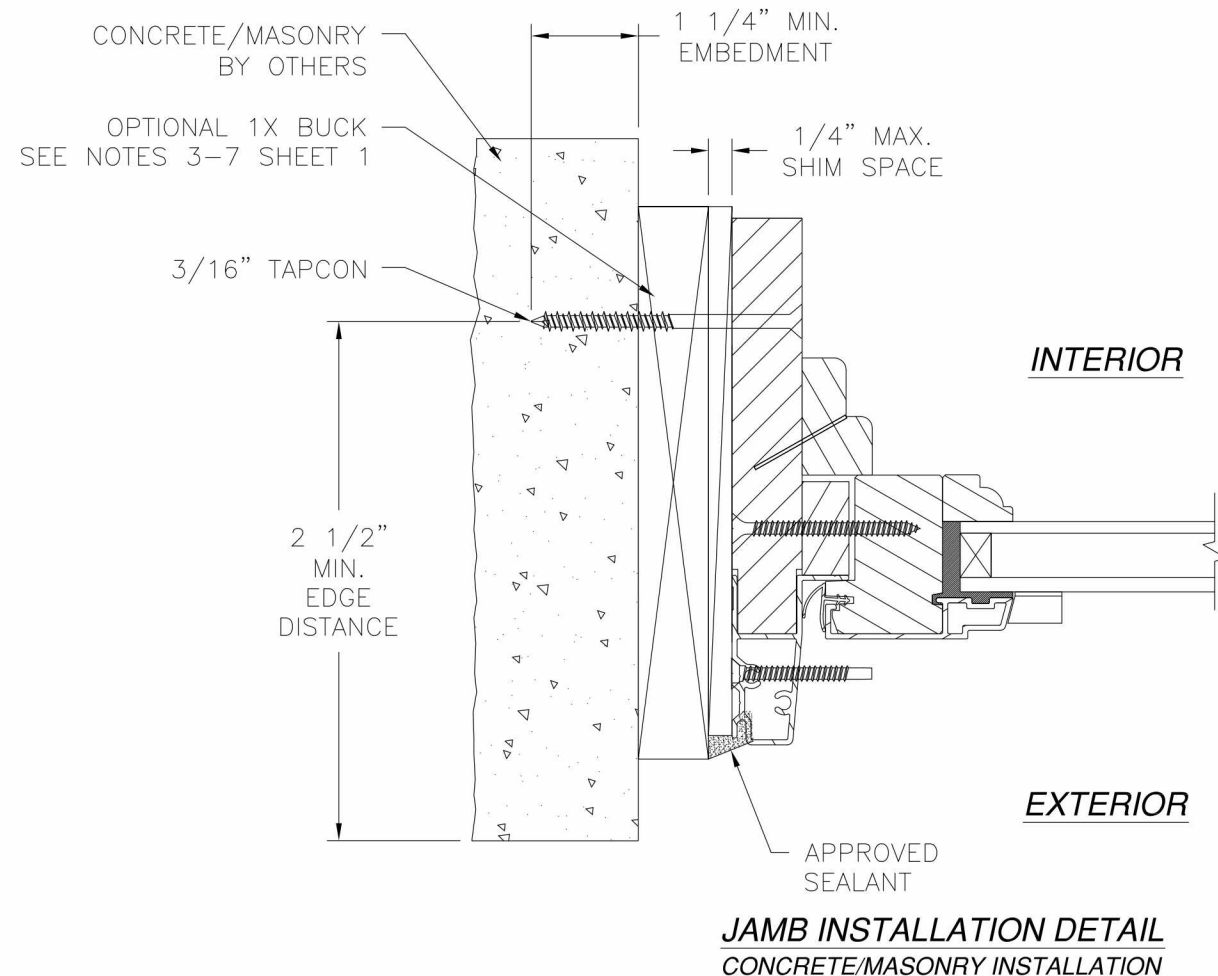
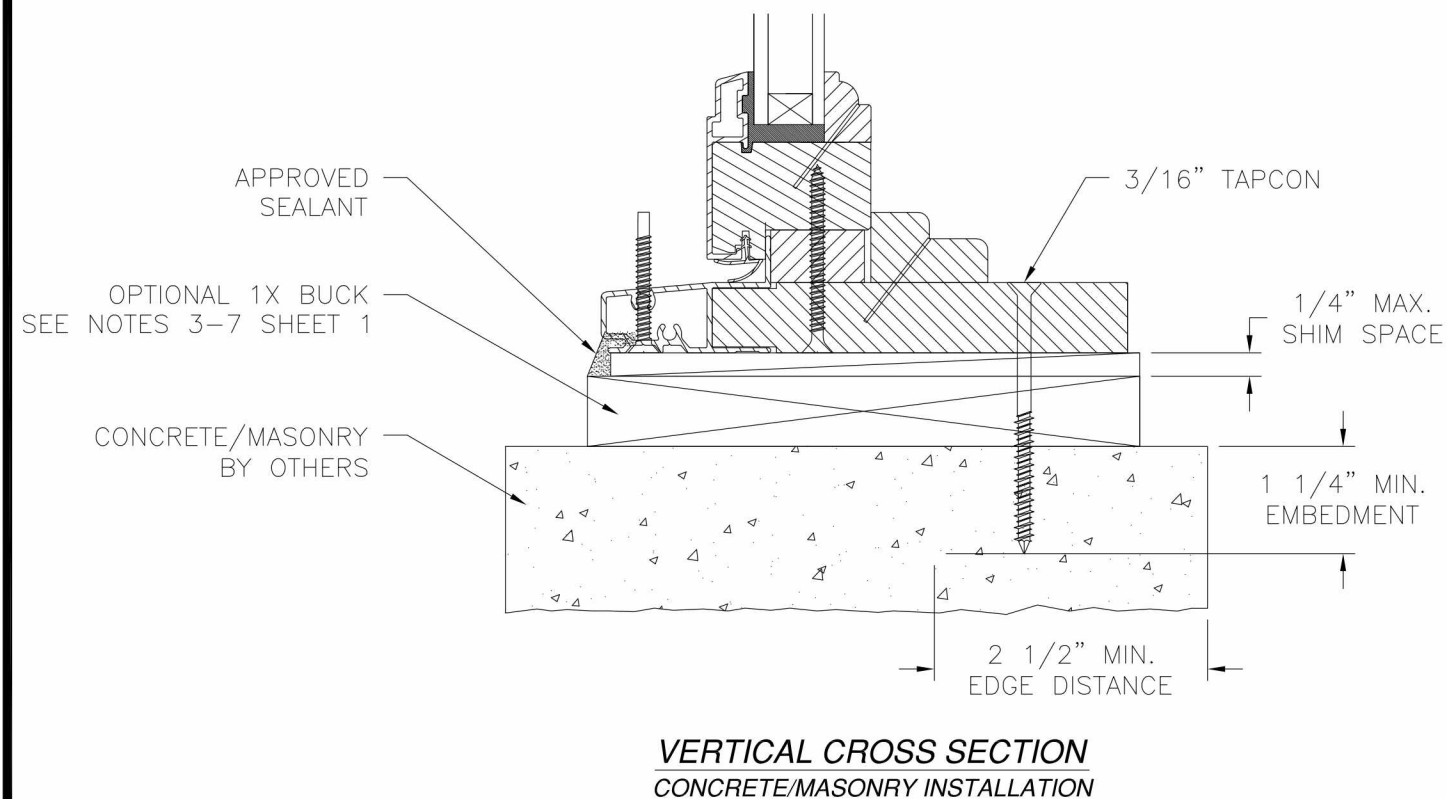
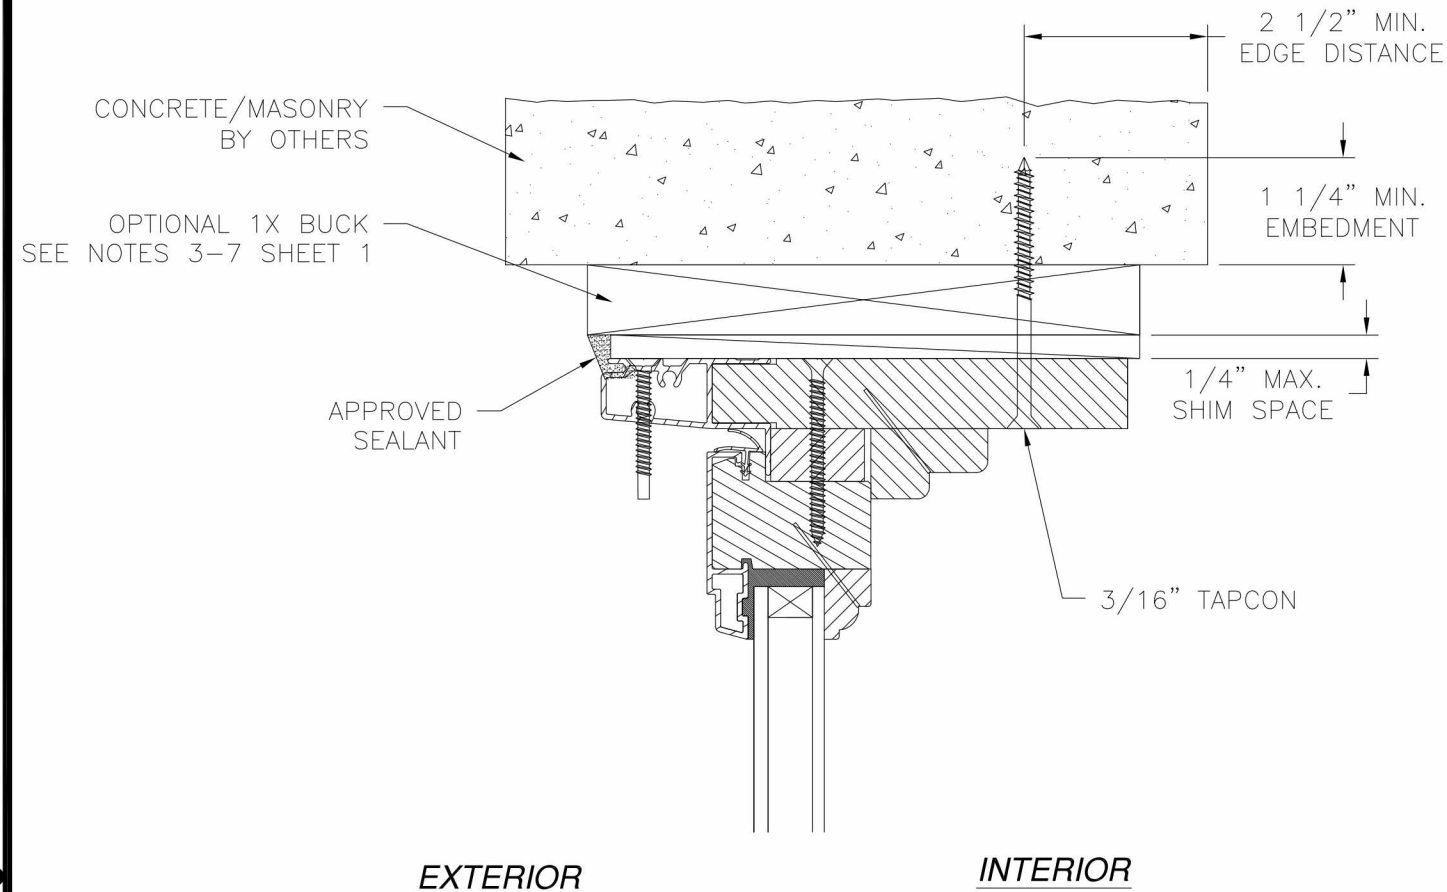


NOTE:
INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT
SHOWN FOR CLARITY.

FRONTLINE BUILDING PRODUCTS 610 JENSEN DRIVE MEDFORD, WI 54451		
400 CLAD CASEMENT PICTURE WINDOW NON-IMPACT INSTALLATION DETAILS		
DRAWN: V.L.	DWG NO. 08-02205	REV —
SCALE NTS	DATE 09/09/13	SHEET 6 OF 7



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

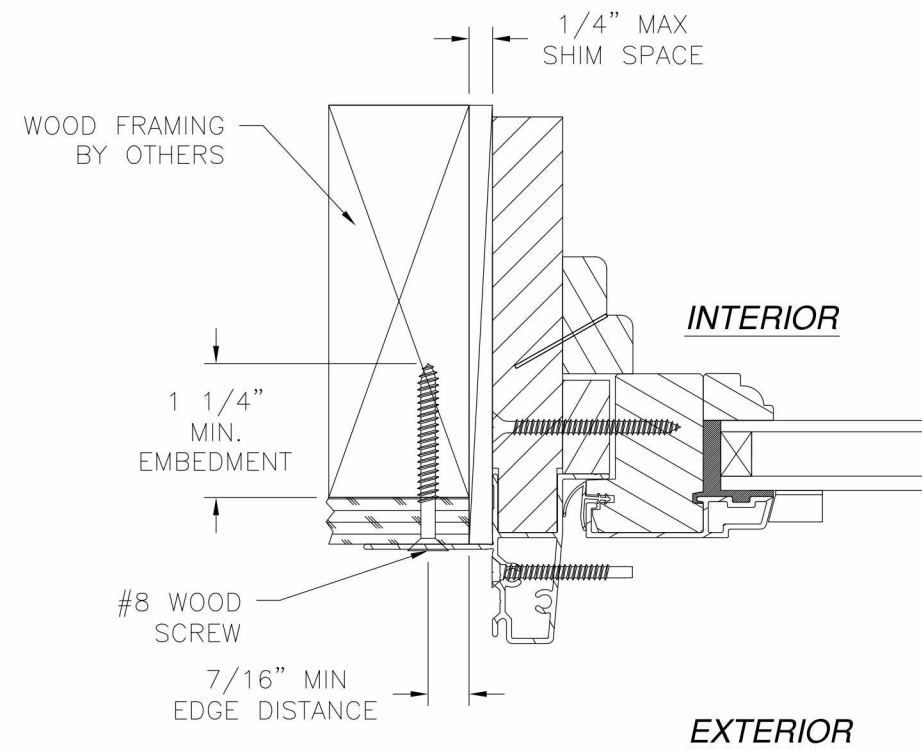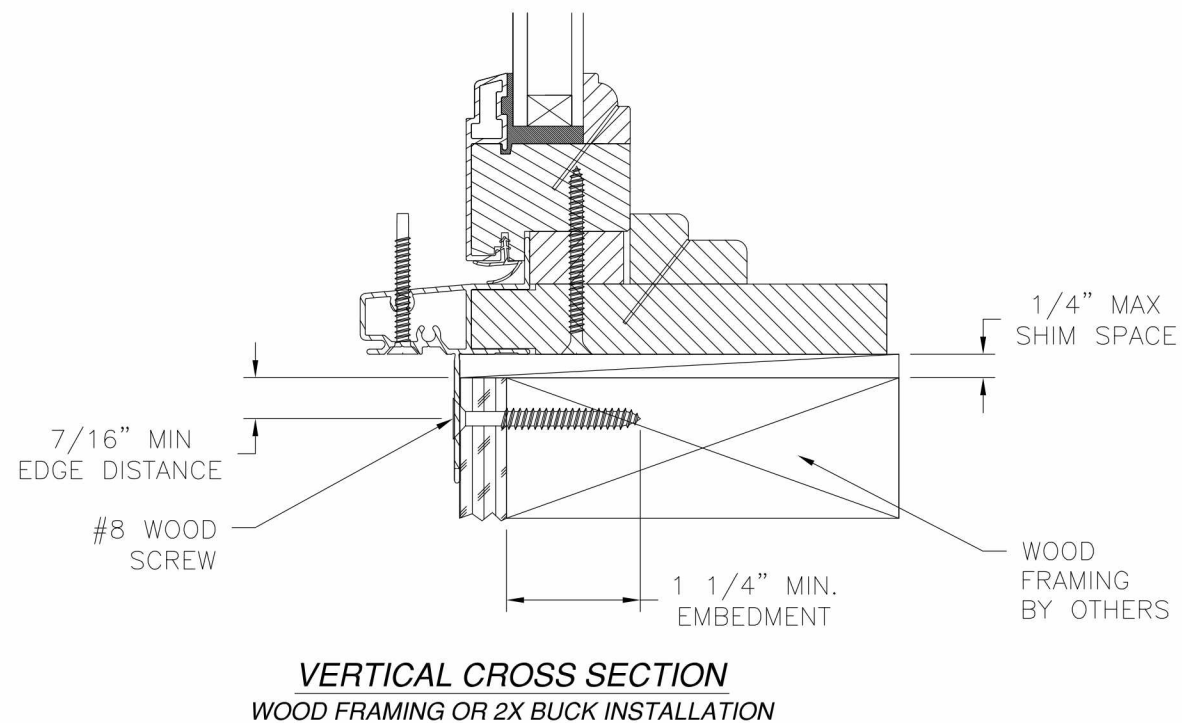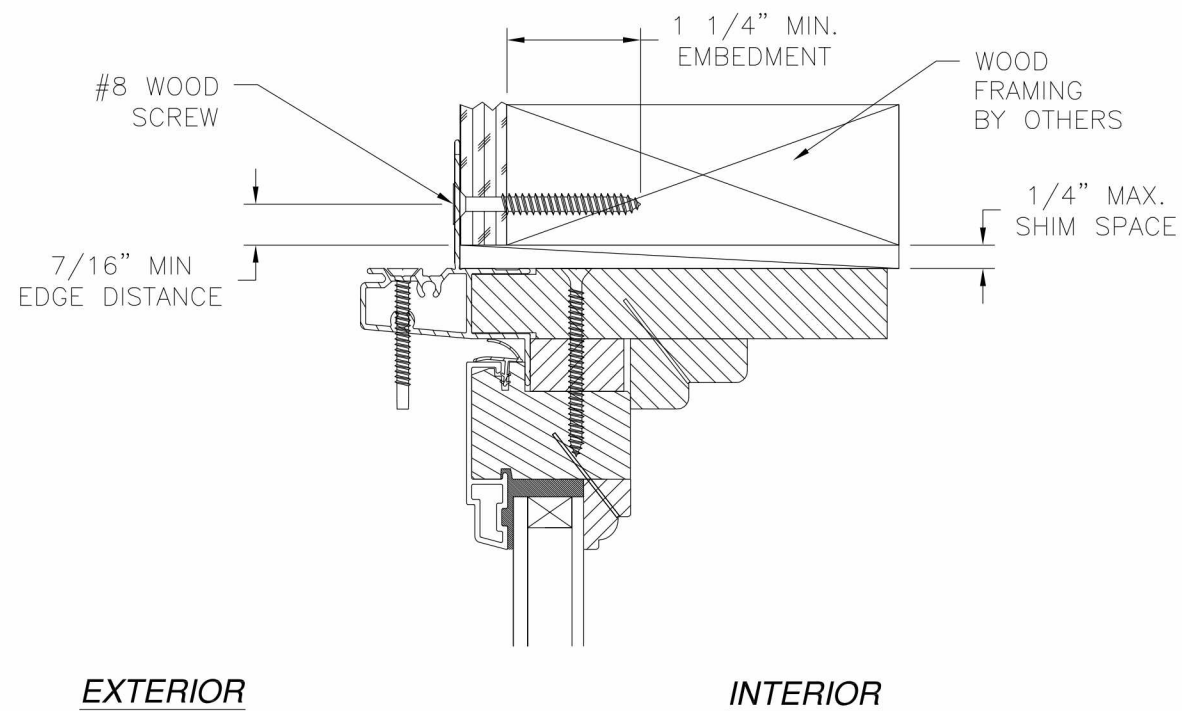

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

NOTE:
INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.

FRONTLINE BUILDING PRODUCTS 610 JENSEN DRIVE MEDFORD, WI 54451			
400 CLAD CASEMENT PICTURE WINDOW NON-IMPACT INSTALLATION DETAILS			
DRAWN: V.L.	DWG NO. 08-02205	REV -	
SCALE NTS	DATE 09/09/13	SHEET 7 OF 7	