

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

- NOTES:
1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH REQUIREMENTS OF THE FLORIDA BUILDING CODE INCLUDING THE HVHZ.
 2. WOOD FRAMING AND MASONRY OPENING TO BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO STRUCTURE. FRAMING AND MASONRY OPENING IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 3. 1X BUCK OVER MASONRY/CONCRETE IS OPTIONAL.
 4. WHERE SHIM OR BUCK THICKNESS IS LESS THAN 1-1/2" WINDOW UNITS MUST BE ANCHORED THROUGH THE FRAME IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS. ANCHORS SHALL BE SECURELY FASTENED DIRECTLY INTO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE MATERIAL.
 5. WHERE WOOD BUCK THICKNESS IS 1-1/2" OR GREATER, BUCK SHALL BE SECURELY FASTENED TO MASONRY, CONCRETE OR OTHER STRUCTURAL SUBSTRATE. WINDOW UNITS MAY BE ANCHORED THROUGH FRAME TO SECURED WOOD BUCK IN ACCORDANCE WITH MANUFACTURER'S PUBLISHED INSTALLATION INSTRUCTIONS.
 6. WHERE 1X BUCK IS NOT USED DISSIMILAR MATERIALS MUST BE SEPARATED WITH APPROVED COATING OR MEMBRANE. SELECTION OF COATING OR MEMBRANE IS THE RESPONSIBILITY OF THE ARCHITECT OR ENGINEER OF RECORD.
 7. BUCKS SHALL EXTEND BEYOND WINDOW INTERIOR FACE SO THAT FULL FRAME SUPPORT IS PROVIDED.
 8. FOR FIN INSTALLATION SHIM AS NEEDED. FOR FRAME INSTALLATION SHIM AS REQUIRED AT EACH ANCHOR LOCATION WITH LOAD BEARING SHIM. SHIM WHERE SPACE OF 1/16" OR GREATER OCCURS. MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4".
 9. SHIMS SHALL BE LOCATED, APPLIED AND MADE FROM MATERIALS AND THICKNESS CAPABLE OF SUSTAINING APPLICABLE LOADS.
 10. WIND LOAD DURATION FACTOR Cd=1.6 WAS USED FOR WOOD ANCHOR CALCULATIONS.
 11. FRAME MATERIAL: EXTRUDED RIGID PVC.
 12. UNITS MUST BE GLAZED PER ASTM E1300, SEE SHEET 2 FOR GLASS DETAILS.
 13. APPROVED IMPACT PROTECTIVE SYSTEM IS NOT REQUIRED FOR THIS PRODUCT IN WIND BORNE DEBRIS REGIONS.
 14. FOR FIN INSTALLATION INTO WOOD FRAMING OR 2X BUCK USE #8 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1-1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.

15. FOR FRAME ANCHORING INTO WOOD FRAMING OR 2X BUCK USE #12 WOOD SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE A 1-1/4" MINIMUM EMBEDMENT INTO SUBSTRATE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
16. FOR FRAME ANCHORING INTO MASONRY/CONCRETE USE 1/4" TAPCONS WITH SUFFICIENT LENGTH TO ACHIEVE A 1-1/4" MINIMUM EMBEDMENT INTO SUBSTRATE WITH 2" MINIMUM EDGE DISTANCE. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
17. FOR FRAME ANCHORING INTO METAL STRUCTURE USE #12 SMS OR SELF DRILLING SCREWS WITH SUFFICIENT LENGTH TO ACHIEVE 3 THREADS MINIMUM BEYOND STRUCTURE INTERIOR WALL. LOCATE ANCHORS AS SHOWN IN ELEVATIONS AND INSTALLATION DETAILS.
18. ALL FASTENERS TO BE CORROSION RESISTANT.
19. WHEN THE PRODUCT SPECIFIED HEREIN IS INSTALLED WITHIN 3000 FEET OF A SALTWATER COASTLINE, ALL ANCHORS AND CLIPS MUST COMPLY WITH SALTWATER ENVIRONMENT CORROSION RESISTANCE REQUIREMENTS OF FBC CHAPTER 17.
20. INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BELOW:
 - A. WOOD - MINIMUM SPECIFIC GRAVITY OF G=0.42
 - B. CONCRETE - MINIMUM COMPRESSIVE STRENGTH OF 3,192 PSI.
 - C. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, GRADE N, TYPE 1 (OR GREATER).
 - D. METAL STRUCTURE: STEEL 18GA, 33KSI OR ALUMINUM 6063-T5 .048" THICK MINIMUM
21. APPROVED CONFIGURATION: XOX.
22. UNITS MAY BE INSTALLED WITH OR WITHOUT FLANGE, OUTSIDE THE HVHZ.

FL 16804

TABLE OF CONTENTS	
SHEET NO.	DESCRIPTION
1	NOTES
2 - 3	ELEVATIONS
4 - 7	INSTALLATION DETAILS



EASTERN ARCHITECTURAL SYSTEMS
A DIVISION OF
CORNERSTONE BUILDING BRANDS

16341 DOMESTIC AVE
FORT MYERS, FL 33912
800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
(1/4 - 1/2 - 1/4) 111" X 63"

NOTES

DRAWN:
N.G.

DWG NO.
08-02536

REV
C


SCALE NTS

DATE 11/17/14


SHEET 1 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/25/2026

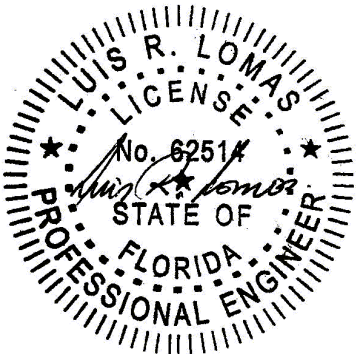

Luis R. Lomas P.E.
FL No.: 62514

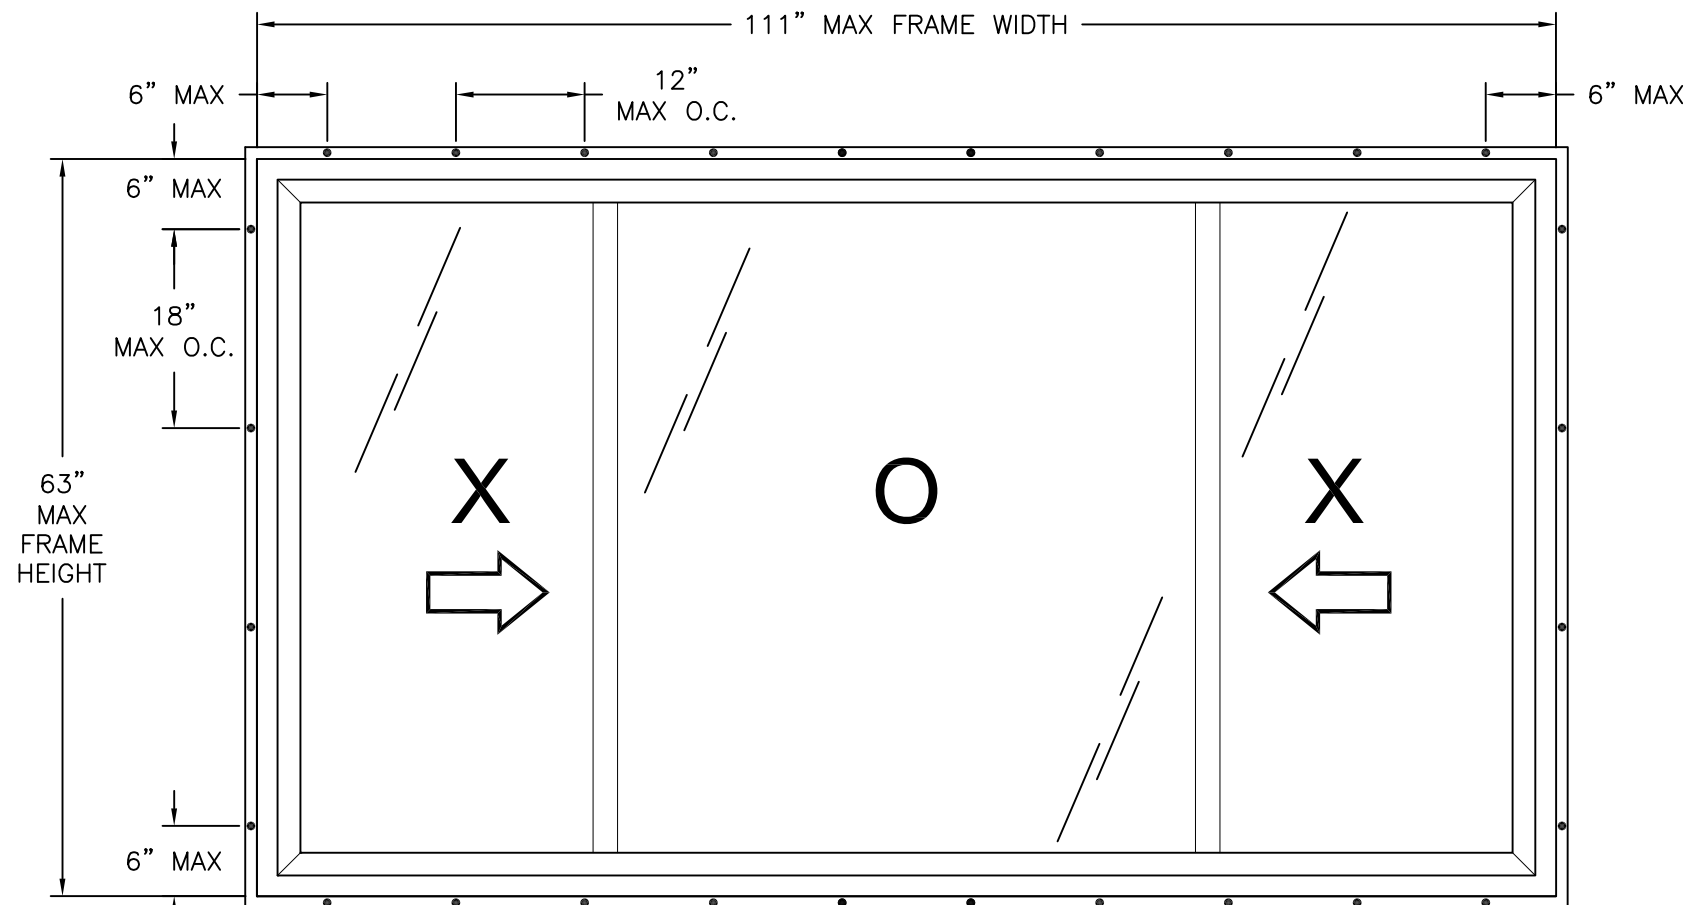

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
EXTERIOR VIEW
FIN INSTALLATION

DESIGN PRESSURE RATING	IMPACT RATING
+55.0/-60.0 PSF	LARGE MISSILE IMPACT


MISSILE LEVEL D, WIND ZONE 4 AND HVHZ

HARDWARE SCHEDULE	
A.	(4) ASHLAND DUAL KEEPERS (13999) AT FIXED MEETING STILE 8" FROM HEAD & SILL
B.	(4) ASHLAND DUAL LOCKS (D2100AL/R) AT SASH LOCK STILE 8" FROM SASH CORNERS
C.	(4) ROLLER HOUSINGS AT EACH CORNER OF SASH BOTTOM RAILS.
D.	(3) TRACKS AT OPERABLE SASH HEAD & SILL
E.	(1) ALUMINUM REINFORCEMENT (10300265) IN FIXED MEETING RAIL
F.	(5) ALUMINUM REINFORCEMENT (10300266) IN SASH TOP AND BOTTOM RAILS, JAMB STILES AND SASH LOCK RAIL


- NOTES:
1. MAXIMUM OPERABLE SASH SIZE: 28-1/4" X 60-1/2".
 2. MAXIMUM FIXED SASH: 57-3/4" X 60-9/16"
 3. MAXIMUM OPERABLE SASH D.L.O.: 25" X 57-1/16".
 4. MAXIMUM FIXED SASH D.L.O.: 50-15/16" X 58-1/4"
 5. (2) WEEPS WITH COVER (97-03) AT SILL FACE FROM EACH CORNER.
 6. (2) 1-1/2" X 1/4" WEEP SLOT AT SILL FACE 4-1/8" FROM EACH CORNER.
 7. (2) 1/8" X 12" WEEP SLOT AT SILL FACE AND SILL SASH 3-1/8" FROM EACH END.
 8. (2) 1/2" X 1/8" WEEP SLOT AT SILL BEHIND GLAZING LEG.

FL 16804

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

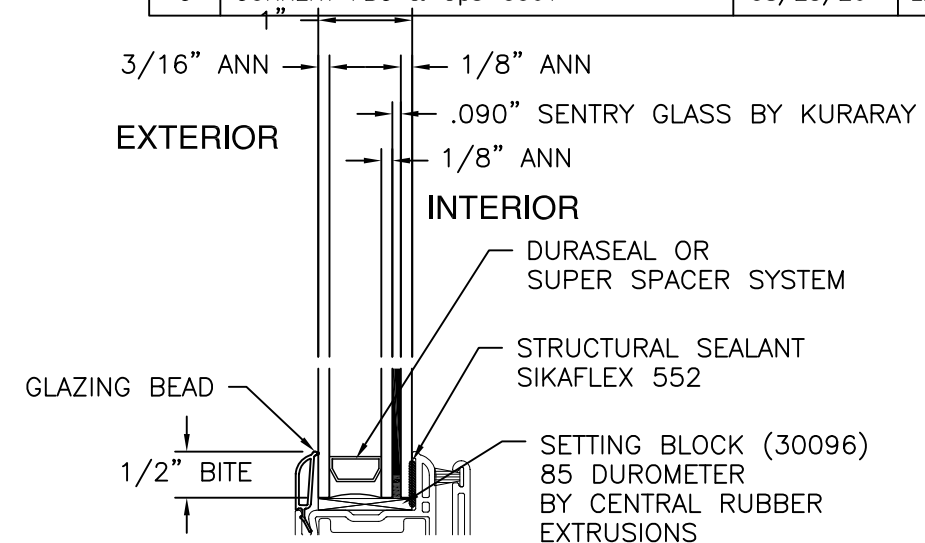

GLAZING DETAIL A

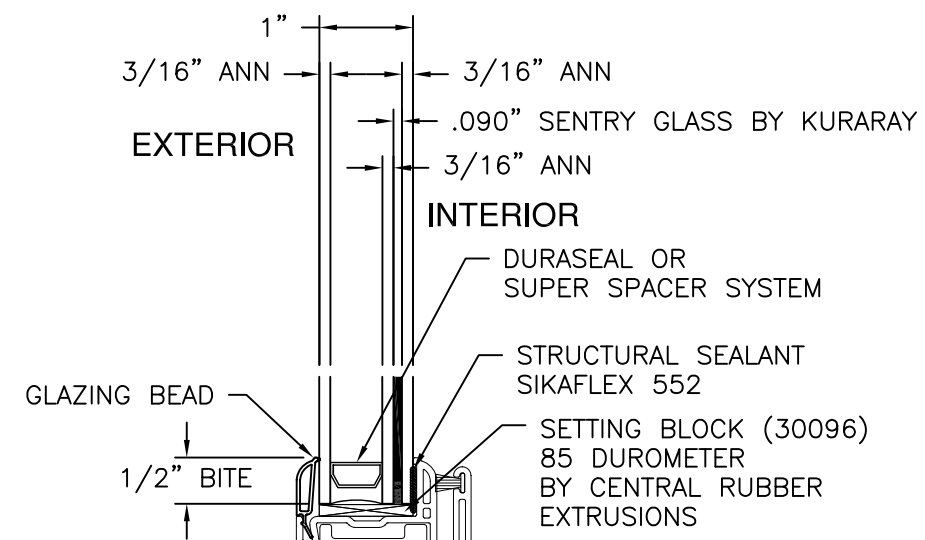

GLAZING DETAIL B

SIGNED: 08/25/2026




EASTERN ARCHITECTURAL SYSTEMS
A DIVISION OF
CORNERSTONE BUILDING BRANDS
16341 DOMESTIC AVE
FORT MYERS, FL 33912
800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
(1/4 - 1/2 - 1/4) 111" X 63"
ELEVATIONS


DRAWN: N.G.	DWG NO. 08-02536	REV C
SCALE NTS	DATE 11/17/14	SHEET 2 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

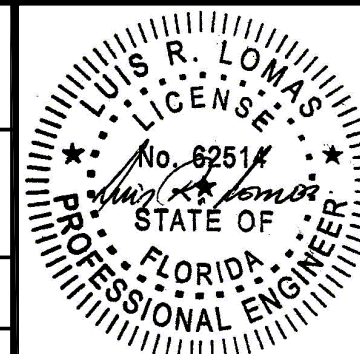


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

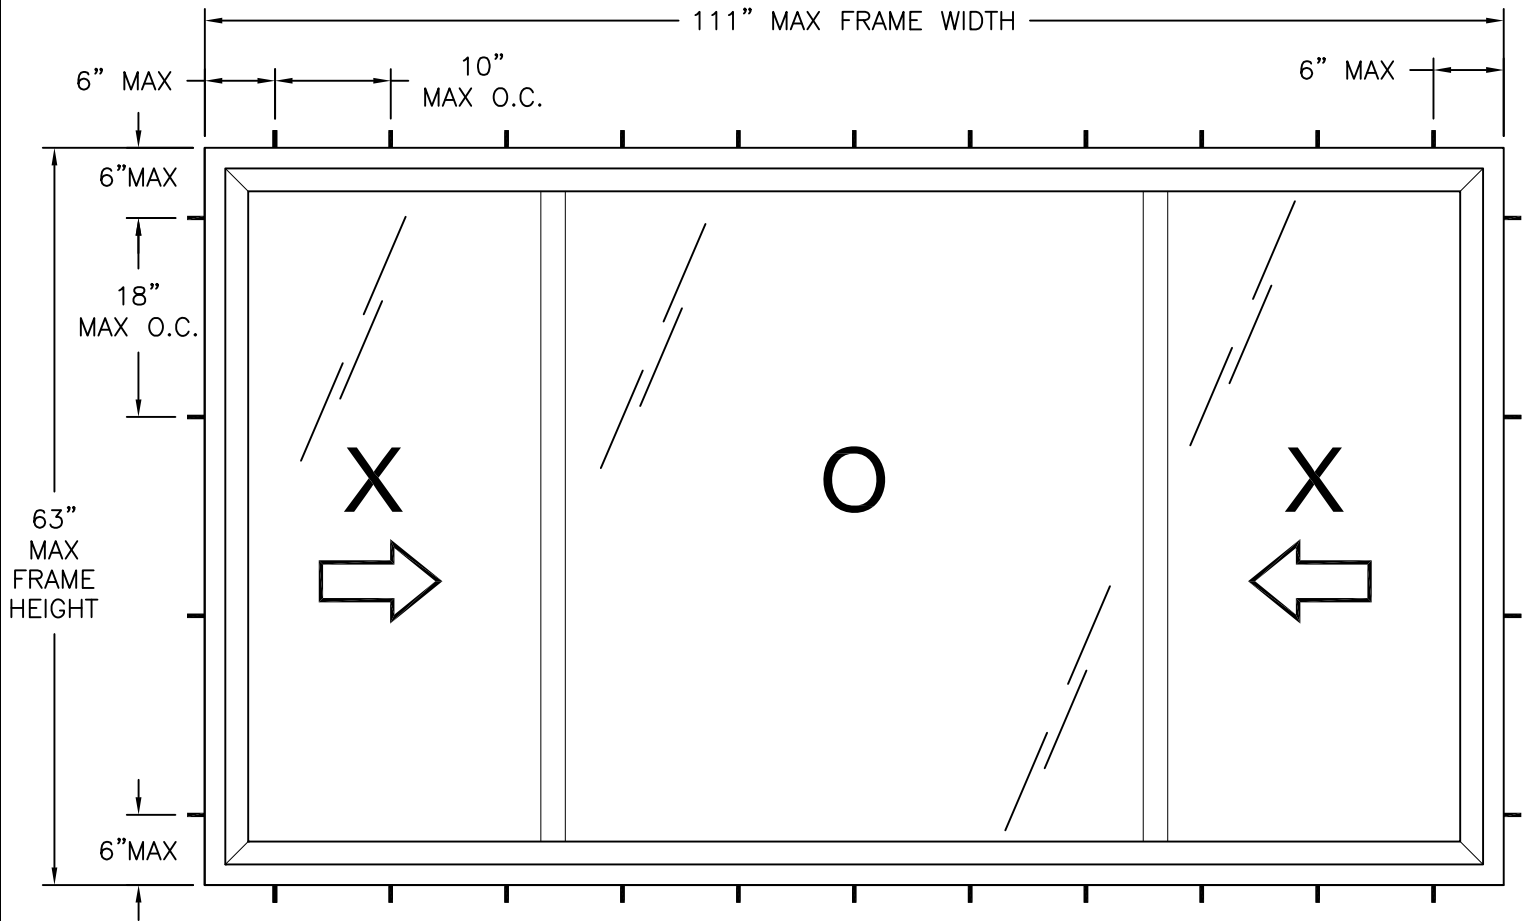

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
EXTERIOR VIEW
THROUGH FRAME INSTALLATION
FOR MASONRY AND METAL STRUCTURE

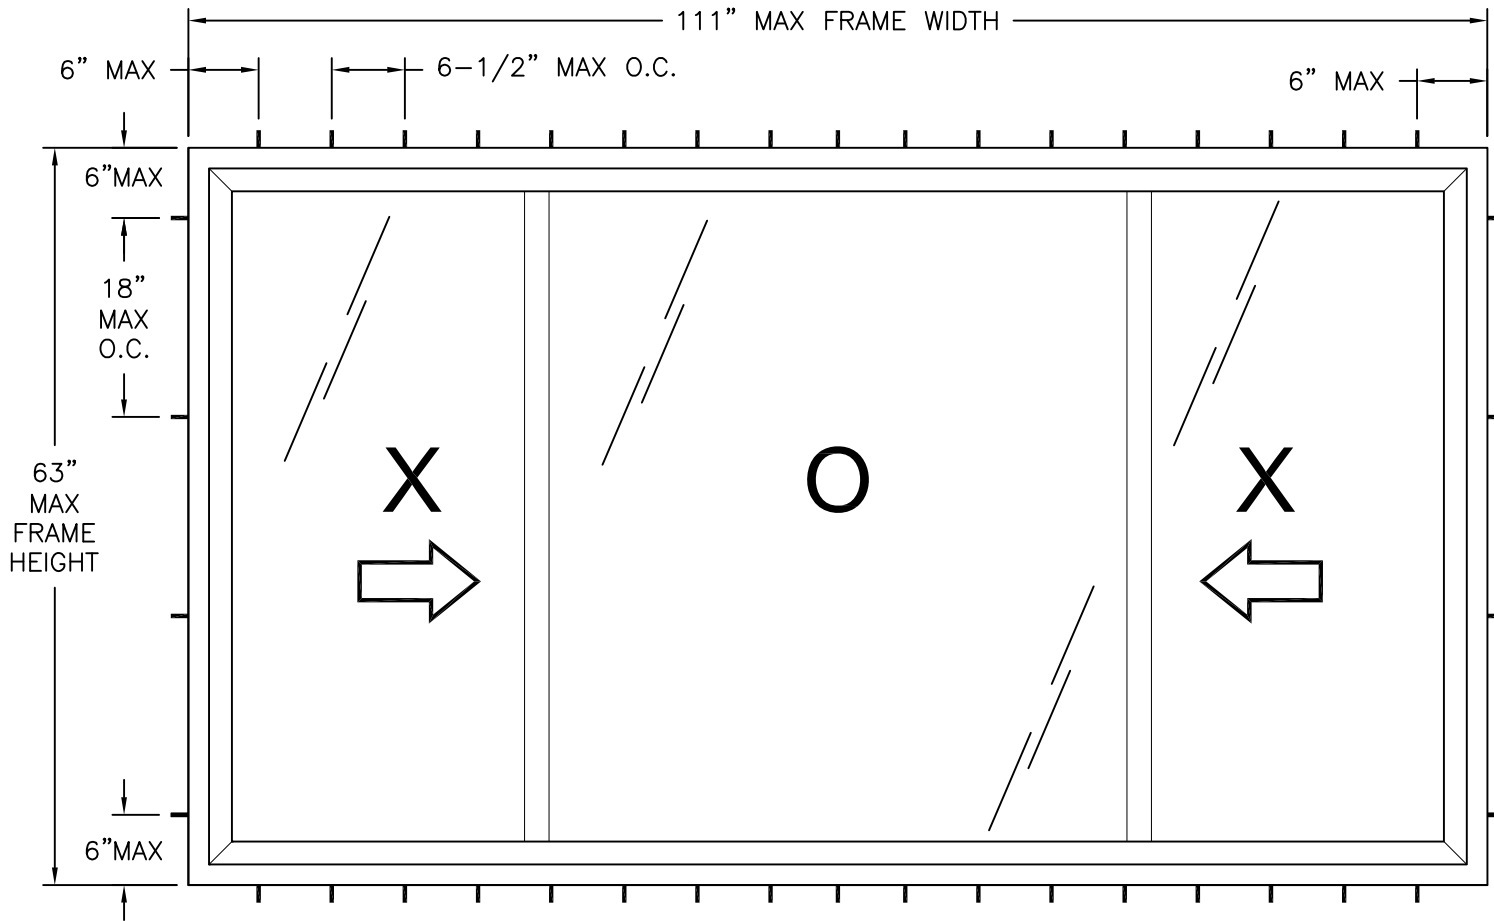

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
EXTERIOR VIEW
THROUGH FRAME INSTALLATION
FOR WOOD FRAMING

DESIGN PRESSURE RATING	IMPACT RATING
+50.0/-65.0 PSF	LARGE MISSILE IMPACT

MISSILE LEVEL D, WIND ZONE 4 AND HVHZ

SIGNED: 08/25/2026




EASTERN ARCHITECTURAL SYSTEMS
A DIVISION OF
CORNERSTONE BUILDING BRANDS
16341 DOMESTIC AVE
FORT MYERS, FL 33912
800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
(1/4 - 1/2 - 1/4) 111" X 63"
ELEVATIONS



DRAWN: N.G.	DWG NO. 08-02536	REV C
SCALE NTS	DATE 11/17/14	SHEET 3 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

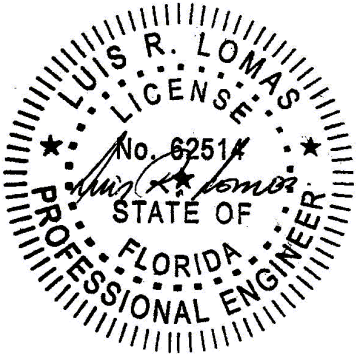


Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

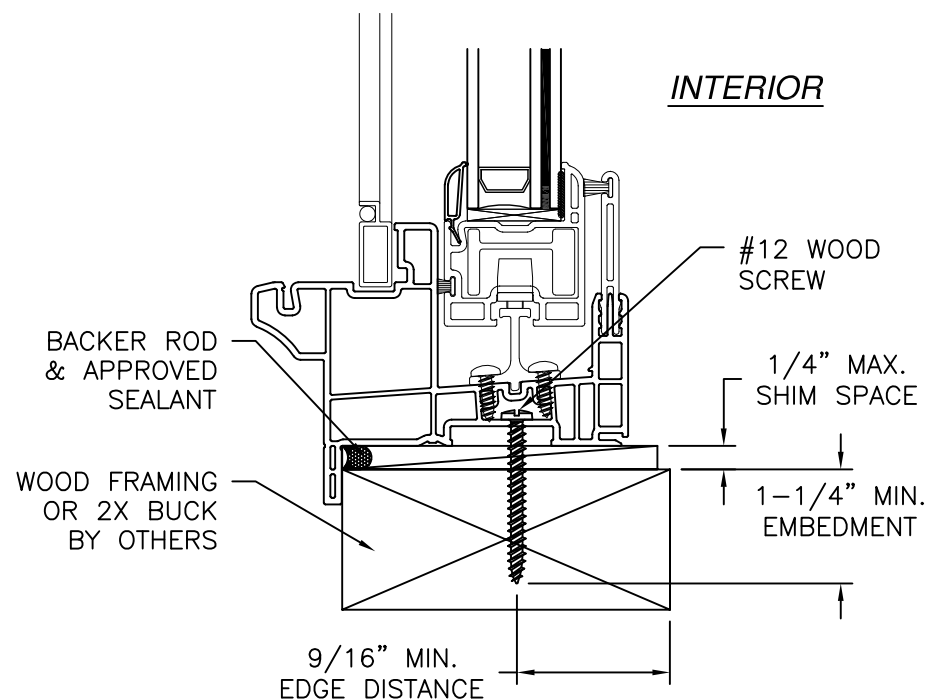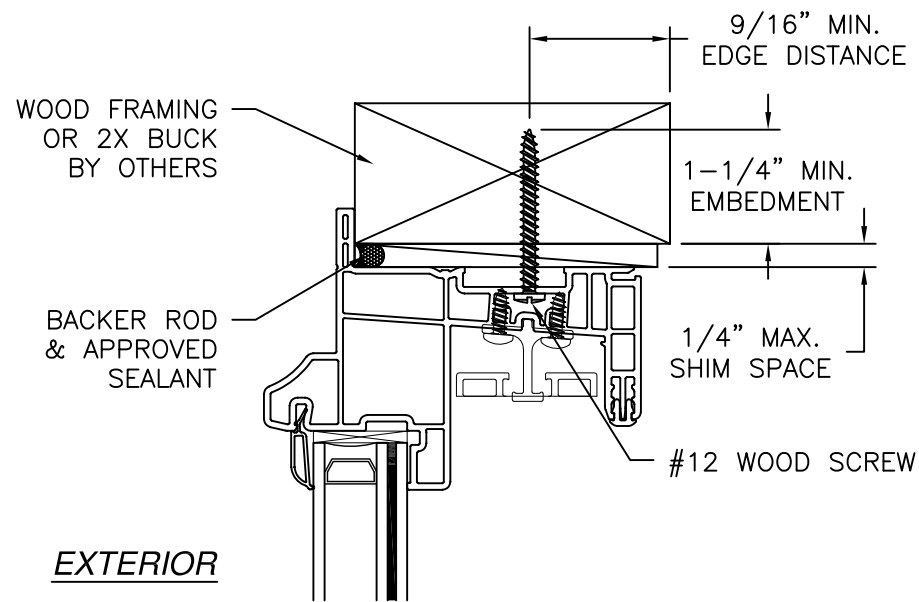

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

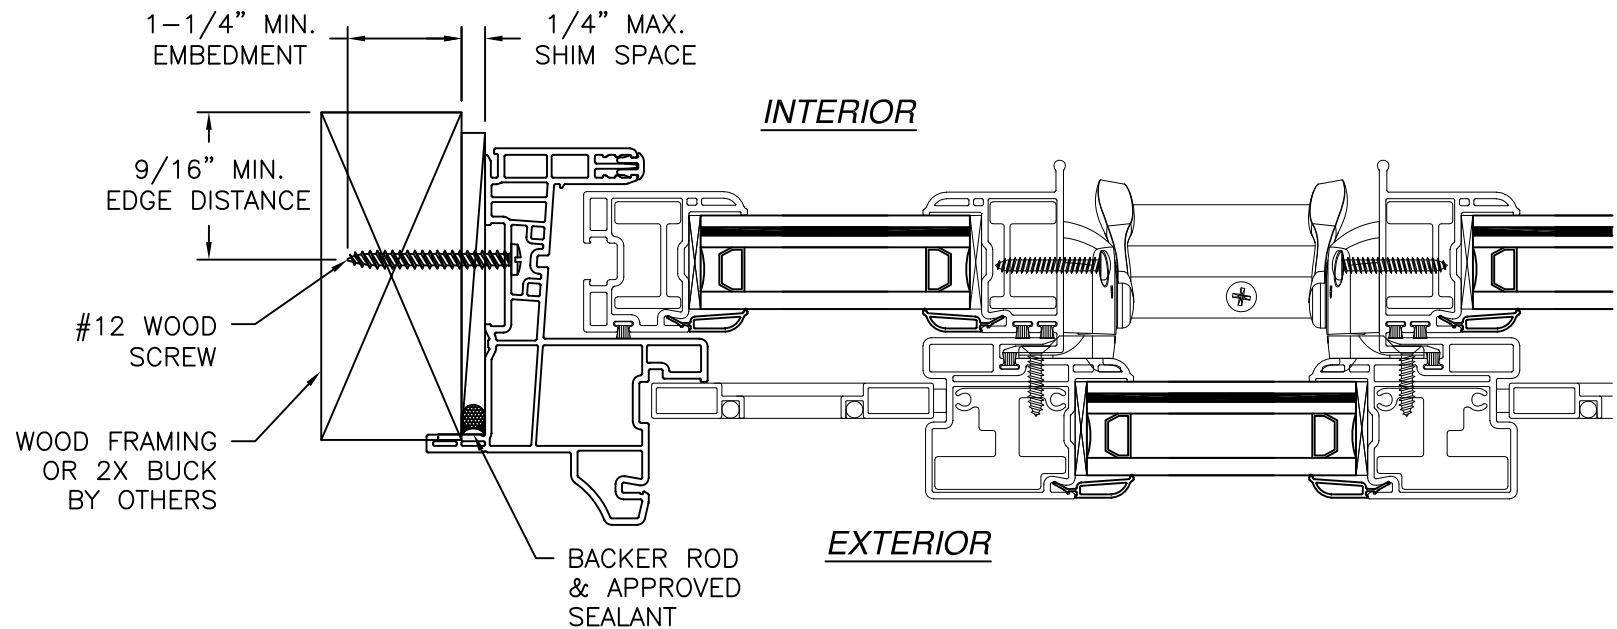

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION




EASTERN ARCHITECTURAL SYSTEMS
A DIVISION OF
CORNERSTONE BUILDING BRANDS
16341 DOMESTIC AVE
FORT MYERS, FL 33912
800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
(1/4 - 1/2 - 1/4) 111" X 63"
INSTALLATION DETAILS

DRAWN: N.G.	DWG NO. 08-02536	REV C
SCALE NTS	DATE 11/17/14	SHEET 4 OF 7



L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/25/2026

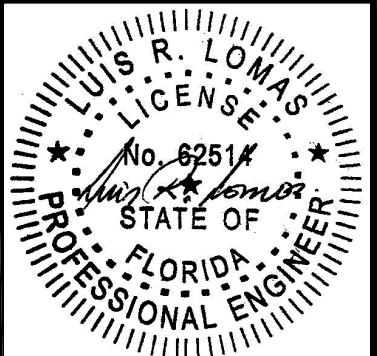

Luis R. Lomas P.E.
FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

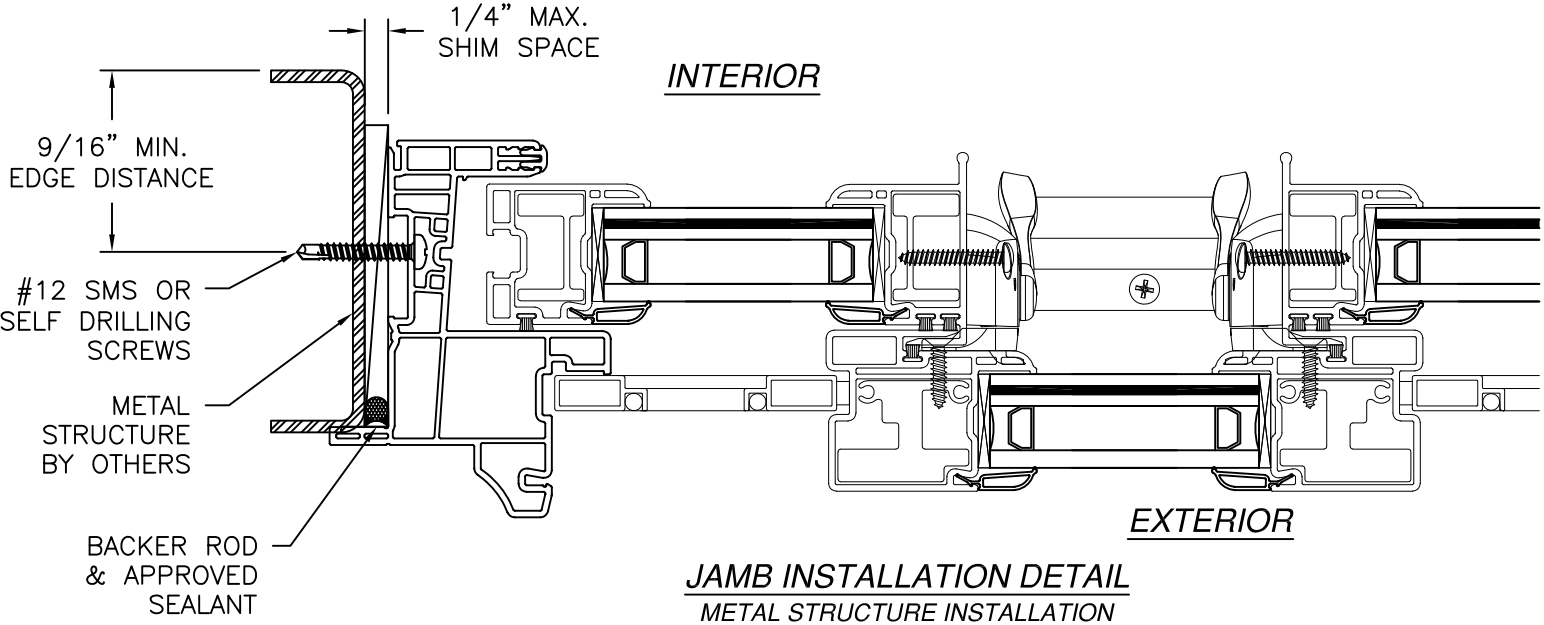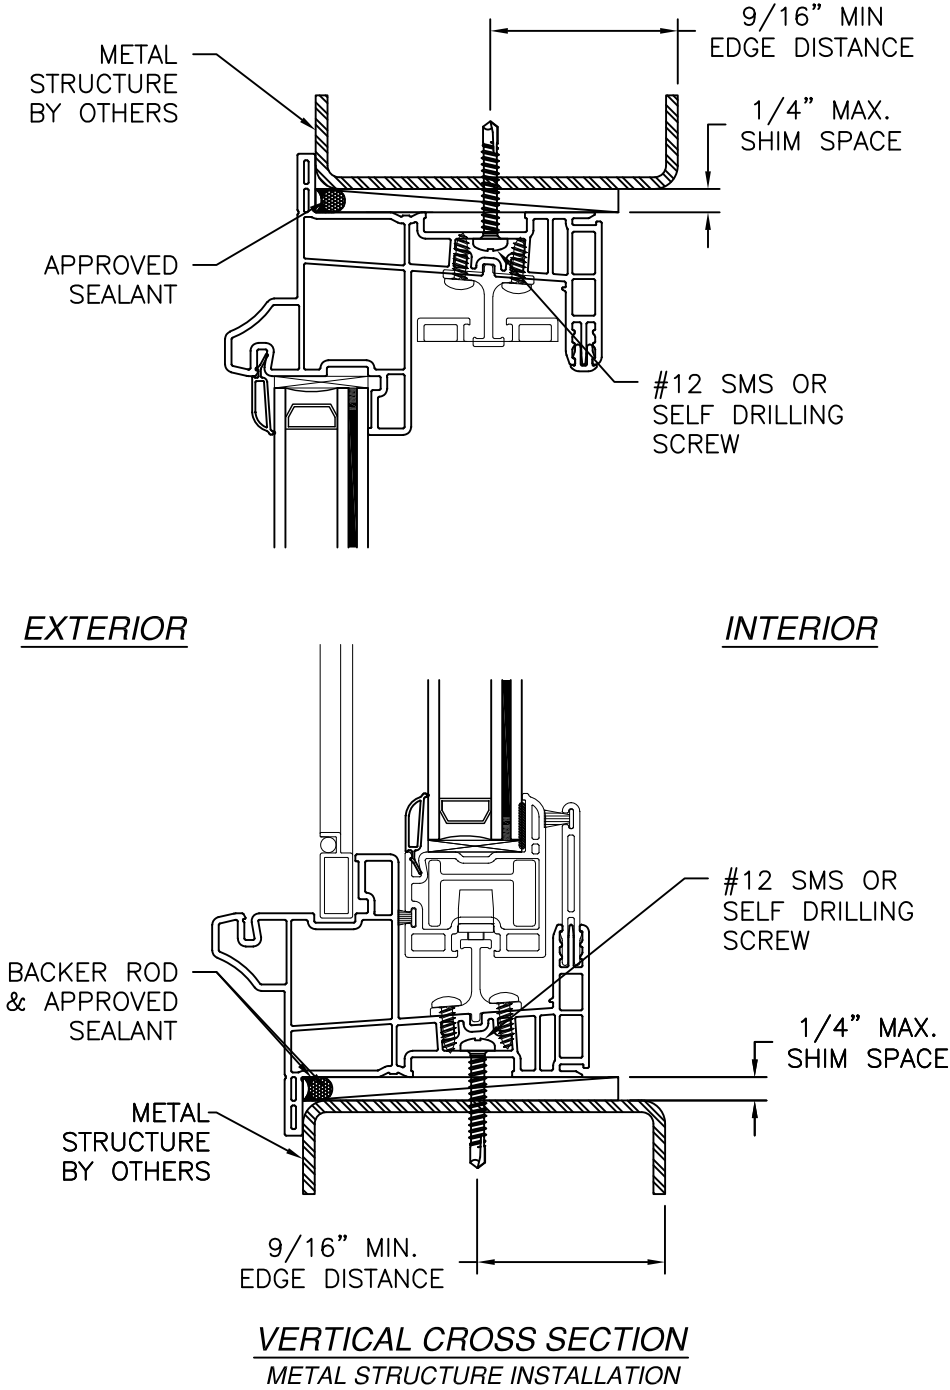

NOTES:
 1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112




EASTERN ARCHITECTURAL SYSTEMS
 A DIVISION OF
 CORNERSTONE BUILDING BRANDS
 16341 DOMESTIC AVE
 FORT MYERS, FL 33912
 800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
 (1/4 - 1/2 - 1/4) 111" X 63"
 INSTALLATION DETAILS

DRAWN: N.G.	DWG NO. 08-02536	REV C
SCALE NTS	DATE 11/17/14	SHEET 5 OF 7




L. ROBERTO LOMAS P.E.
 208 7th Ave, INDIALANTIC, FL 32903
 434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/25/2026

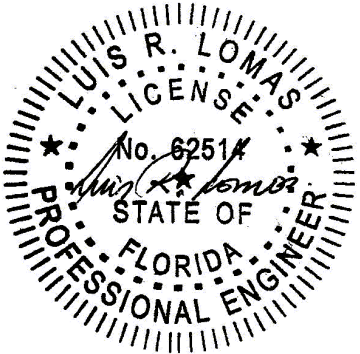

Luis R. Lomas P.E.
 FL No.: 62514

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH

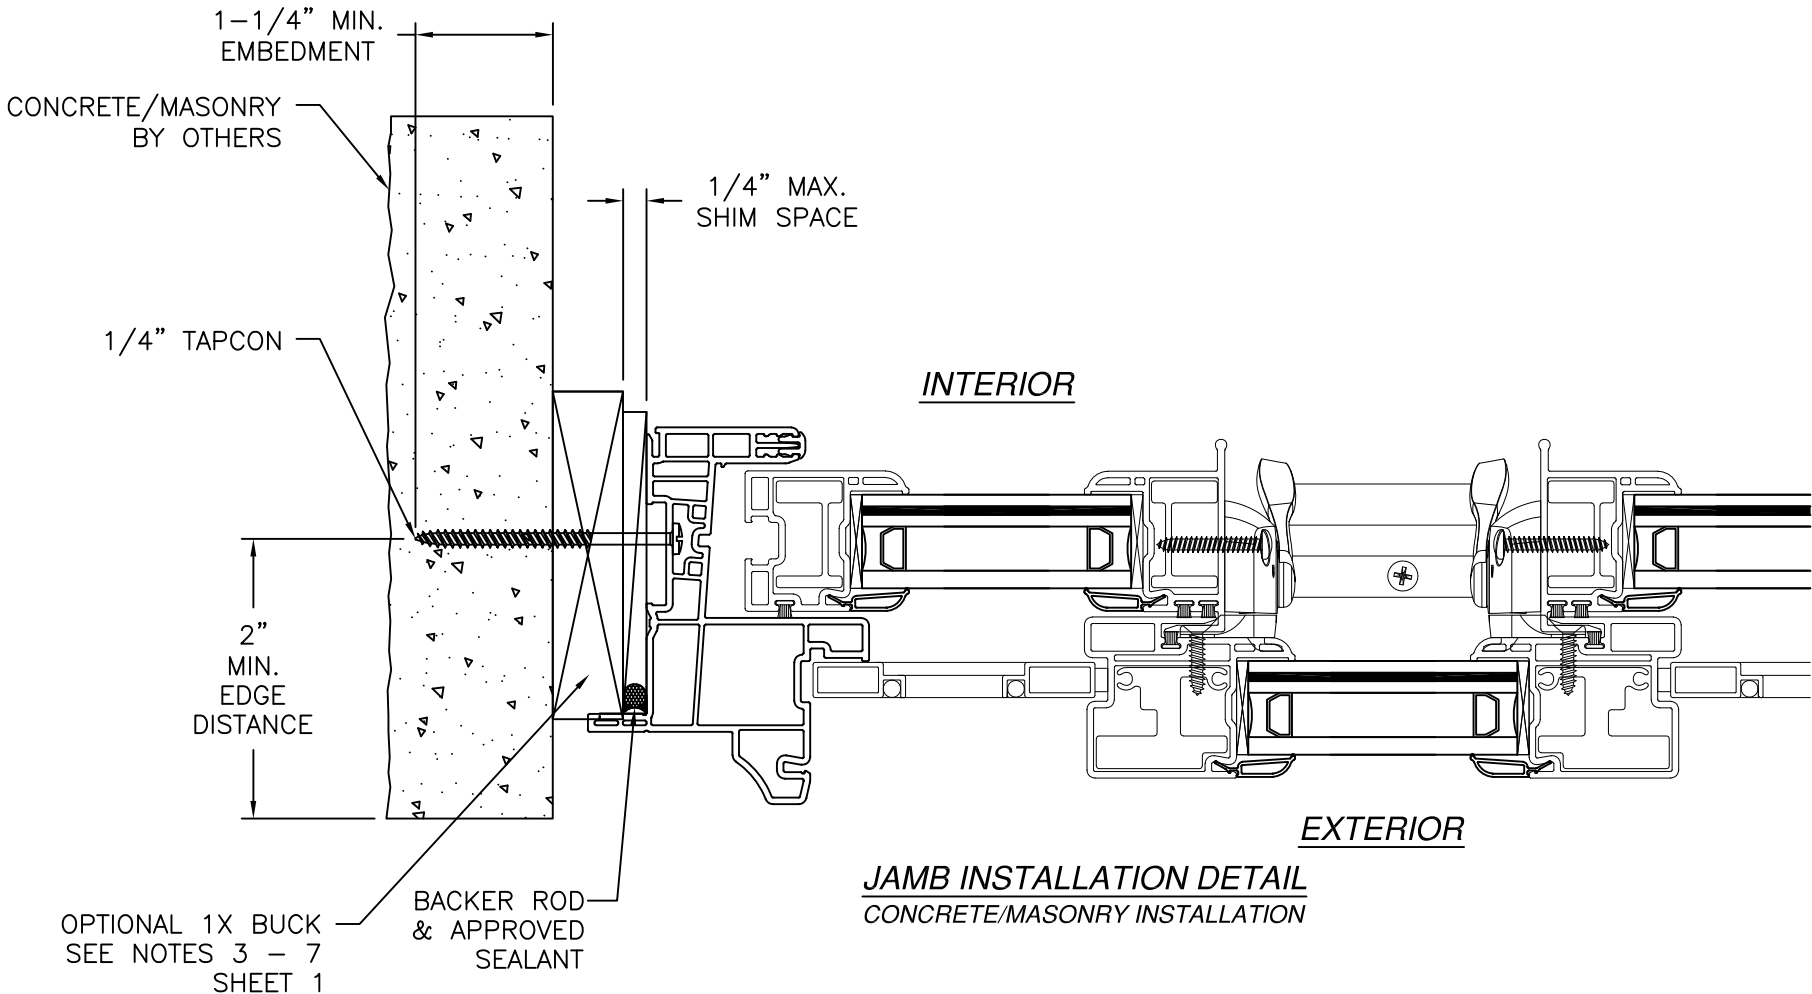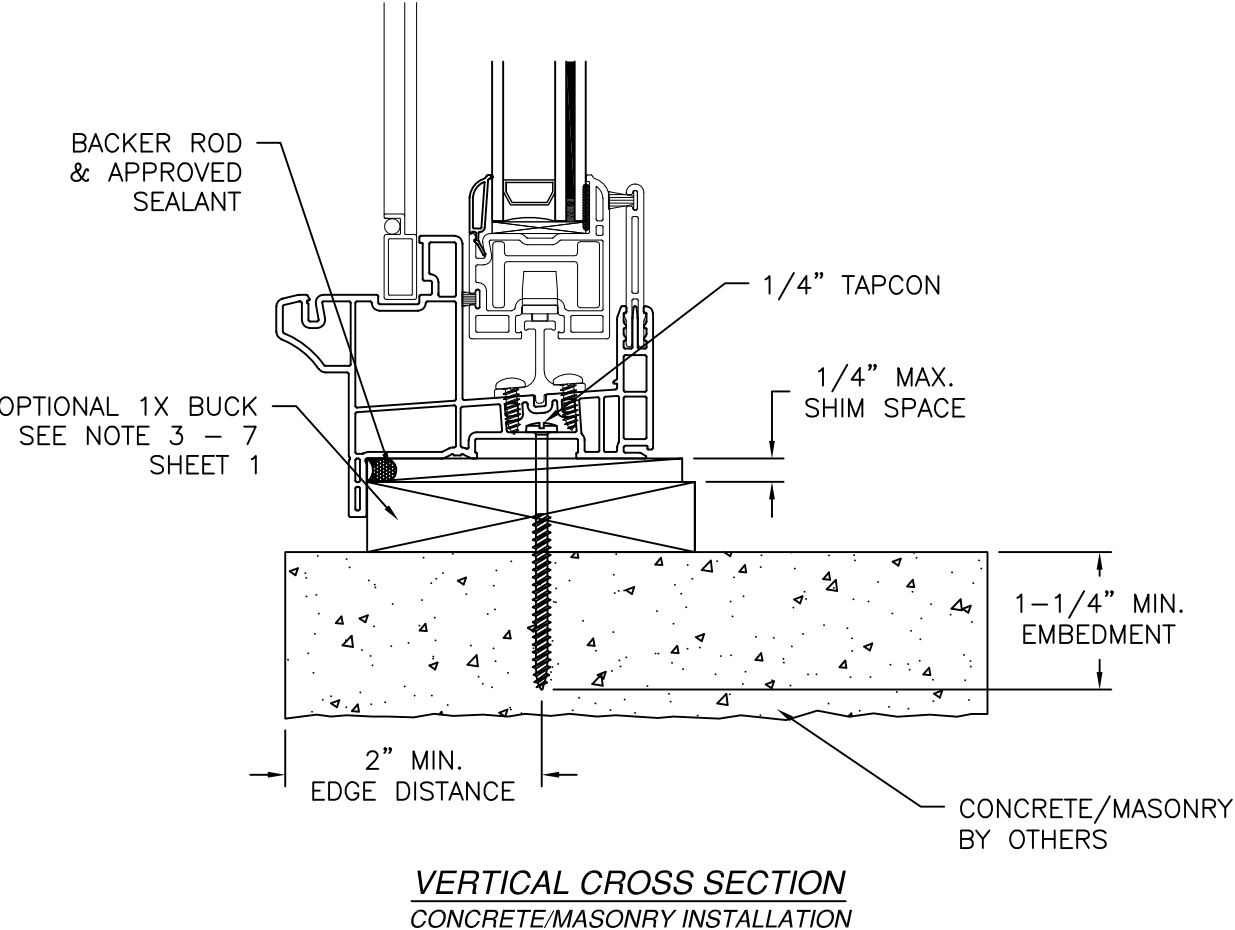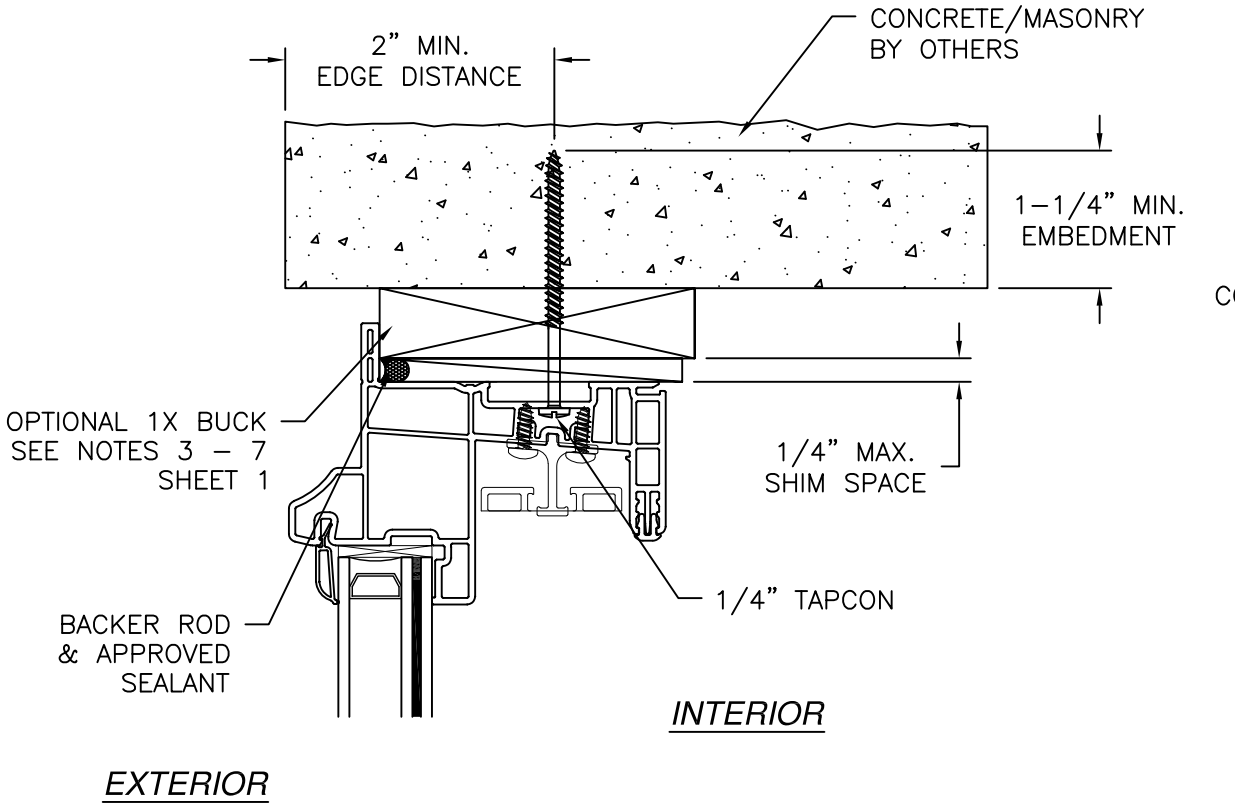

- NOTES:
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

SIGNED: 08/25/2026



EASTERN ARCHITECTURAL SYSTEMS

A DIVISION OF

CORNERSTONE BUILDING BRANDS

16341 DOMESTIC AVE

FORT MYERS, FL 33912

800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW

(1/4 - 1/2 - 1/4) 111" X 63"


INSTALLATION DETAILS

DRAWN:	DWG NO.	REV
N.G.	08-02536	C
SCALE NTS	DATE 11/17/14	SHEET 6 OF 7


L. ROBERTO LOMAS P.E.

208 7th Ave, INDIALANTIC, FL 32903

434-688-0609 rllomas@lrlomaspe.com

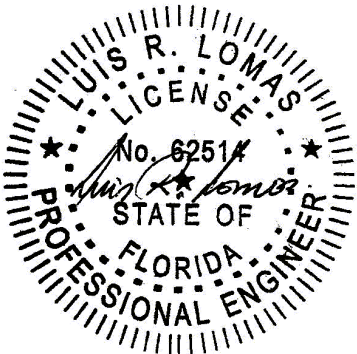


Luis R. Lomas P.E.
FL No.: 62514

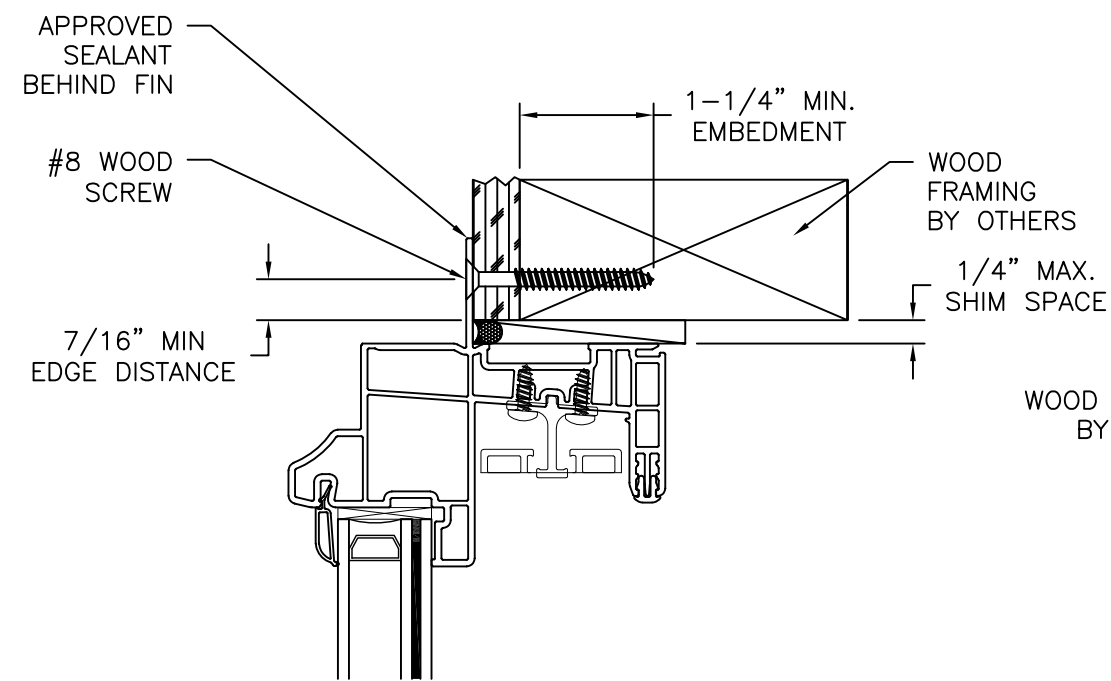


EXTERIOR

INTERIOR

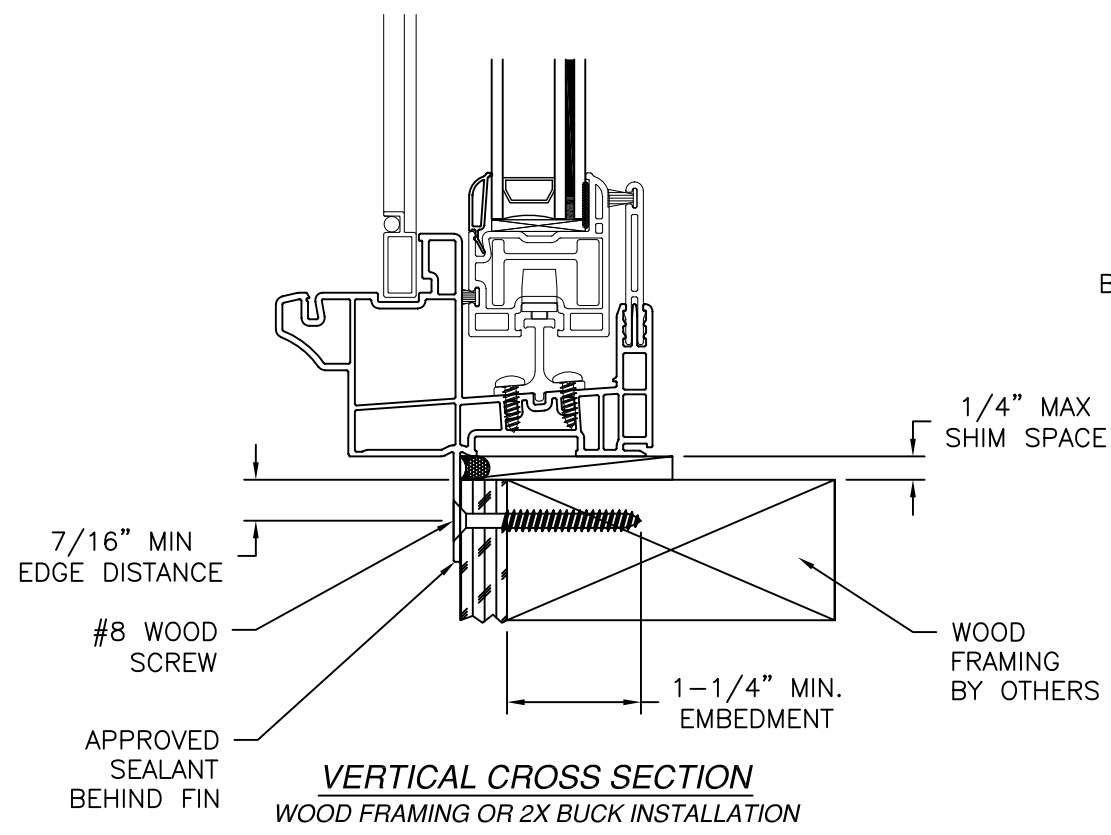

VERTICAL CROSS SECTION
WOOD FRAMING OR 2X BUCK INSTALLATION

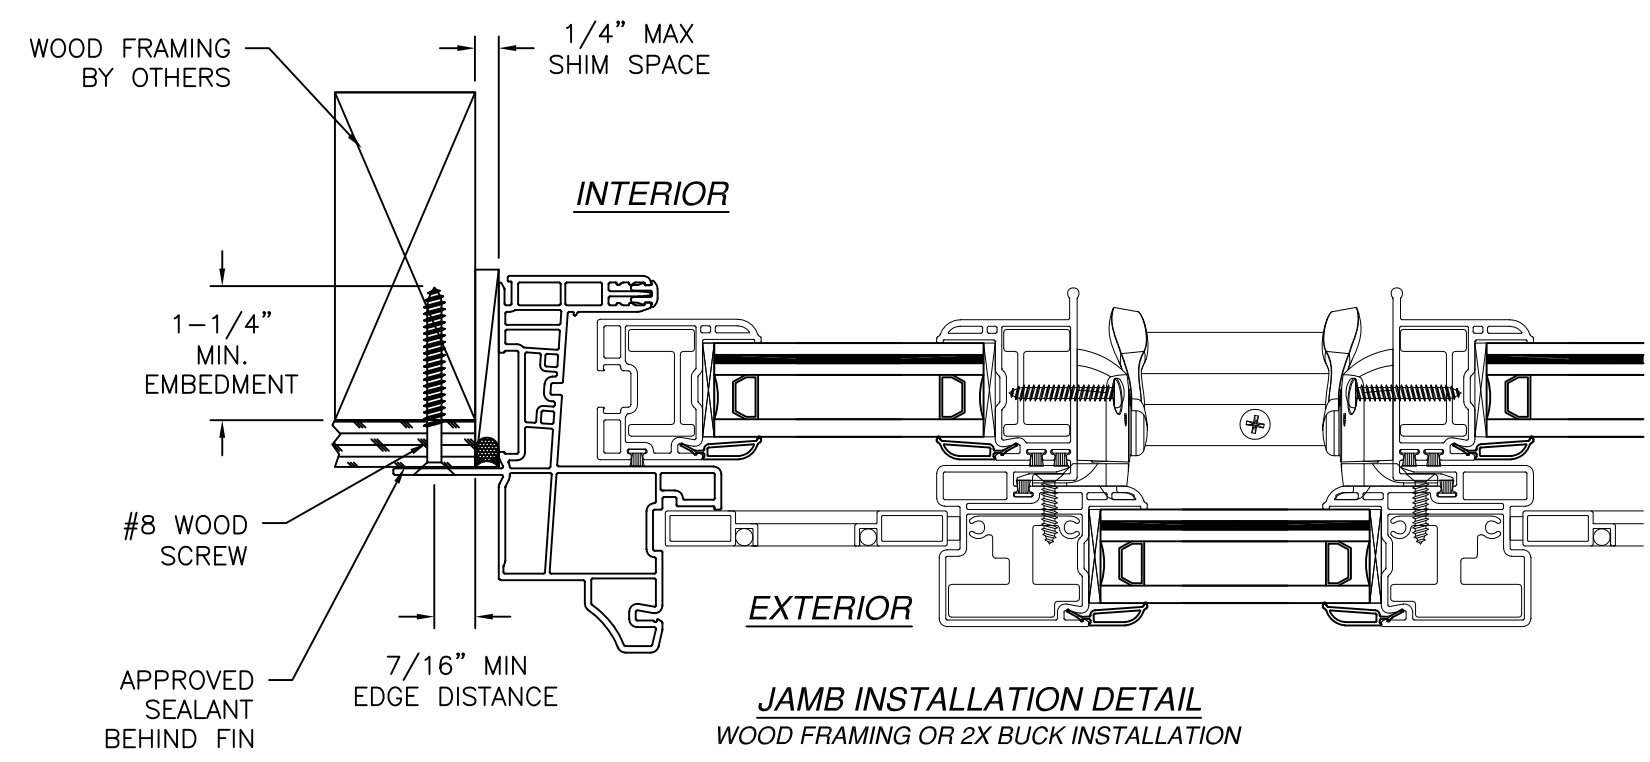

JAMB INSTALLATION DETAIL
WOOD FRAMING OR 2X BUCK INSTALLATION

- NOTES:**
1. INTERIOR AND EXTERIOR FINISHES, BY OTHERS, NOT SHOWN FOR CLARITY.
 2. PERIMETER AND JOINT SEALANT BY OTHERS TO BE DESIGNED IN ACCORDANCE WITH ASTM E2112

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	REVISED INSTALLATION DETAILS	06/23/15	R.L.
B	REVISED PER NEW REQUIREMENTS	01/10/18	R.L.
C	CURRENT FBC & Ops-0061	08/25/26	LMH




Eastern
ARCHITECTURAL SYSTEMS
A DIVISION OF
CORNERSTONE BUILDING BRANDS
16341 DOMESTIC AVE
FORT MYERS, FL 33912
800-432-2204

SERIES 176 SS VINYL HORIZONTAL SLIDING WINDOW
(1/4 - 1/2 - 1/4) 111" X 63"
INSTALLATION DETAILS

DRAWN: N.G.	DWG NO. 08-02536	REV C
SCALE NTS	DATE 11/17/14	SHEET 7 OF 7

L. ROBERTO LOMAS P.E.
208 7th Ave, INDIALANTIC, FL 32903
434-688-0609 rllomas@lrlomaspe.com

SIGNED: 08/25/2026

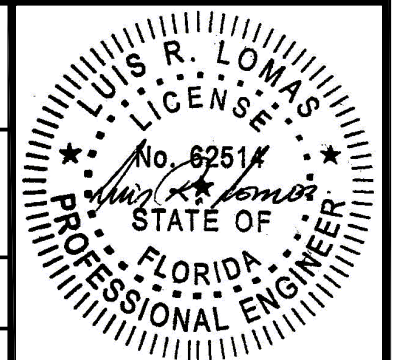

Luis R. Lomas P.E.
FL No.: 62514