



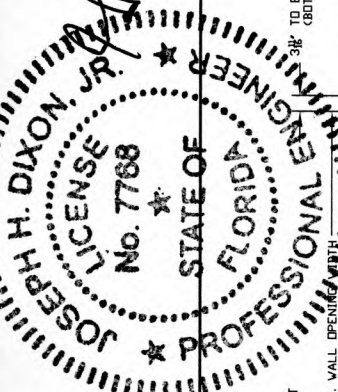

2/16/12

REVISIONS			
REV	DESCRIPTION	DATE	APPROVAL
—	DRAWING RELEASE	5-30-07	JDM
A	NOTE REVISIONS	6-17-09	CS

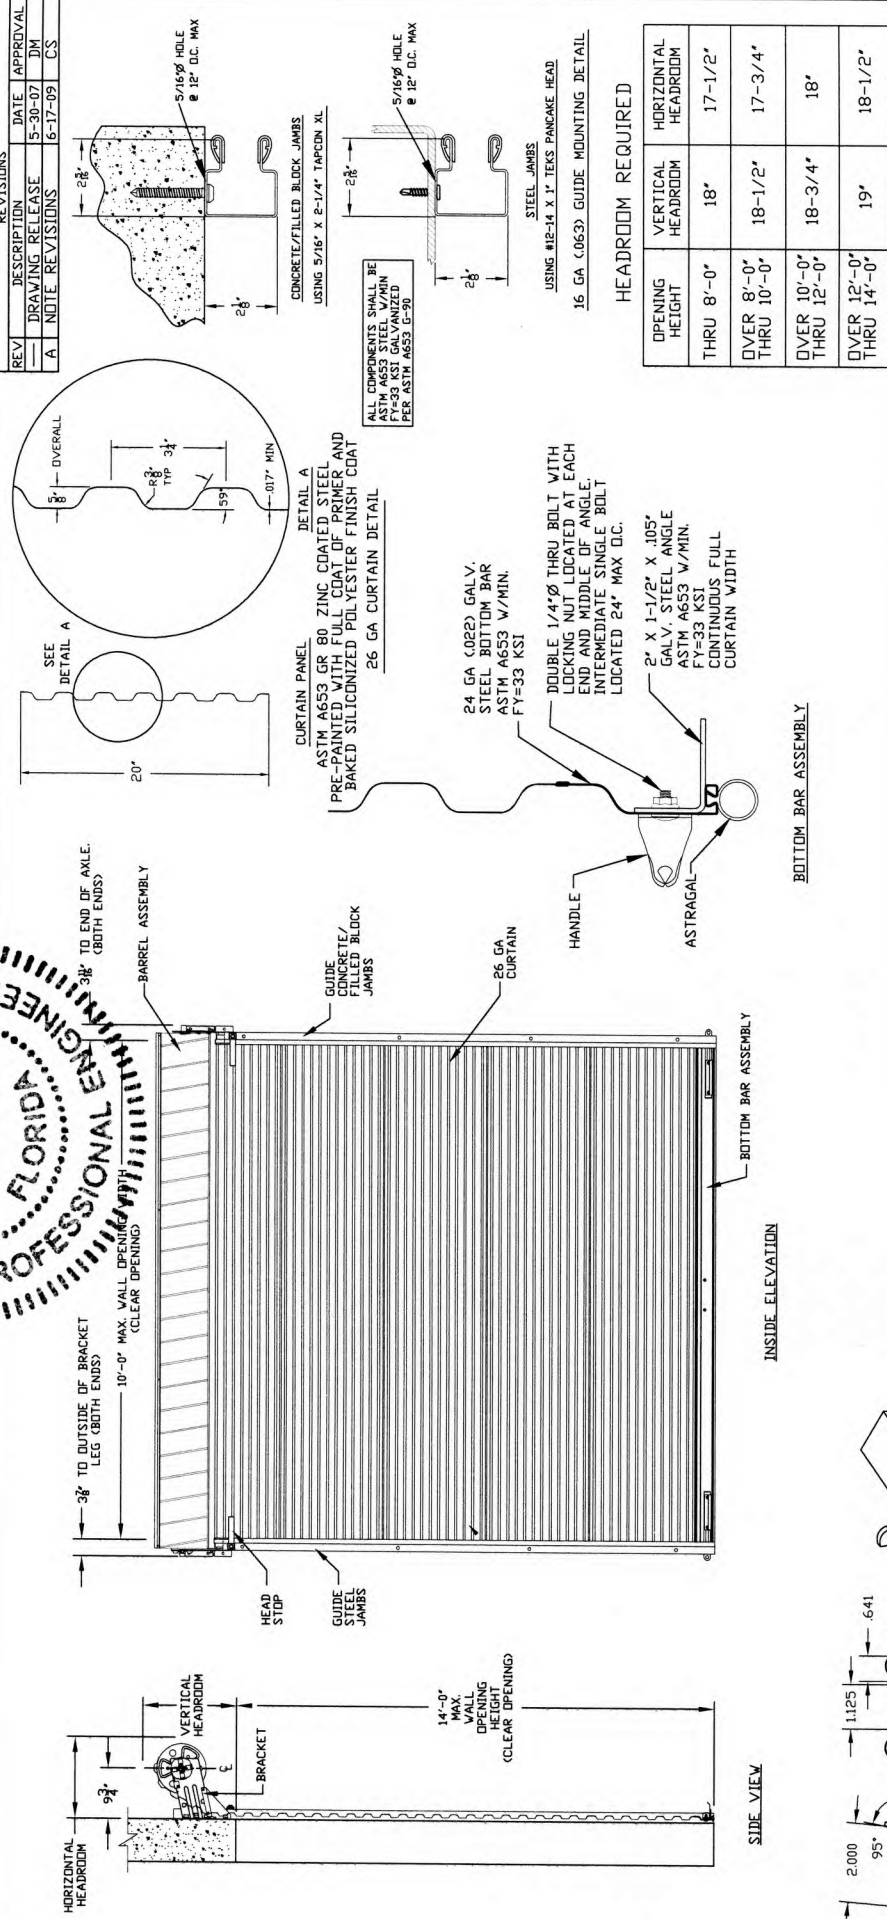

THESE CONFIDENTIAL DOCUMENTS SUBMITTED BY JANUS CONTAIN INFORMATION OF A PROPRIETARY NATURE AND MAY NOT BE REPRODUCED OR USED TO MANUFACTURE ANYTHING IN PART OR IN WHOLE FOR ANY PURPOSE OTHER THAN THAT WHICH IS NECESSARY FOR PREPARATION OF BIDS OF ENGINEERING WITHOUT THE EXPRESS PERMISSION OF JANUS WHICH MAY RECALL DOCUMENTS AT ANY TIME.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

	DECIMAL	FRACTIONS	ANGLES	HOLE DIAMETERS
.XX	±.03	± 1/16	± 0° 30'	UNDER .251 +.004 - .003
.XXX	±.005			.251 to .500 +.006 - .003
				OVER .500 +.008 - .003

WINDLOCK
GALV. STEEL,
ASTM A653
WITH MIN.
FY=33KSI

HEADROOM REQUIRED

OPENING HEIGHT	VERTICAL HEADROOM	HORIZONTAL HEADROOM
THRU 8'-0"	18'	17'-1/2"
OVER 8'-0" THRU 10'-0"	18'-1/2"	17'-3/4"
OVER 10'-0" THRU 12'-0"	18'-3/4"	18'
OVER 12'-0" THRU 14'-0"	19'	18'-1/2"

JANUS INTERNATIONAL CORPORATION
134 JANUS INTERNATIONAL BLVD TEMPLE, GA 30179
770-562-2850/Fax 770-562-2264
© 2012 Janus International Corporation All Rights Reserved

CERTIFIED WIND LOAD RATED
26 GA SERIES 1100 DOOR ASSEMBLY
MAX. SIZE 10'-0" X 14'-0"

REV: A
DRAWING NUMBER: T1013
SIZE: B
SCALE: NONE
SHEET: 1 OF: 2

