

s:\projects\ykk ap america, inc.\fbc-21-1729-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

2/2/2022 4:53 PM

INSTALLATION NOTES:

1. ONE (1) INSTALLATION ANCHOR IS REQUIRED AT EACH ANCHOR LOCATION SHOWN.
2. THE NUMBER OF INSTALLATION ANCHORS DEPICTED IS THE MINIMUM NUMBER OF ANCHORS TO BE USED FOR PRODUCT INSTALLATION.
3. INSTALL INDIVIDUAL INSTALLATION ANCHORS WITHIN A TOLERANCE OF ±1/2 INCH OF THE DEPICTED LOCATION IN THE ANCHOR LAYOUT DETAIL (I.E., WITHOUT CONSIDERATION OF TOLERANCES). TOLERANCES ARE NOT CUMULATIVE FROM ONE INSTALLATION ANCHOR TO THE NEXT.
4. SHIM AS REQUIRED AT EACH INSTALLATION ANCHOR WITH LOAD BEARING SHIM(S). MAXIMUM ALLOWABLE SHIM STACK TO BE 1/4 INCH. SHIM WHERE SPACE OF 1/16 INCH OR GREATER OCCURS. SHIM(S) SHALL BE CONSTRUCTED OF HIGH DENSITY PLASTIC OR BETTER.
5. FOR INSTALLATION INTO WOOD FRAMING USE *#14 WOOD SCREWS* OF SUFFICIENT LENGTH TO ACHIEVE 1 1/2 INCH MINIMUM EMBEDMENT INTO WOOD SUBSTRATE.
6. FOR INSTALLATION THROUGH 1X BUCK TO CONCRETE/MASONRY, OR DIRECTLY INTO CONCRETE/MASONRY, USE *1/4 INCH DIAMETER ITW TAPCONS* OF SUFFICIENT LENGTH TO ACHIEVE 1 1/4 INCH MINIMUM EMBEDMENT.
7. FOR INSTALLATION THROUGH METAL STUD USE *1/4 INCH DIAMETER TEK SCREWS OR 1/4 INCH DIAMETER SMS SCREWS, GR. 5* OF SUFFICIENT LENGTH TO ACHIEVE *3 THREADS* MINIMUM PENETRATION BEYOND METAL FRAME SUBSTRATE.
8. MINIMUM EMBEDMENT AND EDGE DISTANCE EXCLUDE WALL FINISHES, INCLUDING BUT NOT LIMITED TO STUCCO, FOAM, BRICK VENEER, AND SIDING.
9. INSTALLATION ANCHORS AND ASSOCIATED HARDWARE MUST BE MADE OF CORROSION RESISTANT MATERIAL OR HAVE A CORROSION RESISTANT COATING.
- 10.FOR HOLLOW BLOCK AND GROUT FILLED BLOCK, DO NOT INSTALL INSTALLATION ANCHORS INTO MORTAR JOINTS. EDGE DISTANCE IS MEASURED FROM FREE EDGE OF BLOCK OR EDGE OF MORTAR JOINT INTO FACE SHELL OF BLOCK.
- 11.INSTALLATION ANCHORS SHALL BE INSTALLED IN ACCORDANCE WITH ANCHOR MANUFACTURER'S INSTALLATION INSTRUCTIONS, AND ANCHORS SHALL NOT BE USED IN SUBSTRATES WITH STRENGTHS LESS THAN THE MINIMUM STRENGTH SPECIFIED BY THE ANCHOR MANUFACTURER.
- 12.INSTALLATION ANCHOR CAPACITIES FOR PRODUCTS HEREIN ARE BASED ON SUBSTRATE MATERIALS WITH THE FOLLOWING PROPERTIES:

A. WOOD - MINIMUM SPECIFIC GRAVITY OF 0.55.

B. CONCRETE -MINIMUM COMPRESSIVE STRENGTH OF 3000 PSI.

C. MASONRY - STRENGTH CONFORMANCE TO ASTM C-90, WITH MINIMUM COMPRESSIVE STRENGTH OF 2000 PSI.

D. STEEL - MINIMUM YIELD STRENGTH OF 33 KSI. MINIMUM 20 GA. WALL THICKNESS.

E. ALUMINUM - MINIMUM 1/16 INCH THICK, 6063-T5 ALUMINUM.
- 13.INSTALLATION SHALL FOLLOW MANUFACTURERS RECOMMENDATIONS FOR SEALING WINDOWS AND ACCESSORY ITEMS.

GENERAL NOTES:

1. THE PRODUCT SHOWN HEREIN IS DESIGNED AND MANUFACTURED TO COMPLY WITH THE CURRENT FLORIDA BUILDING CODE (FBC), INCLUDING HVHZ AND HAS BEEN EVALUATED ACCORDING TO THE FOLLOWING:

- TAS 201-94
 - TAS 202-94
 - TAS 203-94
 - ASTM E 1886-13a
 - ASTM E 1996-17
2. ADEQUACY OF THE EXISTING STRUCTURAL CONCRETE/MASONRY, 2X FRAMING AND METAL STUD FRAMING AS A MAIN WIND FORCE RESISTING SYSTEM CAPABLE OF WITHSTANDING AND TRANSFERRING APPLIED PRODUCT LOADS TO THE FOUNDATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
3. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND ANCHORED TO PROPERLY TRANSFER ALL LOADS TO THE STRUCTURE. BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER OR ARCHITECT OF RECORD FOR THE PROJECT OF INSTALLATION.
4. THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT. DOCUMENTS SHALL BE APPROVED BY AUTHORITY HAVING JURISDICTION (AHJ).
5. APPROVED IMPACT PROTECTIVE SYSTEM **IS NOT REQUIRED** ON THIS PRODUCT IN AREAS REQUIRING IMPACT RESISTANCE.
6. WINDOW FRAME MATERIAL: ALUMINUM 6063-T5
7. IN ACCORDANCE WITH THE FBC, DISSIMILAR METALS INCLUDING FASTENERS THAT MAY COME INTO CONTACT WITH ALUMINUM UNIT FRAMING SHALL BE PROTECTED AS DEFINED IN SEC 2003.
8. GLASS MEET THE REQUIREMENTS OF ASTM E 1300 GLASS CHARTS. SEE SHEET 7 FOR GLAZING DETAILS.

YKK AP AMERICA INC.

YES SSG TUH ALUMINUM PROJECT OUT WINDOW (IMPACT) (HVHZ)

TABLE OF CONTENTS	
SHEET	SHEET DESCRIPTION
1	INSTALLATION & GENERAL NOTES
2	ELEVATIONS
3	ANCHOR LAYOUTS AND HARDWARE SCHEDULE
4	FLAT FRAME INSTALLATION DETAILS
5	FLAT FRAME (WALL SYS.) INSTALLATION DETAILS
6	POCKET FRAME (WALL SYS.) INSTALLATION DETAILS
7	GLAZING DETAILS
8	BILL OF MATERIALS AND COMPONENTS

DESIGN PRESSURE TABLE				
GLAZING TYPES	MAX. FRAME SIZE	MAX. DP	IMPACT RATING	HARDWARE
G1, G3, G4	60" X 36"	+80/-80 PSF	LMI	OPTION 1
G2	60" X 36"	+80/-80 PSF	SMI	OPTION 1
G1, G3, G4	60" X 36"	+65/-65 PSF	LMI	OPTION 2
G2	60" X 36"	+65/-65 PSF	SMI	OPTION 2

NOTE:
1. LMI - LARGE MISSILE IMPACT RATED
2. SMI - SMALL MISSILE IMPACT RATED
3. SEE SHEET 7 FOR GLAZING DETAILS
4. HARDWARE OPTIONS FOUND ON SHEET 3.



YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM PROJECT OUT WINDOW (IMPACT)(HVHZ)

INSTALLATION & GENERAL NOTES

PREPARED BY:


BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

Digitally signed by Hermes F Norero
Reason: I am approving this document
Date: 2022.02.07 09:58:40 -0500

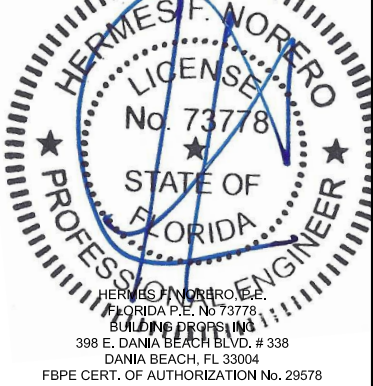

FL #:
FL17098

DATE: **08.16.18**

DWG. BY: **HR**CHK. BY: **HFN**


SCALE: **NTS**

DWG. #: **YKK037**


SHEET:
1

2/2/2022 4:54 PM


s:\projects\ykk ap america, inc\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

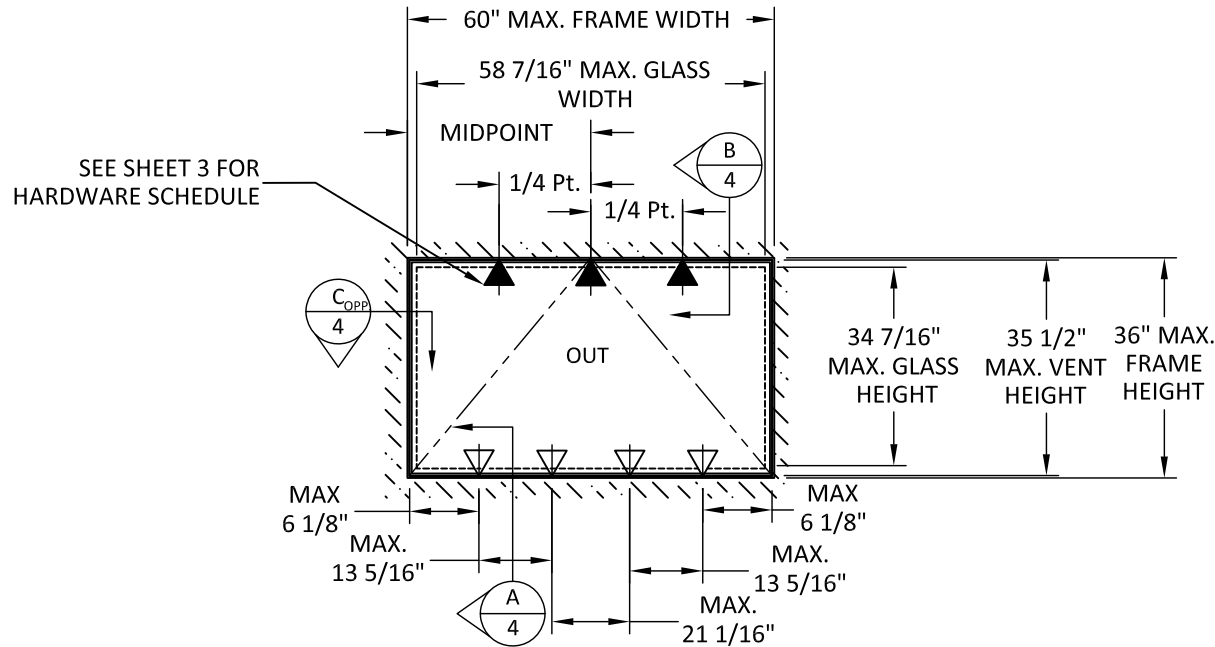

**ELEVATION
MULTI-POINT LOCK**

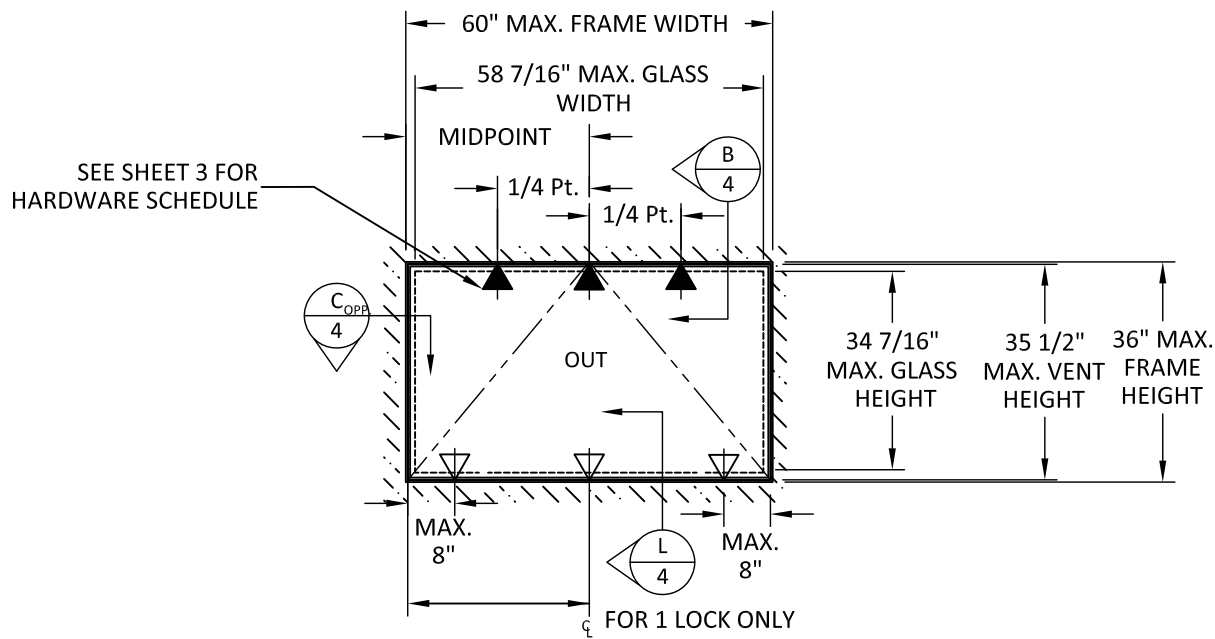

**ELEVATION
CAM LOCK**

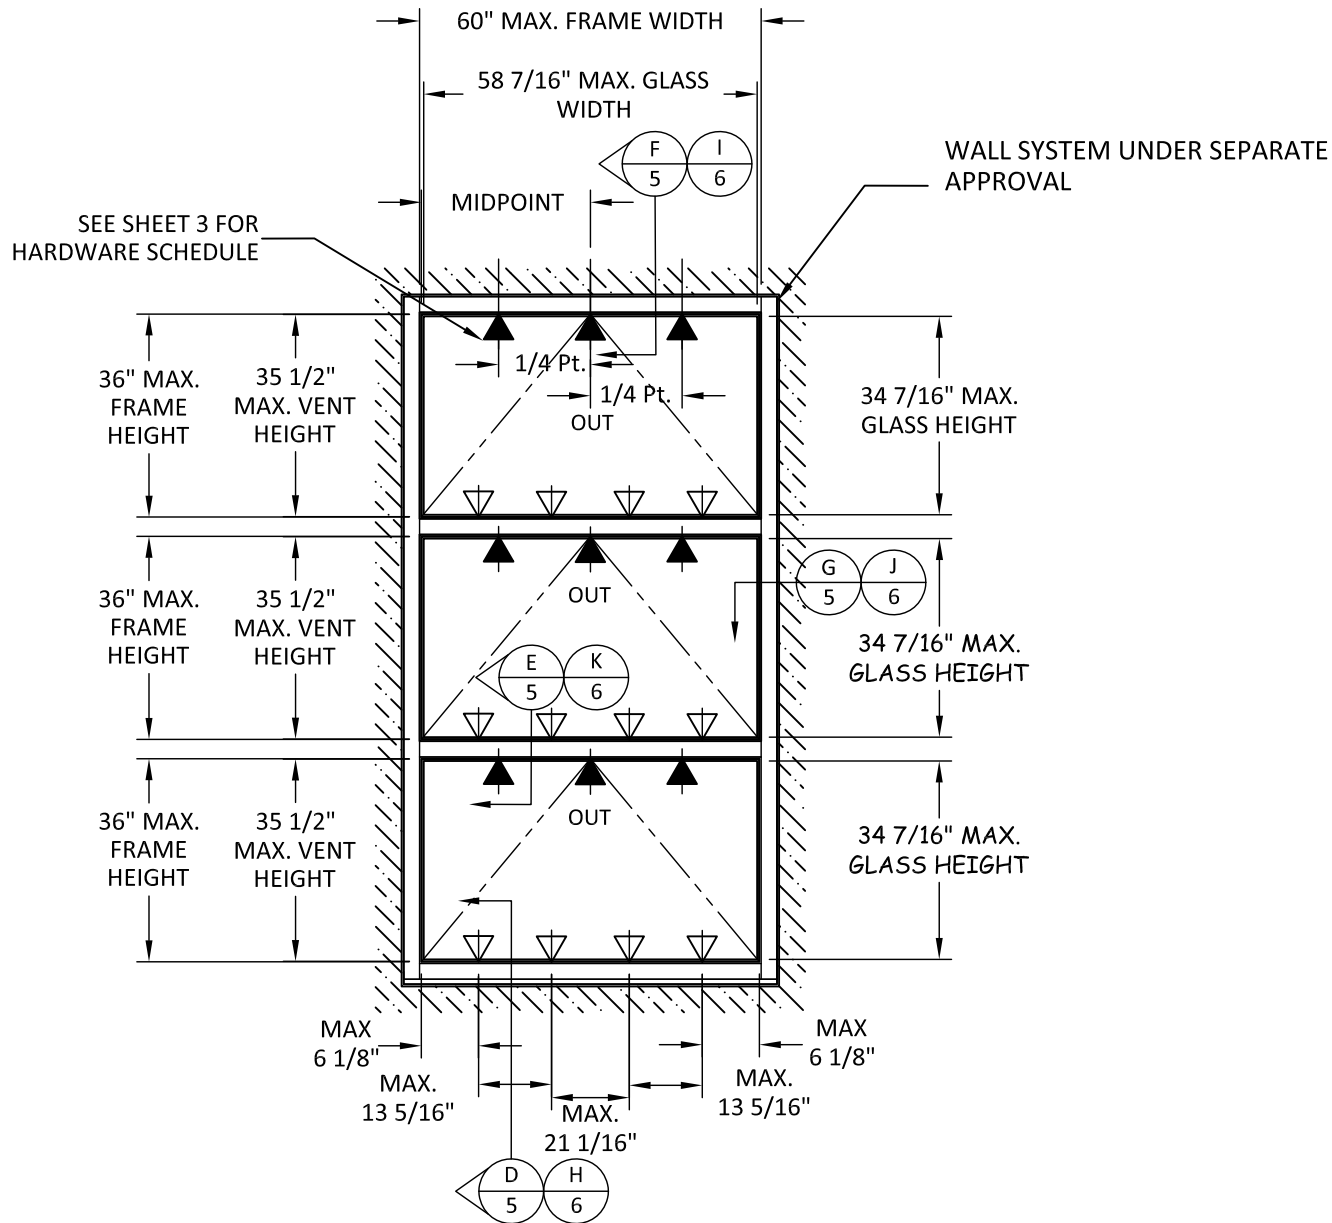

**ELEVATION
TYPICAL
STOREFRONT/WALL**

▲ -SNUBBER

▽ -LOCK POINT

- NOTE:
- 1) YESSG TUH PROJECT OUT WINDOWS, FLAT FRAME OR POCKET FRAME, MAY BE USED WITHIN ANY IMPACT APPROVED WALL SYSTEM AS LISTED IN THE FLORIDA PRODUCT APPROVAL IN VARIOUS CONFIGURATIONS SUCH THAT MAXIMUM FRAME SIZE IS NOT EXCEEDED.
 - 2) MAXIMUM DAYLIGHT OPENING OF APPROVED WALL SYSTEM SHALL NOT BE EXCEEDED.
 - 3) SHOULD DESIGN PRESSURES VARY BETWEEN THE APPROVED WALL SYSTEM AND PROJECT OUT, THE LESSER DESIGN PRESSURE SHALL GOVERN.



YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001


TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
ELEVATIONS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

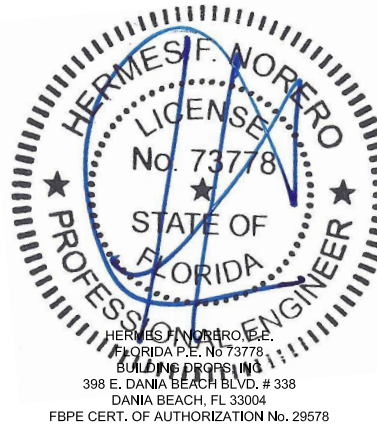

FL #:
FL17098

DATE: **08.16.18**

DWG. BY: **HR** CHK. BY: **HFN**

SCALE: **NTS**


DWG. #: **YKK037**

SHEET:


2

2/2/2022 4:54 PM

s:\projects\ykk ap america, inc\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

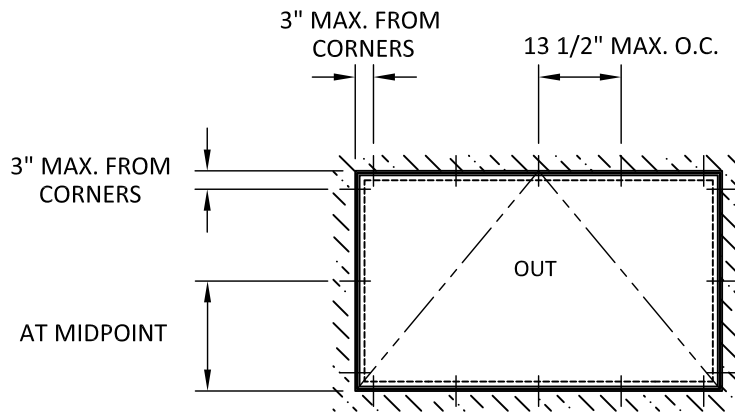

ANCHOR LAYOUT
FLAT FRAME

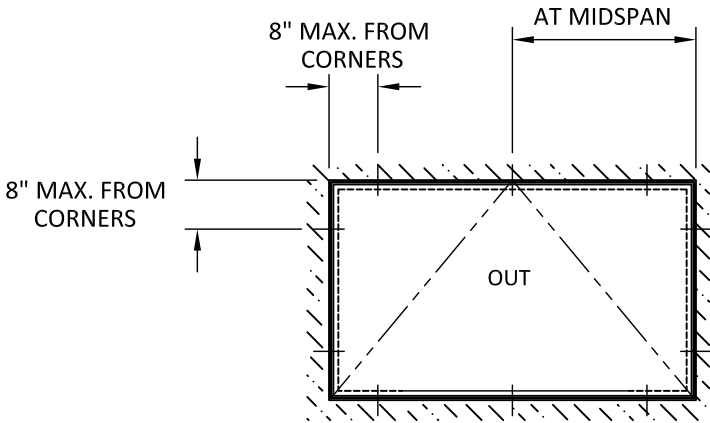

ANCHOR LAYOUT
POCKET FRAME

HARDWARE SCHEDULE

OPTION 1

MULTI POINT LOCK POINTS	
FRAME WIDTH	QTY OF LOCK POINTS REQUIRED
20" ≤ FW ≤ 33"	2
33.1" ≤ FW ≤ 60"	4

OPTION 2

CAM LOCKS	
FRAME WIDTH	QTY OF CAM LOCKS REQUIRED
12" ≤ FW ≤ 24"	*1
24.1" ≤ FW ≤ 42"	2
42.1" ≤ FW ≤ 60"	2

*FOR ONE CAM LOCK, PLACE AT MIDSPAN OF WINDOW JAMB

4 AND 5 BAR HINGES			
OPENING ANGLE MAX.	TYPE	PART NO.	FRAME SIZE
STANDARD MAXIMUM 20° OPENING	12"	4K-14207	FW ≤ 60" X FH ≤ 24"
STANDARD MAXIMUM 30° OPENING	16"	5K-15284	FW ≤ 60" X FH ≤ 36"
STANDARD MAXIMUM 30° OPENING	22"	4K-14209	FW ≤ 60" X FH ≤ 36"

SNUBBER SCHEDULE	
FRAME WIDTH	QTY OF SNUBBERS REQUIRED
12" ≤ FW ≤ 24"	*1
24.1" ≤ FW ≤ 42"	**2
42.1" ≤ FW ≤ 60"	3

*FOR ONE SNUBBER, PLACE AT MIDSPAN OF WINDOW JAMB
**FOR TWO SNUBBERS, PLACE AT WIDTH/4 FROM EA. CORNER.



YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001


TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
ANCHOR LAYOUTS &
HARDWARE SCHEDULE

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

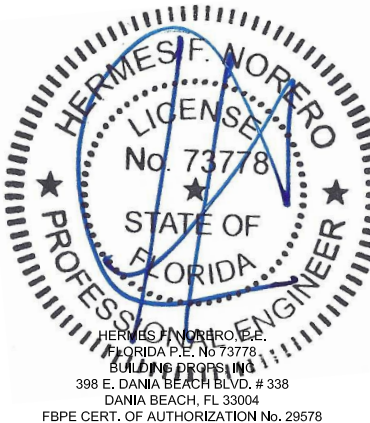


FL #:	FL17098
DATE:	08.16.18
DWG. BY:	HR
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK037

SHEET:


3

2/2/2022 4:54 PM


s:\projects\ykk ap america, inc\fb-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

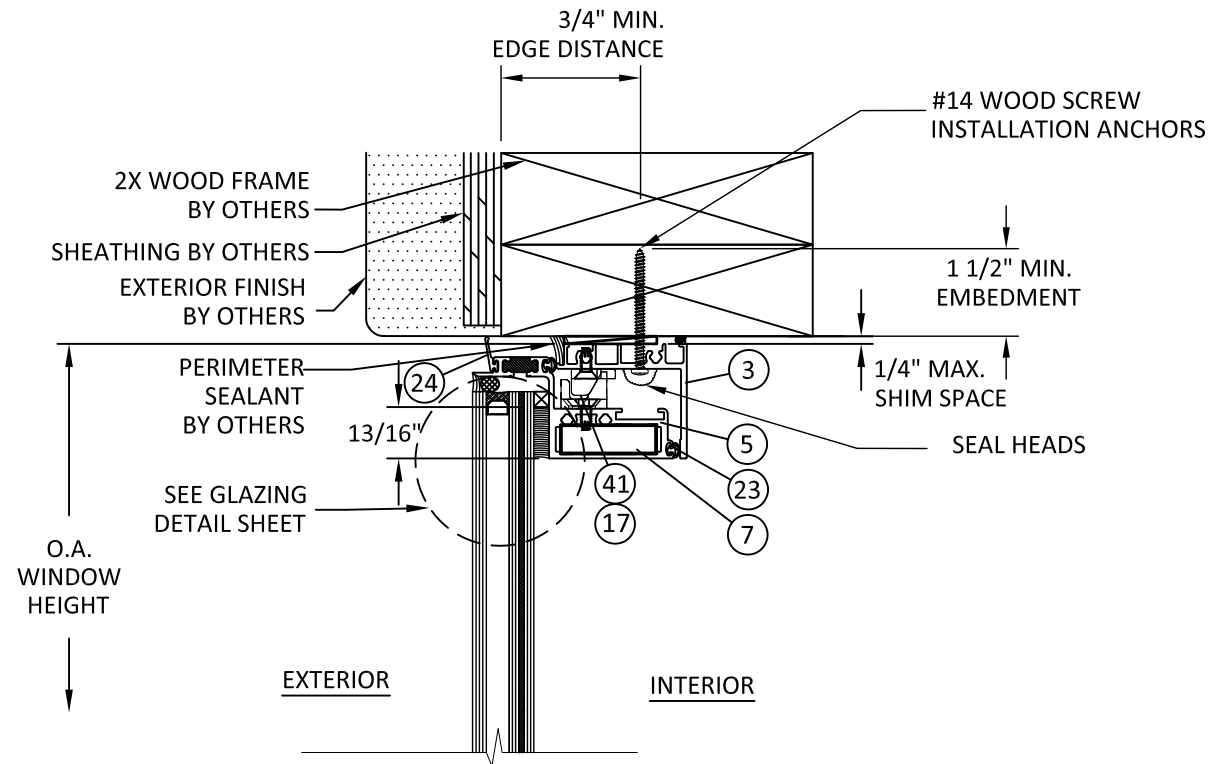


B
4 **VERTICAL SECTION**
VENT HEAD - 2X WOOD FRAME
FLAT FRAME

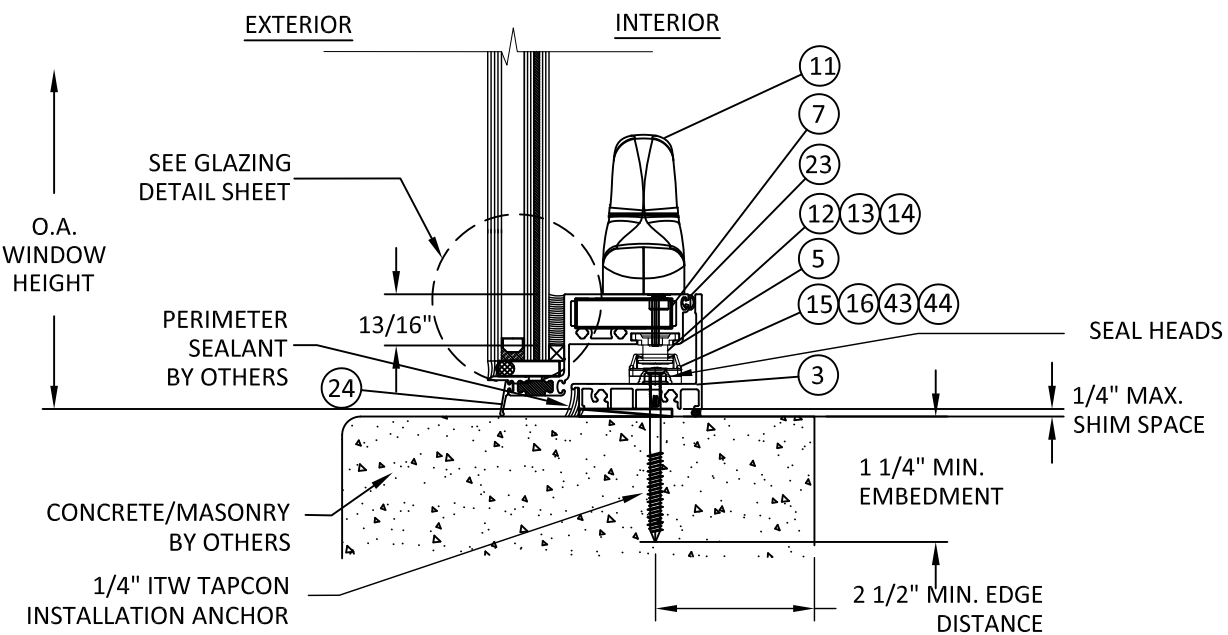

A
4 **VERTICAL SECTION**
VENT SILL - CONCRETE/MASONRY
FLAT FRAME

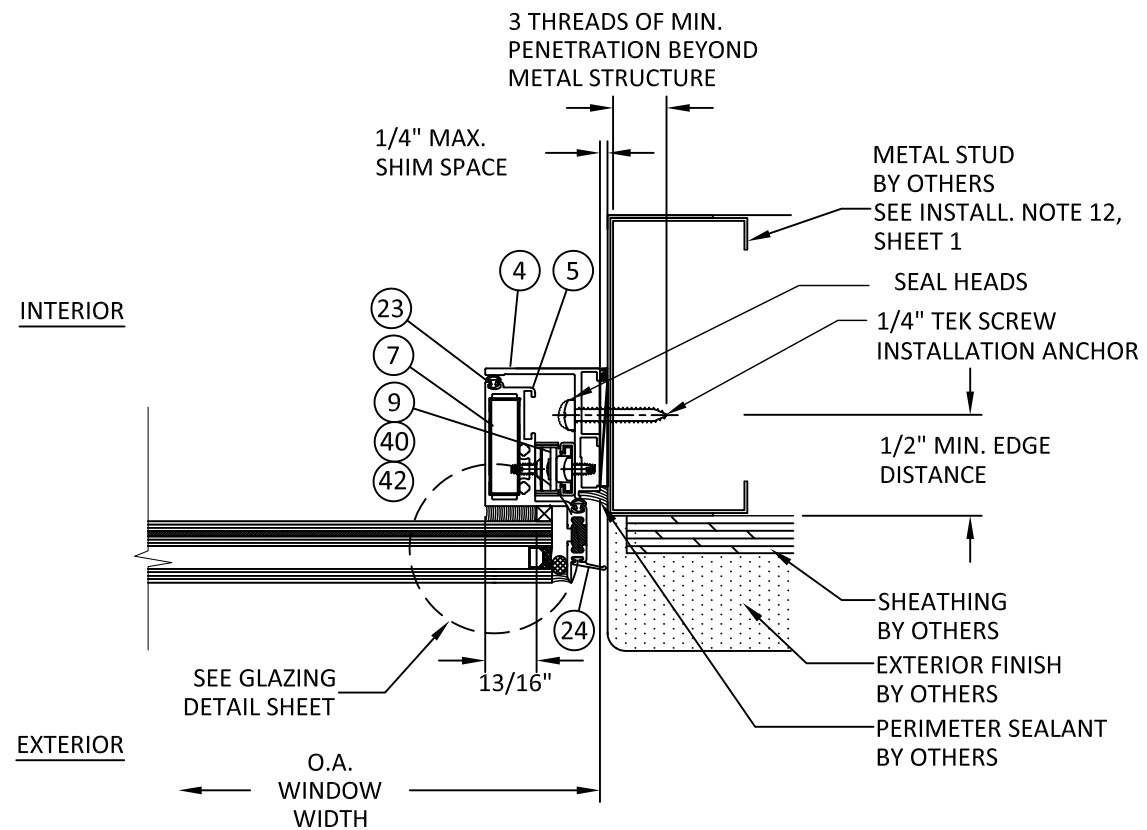

C
4 **HORIZONTAL SECTION**
VENT JAMB - METAL STUD FRAME
FLAT FRAME

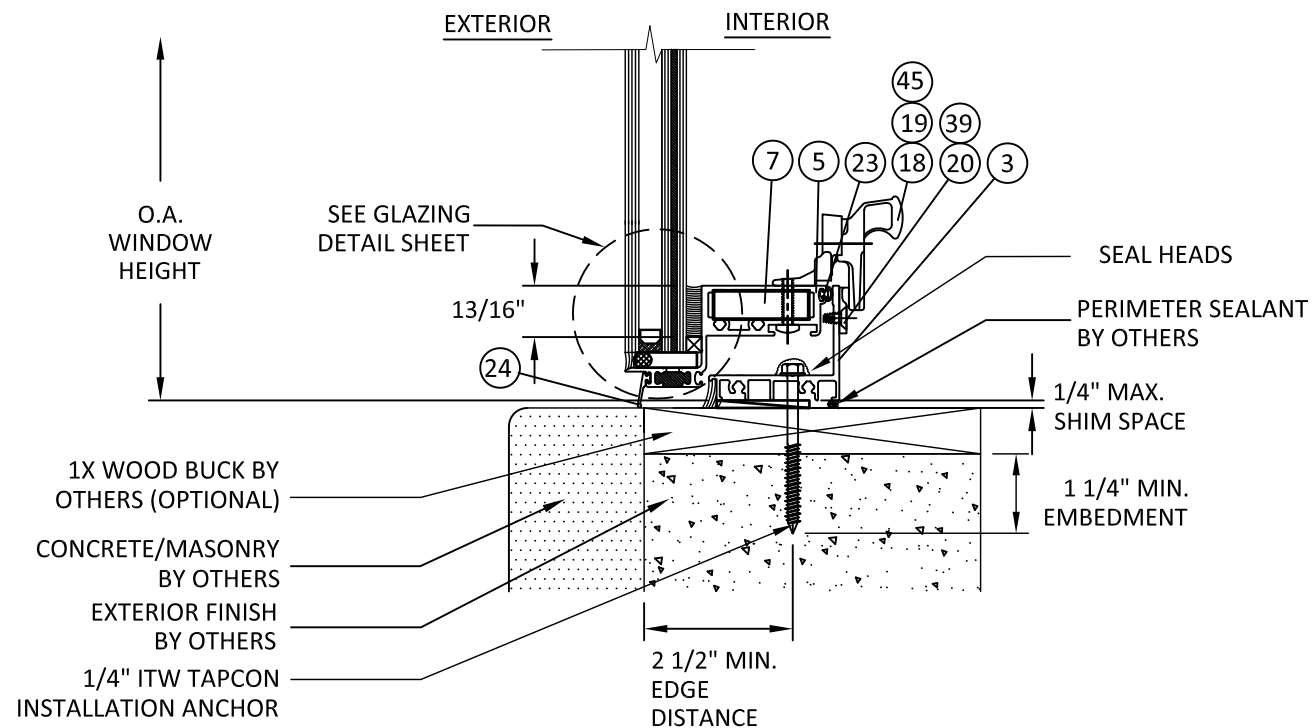

L
4 **VERTICAL SECTION**
VENT SILL - CONCRETE/MASONRY
FLAT FRAME - CAM LOCK - TYP.

NOTE: CAM LOCK MAY BE USED
WITH ANY FLAT FRAME OR
POCKET FRAME APPLICATION




YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
FLAT FRAME
INSTALLATION DETAILS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

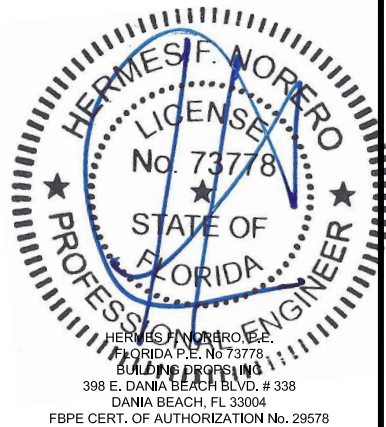

FL #:	FL17098
DATE:	08.16.18
DWG. BY:	HR
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK037
SHEET:	4

2/2/2022 4:54 PM


s:\projects\ykk ap america, inc\fb-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

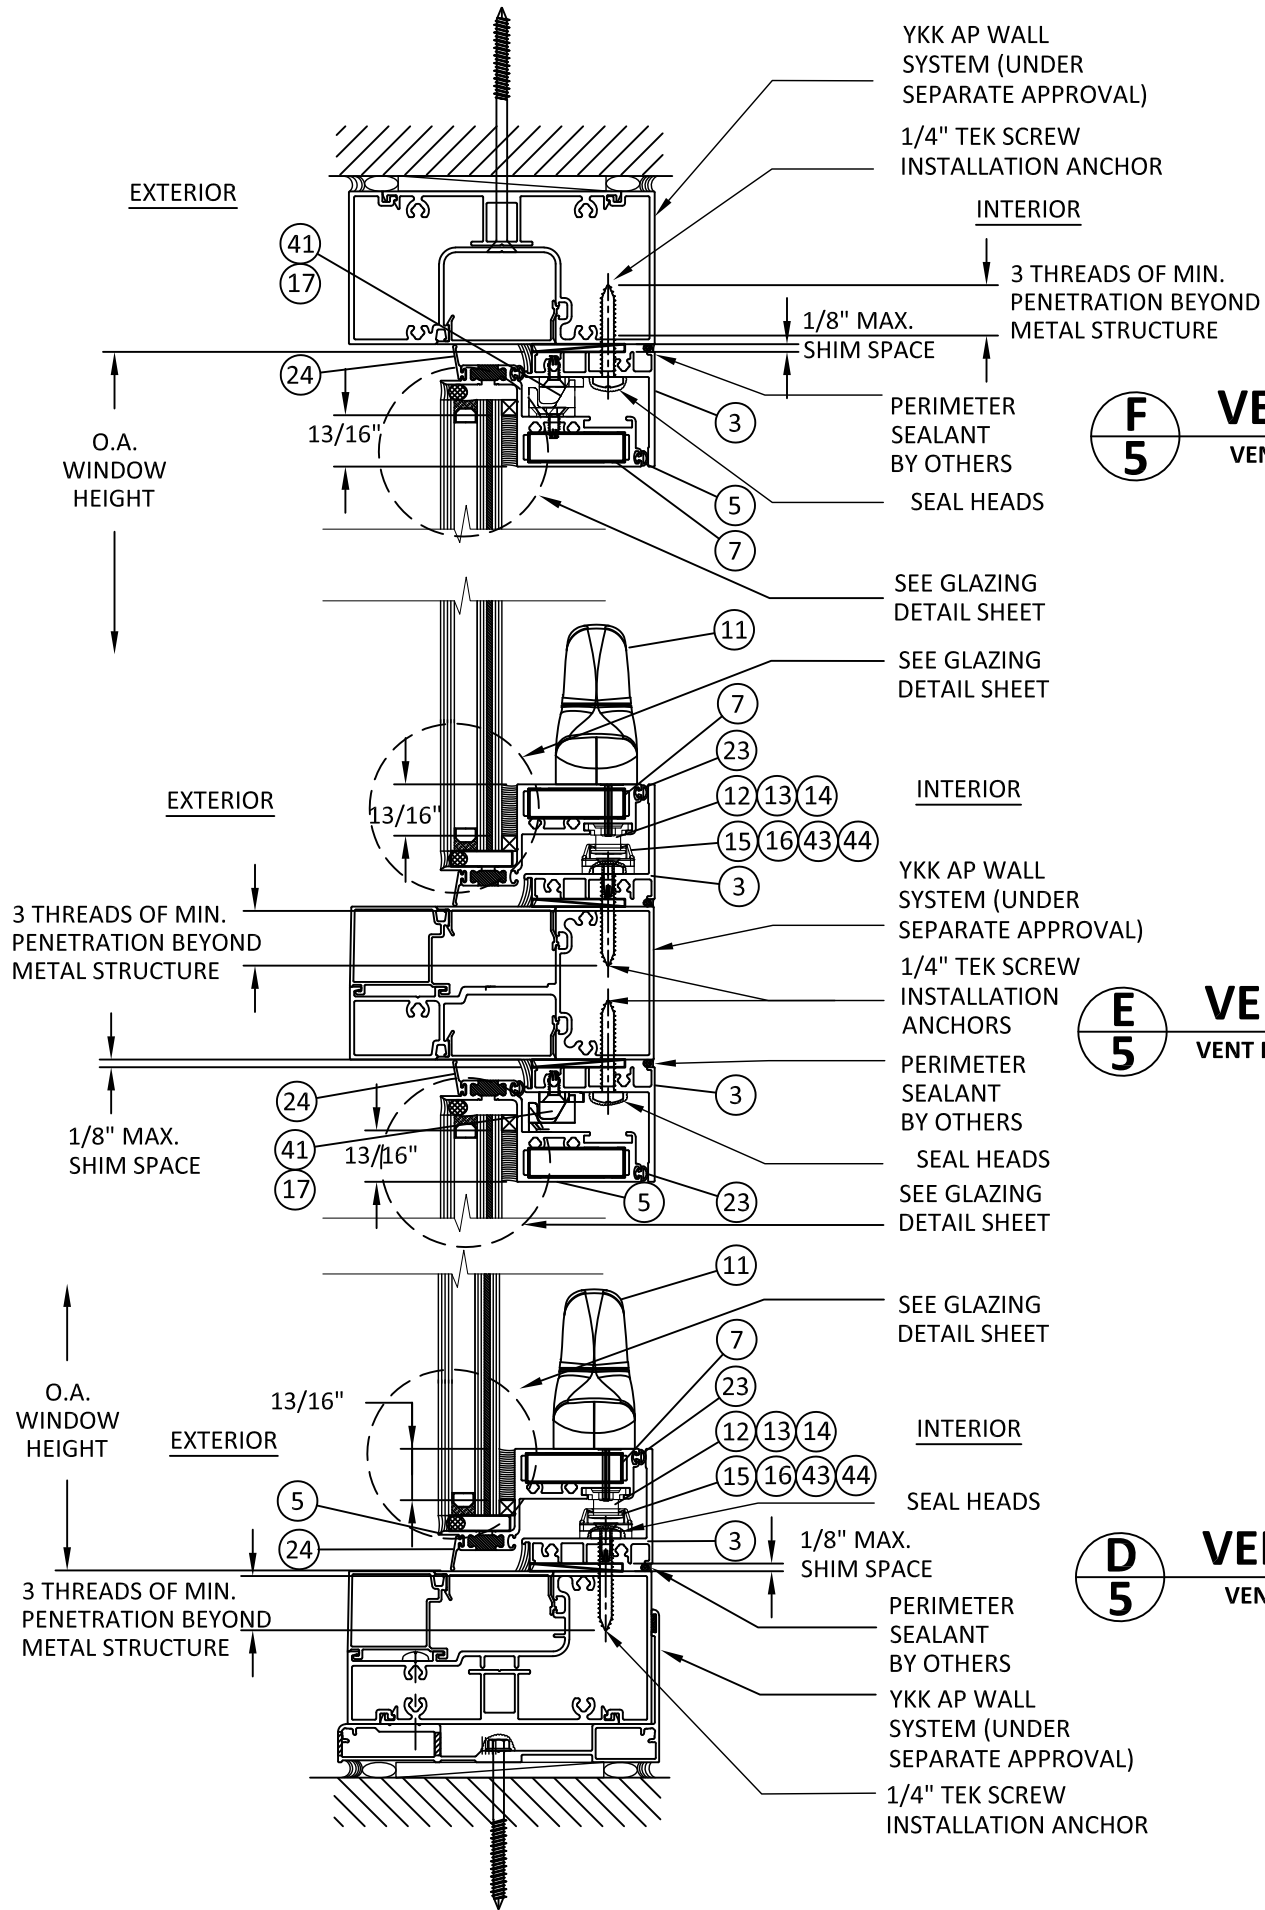

F
5 **VERTICAL SECTION**
VENT HEAD - YKK AP WALL SYSTEM
FLAT FRAME

E
5 **VERTICAL SECTION**
VENT MULLION - YKK AP WALL SYSTEM
FLAT FRAME

D
5 **VERTICAL SECTION**
VENT SILL - YKK AP WALL SYSTEM
FLAT FRAME

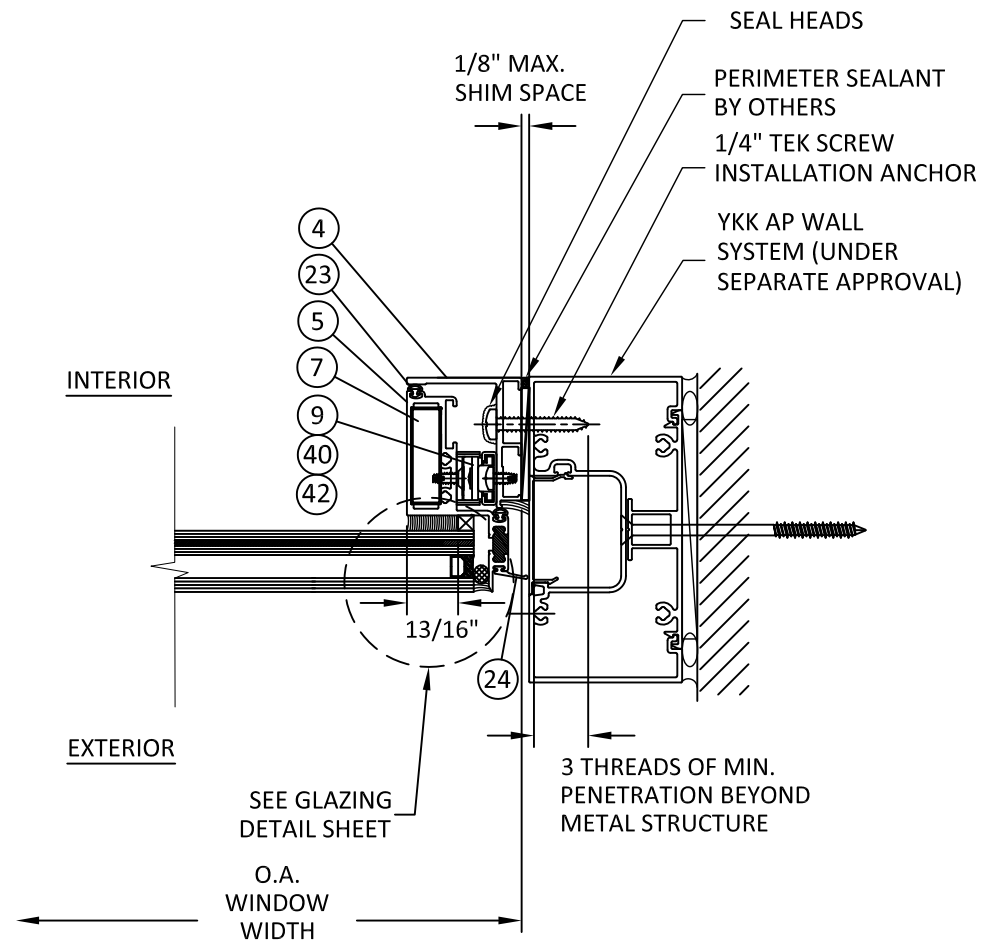

G
5 **HORIZONTAL SECTION**
VENT JAMB - YKK AP WALL SYSTEM
FLAT FRAME




YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
FLAT FRAME (STOREFRONT)
INSTALLATION DETAILS

PREPARED BY:
BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
A. PERIMETER SEALANT UPDATE	HLA	06/29/17
B. FLAT FRAME CHANGED	HR	11/29/17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

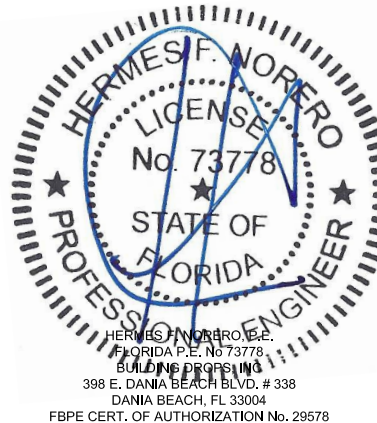


FL #:	FL17098
DATE:	08.16.18
DWG. BY:	HR
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK037
SHEET:	

2/2/2022 4:54 PM


s:\projects\ykk ap america, inc.\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

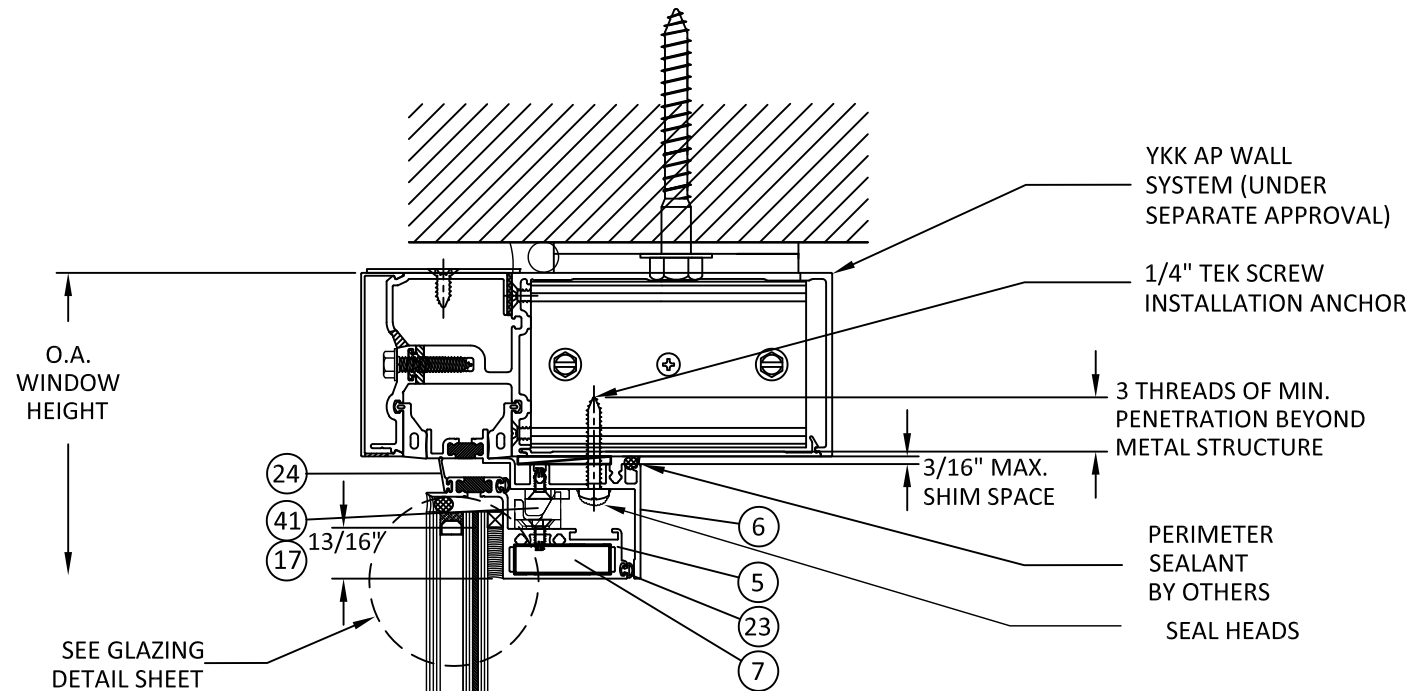


**I
6** VERTICAL SECTION
VENT HEAD - YKK AP WALL SYSTEM
POCKET FRAME

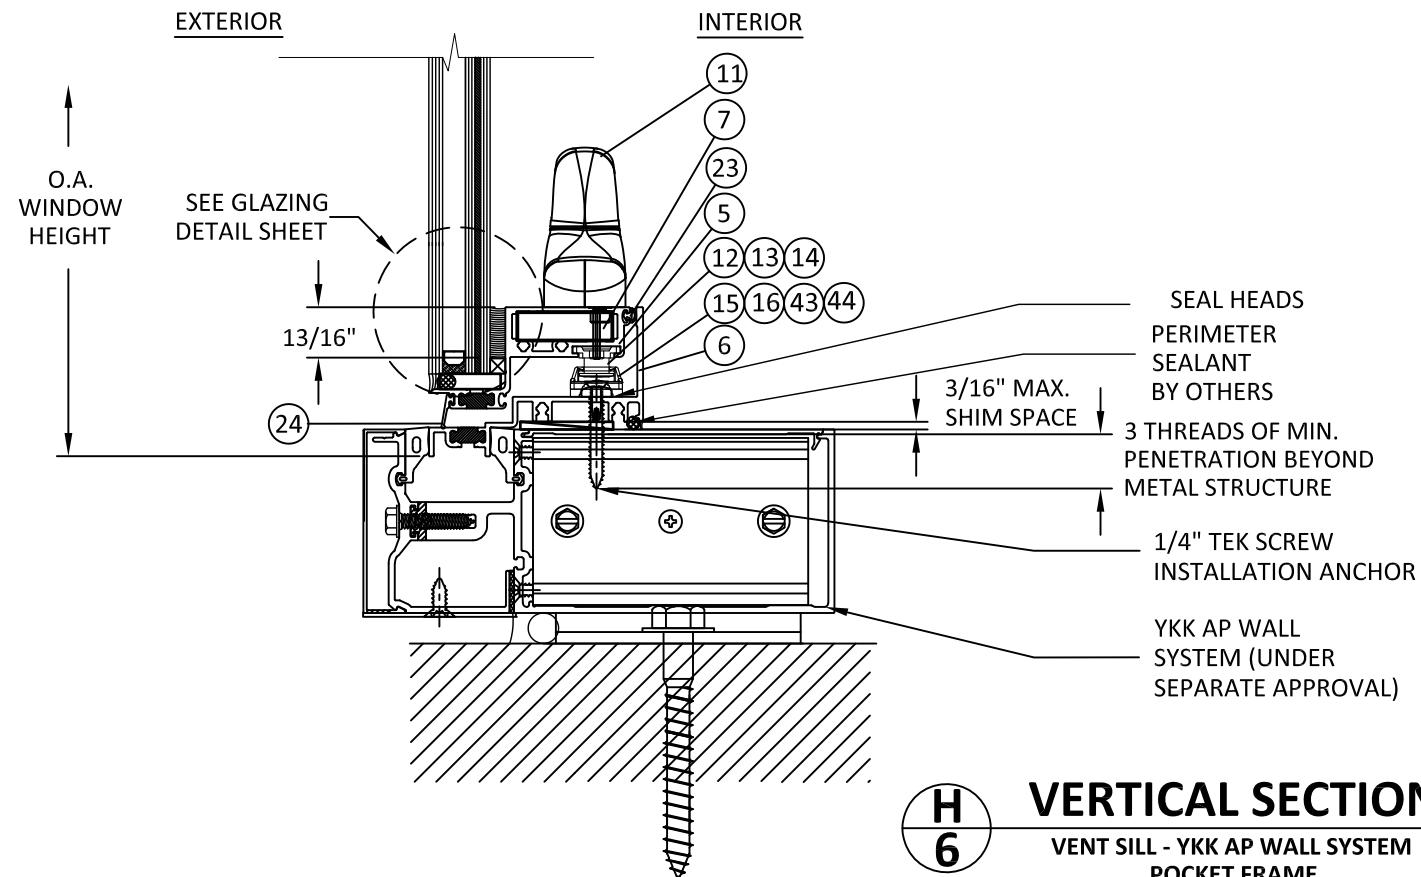

**H
6** VERTICAL SECTION
VENT SILL - YKK AP WALL SYSTEM
POCKET FRAME

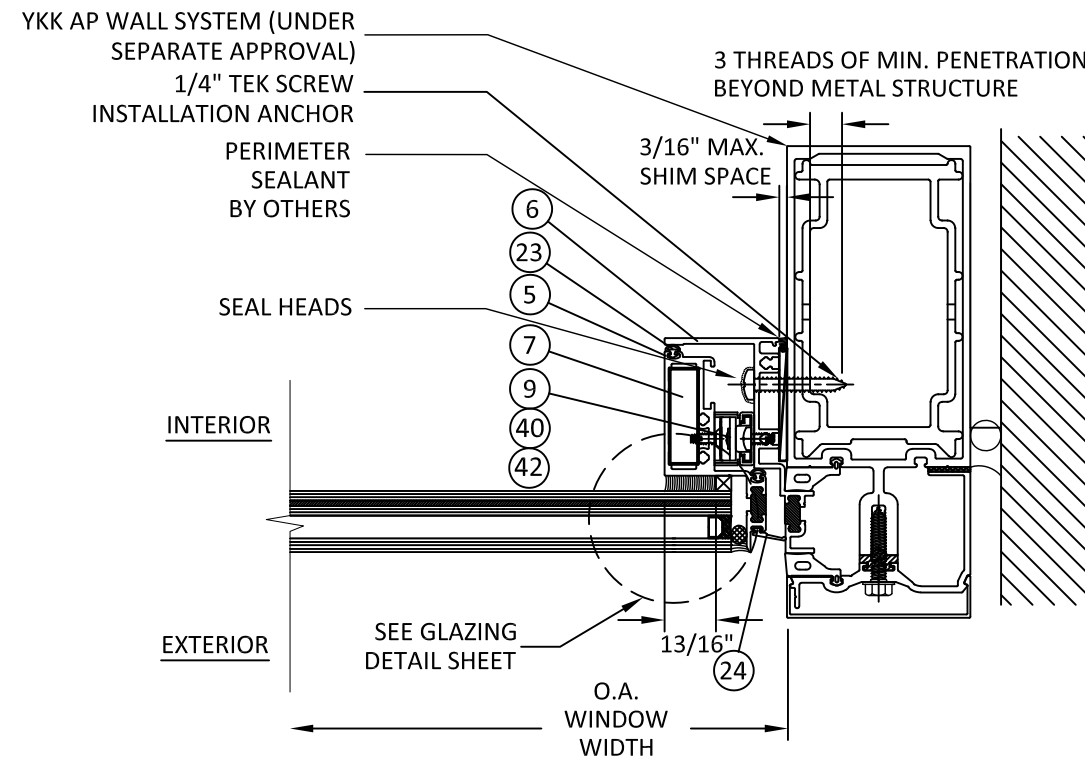

**J
6** HORIZONTAL SECTION
VENT JAMB - YKK AP WALL SYSTEM
POCKET FRAME

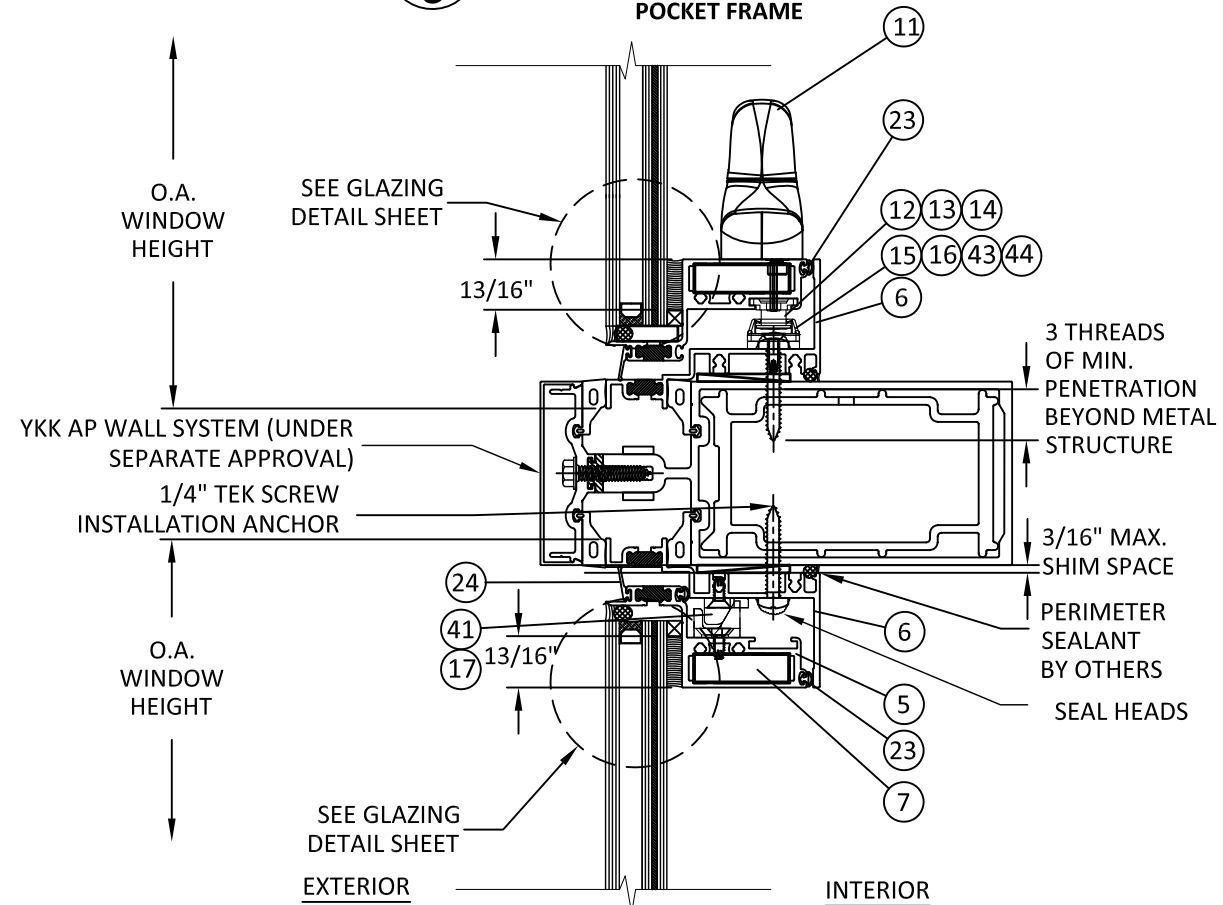

**K
6** VERTICAL SECTION
VENT MULLION - YKK AP WALL SYSTEM
POCKET FRAME




YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
POCKET FRAME (CURTAIN WALL)
INSTALLATION DETAILS
PREPARED BY: BUILDING DROPS, INC.
398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com

REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22


THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC
AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC
SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE
FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED
ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC
DOCUMENTS FOR USE WITH THIS DOCUMENT.

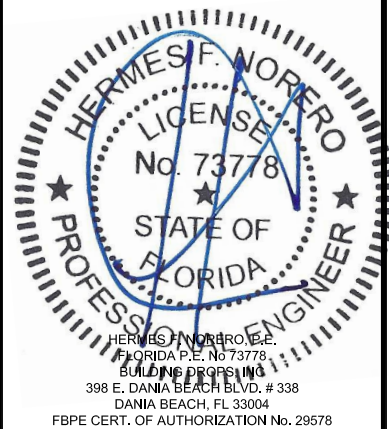


FL #:	FL17098
DATE:	08.16.18
DWG. BY:	HR
CHK. BY:	HFN
SCALE:	NTS
DWG. #:	YKK037
SHEET:	6

s:\projects\ykk ap america, inc\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg


s:\projects\ykk ap america, inc\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg

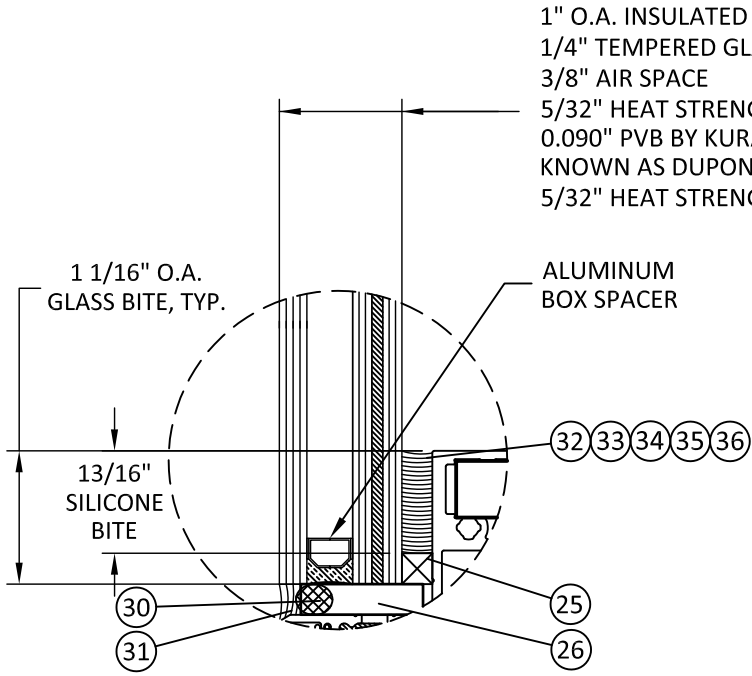

GLAZING DETAIL 1

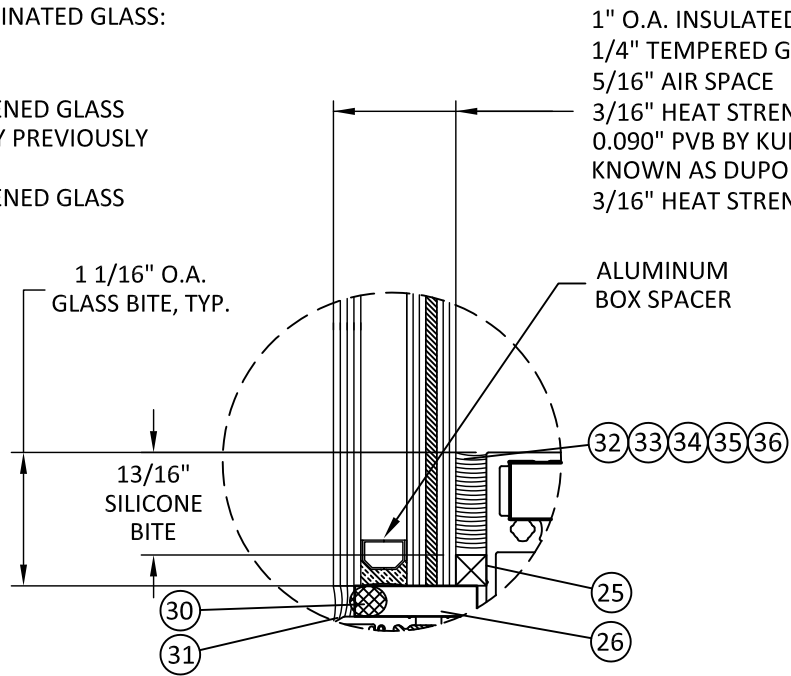


GLAZING DETAIL 3

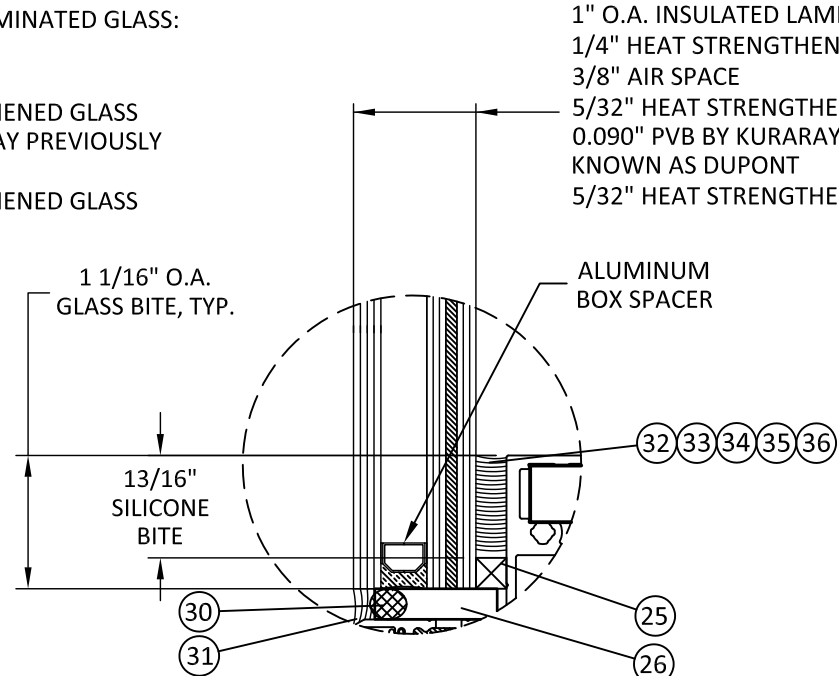

GLAZING DETAIL 4

LARGE MISSILE IMPACT RATED

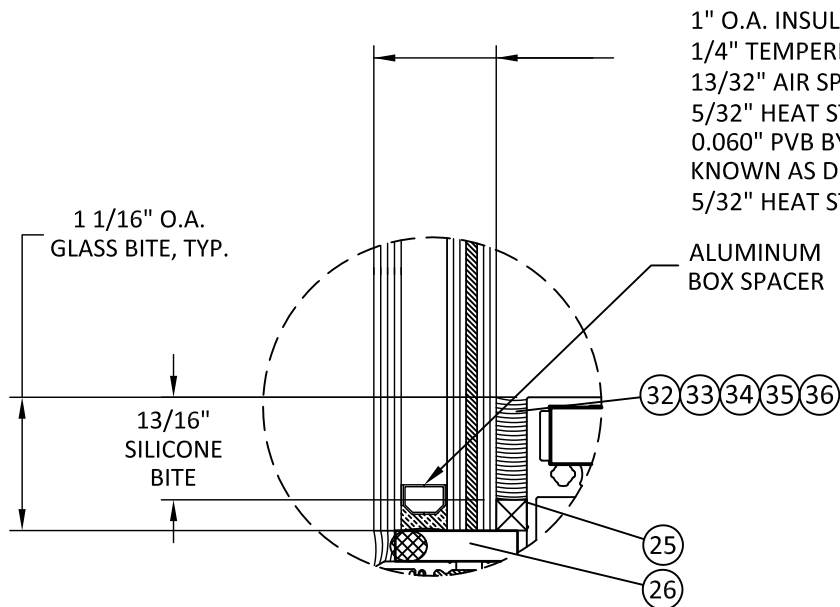

GLAZING DETAIL 2

SMALL MISSILE IMPACT RATED

GLAZING NOTES:

1. GLASS MEETS THE REQUIREMENTS OF ASTM E 1300-04 GLASS CHARTS. SEE SHEET 7 FOR GLAZING DETAILS.
2. GLAZING SELECTION SHALL MEET SAFETY GLAZING REQUIREMENTS PER CURRENT FBC, CH.24.
3. GLASS SHALL BE SET WITH THE USE OF SETTING BLOCKS IN ACCORDANCE WITH CH.24 AS APPLICABLE.
4. GLAZING GASKETS WHEN IN USE WITH NON-STRUCTURALLY GLAZED ASSEMBLIES, SHALL MEET THE REQUIREMENTS OF CH.24
5. GLASS TYPE AND THICKNESS SHALL COMPLY WITH ASTM E1300 REQUIREMENTS AS WELL AS APPLICABLE SAFETY GLAZING REQUIREMENTS PER THE FBC. THICKNESS, TEMPER, AND SAFETY GLAZING REQUIREMENTS SHALL BE REVIEWED ON A SITE SPECIFIC BASIS.
6. SETTING BLOCK DUROMETER HARDNESS OF 70-90 (SHORE A) AS REFERENCED IN FBC CHAPTER 24.
7. SETTING BLOCKS TO BE LOCATED AT 1/4 SPAN LENGTH FOR GLASS WIDER THAN 36" AS PER FBC CHAPTER 24.
8. D.L.O. AND DESIGN PRESSURES MAY NOT EXCEED MAX VALUES IN DESIGN PRESSURE TABLE ON SHEET 1.

AIR SPACE CONSISTING OF :

- SPACER: ALUMINUM BOX SPACER.
- PRIMARY SEALANT: POLYISOBUTYLENE (PIB).
- SECONDARY SEALANT: STRUCTURAL SILICONE INTENDED FOR FABRICATION OF INSULATING GLASS UNITS.



YKK AP America Inc.
1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
GLAZING DETAILS


PREPARED BY:
BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

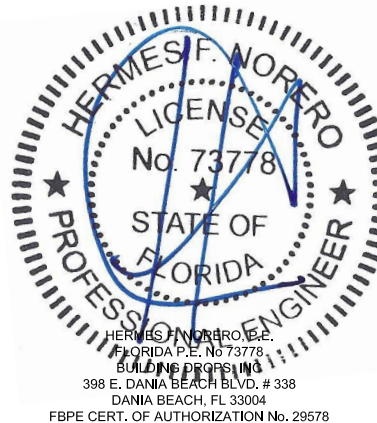

FL #:
FL17098

DATE: **08.16.18**

DWG. BY: **HR** CHK. BY: **HFN**

SCALE: **NTS**

DWG. #: **YKK037**

SHEET:

7

s:\projects\ykk ap america, inc\fbc-21-1229-1 - fbc submittal - revisions\dwgs\feb. upload\ykk037.dwg



2/2/2022 4:54 PM

YESSG TUH - BILL OF MATERIAL				
ITEM #	PART#	DESCRIPTION	MATERIAL	MANUFACTURER
1	YHS50 FI	APPROVED IMPACT STOREFRONT SYSTEM (FPA 14218)		YKK AP
2	YHC300 OG	APPROVED IMPACT CURTAIN WALL SYSTEM (FPA 13433)		YKK AP
3	E9-4129	FLAT FRAME	6063-T5	YKK AP
4	E9-4130	FLAT FRAME	6063-T5	YKK AP
5	BE9-4132	VENT FRAME	6063-T5	YKK AP
6	BE9-4131	POCKET FRAME	6063-T5	YKK AP
7	E1-1950	CORNER BLOCK X 1.565"	6063-T5	YKK AP
8				
9A	4K-14207	12" 4 BAR HINGE (FOR CO & PO)	STAINLESS STEEL	YKK AP
9B	4K-14208	16" 4 BAR HINGE (FOR CO)	STAINLESS STEEL	YKK AP
9C	5K-15284	16" 5 BAR HINGE (FOR PO)	STAINLESS STEEL	YKK AP
9D	4K-14209	22" 4 BAR HINGE (FOR PO)	STAINLESS STEEL	YKK AP
10				
11	H -1903	LOCK HANDLE ASSEMBLY - RH	ZAMACK/PP	AMC/CALDWELL OR EQUAL
12	H -1902	HANDLE CONNECTOR ASSEMBLY	ZAMACK/SS	AMC/CALDWELL OR EQUAL
13	E1 -1836	LOCK PLATES	STAINLESS STEEL	AMC/CALDWELL OR EQUAL
14	E3 -1201	CONNECTING BAR	POLYAMIDE	TECHNOFORM OR EQUAL
15	E1-1953	1/8" SHIM	PVC	AMC/CALDWELL OR EQUAL
16	E1-1952	INTERLOCK KEEPER	CAST STAINLESS	AMC/CALDWELL OR EQUAL
17	H-1901	HP SNUBBER KIT	6063-T5	AMC/CALDWELL OR EQUAL
18	E1-1577	CAM HANDLE (R)	WHITE BRONZE	BRONZECRAFT OR EQUAL
19	E1-1578	CAM HANDLE (L)	WHITE BRONZE	BRONZECRAFT OR EQUAL
20	E1-1579	KEEPER	WHITE BRONZE	BRONZECRAFT OR EQUAL
21	E1-1525	GUIDE RAMP	6063-T5	YKK AP
22	K1-8522	GUIDE ROLLER	STAINLESS/POM	YKK AP
23	E2-0625	AT GASKET	SANTOPRENE	YKK AP
24	E2-0269	WEATHERSEAL	EPDM	TREMCO OR EQUAL
25	E2-0110	SPACER TAPE - 1/4" X 1/4"	URETHANE FOAM	TREMCO OR EQUAL
26	E2-0704PC	SETTING BLOCK	EPDM PC	TREMCO OR EQUAL
27				
28	IMPACT GLASS	LMI IG GLASS	GLASS/0.090 PVB	VIRACON OR EQUAL
29	IMPACT GLASS	SMI IG GLASS	GLASS/0.060 PVB	VIRACON OR EQUAL
30		3/8" DIA. BACKER ROD	OPEN CELL FOAM	CRL OR EQUAL
31		WEATHERSEAL SILICONE		TREMCO OR EQUAL
32		PROGLAZE II - STRUCTURAL SILICONE		TREMCO
33		DOW 983 - STRUCTURAL SILICONE		DOW
34		SPECTRUM II - STURCTURAL SILICONE		TREMCO
35		DOW 995 - STURCTURAL SILICONE		DOW
36		PECORA 895NST - STURCTURAL SILICONE		PECORA
37	FF0808-SS	#8-32 X 1/2" FLAT HEAD T/F (GUIDE RAMP)	STAINLESS STEEL	
38	PF0808-SS	#8-32 X 1/2" PAN HEAD T/F (GUIDE ROLLER)	STAINLESS STEEL	
39	FF1006-SS	#10-24 X 3/8" FLAT HEAD T/F (E1-1579 KEEPER)	STAINLESS STEEL	
40	UF1006-SS	#10-24 X 3/8" UC FLAT HEAD T/F (4 BAR HINGE TO VENT)	STAINLESS STEEL	
41	FF1008-SS	#10-24 X 1/2" FLAT HEAD T/F (HP SNUBBER)	STAINLESS STEEL	
42	PF1008-SS	#10-24 X 1/2" PAN HEAD T/F (4 BAR HINGE TO FRAME)	STAINLESS STEEL	
43	FF1010-SS	#10-24 X 5/8" FLAT HEAD T/F (E1-1952 KEEPER)	STAINLESS STEEL	
44	FS1010-SS	#10-24 X 5/8" FLAT HEAD TEK (E1-1952 KEEPER LOCK DOWN)	STAINLESS STEEL	
45	PM1012-SS	#10-24 X 3/4" PAN HEAD MS (E1-1577 & 78 CAM HANDLE))	STAINLESS STEEL	
46	PC1016-SS	#10 X 1" PAN HEAD SMS T/AB (FLAT FRAME ASS'Y)	STAINLESS STEEL	
47	PC1024-SS	#10 X 1 1/2" PAN HEAD SMS T/AB (POCKET& VENT FRAME ASS'Y)	STAINLESS STEEL	
48				
49		#14 x 1 1/2" PAN HEAD SMS OR 1/4" X 1 1/2" TEK SCREW		
50		1/4" X 2 3/4" HEX HEAD TAPCON		
51		1/4" X 4" FLAT HEAD TAPCON		
52		1/2" X 3 1/2" HEX HEAD LAG SCREW		




NOTES:

1) CAM LOCK HANDLES MAY UTILIZE OPTIONAL POLE RING OR CUSTODIAL TYPE HANDLES.


2) PROJECT OUT WINDOWS MAY UTILIZE OPTIONAL ROTO-OPERATOR HARDWARE IN CONJUNCTION WITH CAM LOCKS ONLY.

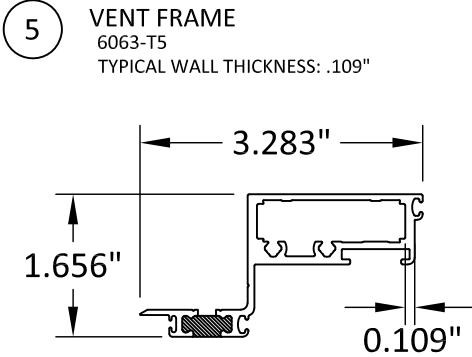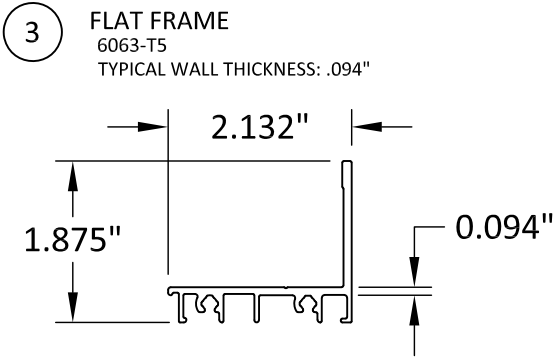


FLAT FRAME CORNER
CONSTRUCTION

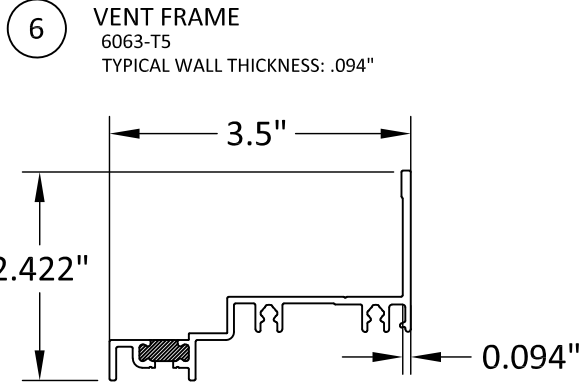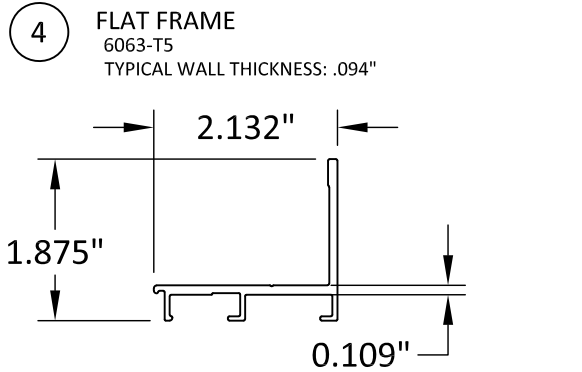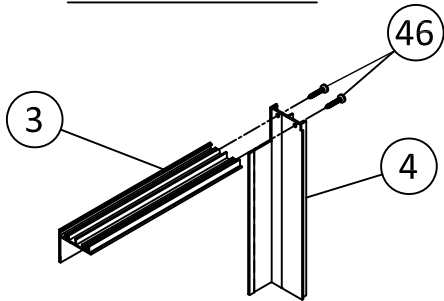

VENT CORNER CONSTRUCTION

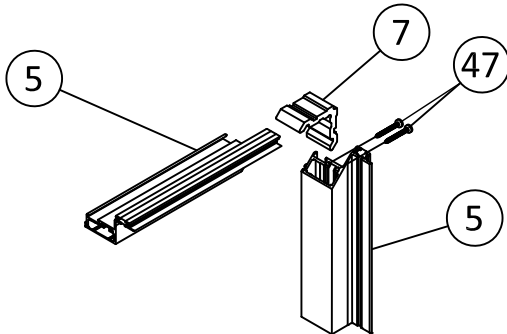

POCKET FRAME CORNER
CONSTRUCTION

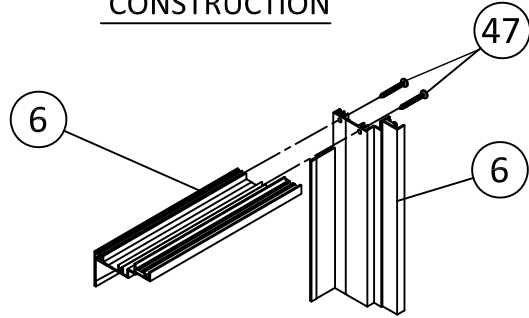

YKK AP America Inc.

1229 HWY 441 BYPASS
DUBLIN, GEORGIA 31021
PH: (478)277-1955 FAX: (678)838-6001

TITLE: YES SSG TUH ALUMINUM
PROJECT OUT WINDOW
(IMPACT)(HVHZ)
BILL OF MATERIALS
AND COMPONENTS


PREPARED BY:
BUILDING DROPS, INC.

398 E. DANIA BEACH BLVD., STE. 338
DANIA BEACH, FL 33004
PH: (954)399-8478
FAX: (954)744-4738
WEB: www.buildingdrops.com



REMARKS	BY	DATE
A. PECORA 895 NST UPDATE	LA	06.13.17
B. FLAT FRAME CHANGED	HR	11.29.17
C. SILICONE DEPTH CHANGE	HR	11.29.17
D. SILL AT GASKET UPDATE	MS	01.21.22

THE INSTALLATION DETAILS DESCRIBED HEREIN ARE GENERIC AND MAY NOT REFLECT ACTUAL CONDITIONS FOR A SPECIFIC SITE. IF SITE CONDITIONS CAUSE INSTALLATION TO DEVIATE FROM THE REQUIREMENTS DETAILED HEREIN, A LICENSED ENGINEER OR ARCHITECT SHALL PREPARE SITE SPECIFIC DOCUMENTS FOR USE WITH THIS DOCUMENT.

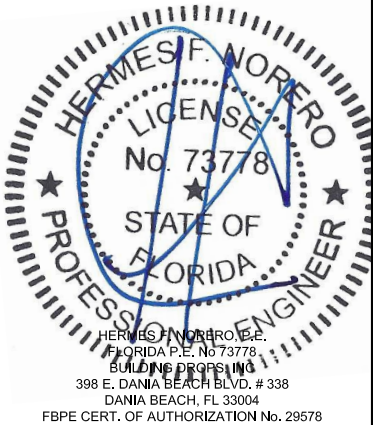

FL #:
FL17098

DATE: **08.16.18**

DWG. BY:
HR

CHK. BY:
HFN

SCALE: **NTS**

DWG. #: **YKK037**

SHEET: