




5200 W. CENTURY BLVD.
LOS ANGELES, CA 90045

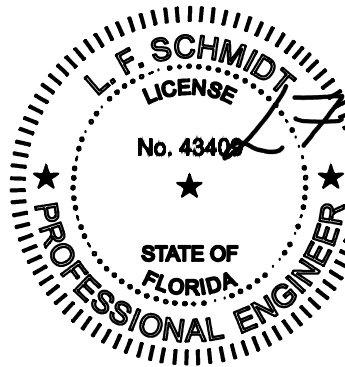

Digitally signed by
Lyndon F Schmidt
Date: 2023.08.23
12:46:23 -04'00"

This item has been digitally signed and sealed by
L. F. Schmidt, P.E. on the date adjacent to the seal.
Printed copies of this document are not
considered signed and sealed and the signature
must be verified on any electronic copies.



THIS PRODUCT APPROVAL IS VALID
ONLY FOR THE STATE OF FLORIDA

GLAZED FIBERGLASS SINGLE DOOR
w/ or w/out SIDELITES
INSWING / OUTSWING
"IMPACT"

GENERAL NOTES

1. This product has been evaluated and is in compliance with the 8th Edition (2023) Florida Building Code (FBC) structural requirements excluding the "High Velocity Hurricane Zone" (HVHZ).
2. Product anchors shall be as listed and spaced as shown on details. Anchor embedment to base material shall be beyond wall dressing or stucco.
3. When used in areas requiring wind borne debris protection this product complies with FBC Sections 1609.1.2 & R301.2.1.2 and does not require an impact resistant covering. This product meets missile level "D" and includes Wind Zone 4 as defined in ASTM E1996 and FBC Sections 1609.1.2.2 & R301.2.1.2.1.
4. For 2x stud framing construction, anchoring of these units shall be the same as that shown for 2x buck masonry construction.
5. Site conditions that deviate from the details of this drawing require further engineering analysis by a licensed engineer or registered architect.

TABLE OF CONTENTS	
SHEET #	DESCRIPTION
1	Typical elevations, design pressures & general notes
2	Door panel details
3	Sidelite panel & glazing details
4	Horizontal cross sections
5	Horizontal cross sections
6	Vertical cross sections
7	Vertical cross sections
8	Buck & frame anchoring (X)
9	Buck & frame anchoring (OX / XO)
10	Buck & frame anchoring (OXO)
11	Multi-point lock details & components
12	Bill of materials

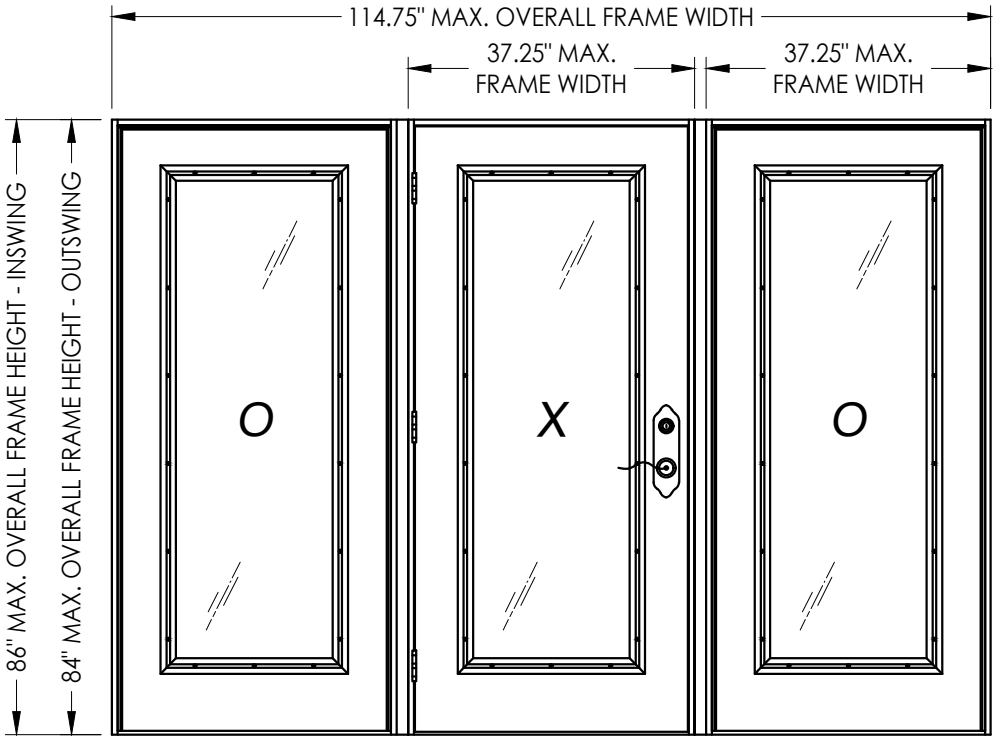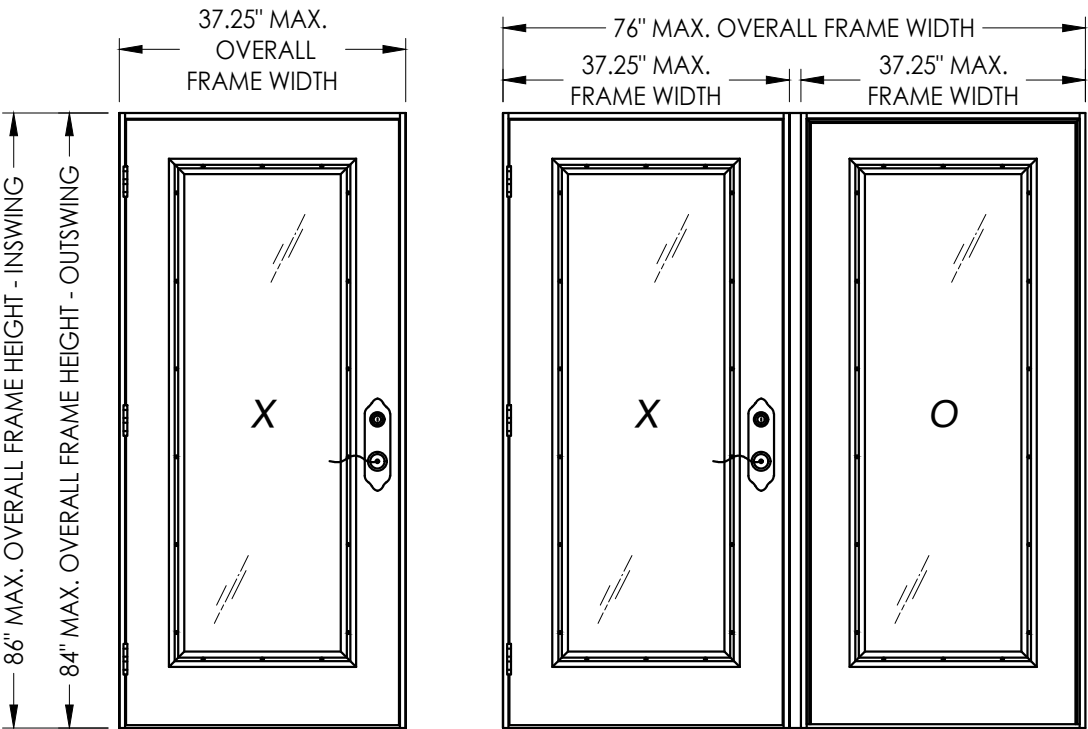

CONFIGURATION	MAX. FRAME DIMENSION	MAX. D.L.O. DIMENSION	GLASS TYPE	DESIGN PRESSURE (PSF) INSWING		DESIGN PRESSURE (PSF) OUTSWING	
				POSITIVE	NEGATIVE	POSITIVE	NEGATIVE
X	37.25" x 86.0"	20.63" x 62.63"	G1	+50.0	-55.0	+50.0	-50.0
OX / XO	76.0" x 86.0"	20.63" x 62.63"		+50.0	-55.0	+50.0	-50.0
OXO	114.75" x 86.0"	20.63" x 62.63"		+50.0	-55.0	+50.0	-50.0

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
TYPICAL ELEVATIONS, DESIGN PRESSURES & GENERAL NOTES

5	8/23/23	UPDATE TO 8TH ED. (2023) FBC	LFS
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC	DAC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC	JK
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD	JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC	JK
NO.	DATE		BY

REVISIONS

DATE: 8/25/14

SCALE: N.T.S.

DWG. BY: AL


CHK. BY: LFS

DRAWING NO.: FL-17184.15


SHEET 1 OF 12

BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813







Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

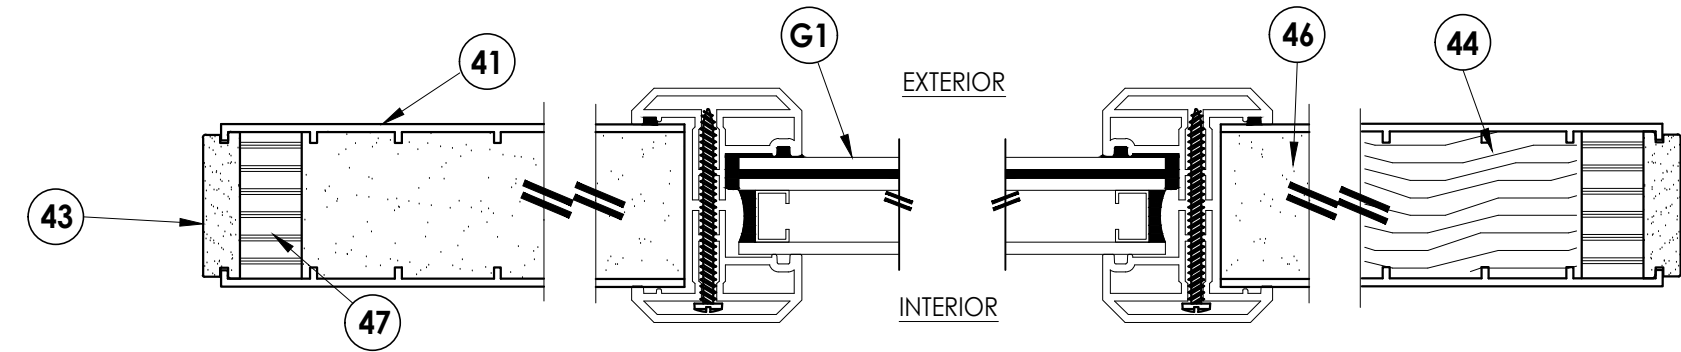

1
2 HORIZONTAL CROSS SECTION

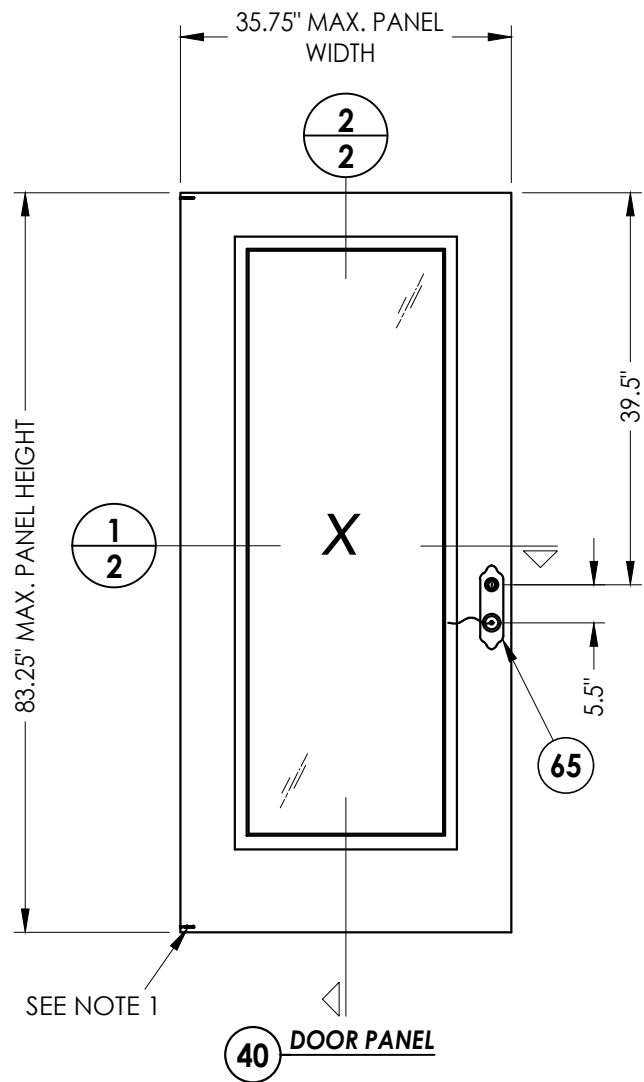

NOTE 1:
1. #8 X 2" PFH WOOD SCREW THROUGH HINGE CAP
INTO TOP AND BOTTOM RAILS FOR D.P. > 47 PSF.

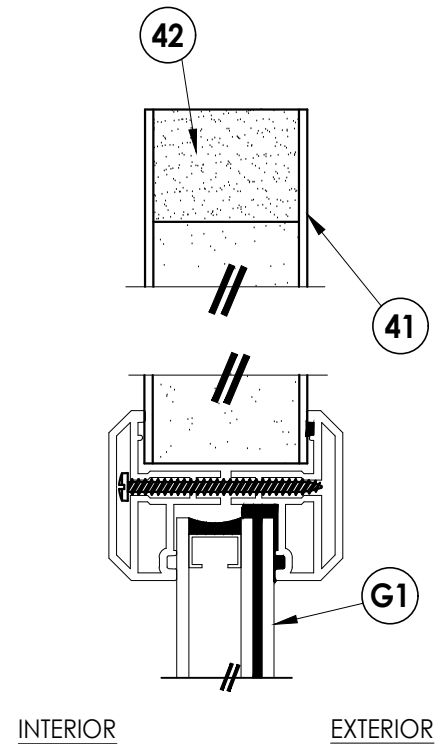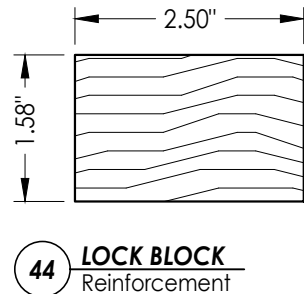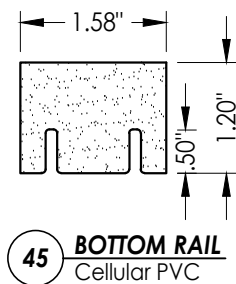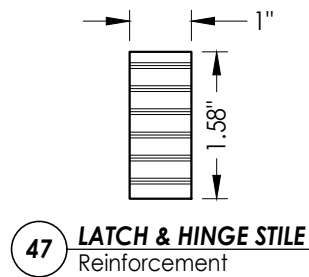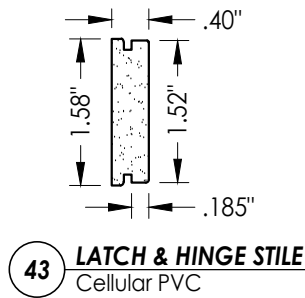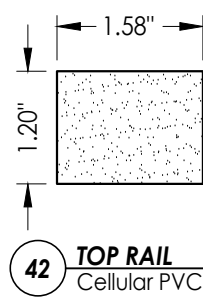

2
2 VERTICAL CROSS SECTION

NO.		DATE		REVISIONS	
		NO.	DATE	BY	
5	8/23/23	UPDATE TO 8TH ED. (2023)	FBC	LFS	
4	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC	
3	08/02/07	UPDATE TO 6TH ED. (2017)	FBC	JK	
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD	JK	JK	
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK	

DATE: 8/25/14

SCALE: N.T.S.

DWG. BY: AL

CHK. BY: LFS

DRAWING NO.:
FL-17184.15

SHEET 2 OF 12


Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR


PART OR ASSEMBLY:
DOOR PANEL DETAILS

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813


Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

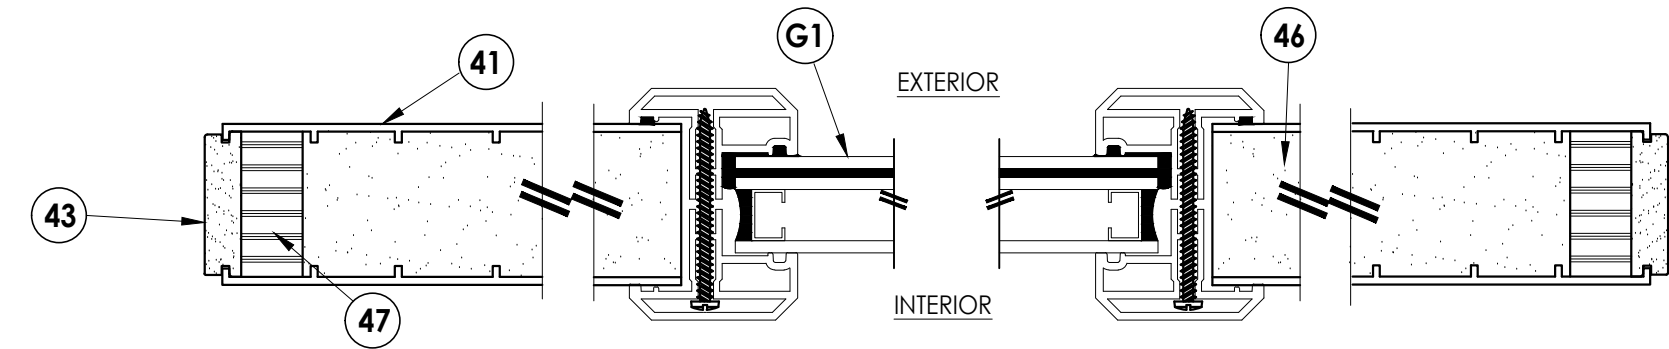



1/3 HORIZONTAL CROSS SECTION

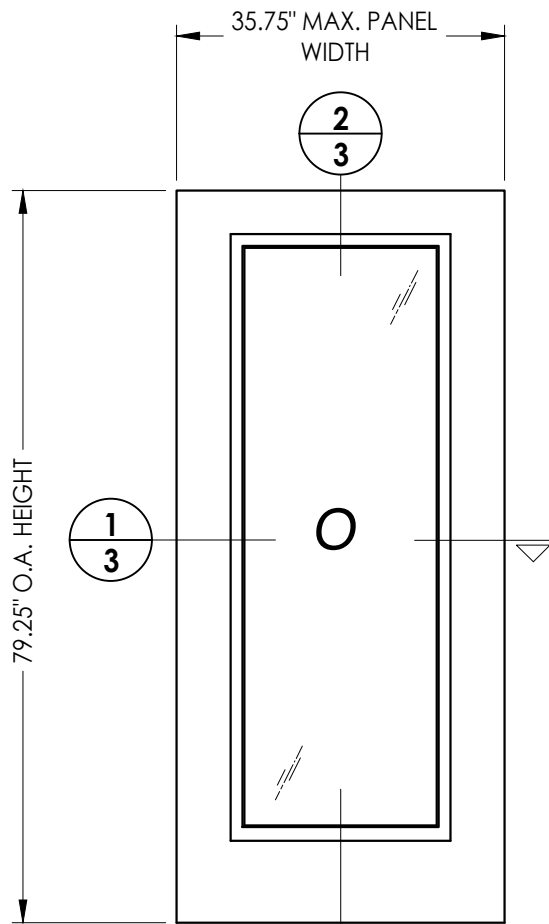


50 SIDELITE PANEL

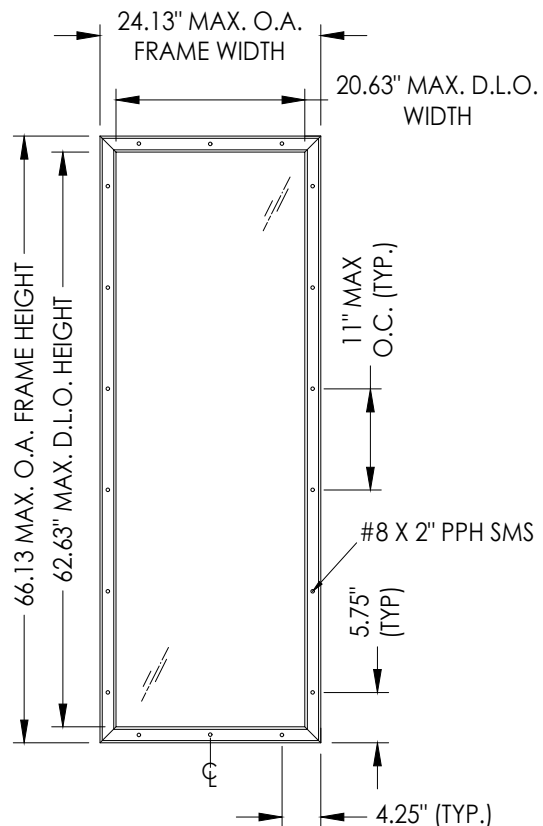


ODL LITE FRAME DETAIL
"FLAT FRAME" PROFILE

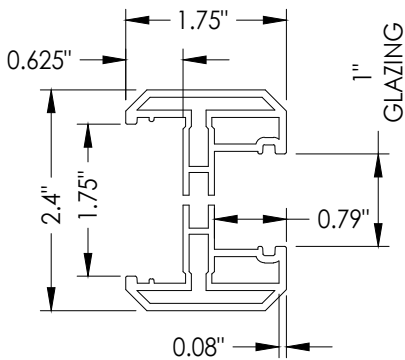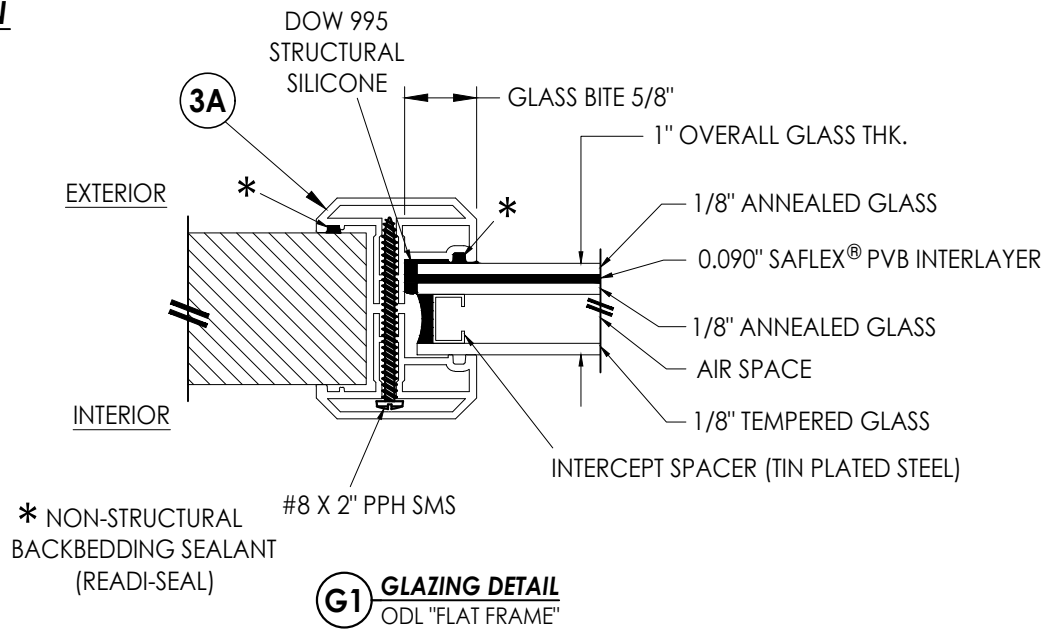


3A ODL LITE FRAME
"FLAT FRAME" PROFILE
(6063-T5 ALUM)




45 BOTTOM RAIL
Cellular PVC




42 TOP RAIL
Cellular PVC



43 LATCH & HINGE STILE
Cellular PVC



47 LATCH & HINGE STILE
Reinforcement

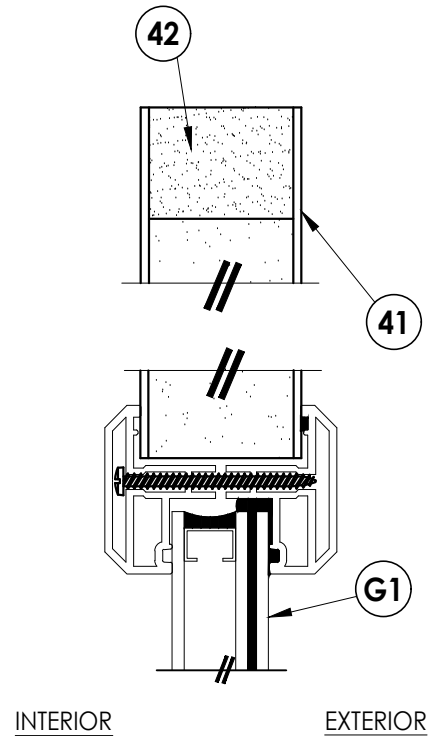

2/3 VERTICAL CROSS SECTION

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
SIDELITE PANEL DETAILS
& GLAZING DETAIL

NO.	DATE	REVISIONS
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC
3	08/02/07	UPDATE TO 6TH ED. (2017) FBC
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 8/25/14

SCALE: N.T.S.

DWG. BY: AL



CHK. BY: LFS

DRAWING NO.: FL-17184.15

SHEET 3 OF 12


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

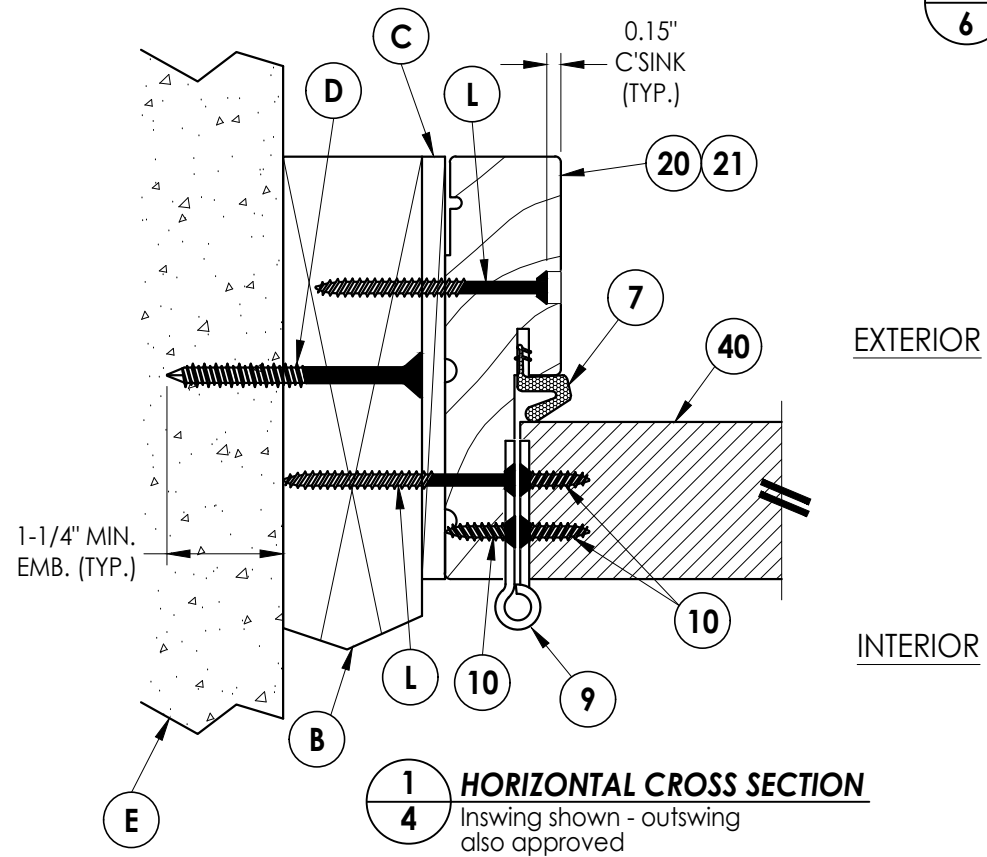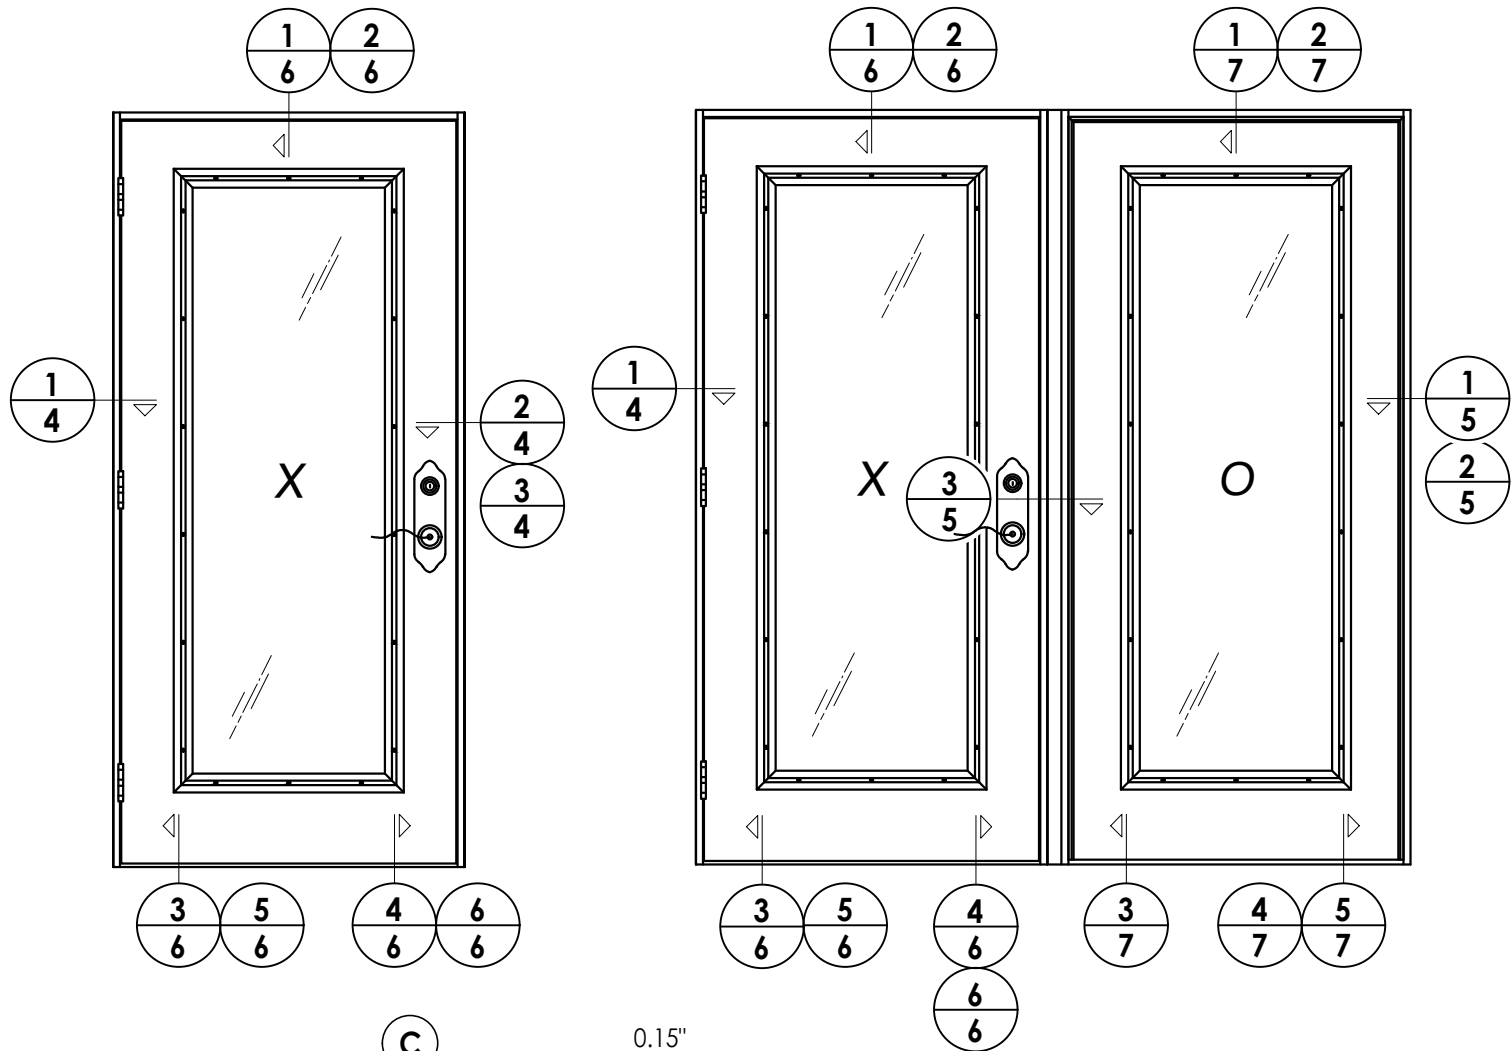


EXTERIOR

INTERIOR

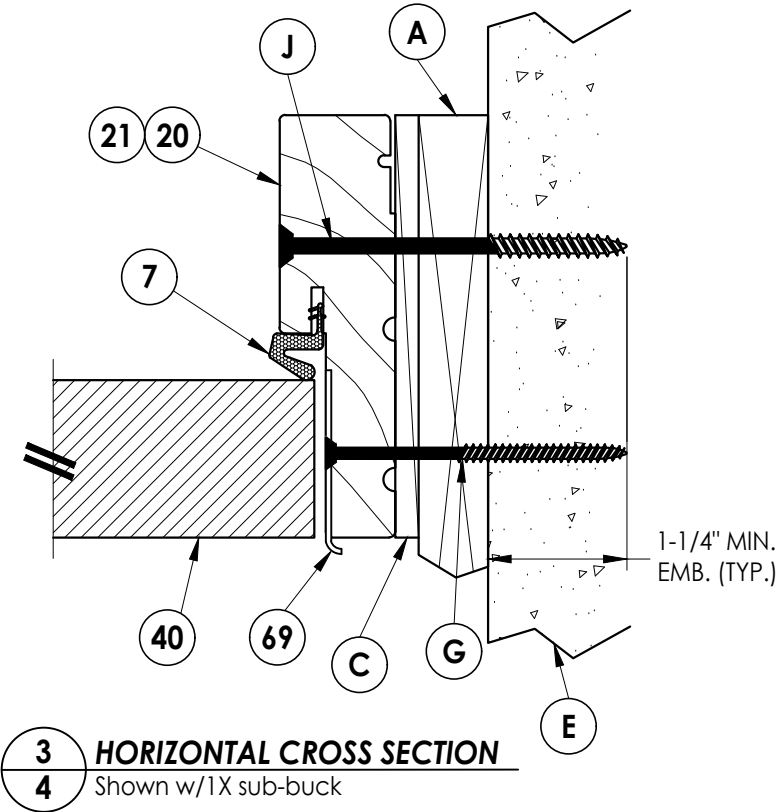

EXTERIOR

INTERIOR

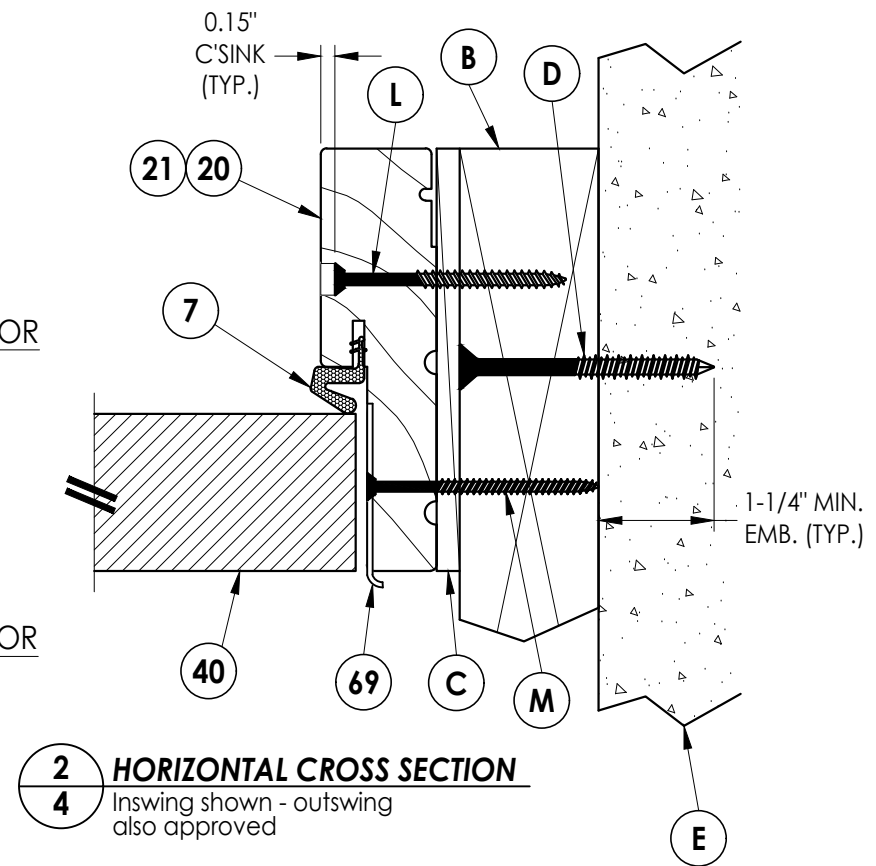

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT: PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
HORIZONTAL CROSS SECTIONS

NO.	DATE	REVISIONS				
		LFS	FBC	FBC	DAC	JK
5	8/23/23	UPDATE TO 8TH ED. (2023)	FBC			
4	8/05/20	UPDATE TO 7TH ED. (2020)	FBC			
3	08/02/17	UPDATE TO 6TH ED. (2017)	FBC			
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD	JK			
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC			

DATE: 8/25/14

SCALE: N.T.S.


DWG. BY: AL

CHK. BY: LFS


DRAWING NO.: FL-17184.15

SHEET 4 OF 12


Z:\2023 FBC Drawings\Plastpro\FL-17184 R1\FL-17184.15-16.dwg

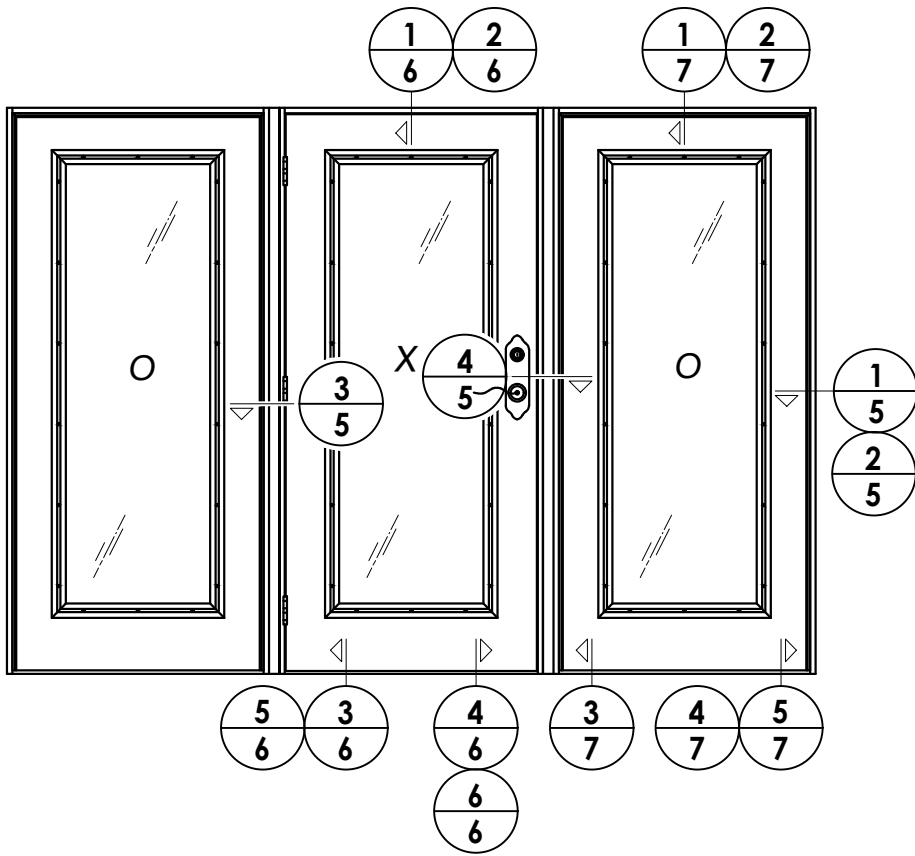


NOTE:
1. Sidelite screws (item #22) located at 3", 6", 16", 27", 38", 49", 60", 70" and 80" from bottom of panel.

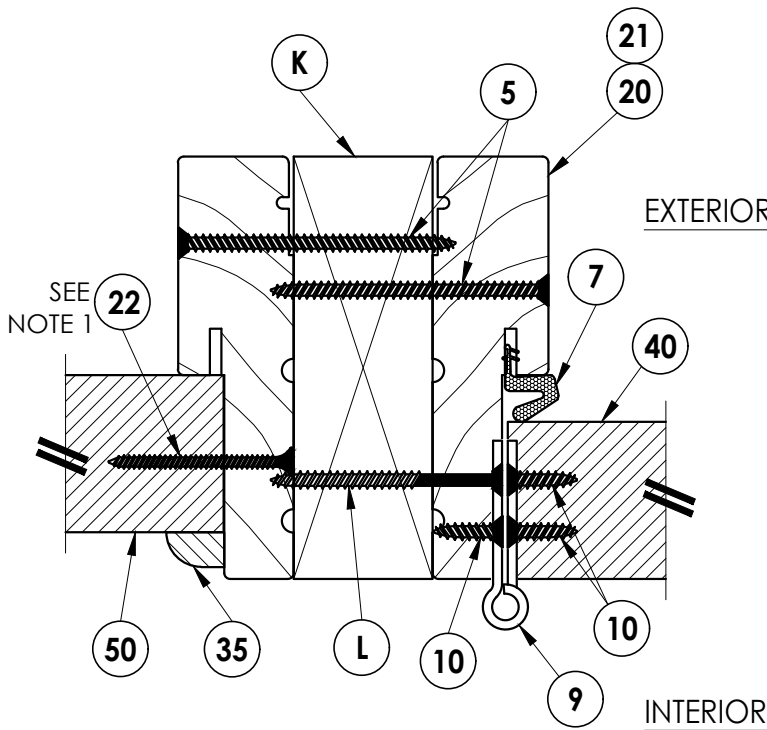


3
5 **HORIZONTAL CROSS SECTION**
Inswing shown - outswing also approved

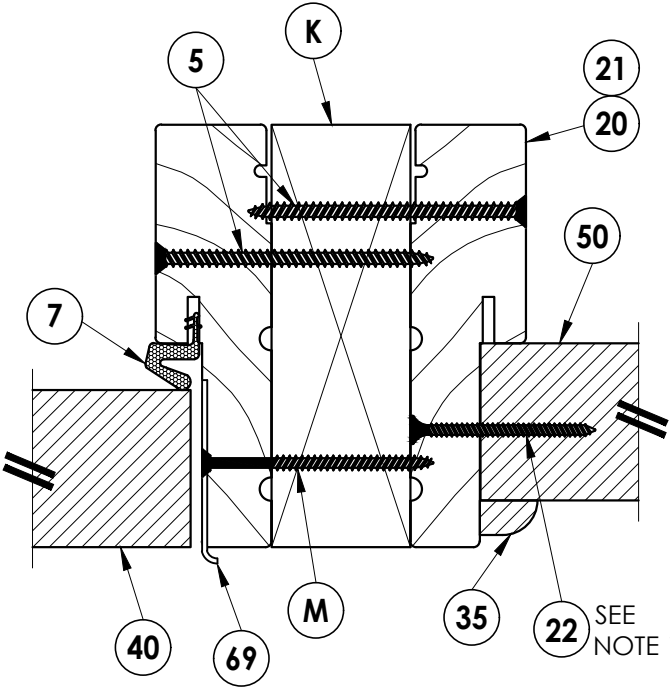

4
5 **HORIZONTAL CROSS SECTION**
Inswing shown - outswing also approved

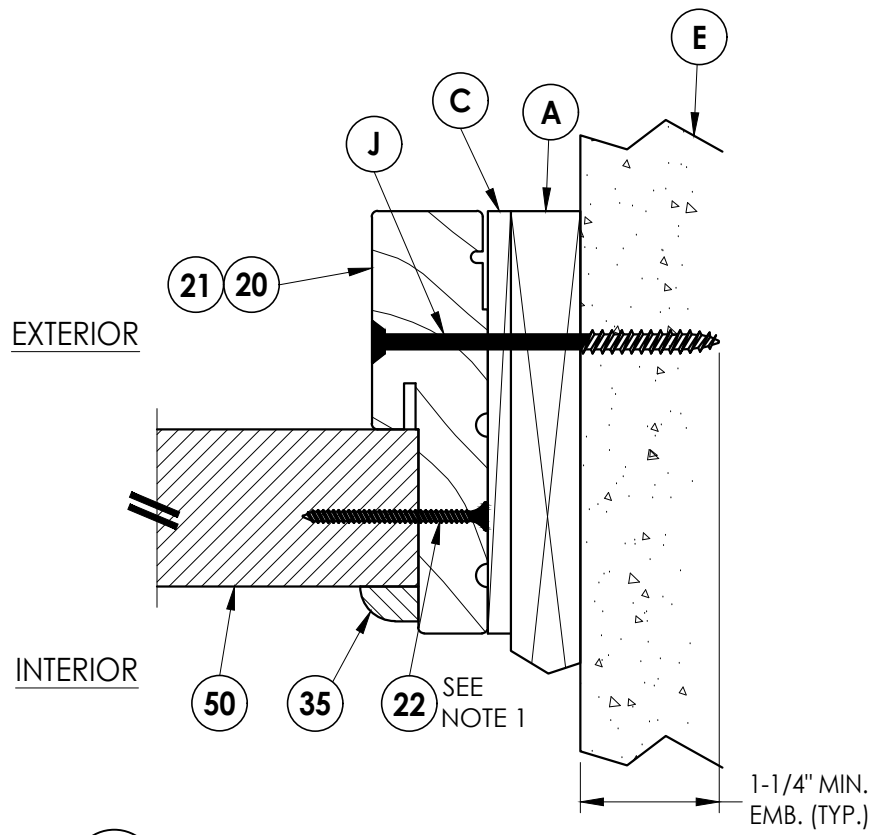


1
5 **HORIZONTAL CROSS SECTION**
Shown w/1X sub-buck

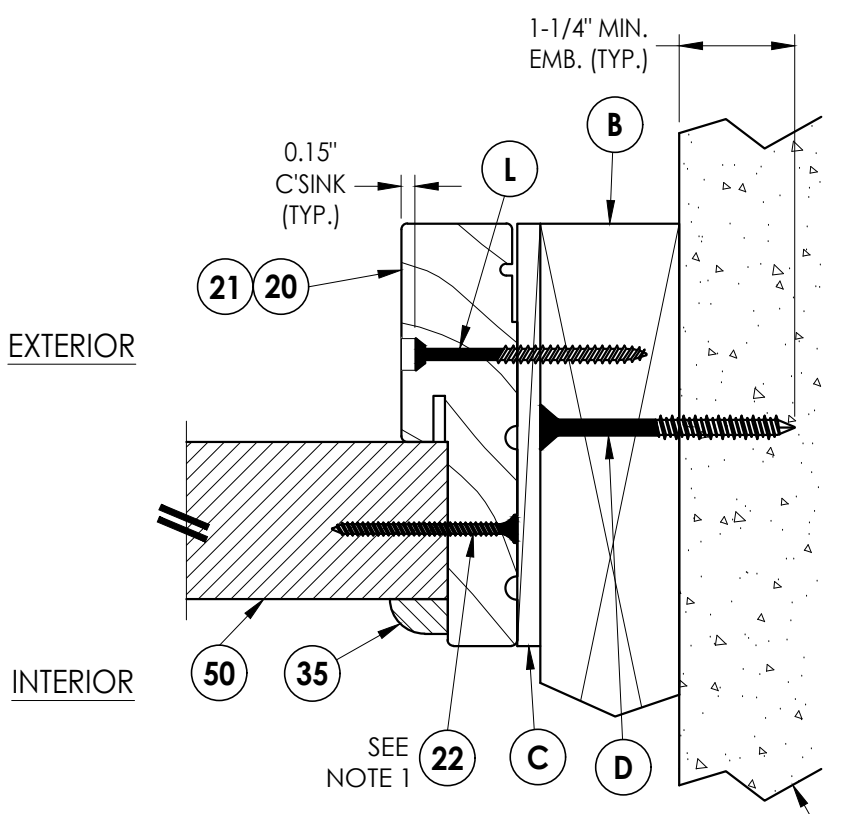


2
5 **HORIZONTAL CROSS SECTION**
Inswing shown - outswing also approved

PRODUCT:				PLASTPRO INC. FIBERGLASS DOOR				Documents Prepared By: Lyndon F. Schmidt P.E. No. 43409				RW BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813			
PART OR ASSEMBLY:				HORIZONTAL CROSS SECTIONS											
5	8/23/23	UPDATE TO 8TH ED. (2023)	FBC	LFS											
4	8/05/20	UPDATE TO 7TH ED. (2020)	FBC	DAC											
3	08/02/17	UPDATE TO 6TH ED. (2017)	FBC	JK											
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD	JK	JK											
1	04/22/15	UPDATE TO 5TH ED. (2014)	FBC	JK											
NO.	DATE			BY											
				REVISIONS											
DATE: 8/25/14															
SCALE: N.T.S.															
DWG. BY: AL															
CHK. BY: LFS															
DRAWING NO.: FL-17184.15															
SHEET 5 OF 12															


Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

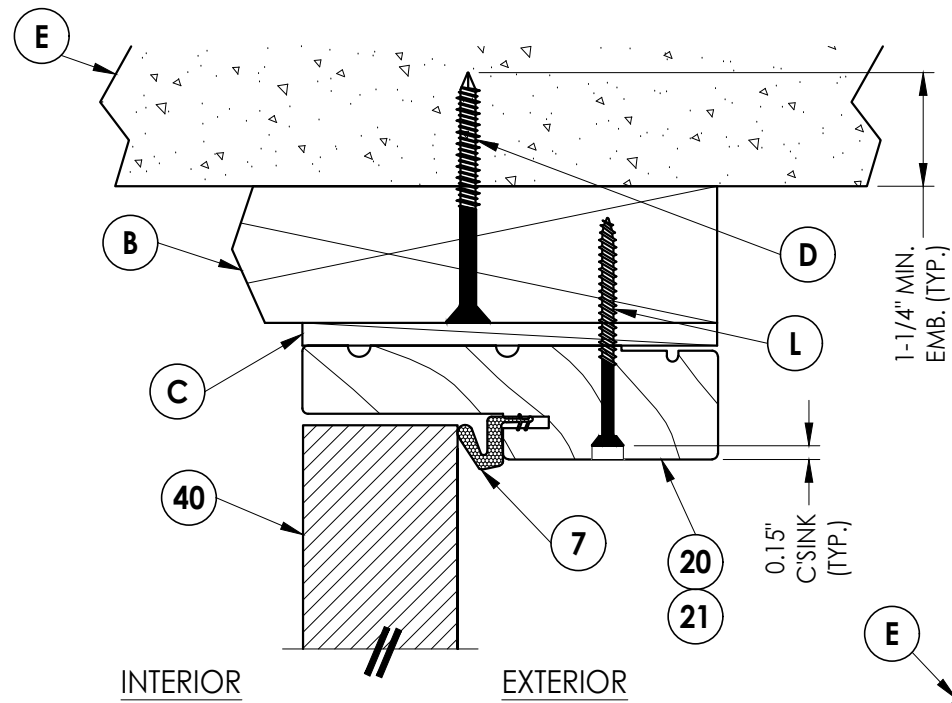


1
6 **VERTICAL CROSS SECTION**
Inswing shown - outswing
also approved

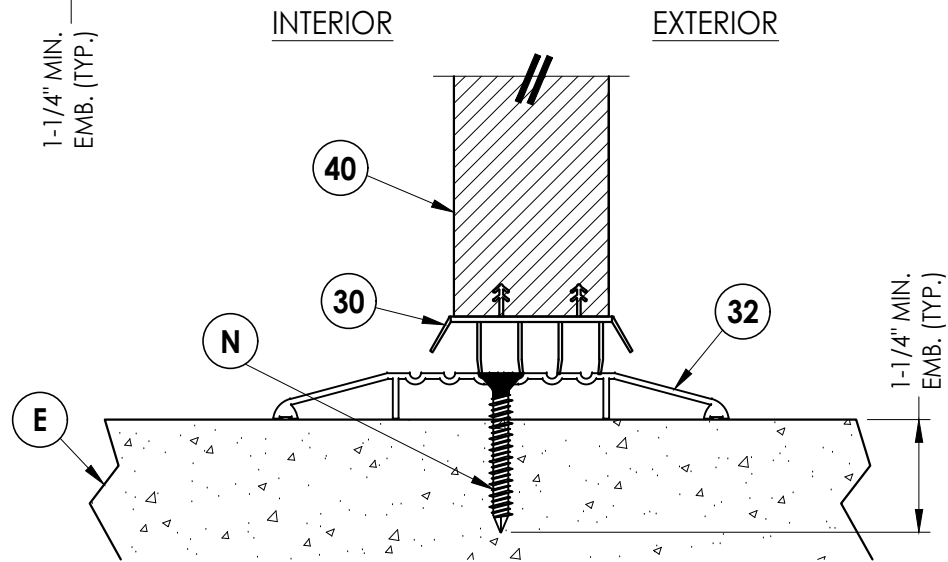


5
6 **VERTICAL CROSS SECTION**
Shown w/ ADA threshold

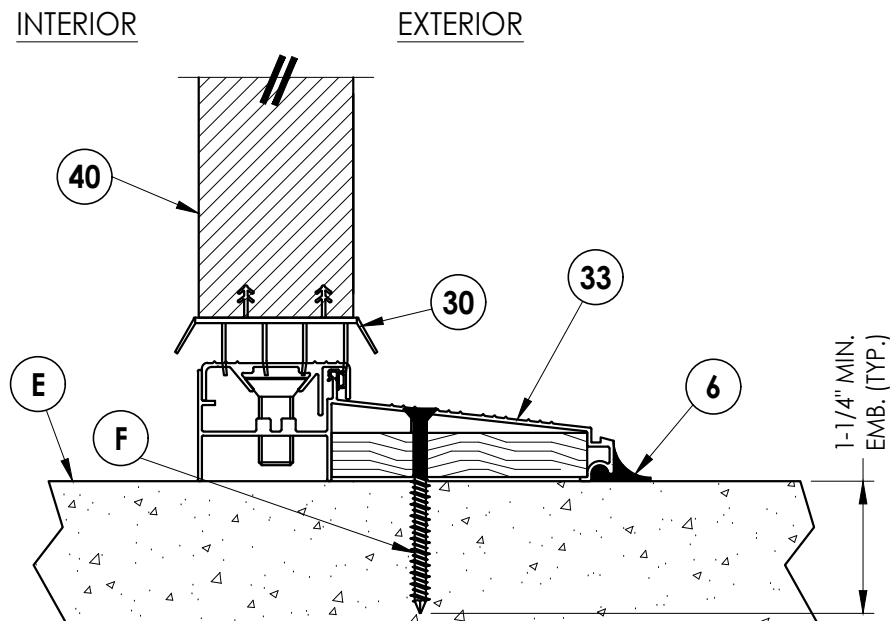


3
6 **VERTICAL CROSS SECTION**
Inswing configuration

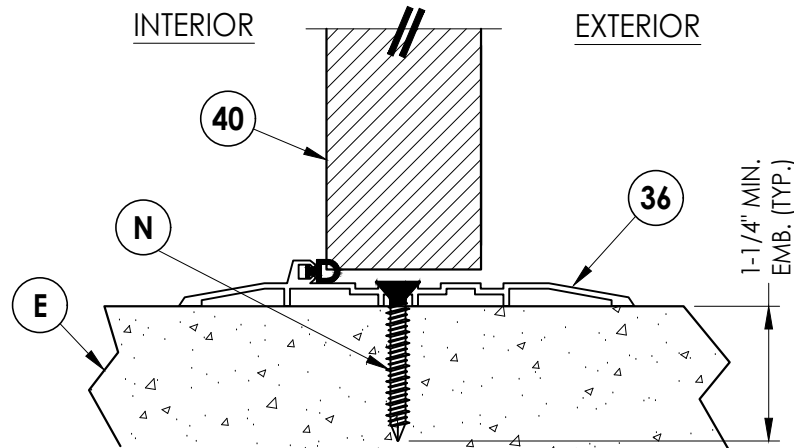

6
6 **VERTICAL CROSS SECTION**
Shown w/ O.S. ADA bump threshold

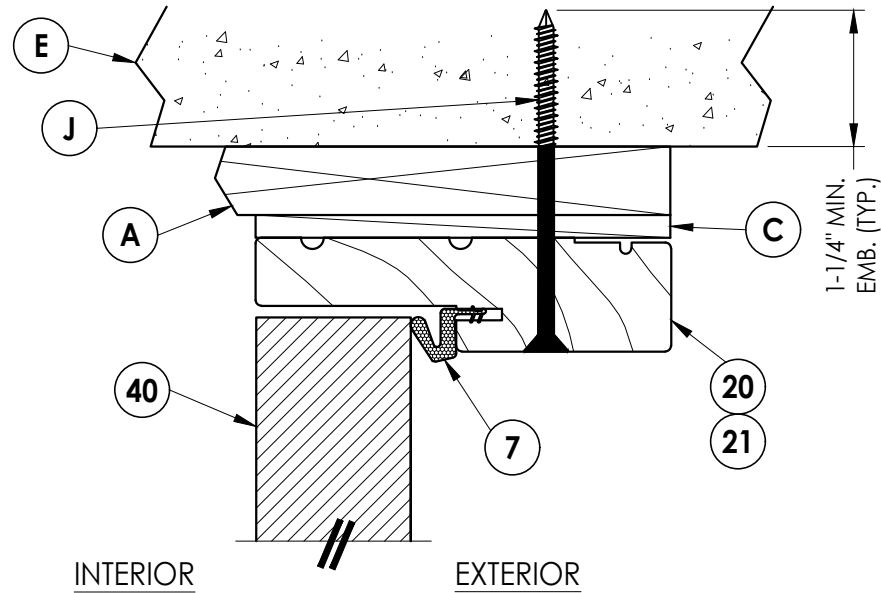

2
6 **VERTICAL CROSS SECTION**
Shown w/ 1X sub-buck

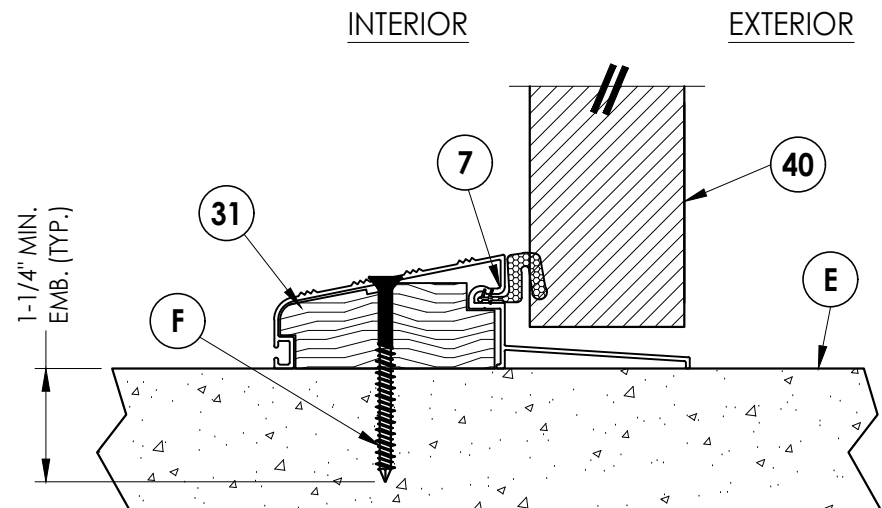

4
6 **VERTICAL CROSS SECTION**
Outswing configuration

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR


RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS


NO.	DATE	REVISIONS	BY
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC	LFS
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC	DAC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC	JK
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD	JK
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC	JK

DATE: 8/25/14
SCALE: N.T.S.
DWG. BY: AL
CHK. BY: LFS
DRAWING NO.: FL-17184.15
SHEET 6 OF 12

Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

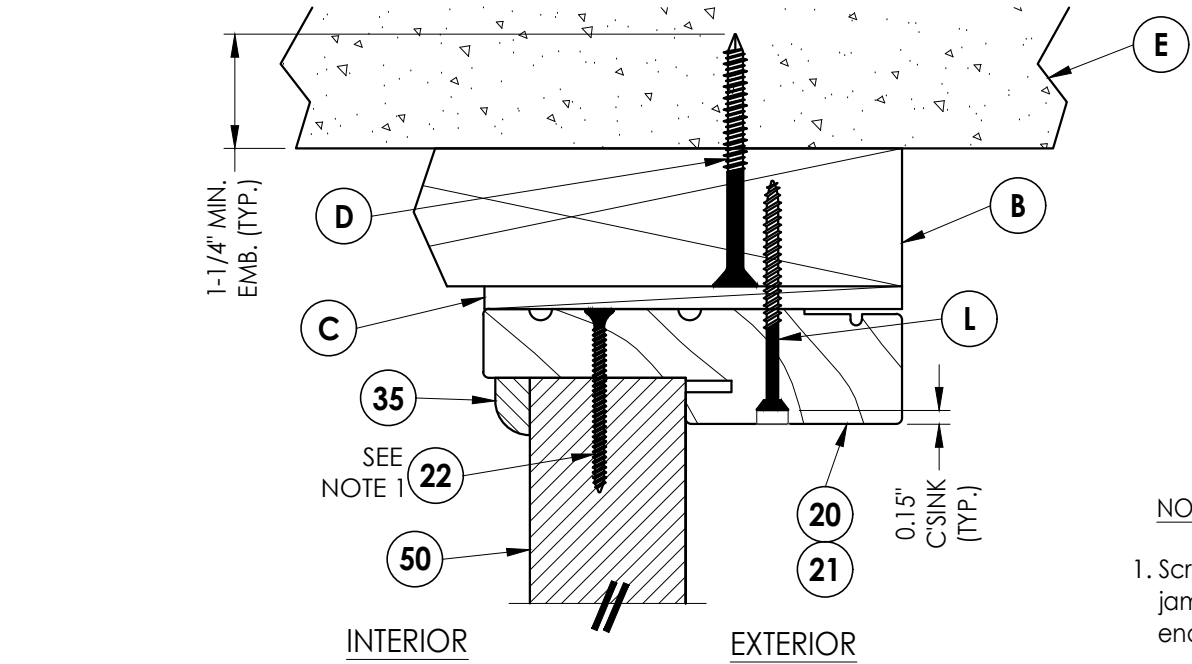


1
7 **VERTICAL CROSS SECTION**
Inswing shown - outswing
also approved

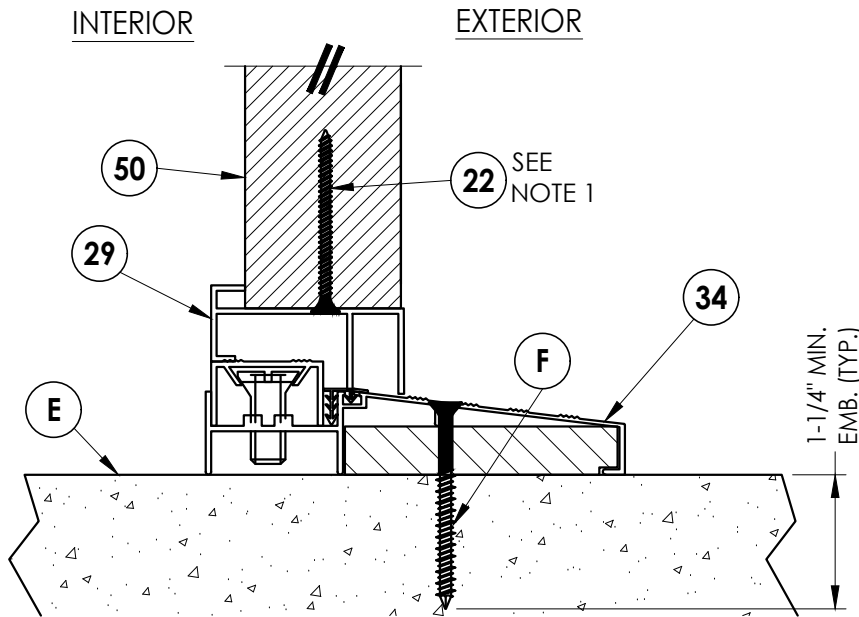


3
7 **VERTICAL CROSS SECTION**
Inswing configuration

NOTE:


1. Screws thru head and sill
jamb located 3" from each
end and O.C. (TYP.) line.

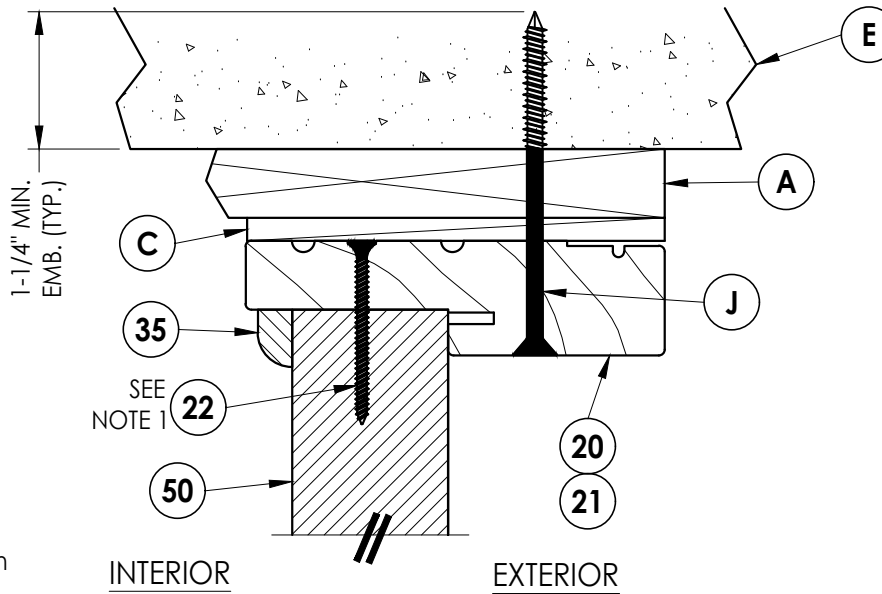

2
7 **VERTICAL CROSS SECTION**
Shown w/1X sub-buck

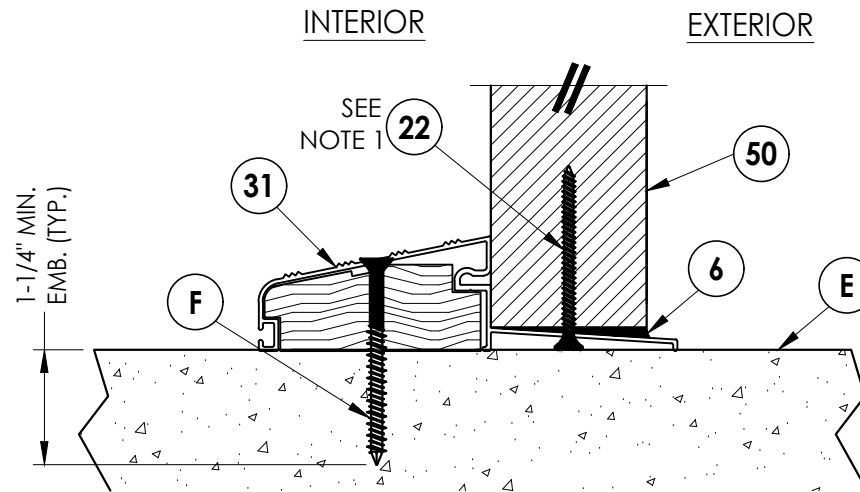

4
7 **VERTICAL CROSS SECTION**
Outswing configuration

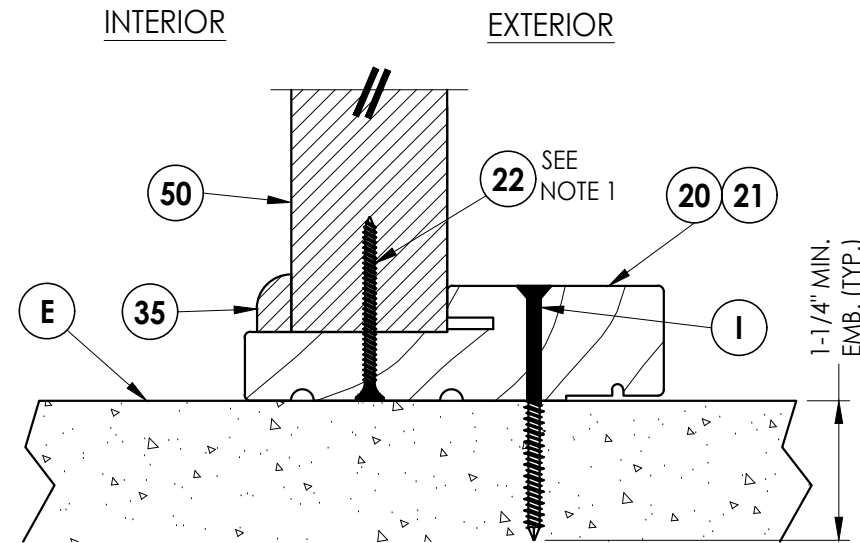

5
7 **VERTICAL CROSS SECTION**
Outswing configuration

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Vairico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

PART OR ASSEMBLY:
VERTICAL CROSS SECTIONS

NO.	DATE	REVISIONS
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 8/25/14

SCALE: N.T.S.

DWG. BY: AL


CHK. BY: LFS

DRAWING NO.:


FL-17184.15

SHEET 7 OF 12


Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

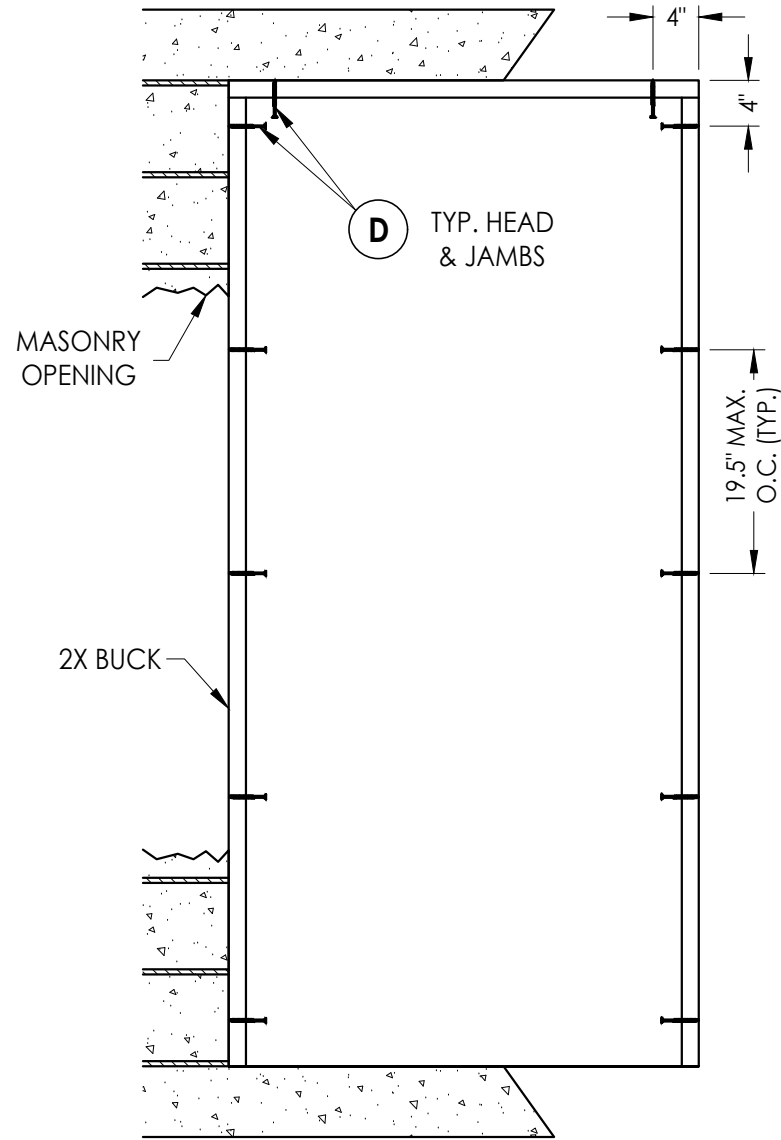


BUCK ANCHORING

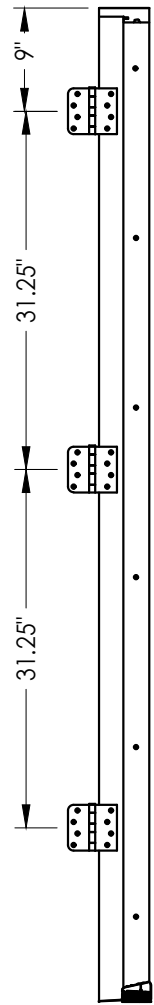

HINGE JAMB

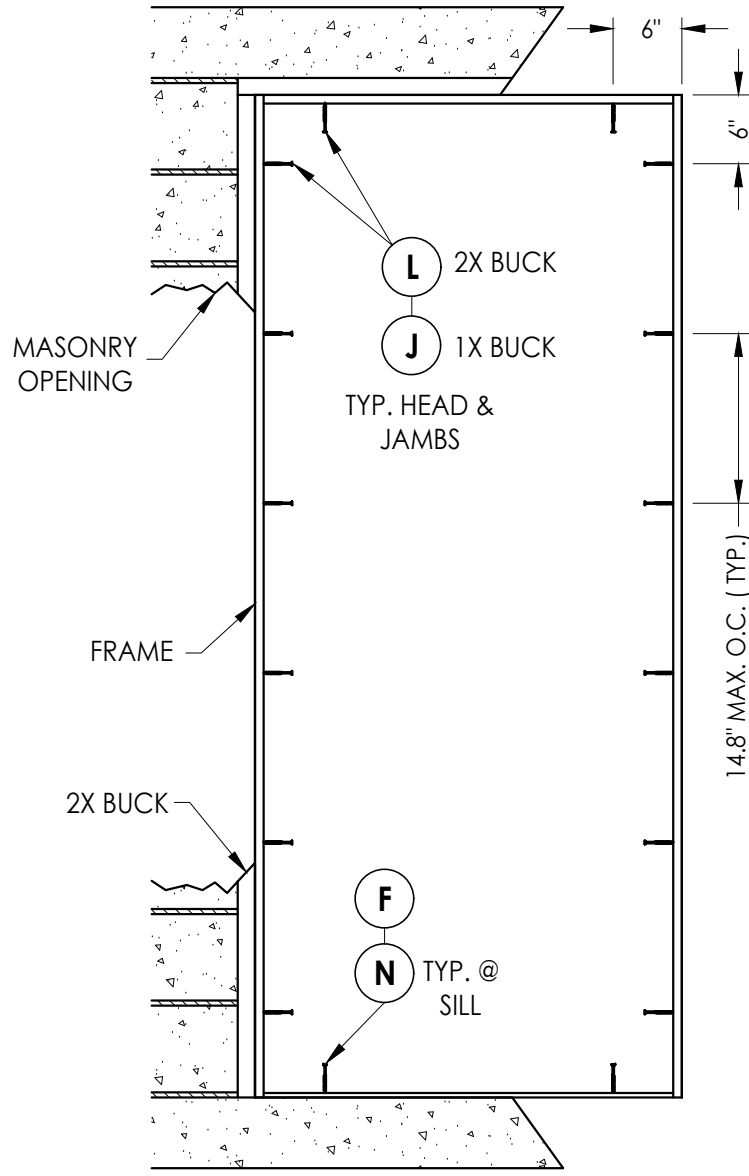

FRAME ANCHORING
Masonry construction

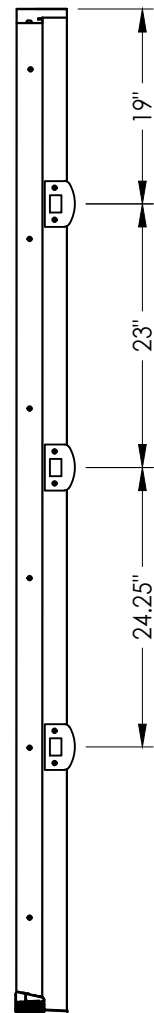

STRIKE JAMB


CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:


ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRA-CON®	1/4"	1-1/4"	1"	4"
ITW TAPCON®	3/16"	1-1/4"	3"	1-1/2"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

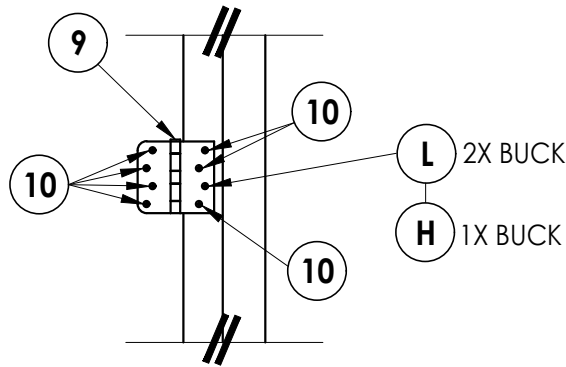

HINGE DETAIL

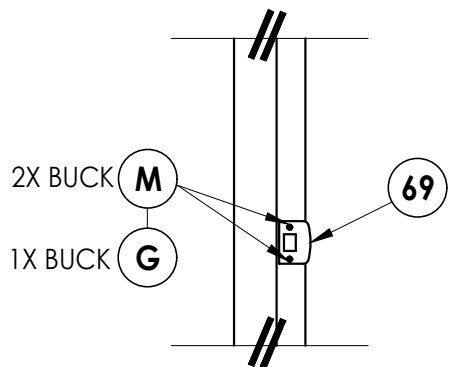

LATCH DETAIL

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PART OR ASSEMBLY:
BUCK AND FRAME ANCHORING
(X)

NO.	DATE	REVISIONS
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 8/25/14

SCALE: N.T.S.


DWG. BY: AL

CHK. BY: LFS


DRAWING NO.:
FL-17184.15

SHEET 8 OF 12


Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

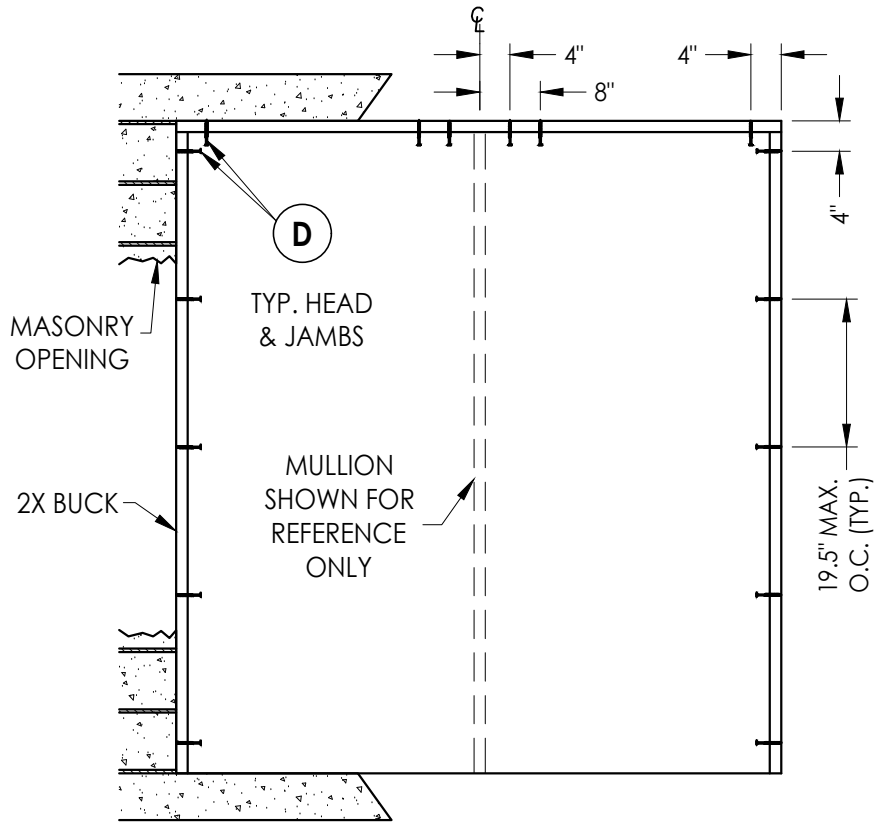


BUCK ANCHORING

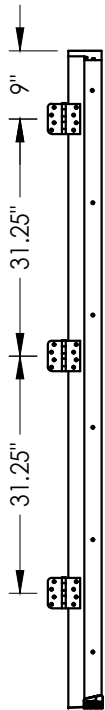


HINGE JAMB

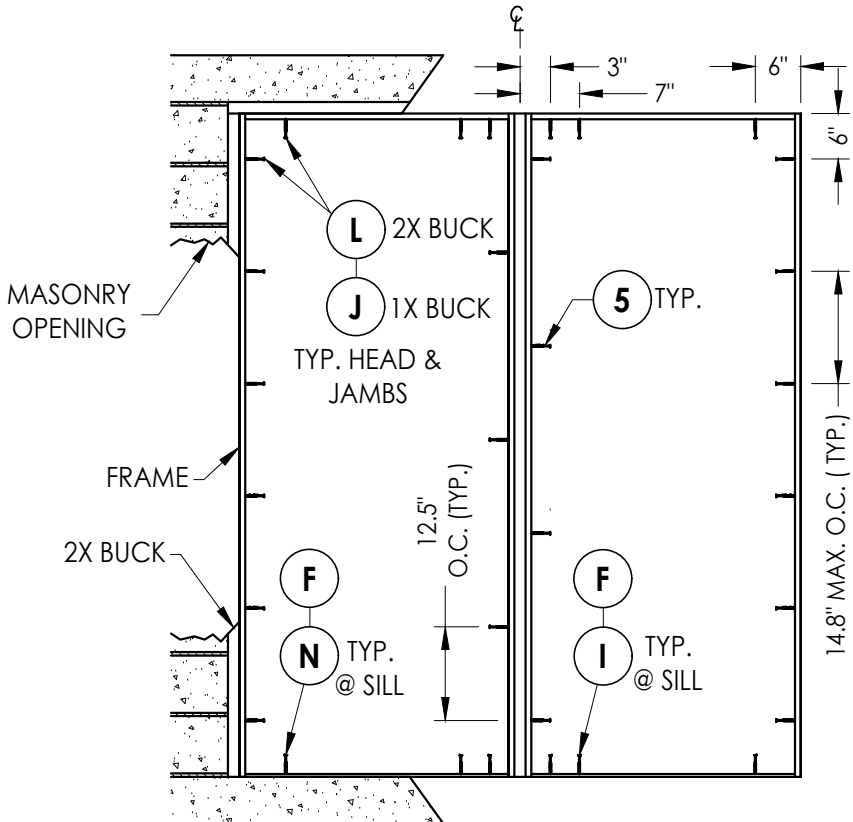


FRAME ANCHORING
Masonry construction

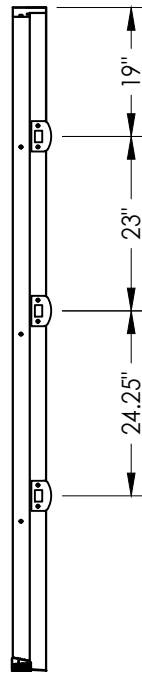

STRIKE JAMB

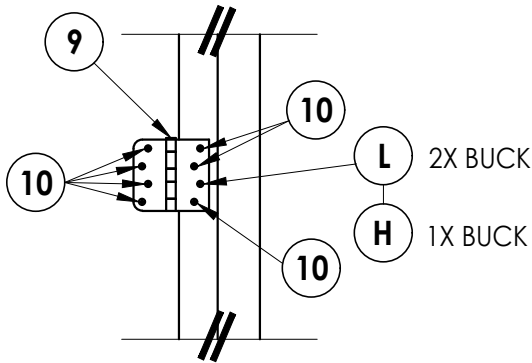

HINGE DETAIL

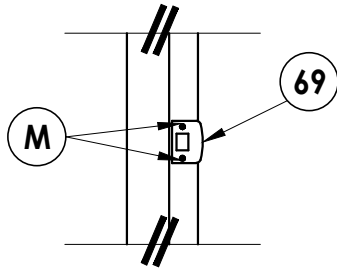

LATCH DETAIL

CONCRETE ANCHOR NOTES:

- Concrete anchor locations at the corners may be adjusted to maintain the min. edge distance to mortar joints.
- Concrete anchor locations noted as "MAX. ON CENTER" must be adjusted to maintain the min. edge distance to mortar joints, additional concrete anchors may be required to ensure the "MAX. ON CENTER" dimension are not exceeded.
- Concrete anchor table:

ANCHOR TYPE	ANCHOR SIZE	MIN. EMBEDMENT	MIN. CLEARANCE TO MASONRY EDGE	MIN. CLEARANCE TO ADJACENT ANCHOR
ITW TAPCON®	1/4"	1-1/4"	2"	4"
DeWALT ULTRACON+®	1/4"	1-1/4"	1"	4"

WOOD SCREW INSTALLATION NOTES:

- Maintain a minimum 5/8" edge distance, 1" end distance, & 1" o.c. spacing of wood screws to prevent the splitting of wood.

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

R^W BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PART OR ASSEMBLY:
BUCK & FRAME ANCHORING
(OX/XO)

NO.	DATE	REVISIONS
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC
NO.	DATE	BY

DATE: 8/25/14

SCALE: N.T.S.


DWG. BY: AL

CHK. BY: LFS


DRAWING NO.:
FL-17184.15

SHEET 9 OF 12


Z:\2023 FBC Drawings\Plastpro\FL-17184 R11\FL-17184.15-16.dwg

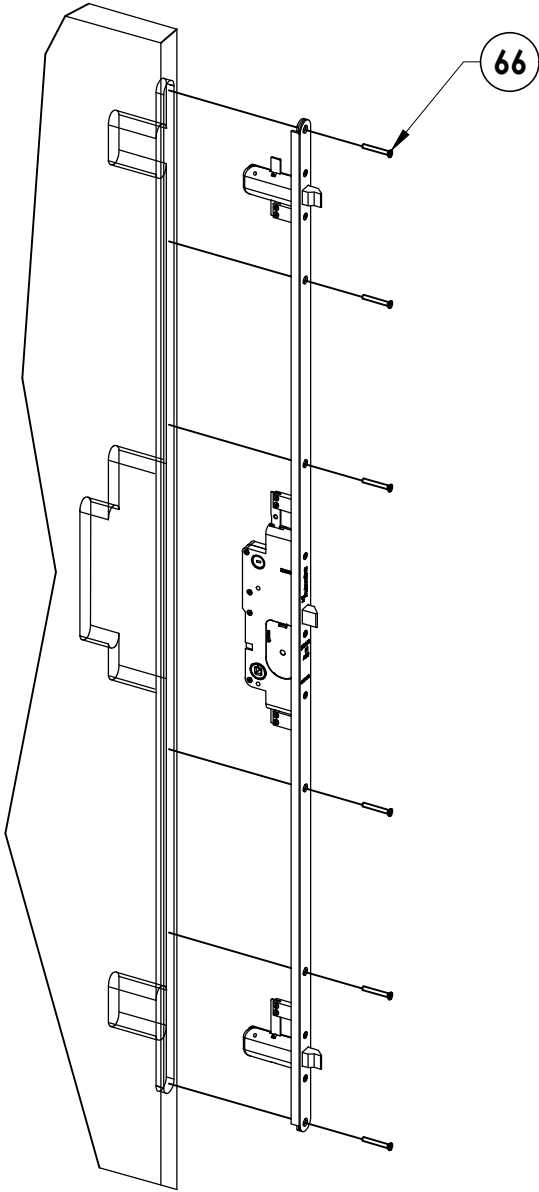


65 **MULTI-POINT LOCK**
Trilennium by Endura

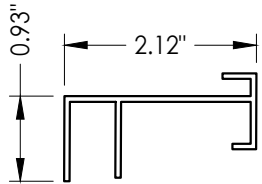


29 **SIDELITE SPACER**
ISSLB

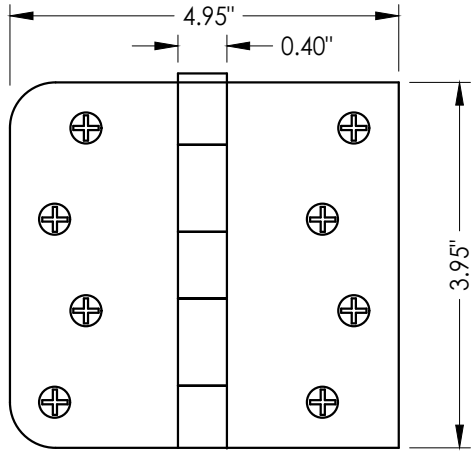


9 **HINGE**

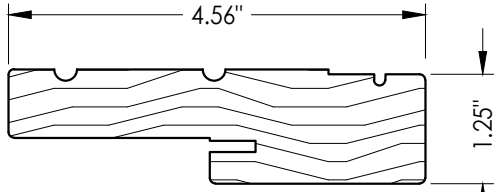


20 **HEAD & SIDE**
Jamb

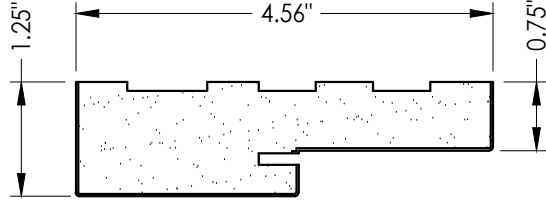


21 **HEAD & SIDE**
Poly fiber jamb

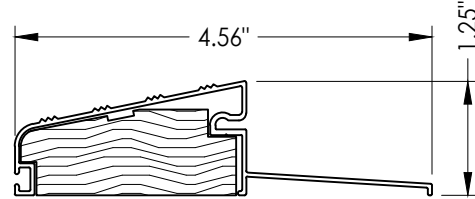


31 **OUTSWING THRESHOLD**
QOSH

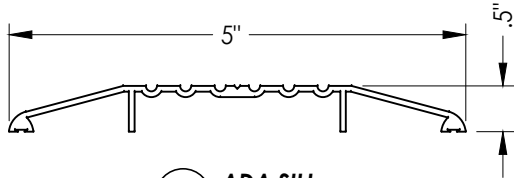


32 **ADA SILL**
ISHC

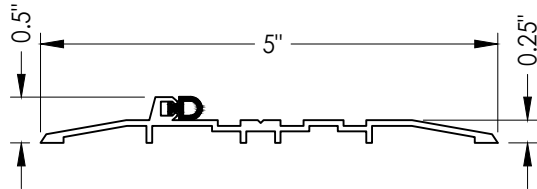

36 **OUTSWING ADA BUMP THRESHOLD**
OSHC

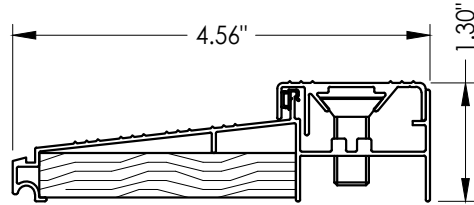

33 **INSWING THRESHOLD**
ISCS

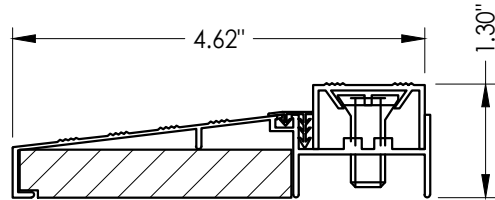

34 **SIDELITE THRESHOLD**
ISH/ EIS

NO.	DATE	REVISIONS
5	8/23/23	UPDATE TO 8TH ED. (2023) FBC
4	8/05/20	UPDATE TO 7TH ED. (2020) FBC
3	08/02/17	UPDATE TO 6TH ED. (2017) FBC
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD
1	04/22/15	UPDATE TO 5TH ED. (2014) FBC

DATE: 8/25/14

SCALE: N.T.S.

DWG. BY: AL

CHK. BY: LFS

DRAWING NO.:

FL-17184.15

SHEET 11 OF 12

Documents Prepared By:
Lyndon F. Schmidt
P.E. No. 43409

PRODUCT:
PLASTPRO INC.
FIBERGLASS DOOR

RW BUILDING CONSULTANTS, INC.
P.O. Box 230, Valrico, FL 33595
Phone No.: 813.659.9197
FBPE Registry No. 9813

PART OR ASSEMBLY:
MULTI-POINT LOCK DETAILS
& COMPONENTS

BILL OF MATERIALS		
ITEM	DESCRIPTION	MATERIAL
A	1X BUCK SG >= 0.55	WOOD
B	2X BUCK SG >= 0.55	WOOD
C	1/4" MAX. SHIM SPACE	-
D	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
E	MASONRY - 3,000 PSI MIN. CONCRETE CONFORMING TO ACI 301 OR HOLLOW BLOCK CONFORMING TO ASTM C90	CONCRETE
F	1/4" X 2-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
G	3/16" X 3-1/4" PFH ITW CONCRETE SCREW	STEEL
H	1/4" X 3-1/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
I	1/4" X 2-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
J	1/4" X 3-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
K	2X REINFORCEMENT (CLEAR PINE SG >= 0.42)	STEEL
L	#10 X 2-1/2" PFH WOOD SCREW (1.15" MIN. EMBEDMENT)	STEEL
M	#8 X 2-1/2" PFH WOOD SCREW	STEEL
N	1/4" X 1-3/4" PFH DeWALT OR ITW CONCRETE SCREW	STEEL
5	#10 X 3" PFH SCREW	STEEL
6	SEALANT	SILICONE
7	WEATHERSTRIP BY Q-LON	FOAM
9	4" HINGE	STEEL
10	#9 X 3/4" PFH WOOD SCREW	STEEL
20	JAMB FINGER - JOINT - PINE (SG >= 0.42)	WOOD
21	POLY FIBER JAMB	POLY FIBER
22	#7 X 2" PFH DRYWALL SCREW	STEEL
29	SIDELITE SPACER (ISSLB)	PVC
30	DOOR SWEEP	ALUM.
31	OUTSWING THRESHOLD BY DLP (QOSH)	ALUM. / WOOD
32	ADA THRESHOLD BY DLP (ISHC)	ALUM. / WOOD
33	INSWING THRESHOLD BY DLP (ISCS)	ALUM. / WOOD
34	SIDELITE THRESHOLD BY DLP (ISH/ EIS)	ALUM. / WOOD
35	TRIM	WOOD
36	OUTSWING ADA BUMP THRESHOLD	ALUMINUM
40	DOOR PANEL - SEE DOOR PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
41	DOOR SKIN (MIN. 0.075" THICK) PLAST-PRO/NANYA Fy = 11,063 PSI MIN.	FIBERGLASS
42	TOP RAIL	CELLULAR PVC
43	LATCH & HINGE STILE	CELLULAR PVC
44	LOCK BLOCK (SG >= 0.42)	WOOD
45	BOTTOM RAIL	CELLULAR PVC
46	FOAM CORE	POLYURETHANE
47	LATCH & HINGE STILE REINFORCEMENT	LVL
50	SIDELITE PANEL - SEE SIDELITE PANEL DETAIL SHEET FOR CONSTRUCTION DETAILS	-
65	MULTI-POINT LOCK ASSEMBLY TRILENNIUM BY ENDURA	-
66	#10 X 1-1/2" PFH SCREW	ALUMINUM
69	MULTI-POINT STRIKE PLATE	ALUMINUM

						DOCUMENTS PREPARED BY: LYNDON F. SCHMIDT P.E. No. 43409	
PRODUCT:						PLASTPRO INC. FIBERGLASS DOOR	
PART OR ASSEMBLY:						BUILDING CONSULTANTS, INC. P.O. Box 230, Valrico, FL 33595 Phone No.: 813.659.9197 FBPE Registry No. 9813	
5	8/23/23	UPDATE TO 8TH ED.	(2023)	FBC	LFS		
4	8/05/20	UPDATE TO 7TH ED.	(2020)	FBC	DAC		
3	08/02/17	UPDATE TO 6TH ED.	(2017)	FBC	JK		
2	3/10/16	ADDED ADA O.S. BUMP THRESHOLD			JK		
1	04/22/15	UPDATE TO 5TH ED.	(2014)	FBC	JK		
NO.	DATE				BY		
						REVISIONS	
DATE: 8/25/14							
SCALE: N.T.S.							
DWG. BY: AL							
CHK. BY: LFS							
DRAWING NO.: FL-17184.15							
SHEET 12 OF 12							